


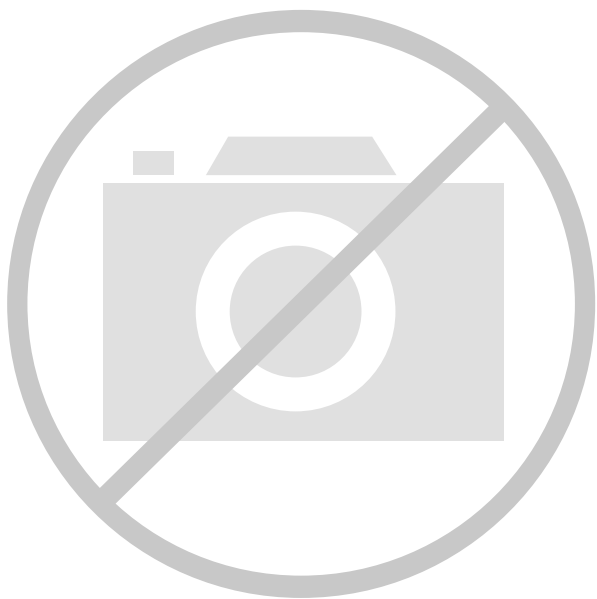

Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Obsolete
Number of LABs/CLBs	1536
Number of Logic Elements/Cells	6912
Total RAM Bits	65536
Number of I/O	316
Number of Gates	322970
Voltage - Supply	2.375V ~ 2.625V
Mounting Type	Surface Mount
Operating Temperature	-55°C ~ 125°C (TJ)
Package / Case	432-LBGA Exposed Pad, Metal
Supplier Device Package	432-MBGA (40x40)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/5962-9957201nua

DC Input and Output Levels

Values for V_{IL} and V_{IH} are recommended input voltages. Values for I_{OL} and I_{OH} are guaranteed output currents over the recommended operating conditions at the V_{OL} and V_{OH} test points. Only selected standards are tested. These are

chosen to ensure that all standards meet their specifications. The selected standards are tested at minimum V_{CCO} with the respective V_{OL} and V_{OH} voltage levels shown. Other standards are sample tested.

Input/Output Standard	V_{IL}		V_{IH}		V_{OL}	V_{OH}	I_{OL}	I_{OH}
	V, min	V, max	V, min	V, max	V, max	V, min	mA	mA
LVTTL ⁽¹⁾	-0.5	0.8	2.0	5.5	0.4	2.4	24	-24
LVCMOS2	-0.5	0.7	1.7	5.5	0.4	1.9	12	-12
PCI, 3.3V	-0.5	44% V_{CCINT}	60% V_{CCINT}	$V_{CCO} + 0.5$	10% V_{CCO}	90% V_{CCO}	(2)	(2)
PCI, 5.0V	-0.5	0.8	2.0	5.5	0.55	2.4	(2)	(2)
GTL	-0.5	$V_{REF} - 0.05$	$V_{REF} + 0.05$	3.6	0.4	n/a	40	n/a
GTL+	-0.5	$V_{REF} - 0.1$	$V_{REF} + 0.1$	3.6	0.6	n/a	36	n/a
HSTL I	-0.5	$V_{REF} - 0.1$	$V_{REF} + 0.1$	3.6	0.4	$V_{CCO} - 0.4$	8	-8
HSTL III	-0.5	$V_{REF} - 0.1$	$V_{REF} + 0.1$	3.6	0.4	$V_{CCO} - 0.4$	24	-8
HSTL IV	-0.5	$V_{REF} - 0.1$	$V_{REF} + 0.1$	3.6	0.4	$V_{CCO} - 0.4$	48	-8
SSTL3 I	-0.5	$V_{REF} - 0.2$	$V_{REF} + 0.2$	3.6	$V_{REF} - 0.6$	$V_{REF} + 0.6$	8	-8
SSTL3 II	-0.5	$V_{REF} - 0.2$	$V_{REF} + 0.2$	3.6	$V_{REF} - 0.8$	$V_{REF} + 0.8$	16	-16
SSTL2 I	-0.5	$V_{REF} - 0.2$	$V_{REF} + 0.2$	3.6	$V_{REF} - 0.65$	$V_{REF} + 0.65$	7.6	-7.6
SSTL2 II	-0.5	$V_{REF} - 0.2$	$V_{REF} + 0.2$	3.6	$V_{REF} - 0.80$	$V_{REF} + 0.80$	15.2	-15.2
CTT	-0.5	$V_{REF} - 0.2$	$V_{REF} + 0.2$	3.6	$V_{REF} - 0.4$	$V_{REF} + 0.4$	8	-8
AGP	-0.5	$V_{REF} - 0.2$	$V_{REF} + 0.2$	3.6	10% V_{CCO}	90% V_{CCO}	(2)	(2)

Notes:

1. V_{OL} and V_{OH} for lower drive currents are sample tested.
2. Tested according to the relevant specifications.

Virtex Switching Characteristics

Testing of switching parameters is modeled after testing methods specified by MIL-M-38510/605. All devices are 100% functionally tested. Internal timing parameters are derived from measuring internal test patterns. Listed below are representative values. For more specific, more precise, and worst-case guaranteed data, use the values reported

by the static timing analyzer (TRCE in the Xilinx Development System) and back-annotated to the simulation netlist. All timing parameters assume worst-case operating conditions (supply voltage and junction temperature). Values apply to all Virtex devices unless otherwise noted.

IOB Input Switching Characteristics

Input delays associated with the pad are specified for LVTTTL levels. For other standards, adjust the delays with

the values shown in "IOB Input Switching Characteristics Standard Adjustments" on page 6.

Symbol	Description	Device	Speed Grade		Units
			-4		
			Min	Max	
Propagation Delays					
T _{IOPI}	Pad to I output, no delay	All	-	1.0	ns
T _{IOPID}	Pad to I output, with delay	XQV100	-	1.9	ns
		XQV300	-	1.9	ns
		XQV600	-	2.3	ns
		XQV1000	-	2.7	ns
T _{IOPLI}	Pad to output IQ via transparent latch, no delay	All	-	2.0	ns
T _{IOPLID}	Pad to output IQ via transparent latch, with delay	XQV100	-	4.8	ns
		XQV300	-	5.1	ns
		XQV600	-	5.5	ns
		XQV1000	-	5.9	ns
Sequential Delays					
T _{IOCKIQ}	Clock CLK to output IQ	All	-	0.8	ns
Setup and Hold Times with Respect to Clock CLK		Setup Time / Hold Time			
T _{IOPICK} / T _{IOICKP}	Pad, no delay	All	2.0 / 0	-	ns
T _{IOPICKD} / T _{IOICKPD}	Pad, with delay	All	5.0 / 0	-	ns
T _{IOICECK} / T _{IOCKICE}	ICE input	All	1.0 / 0	-	ns
T _{IOSRCKI} / T _{IOCKISR}	SR input (IFF, synchronous)	All	1.3 / 0	-	ns
Set/Reset Delays					
T _{IOSRIQ}	SR input to IQ (asynchronous)	All	-	1.8	ns
T _{GSRQ}	GSR to output IQ	All	-	12.5	ns

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed "best-case", but if a "0" is listed, there is no positive hold time.

IOB Input Switching Characteristics Standard Adjustments

Symbol	Description	Standard	Speed Grade	Units
			-4	
Data Input Delay Adjustments				
T _{ILVTTL}	Standard-specific data input delay adjustments	LVTTTL	0.0	ns
T _{ILVCMOS2}		LVCMOS2	−0.05	ns
T _{IPCI33_3}		PCI, 33 MHz, 3.3V	−0.14	ns
T _{IPCI33_5}		PCI, 33 MHz, 5.0V	0.33	ns
T _{IGTL}		GTL	0.26	ns
T _{IGTLP}		GTL+	0.14	ns
T _{IHSTL}		HSTL	0.04	ns
T _{ISSTL2}		SSTL2	−0.10	ns
T _{ISSTL3}		SSTL3	−0.06	ns
T _{ICTT}		CTT	0.02	ns
T _{IAGP}		AGP	−0.08	ns

IOB Output Switching Characteristics

Output delays terminating at a pad are specified for LVTTTL with 12 mA drive and fast slew rate. For other standards, adjust the delays with the values shown in "IOB Output Switching Characteristics Standard Adjustments" on page 8.

Symbol	Description	Speed Grade		Units
		-4		
		Min	Max	
Propagation Delays				
T _{IOOP}	O input to pad	-	3.5	ns
T _{IOOLP}	O input to pad via transparent latch	-	4.0	ns
3-State Delays				
T _{IOTHZ}	T input to pad high-impedance ⁽¹⁾	-	2.4	ns
T _{IOTON}	T input to valid data on pad	-	3.7	ns
T _{IOTLPHZ}	T input to pad high-impedance via transparent latch ⁽¹⁾	-	3.0	ns
T _{IOTLPON}	T input to valid data on pad via transparent latch	-	4.2	ns
T _{GTS}	GTS to pad high-impedance ⁽¹⁾	-	6.3	ns
Sequential Delays				
T _{IOCKP}	Clock CLK to pad	-	3.5	ns
T _{IOCKHZ}	Clock CLK to pad high-impedance (synchronous) ⁽¹⁾	-	2.9	ns
T _{IOCKON}	Clock CLK to valid data on pad (synchronous)	-	4.1	ns
Setup and Hold Times before/after Clock CLK		Setup Time / Hold Time ⁽²⁾		
T _{IOOCK} /T _{IOCKO}	O input	1.3 / 0	-	ns
T _{IOOCECK} /T _{IOCKOCE}	OCE input	1.0 / 0	-	ns
T _{IOSRCKO} /T _{IOCKOSR}	SR input (OFF)	1.4 / 0	-	ns
T _{IOTCK} /T _{IOCKT}	3-state setup times, T input	0.9 / 0	-	ns
T _{IOTCECK} /T _{IOCKTCE}	3-state setup times, TCE input	1.1 / 0	-	ns
T _{IOSRCKT} /T _{IOCKTSR}	3-state setup times, SR input (TFF)	1.3 / 0	-	ns
Set/Reset Delays				
T _{IOSRP}	SR input to pad (asynchronous)	4.6	-	ns
T _{IOSRHZ}	SR input to pad high-impedance (asynchronous) ⁽¹⁾	3.9	-	ns
T _{IOSRON}	SR input to valid data on pad (asynchronous)	5.1	-	ns

Notes:

1. High-impedance turn-off delays should not be adjusted.
2. A Zero "0" Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed "best-case", but if a "0" is listed, there is no positive hold time.

IOB Output Switching Characteristics Standard Adjustments

Output delays terminating at a pad are specified for LVTTTL with 12 mA drive and fast slew rate. For other standards, adjust the delays by the values shown.

Symbol	Description	Standard		Speed Grade	Units
				-4	
Output Delay Adjustments					
T _{OLVTTL_S2}	Standard-specific adjustments for output delays terminating at pads (based on standard capacitive load, C _{SI})	LVTTTL, slow	2 mA	17.0	ns
T _{OLVTTL_S4}			4 mA	8.6	ns
T _{OLVTTL_S6}			6 mA	5.6	ns
T _{OLVTTL_S8}			8 mA	3.5	ns
T _{OLVTTL_S12}			12 mA	2.2	ns
T _{OLVTTL_S16}			16 mA	2.0	ns
T _{OLVTTL_S24}			24 mA	1.6	ns
T _{OLVTTL_F2}		LVTTTL, fast	2 mA	15.1	ns
T _{OLVTTL_F4}			4 mA	6.1	ns
T _{OLVTTL_F6}			6 mA	3.6	ns
T _{OLVTTL_F8}			8 mA	1.2	ns
T _{OLVTTL_F12}			12 mA	0.0	ns
T _{OLVTTL_F16}			16 mA	−0.05	ns
T _{OLVTTL_F24}			24 mA	−0.23	ns
T _{OLVCMOS2}		LVCMOS2		0.12	ns
T _{OPCI33_3}		PCI, 33 MHz, 3.3V		2.7	ns
T _{OPCI33_5}		PCI, 33 MHz, 5.0V		3.3	ns
T _{OGTL}		GTL		0.6	ns
T _{OGTLP}		GTL+		1.0	ns
T _{OHSTL_I}		HSTL I		−0.5	ns
T _{OHSTL_III}		HSTL III		−1.0	ns
T _{OHSTL_IV}		HSTL IV		−1.1	ns
T _{OSSTL2_I}		SSTL2 I		−0.5	ns
T _{OSSTL2_II}		SSTL2 II		−1.0	ns
T _{OSSTL3_I}		SSTL3 I		−0.5	ns
T _{OSSTL3_II}		SSTL3 II		−1.1	ns
T _{OCTT}		CTT		−0.6	ns
T _{OAGP}		AGP		−1.0	ns

Calculation of T_{iopp} as a Function of Capacitance

The values for T_{iopp} were based on the standard capacitive load (C_{sl}) for each I/O standard as listed in Table 2.

For other capacitive loads, use the formulas below to calculate the corresponding T_{iopp} :

$$T_{iopp} = T_{iopl} + T_{opadjust} + (C_{load} - C_{sl}) * fl$$

Where:

$T_{opadjust}$ is reported above in the Output Delay Adjustment section.

C_{load} is the capacitive load for the design.

Table 2: Constants for Use in Calculation of T_{op}

Standard		C_{sl} (pF)	fl (ns/pF)
LVTTTL slow slew rate	2 mA drive	35	0.41
	4 mA drive	35	0.20
	6 mA drive	35	0.100
	8 mA drive	35	0.086
	12 mA drive	35	0.058
	16 mA drive	35	0.050
	24 mA drive	35	0.048
LVTTTL fast slew rate	2 mA drive	35	0.41
	4 mA drive	35	0.20
	6 mA drive	35	0.13
	8 mA drive	35	0.079
	12 mA drive	35	0.044
	16 mA drive	35	0.043
	24 mA drive	35	0.033

Table 2: Constants for Use in Calculation of T_{op}

Standard	C_{sl} (pF)	fl (ns/pF)
LVC MOS2	35	0.041
PCI 33 MHz 5V	50	0.050
PCI 33 MHz 3.3V	10	0.050
GTL	0	0.014
GTL+	0	0.017
HSTL Class I	20	0.022
HSTL Class III	20	0.016
HSTL Class IV	20	0.014
SSTL2 Class I	30	0.028
SSTL2 Class II	30	0.016
SSTL3 Class 1	30	0.029
SSTL3 Class II	30	0.016
CTT	20	0.035
AGP	10	0.037

Clock Distribution Guidelines and Switching Characteristics

Symbol	Description	Device	Speed Grade		Units
			-4		
			Min	Max	
Global Clock Skew					
T _{GSKEWIOB}	Global clock skew between IOB flip-flops	XQV100	-	0.15	ns
		XQV300	-	0.18	ns
		XQV600	-	0.17	ns
		XQV1000	-	0.25	ns
T _{GPIO}	Global clock PAD to output	All	-	0.9	ns
T _{GIO}	Global clock buffer I input to O output	All	-	0.9	ns

Notes:

- These clock-distribution delays are provided for guidance only. They reflect the delays encountered in a typical design under worst-case conditions. Precise values for a particular design are provided by the timing analyzer.

CLB Arithmetic Switching Characteristics

Setup times not listed explicitly can be approximated by decreasing the combinatorial delays by the setup time adjustment listed. Precise values are provided by the timing analyzer.

Symbol	Description	Speed Grade		Units
		-4		
		Min	Max	
Combinatorial Delays				
T _{OPX}	F operand inputs to X via XOR	-	1.0	ns
T _{OPXB}	F operand input to XB output	-	1.4	ns
T _{OPY}	F operand input to Y via XOR	-	2.0	ns
T _{OPYB}	F operand input to YB output	-	2.0	ns
T _{OPCYF}	F operand input to COUT output	-	1.5	ns
T _{OPGY}	G operand inputs to Y via XOR	-	1.2	ns
T _{OPGYB}	G operand input to YB output	-	2.1	ns
T _{OPCYG}	G operand input to COUT output	-	1.6	ns
T _{BXCY}	BX initialization input to COUT	-	1.1	ns
T _{CINX}	CIN input to X output via XOR	-	0.6	ns
T _{CINXB}	CIN input to XB	-	0.1	ns
T _{CINY}	CIN input to Y via XOR	-	0.6	ns
T _{CINYB}	CIN input to YB	-	0.6	ns
T _{BYP}	CIN input to COUT output	-	0.2	ns
Multiplier Operation				
T _{FANDXB}	F1/2 operand inputs to XB output via AND	-	0.5	ns
T _{FANDYB}	F1/2 operand inputs to YB output via AND	-	1.1	ns
T _{FANDCY}	F1/2 operand inputs to COUT output via AND	-	0.6	ns
T _{GANDYB}	G1/2 operand inputs to YB output via AND	-	0.7	ns
T _{GANDCY}	G1/2 operand inputs to COUT output via AND	-	0.2	ns
Setup and Hold Times before/after Clock CLK		Setup Time / Hold Time		
T _{CCKX} /T _{CKCX}	CIN input to FFX	1.3 / 0	-	ns
T _{CCKY} /T _{CKCY}	CIN input to FFY	1.4 / 0	-	ns

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed "best-case", but if a "0" is listed, there is no positive hold time.

CLB SelectRAM Switching Characteristics

Symbol	Description	Speed Grade		Units
		-4		
		Min	Max	
Sequential Delays				
T _{SHCKO}	Clock CLK to X/Y outputs (WE active)	-	3.0	ns
Shift-Register Mode				
T _{SHCKO}	Clock CLK to X/Y outputs	-	3.0	ns
Setup Times before Clock CLK		Setup Time / Hold Time		
T _{AS} /T _{AH}	F/G address inputs	0.7 / 0	-	ns
T _{DS} /T _{DH}	BX/BY data inputs (DIN)	0.9 / 0	-	ns
T _{WS} /T _{WH}	CE input (WE)	1.0 / 0	-	ns
Shift-Register Mode				
T _{SHDICK}	BX/BY data inputs (DIN)	0.9	-	ns
T _{SHCECK}	CE input (WS)	1.0	-	ns
Clock CLK				
T _{WPH}	Minimum pulse width, High	3.1	-	ns
T _{WPL}	Minimum pulse width, Low	3.1	-	ns
T _{WC}	Minimum clock period to meet address write cycle time	6.2	-	ns
Shift-Register Mode				
T _{SRPH}	Minimum pulse width, High	3.1	-	ns
T _{SRPL}	Minimum pulse width, Low	3.1	-	ns

BLOCKRAM Switching Characteristics

Symbol	Description	Speed Grade		Units
		-4		
		Min	Max	
Sequential Delays				
T _{BCKO}	Clock CLK to DOUT output	-	4.1	ns
Setup Times Before Clock Clk				
T _{BACK} /T _{BCKA}	ADDR inputs	1.5 / 0	-	ns
T _{BDCK} /T _{BCKD}	DIN inputs	1.5 / 0	-	ns
T _{BECK} /T _{BCKE}	EN input	3.4 / 0	-	ns
T _{BRCK} /T _{BCKR}	RST input	3.2 / 0	-	ns
T _{BWCK} /T _{BCKW}	WEN input	3.0 / 0	-	ns
Clock CLK				
T _{BPWH}	Minimum pulse width, High	2.0	-	ns
T _{BPWL}	Minimum pulse width, Low	2.0	-	ns
T _{BCCS}	CLKA -> CLKB setup time for different ports	4.0	-	ns

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time. Negative values can not be guaranteed "best-case", but if a "0" is listed, there is no positive hold time.

TBUF Switching Characteristics

Symbol	Description	Speed Grade		Units
		-4		
		Min	Max	
Combinatorial Delays				
T _{IO}	IN input to OUT output	-	0.0	ns
T _{OFF}	TRI input to OUT output high-impedance	-	0.2	ns
T _{ON}	Tri input to valid data on OUT output	-	0.2	ns

JTAG Test Access Port Switching Characteristics

Symbol	Description	Speed Grade		Units
		-4		
		Min	Max	
T _{TAPTCK}	TMS and TDI setup times before TCK	4.0	-	ns
T _{TCKTAP}	TMS and TDI hold times after TCK	2.0	-	ns
T _{TCKTDO}	Output delay from clock TCK to output TDO	-	11.0	ns
F _{TCK}	Maximum TCK clock frequency	-	33	MHz

Virtex Pin-to-Pin Output Parameter Guidelines

Testing of switching parameters is modeled after testing methods specified by MIL-M-38510/605. All devices are 100% functionally tested. Listed below are representative

values for typical pin locations and normal clock loading. Values are expressed in nanoseconds unless otherwise noted.

Global Clock Input to Output Delay for LVTTL, 12 mA, Fast Slew Rate, *with* DLL

Symbol	Description	Device	Speed Grade		Units
			-4		
			Min	Max	
	LVTTL Global Clock Input to Output Delay using Output Flip-flop, 12 mA, Fast Slew Rate, <i>with</i> DLL. For data <i>output</i> with different standards, adjust the delays with the values shown in "IOB Output Switching Characteristics Standard Adjustments" on page 8.	XQV100	-	3.6	ns
		XQV300	-	3.6	ns
		XQV600	-	3.6	ns
		XQV1000	-	3.6	ns

Notes:

- Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
- Output timing is measured at 50% V_{CC} threshold with 35 pF external capacitive load. For different loads, see [Table 2](#).
- DLL output jitter is already included in the timing calculation.

Global Clock Input to Output Delay for LVTTL, 12 mA, Fast Slew Rate, *without* DLL

Symbol	Description	Device	Speed Grade		Units
			-4		
			Min	Max	
	LVTTL Global Clock Input to Output Delay using Output Flip-flop, 12 mA, Fast Slew Rate, <i>without</i> DLL. For data <i>output</i> with different standards, adjust the delays with the values shown in "IOB Output Switching Characteristics Standard Adjustments" on page 8.	XQV100	-	5.7	ns
		XQV300	-	5.9	ns
		XQV600	-	6.0	ns
		XQV1000	-	6.3	ns

Notes:

- Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
- Output timing is measured at 50% V_{CC} threshold with 35 pF external capacitive load. For different loads, see [Table 2](#).

Minimum Clock to Out for Virtex Devices

I/O Standard	With DLL	Without DLL				Units
	All Devices	V100	V300	V600	V1000	
LVTTL_S2 ⁽¹⁾	5.2	6.0	6.1	6.1	6.1	ns
LVTTL_S4 ⁽¹⁾	3.5	4.3	4.4	4.4	4.4	ns
LVTTL_S6 ⁽¹⁾	2.8	3.6	3.7	3.7	3.7	ns
LVTTL_S8 ⁽¹⁾	2.2	3.1	3.1	3.2	3.2	ns
LVTTL_S12 ⁽¹⁾	2.0	2.9	2.9	3.0	3.0	ns
LVTTL_S16 ⁽¹⁾	1.9	2.8	2.8	2.9	2.9	ns
LVTTL_S24 ⁽¹⁾	1.8	2.6	2.7	2.7	2.8	ns
LVTTL_F2 ⁽¹⁾	2.9	3.8	3.8	3.9	3.9	ns
LVTTL_F4 ⁽¹⁾	1.7	2.6	2.6	2.7	2.7	ns
LVTTL_F6 ⁽¹⁾	1.2	2.0	2.1	2.1	2.2	ns
LVTTL_F8 ⁽¹⁾	1.1	1.9	2.0	2.0	2.0	ns
LVTTL_F12 ⁽¹⁾	1.0	1.8	1.9	1.9	1.9	ns
LVTTL_F16 ⁽¹⁾	0.9	1.8	1.8	1.8	1.9	ns
LVTTL_F24 ⁽¹⁾	0.9	1.7	1.8	1.8	1.9	ns
LVC MOS2	1.1	1.9	2.0	2.0	2.1	ns
PCI33_3	1.5	2.4	2.4	2.5	2.5	ns
PCI33_5	1.4	2.2	2.3	2.3	2.4	ns
GTL	1.6	2.5	2.5	2.6	2.6	ns
GTL+	1.7	2.5	2.6	2.6	2.7	ns
HSTL I	1.1	1.9	2.0	2.0	2.0	ns
HSTL III	0.9	1.7	1.8	1.8	1.9	ns
HSTL IV	0.8	1.6	1.7	1.7	1.8	ns
SSTL2 I	0.9	1.7	1.8	1.8	1.8	ns
SSTL2 II	0.8	1.6	1.7	1.7	1.7	ns
SSTL3 I	0.8	1.7	1.7	1.7	1.8	ns
SSTL3 II	0.7	1.5	1.6	1.6	1.7	ns
CTT	1.0	1.8	1.9	1.9	2.0	ns
AGP	1.0	1.8	1.9	1.9	2.0	ns

Notes:

1. S = Slow Slew Rate, F = Fast Slew Rate
2. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column. and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
3. Output timing is measured at 50% V_{CC} threshold with 8 pF external capacitive load.

QPro Virtex Pinouts

Pinout Tables

See the Xilinx WebLINX web site (<http://www.xilinx.com/partinfo/databook.htm>) for updates or additional pinout information. For convenience, Table 3, Table 4 and

Table 5 list the locations of special-purpose and power-supply pins. Pins not listed are user I/Os.

Table 3: Virtex QFP Package Pinout Information

Pin Name	Device	PQ/HQ240
GCK0	All	92
GCK1	All	89
GCK2	All	210
GCK3	All	213
M0	All	60
M1	All	58
M2	All	62
CCLK	All	179
PROGRAM	All	122
DONE	All	120
INIT	All	123
BUSY/DOUT	All	178
D0/DIN	All	177
D1	All	167
D2	All	163
D3	All	156
D4	All	145
D5	All	138
D6	All	134
D7	All	124
WRITE	All	185
CS	All	184
TDI	All	183
TDO	All	181
TMS	All	2
TCK	All	239
V _{CCINT}	All	16, 32, 43, 77, 88, 104, 137, 148, 164, 198, 214, 225
V _{CCO} (The V _{CCO} for the PQ/HQ240 package is common to all eight I/O banks. Different output standards per I/O bank that require different V _{CCO} values cannot be supported.)	All	15, 30, 44, 61, 76, 90, 105, 121, 136, 150, 165, 180, 197, 212, 226, 240

Table 3: Virtex QFP Package Pinout Information (Continued)

Pin Name	Device	PQ/HQ240
V _{REF} Bank 7 (V _{REF} pins are listed incrementally. Connect all pins listed for both the required device and all smaller devices listed in the same package.) Within each bank, if input reference voltage is not required, all V _{REF} pins are general I/O.	XQV100	... + 12
	XQV300	... + 5
	XQV600	... + 11
GND	All	1, 8, 14, 22, 29, 37, 45, 51, 59, 69, 75, 83, 91, 98, 106, 112, 119, 129, 135, 143, 151, 158, 166, 172, 182, 190, 196, 204, 211, 219, 227, 233

Table 4: Virtex Plastic Ball Grid and Ceramic Column Grid Pinout Information

Pin Name	Device	BG256	BG352	BG432	BG560/CG560
GCK0	All	Y11	AE13	AL16	AL17
GCK1	All	Y10	AF14	AK16	AJ17
GCK2	All	A10	B14	A16	D17
GCK3	All	B10	D14	D17	A17
M0	All	Y1	AD24	AH28	AJ29
M1	All	U3	AB23	AH29	AK30
M2	All	W2	AC23	AJ28	AN32
CCLK	All	B19	C3	D4	C4
PROGRAM	All	Y20	AC4	AH3	AM1
DONE	All	W19	AD3	AH4	AJ5
INIT	All	U18	AD2	AJ2	AH5
BUSY/DOUT	All	D18	E4	D3	D4
D0/DIN	All	C19	D3	C2	E4
D1	All	E20	G1	K4	K3
D2	All	G19	J3	K2	L4
D3	All	J19	M3	P4	P3
D4	All	M19	R3	V4	W4
D5	All	P19	U4	AB1	AB5
D6	All	T20	V3	AB3	AC4
D7	All	V19	AC3	AG4	AJ4
WRITE	All	A19	D5	B4	D6
CS	All	B18	C4	D5	A2
TDI	All	C17	B3	B3	D5
TDO	All	A20	D4	C4	E6
TMS	All	D3	D23	D29	B33
TCK	All	A1	C24	D28	E29
DXN	All	W3	AD23	AH27	AK29

Table 4: Virtex Plastic Ball Grid and Ceramic Column Grid Pinout Information (Continued)

Pin Name	Device	BG256	BG352	BG432	BG560/CG560
DXP	All	V4	AE24	AK29	AJ28
V _{CCINT} (V _{CCINT} pins are listed incrementally. Connect all pins listed for both the required device and all smaller devices listed in the same package.)	XQV100	C10, D6, D15, F4, F17, L3, L18, R4, R17, U6, U15, V10	-	-	-
	XQV300	-	A20, B16, C14, D10, D12, J24, K4, L1, L25, P2, P25, R23, T1, V24, W2, AC10, AE14, AE19, AF11, AF16,	A10, A17, B23, C14, C19, K3, K29, N2, N29, T1, T29, W2, W31, AB2, AB30, AJ10, AJ16, AK13, AK19, AK22	-
	XQV600	-	-	... + B26, C7, F1, F30, AE29, AF1, AH8, AH24	-
	XQV1000	-	-	-	A21, B12, B14, B18, B28, C22, C24, E9, E12, F2, H30, J1, K32, M3, N1, N29, N33, U5, U30, Y2, Y31, AB2, AB32, AD2, AD32, AG3, AG31, AJ13, AK8, AK11, AK17, AK20, AL14, AL22, AL27, AN25
V _{CCO} , Bank 0	All	D7, D8	A17, B25, D19	A21, C29, D21	A22, A26, A30, B19, B32
V _{CCO} , Bank 1	All	D13, D14	A10, D7, D13	A1, A11, D11	A10, A16, B13, C3, E5
V _{CCO} , Bank 2	All	G17, H17	B2, H4, K1	C3, L1, L4	B2, D1, H1, M1, R2
V _{CCO} , Bank 3	All	N17, P17	P4, U1, Y4	AA1, AA4, AJ3	V1, AA2, AD1, AK1, AL2
V _{CCO} , Bank 4	All	U13, U14	AC8, AE2, AF10	AH11, AL1, AL11	AM2, AM15, AN4, AN8, AN12
V _{CCO} , Bank 5	All	U7, U8	AC14, AC20, AF17	AH21, AJ29, AL21	AL31, AM21, AN18, AN24, AN30
V _{CCO} , Bank 6	All	N4, P4	U26, W23, AE25	AA28, AA31, AL31	W32, AB33, AF33, AK33, AM32
V _{CCO} , Bank 7	All	G4, H4	G23, K26, N23	A31, L28, L31	C32, D33, K33, N32, T33

Table 4: Virtex Plastic Ball Grid and Ceramic Column Grid Pinout Information (Continued)

Pin Name	Device	BG256	BG352	BG432	BG560/CG560
V_{REF} Bank 4 (V _{REF} pins are listed incrementally. Connect all pins listed for both the required device and all smaller devices listed in the same package.) Within each bank, if input reference voltage is not required, all V _{REF} pins are general I/O.	XQV100	V12, W15, Y18	-	-	-
	XQV300	-	AC12, AE4, AE5, AE8	AJ7, AL4, AL8, AL13	-
	XQV600	-	-	... + AK8, AK15	-
	XQV1000	-	-	-	AK13, AL7, AL9, AL10, AL16, AM4, AM14, AN3
V_{REF} Bank 5 (V _{REF} pins are listed incrementally. Connect all pins listed for both the required device and all smaller devices listed in the same package.) Within each bank, if input reference voltage is not required, all V _{REF} pins are general I/O.	XQV100	V9, W6, Y3	-	-	-
	XQV300	-	AC15, AC18, AD20, AE23	AJ18, AJ25, AK23, AK27	-
	XQV600	-	-	... + AJ17, AL24	-
	XQV1000	-	-	-	AJ18, AJ25, AK28, AL20, AL24, AL29, AM26, AN23
V_{REF} Bank 6 (V _{REF} pins are listed incrementally. Connect all pins listed for both the required device and all smaller devices listed in the same package.) Within each bank, if input reference voltage is not required, all V _{REF} pins are general I/O.	XQV100	M2, R3, T1	-	-	-
	XQV300	-	R24, Y26, AA25, AD26	V28, AB28, AE30, AF28	-
	XQV600	-	-	... + U28, AC28	-
	XQV1000	-	-	-	V29, Y32, AA30, AD31, AE29, AK32, AE31, AH30
V_{REF} Bank 7 (V _{REF} pins are listed incrementally. Connect all pins listed for both the required device and all smaller devices listed in the same package.) Within each bank, if input reference voltage is not required, all V _{REF} pins are general I/O.	XQV100	D1, G3, H1	-	-	-
	XQV300	-	D26, E24, G26, L26	F28, F31, J30, N30	-
	XQV600	-	-	... + J28, R31	-
	XQV1000	-	-	-	D31, E31, G31, H32, K31, P31, T31, L33

Ceramic Quad Flat Package (CB228) Pinout Information

Table 5: CQFP Package (CB228)

Function	Pin No.
GND	1
TMS	2
IO	3
IO	4
IO_VREF_7	5
IO	6
IO	7
GND	8
IO	9
IO	10
IO	11
IO_VREF_7	12
IO	13
GND	14
VCCINT	15
IO	16
IO	17
VCCO	18
IO	19
IO	20
IO_VREF_7	21
IO	22
IO	23
IO	24
IO	25
IO_IRDY	26
GND	27
VCCO	28
IO_TRDY	29
VCCINT	30
IO	31
IO	32
IO	33
IO_VREF_6	34
IO	35
IO	36
VCCO	37
IO	38

Table 5: CQFP Package (CB228) (Continued)

Function	Pin No.
IO	39
IO	40
VCCINT	41
GND	42
IO	43
IO_VREF_6	44
IO	45
IO	46
IO_VREF_6	47
GND	48
IO	49
IO	50
IO_VREF_6	51
IO	52
IO	53
IO	54
M1	55
GND	56
M0	57
VCCO	58
M2	59
IO	60
IO	61
IO	62
IO_VREF_5	63
IO	64
IO	65
GND	66
IO_VREF_5	67
IO	68
IO	69
IO_VREF5	70
IO	71
GND	72
VCCINT	73
IO	74
IO	75
VCCO	76
IO	77
IO	78

Table 5: CQFP Package (CB228) (Continued)

Function	Pin No.
IO_VREF_5	79
IO	80
IO	81
IO	82
VCCINT	83
GCK1	84
VCCO	85
GND	86
GCKO	87
IO	88
IO	89
IO	90
IO	91
IO_VREF_4	92
IO	93
IO	94
VCCO	95
IO	96
IO	97
IO	98
VCCINT	99
GND	100
IO	101
IO_VREF_4	102
IO	103
IO	104
IO_VREF_4	105
GND	106
IO	107
IO	108
IO_VREF_4	109
IO	110
IO	111
IO	112
GND	113
DONE	114
VCCO	115
PROGRAM	116
IO_INIT	117
IO_D7	118

Table 5: CQFP Package (CB228) (Continued)

Function	Pin No.
IO	119
IO_VREF_3	120
IO	121
IO	122
GND	123
IO_VREF_3	124
IO	125
IO	126
IO_VREF_3	127
IO_D6	128
GND	129
VCCINT	130
IO_D5	131
IO	132
VCCO	133
IO	134
IO	135
IO_VREF_3	136
IO_D4	137
IO	138
IO	139
VCCINT	140
IO_TRDY	141
VCCO	142
GND	143
IO_IRDY	144
IO	145
IO	146
IO	147
IO_D3	148
IO_VREF_2	149
IO	150
IO	151
VCCO	152
IO	153
IO	154
IO_D2	155
VCCINT	156
GND	157
IO_D1	158

Table 5: CQFP Package (CB228) (Continued)

Function	Pin No.
IO_VREF_2	159
IO	160
IO	161
IO_VREF_2	162
GND	163
IO	164
IO	165
IO_VREF_2	166
IO	167
IO_DIN_D0	168
IO_DOUT_BUSY	169
CCLK	170
VCCO	171
TDO	172
GND	173
TDI	174
IO_CS	175
IO_WRITE	176
IO	177
IO_VREF_1	178
IO	179
GND	180
IO_VREF_1	181
IO	182
IO	183
IO_VREF_1	184
IO	185
GND	186
VCCINT	187
IO	188
IO	189
IO	190
VCCO	191
IO	192
IO	193
IO_VREF_1	194
IO	195
IO	196
IO	197
IO	198

Table 5: CQFP Package (CB228) (Continued)

Function	Pin No.
GCK2	199
GND	200
VCCO	201
GCK3	202
VCCINT	203
IO	204
IO	205
IO	206
IO_VREF_0	207
IO	208
IO	209
VCCO	210
IO	211
IO	212
IO	213
VCCINT	214
GND	215
IO	216
IO_VREF_0	217
IO	218
IO	219
IO_VREF_0	220
GND	221
IO	222
IO	223
IO_VREF_0	224
IO	225
IO	226
TCK	227
VCCO	228
GND	1, 8, 14, 27, 42, 48, 56, 66, 72, 86, 100, 106, 113, 123, 129, 143, 157, 163, 173, 180, 186, 200, 215, 221
VCCINT	15, 30, 41, 73, 83, 99, 130, 140, 156, 187, 203, 214
VCCO	18, 28, 37, 58, 76, 85, 95, 115, 133, 142, 152, 171, 191, 201, 210, 228

Pinout Diagrams

The following diagrams illustrate the locations of special-purpose pins on Virtex FPGAs. Table 6 lists the symbols used in these diagrams. The diagrams also show I/O-bank boundaries.

Table 6: Pinout Diagram Symbols

Symbol	Pin Function
S	General I/O
d	Device-dependent general I/O, n/c on smaller devices
V	V_{CCINT}
v	Device-dependent V_{CCINT} , n/c on smaller devices
O	V_{CCO}
R	V_{REF}
r	Device-dependent V_{REF} remains I/O on smaller devices
G	Ground
Ø, 1, 2, 3	Global Clocks


Table 6: Pinout Diagram Symbols

Symbol	Pin Function
⑩, ①, ②	M0, M1, M2
⑩, ①, ②, ③, ④, ⑤, ⑥, ⑦	D0/DIN, D1, D2, D3, D4, D5, D6, D7
B	DOUT/BUSY
D	DONE
P	PROGRAM
I	INIT
K	CCLK
W	WRITE
S	CS
T	Boundary-scan test aAccess port
+	Temperature diode, anode
–	Temperature diode, cathode
n	No connect

Device/Package Combinations and Maximum I/O

Package	Maximum User I/O (Excluding dedicated clock pins.)			
	XQV100	XQV300	XQV600	XQV1000
PQ240	166	166	-	-
HQ240	-	-	166	-
BG256	180	-	-	-
BG352	-	-	-	-
BG432	-	316	316	-
BG560	-	-	-	404
CB228	162	162	162	-
CG560	-	-	-	404

Ordering Information

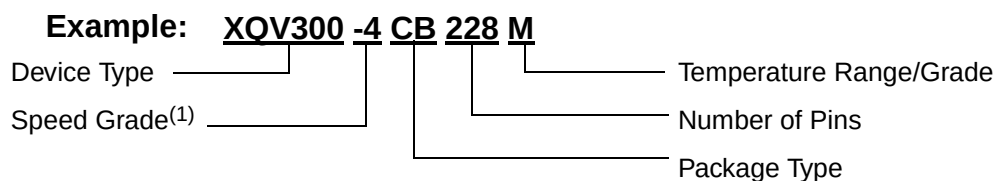

Device Ordering Options

Device Type	Package		Grade		Temperature
XQV100	PQ240	240-pin Plastic Quad Flat Package	M	Military Ceramic	$T_C = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
XQV300	HQ240	240-pin High Heat Dissipation QFP Package	N	Military Plastic	$T_J = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
XQV600	BG256	256-ball Plastic BGA Package	Q	MIL-PRF-38535 ⁽²⁾	$T_C = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
XQV1000	BG352	352-ball Plastic BGA Package			
	BG432	432-ball Plastic BGA Package			
	BG560	560-ball Plastic BGA Package			
	CB228	228-pin Ceramic Quad Flat Package			
	CG560	560-column Ceramic Column Grid Package			


Notes:

- 4 only supported speed grade.
- Class Q must be ordered with SMD number.

Valid Ordering Combinations

M Grade	N Grade	
XQV100-4CB228M	XQV100-4PQ240N	XQV300-4BG432N
XQV300-4CB228M	XQV100-4BG256N	XQV600-4HQ240N
XQV600-4CB228M	XQV300-4PQ240N	XQV600-4BG432N
XQV1000-4CG560M	XQV300-4BG352N	XQV1000-4BG560N

SMD (Class Q) Odering Options

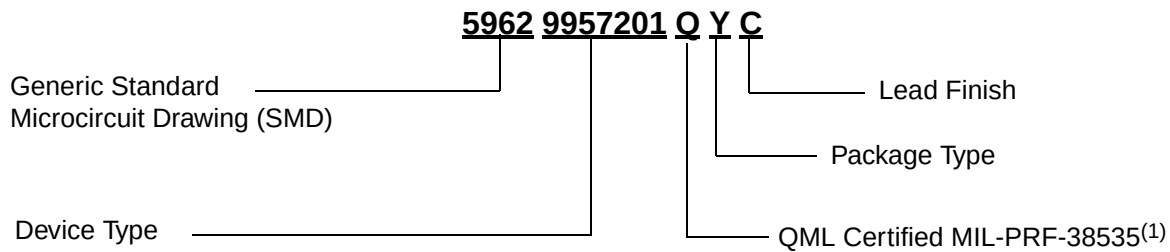

Valid SMD Combinations

SMD Number	Device	Pkg Markings	Lead Finish
5962-9957201QYC	XQV300-4CB228Q	Lid	Gold Plate
5962-9957201QZC	XQV300-4CB228Q	Base	Gold Plate
5962-9957201NTB	XQV300-4PQ240N	-	Solder Plate
5962-9957201NNA	XQV300-4BG352N	-	Solder Ball
5962-9957201NUA	XQV300-4BG432N	-	Solder Ball
5962-9957301QYC	XQV600-4CB228Q	Lid	Gold Plate
5962-9957301QZC	XQV600-4CB228Q	Base	Gold Plate
5962-9957301NTB	XQV600-4HQ240N	-	Solder Plate
5962-9957301NUA	XQV600-4BG432N	-	Solder Ball
5962-9957401QXC	XQV1000-4CG560Q	-	Solder Column
5962-9957401NUA	XQV1000-4BG560N	-	Solder Ball

Notes:

1. Type N designates QML Plastic.

Revision History

The following table shows the revision history for this document

Date	Version	Revision
10/04/99	1.0	Initial Xilinx release.
06/01/00	1.1	Upated format.
02/13/01	1.2	Updated Temperature Specifications.
11/05/01	1.3	Changed V600 Power-up temp min to -55°C. Added L33 as Bank 7 V _{REF} Updated format.
11/15/01	1.4	Fixed boken links. Added note for VCCO banking rules for PQ240 package.
12/05/01	1.5	Corrected Table 5 pin description for pin 9 and pin 39.