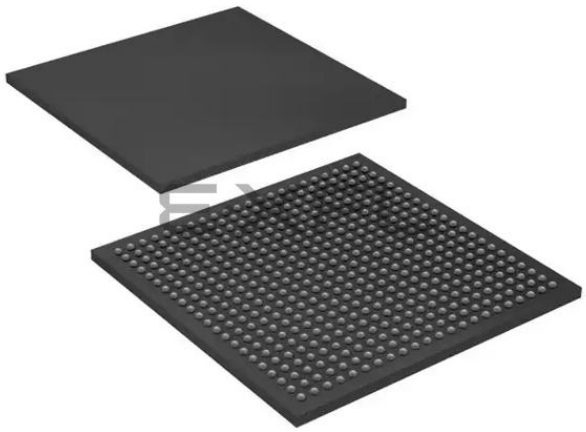

Welcome to E-XFL.COM

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details	
Product Status	Active
Number of LABs/CLBs	38000
Number of Logic Elements/Cells	104000
Total RAM Bits	8641536
Number of I/O	188
Number of Gates	-
Voltage - Supply	0.9V
Mounting Type	Surface Mount
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	484-BFBGA
Supplier Device Package	484-UBGA (19x19)
Purchase URL	https://www.e-xfl.com/product-detail/intel/10cx105yu484i6g

Contents

Intel® Cyclone® 10 GX Device Datasheet....3
Electrical Characteristics....3
Operating Conditions....3
Switching Characteristics....21
Transceiver Performance Specifications....21
Core Performance Specifications....29
Periphery Performance Specifications....36
Configuration Specifications....44
POR Specifications....44
JTAG Configuration Timing....45
FPP Configuration Timing....45
AS Configuration Timing....49
DCLK Frequency Specification in the AS Configuration Scheme....50
PS Configuration Timing....50
Initialization....52
Configuration Files....52
Minimum Configuration Time Estimation....54
Remote System Upgrades....55
User Watchdog Internal Circuitry Timing Specifications....55
I/O Timing....55
Programmable IOE Delay....56
Glossary....56
Document Revision History for the Intel Cyclone 10 GX Device Datasheet....60

Intel® Cyclone® 10 GX Device Datasheet

This datasheet describes the electrical characteristics, switching characteristics, configuration specifications, and I/O timing for Intel® Cyclone® 10 GX devices.

Intel Cyclone 10 GX devices are offered in extended and industrial grades. Extended devices are offered in –E5 (fastest) and –E6 speed grades. Industrial grade devices are offered in the –I5 and –I6 speed grades.

Related Information

Intel Cyclone 10 GX Device Overview
Provides more information about the densities and packages in the Intel Cyclone 10 GX devices.

Electrical Characteristics

The following sections describe the operating conditions and power consumption of Intel Cyclone 10 GX devices.

Operating Conditions

Intel Cyclone 10 GX devices are rated according to a set of defined parameters. To maintain the highest possible performance and reliability of the Intel Cyclone 10 GX devices, you must consider the operating requirements described in this section.

Absolute Maximum Ratings

This section defines the maximum operating conditions for Intel Cyclone 10 GX devices. The values are based on experiments conducted with the devices and theoretical modeling of breakdown and damage mechanisms. The functional operation of the device is not implied for these conditions.

Caution: Conditions outside the range listed in the following table may cause permanent damage to the device. Additionally, device operation at the absolute maximum ratings for extended periods of time may have adverse effects on the device.

Intel Corporation. All rights reserved. Intel, the Intel logo, Altera, Arria, Cyclone, Enpirion, MAX, Nios, Quartus and Stratix words and logos are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. Intel warrants performance of its FPGA and semiconductor products to current specifications in accordance with Intel's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Intel assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Intel. Intel customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.
*Other names and brands may be claimed as the property of others.

ISO 9001:2008 Registered

Pin Capacitance

Table 9. Pin Capacitance for Intel Cyclone 10 GX Devices

Symbol	Description	Maximum	Unit
C_{IO_COLUMN}	Input capacitance on column I/O pins	2.5	pF
C_{OUTFB}	Input capacitance on dual-purpose clock output/feedback pins	2.5	pF

Internal Weak Pull-Up and Weak Pull-Down Resistor

All I/O pins, except configuration, test, and JTAG pins, have an option to enable weak pull-up. The weak pull-down feature is only available for the pins as described in the Internal Weak Pull-Down Resistor Values for Intel Cyclone 10 GX Devices table.

Table 10. Internal Weak Pull-Up Resistor Values for Intel Cyclone 10 GX Devices

Symbol	Description	Condition (V) [18]	Value [19]	Unit
R_{PU}	Value of the I/O pin pull-up resistor before and during configuration, as well as user mode if you have enabled the programmable pull-up resistor option.	V_{CCIO} = 3.0 ±5%	25	kΩ
		V_{CCIO} = 2.5 ±5%	25	kΩ
		V_{CCIO} = 1.8 ±5%	25	kΩ
		V_{CCIO} = 1.5 ±5%	25	kΩ
		V_{CCIO} = 1.35 ±5%	25	kΩ
		V_{CCIO} = 1.25 ±5%	25	kΩ
		V_{CCIO} = 1.2 ±5%	25	kΩ

(18) Pin pull-up resistance values may be lower if an external source drives the pin higher than V_{CCIO}.

(19) Valid with ±25% tolerances to cover changes over PVT.

Single-Ended I/O Standards Specifications

Table 12. Single-Ended I/O Standards Specifications for Intel Cyclone 10 GX Devices

I/O Standard	V_{CCIO} (V)			V_{IL} (V)		V_{IH} (V)		V_{OL} (V)	V_{OH} (V)	I_{OL} (20) (mA)	I_{OH} (20) (mA)
	Min	Typ	Max	Min	Max	Min	Max	Max	Min		
3.0-V LVTTL	2.85	3	3.15	–0.3	0.8	1.7	3.3	0.4	2.4	2	–2
3.0-V LVCMOS	2.85	3	3.15	–0.3	0.8	1.7	3.3	0.2	V_{CCIO} – 0.2	0.1	–0.1
2.5 V	2.375	2.5	2.625	–0.3	0.7	1.7	3.3	0.4	2	1	–1
1.8 V	1.71	1.8	1.89	–0.3	0.35 × V_{CCIO}	0.65 × V_{CCIO}	V_{CCIO} + 0.3	0.45	V_{CCIO} – 0.45	2	–2
1.5 V	1.425	1.5	1.575	–0.3	0.35 × V_{CCIO}	0.65 × V_{CCIO}	V_{CCIO} + 0.3	0.25 × V_{CCIO}	0.75 × V_{CCIO}	2	–2
1.2 V	1.14	1.2	1.26	–0.3	0.35 × V_{CCIO}	0.65 × V_{CCIO}	V_{CCIO} + 0.3	0.25 × V_{CCIO}	0.75 × V_{CCIO}	2	–2

Single-Ended SSTL, HSTL, and HSUL I/O Reference Voltage Specifications

Table 13. Single-Ended SSTL, HSTL, and HSUL I/O Reference Voltage Specifications for Intel Cyclone 10 GX Devices

I/O Standard	V_{CCIO} (V)			V_{REF} (V)			V_{TT} (V)		
	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
SSTL-18 Class I, II	1.71	1.8	1.89	0.833	0.9	0.969	V_{REF} – 0.04	V_{REF}	V_{REF} + 0.04
SSTL-15 Class I, II	1.425	1.5	1.575	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}
SSTL-135/ SSTL-135 Class I, II	1.283	1.35	1.418	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}
SSTL-125/ SSTL-125 Class I, II	1.19	1.25	1.31	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}
SSTL-12/ SSTL-12 Class I, II	1.14	1.2	1.26	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}	0.49 × V_{CCIO}	0.5 × V_{CCIO}	0.51 × V_{CCIO}

continued...

(20) To meet the I_{OL} and I_{OH} specifications, you must set the current strength settings accordingly. For example, to meet the 3.0-V LVTTL specification (2 mA), you should set the current strength settings to 2 mA. Setting at lower current strength may not meet the I_{OL} and I_{OH} specifications in the datasheet.

I/O Standard	$V_{IL(DC)}$ (V)		$V_{IH(DC)}$ (V)		$V_{IL(AC)}$ (V)	$V_{IH(AC)}$ (V)	V_{OL} (V)	V_{OH} (V)	I_{OL} (21) (mA)	I_{OH} (21) (mA)
	Min	Max	Min	Max	Max	Min	Max	Min		
SSTL-12/ SSTL-12 Class I, II	—	V_{REF} – 0.10	V_{REF} + 0.10	—	V_{REF} – 0.15	V_{REF} + 0.15	0.2 × V_{CCIO}	0.8 × V_{CCIO}	—	—
HSTL-18 Class I	—	V_{REF} –0.1	V_{REF} + 0.1	—	V_{REF} – 0.2	V_{REF} + 0.2	0.4	V_{CCIO} – 0.4	8	–8
HSTL-18 Class II	—	V_{REF} – 0.1	V_{REF} + 0.1	—	V_{REF} – 0.2	V_{REF} + 0.2	0.4	V_{CCIO} – 0.4	16	–16
HSTL-15 Class I	—	V_{REF} – 0.1	V_{REF} + 0.1	—	V_{REF} – 0.2	V_{REF} + 0.2	0.4	V_{CCIO} – 0.4	8	–8
HSTL-15 Class II	—	V_{REF} – 0.1	V_{REF} + 0.1	—	V_{REF} – 0.2	V_{REF} + 0.2	0.4	V_{CCIO} –0.4	16	–16
HSTL-12 Class I	–0.15	V_{REF} – 0.08	V_{REF} + 0.08	V_{CCIO} + 0.15	V_{REF} – 0.15	V_{REF} + 0.15	0.25 × V_{CCIO}	0.75 × V_{CCIO}	8	–8
HSTL-12 Class II	–0.15	V_{REF} – 0.08	V_{REF} + 0.08	V_{CCIO} + 0.15	V_{REF} – 0.15	V_{REF} + 0.15	0.25 × V_{CCIO}	0.75 × V_{CCIO}	16	–16
HSUL-12	—	V_{REF} – 0.13	V_{REF} + 0.13	—	V_{REF} – 0.22	V_{REF} + 0.22	0.1 × V_{CCIO}	0.9 × V_{CCIO}	—	—
POD12	–0.15	V_{REF} – 0.08	V_{REF} + 0.08	V_{CCIO} + 0.15	V_{REF} – 0.15	V_{REF} + 0.15	(0.7 – 0.15) × V_{CCIO}	(0.7 + 0.15) × V_{CCIO}	—	—

Differential SSTL I/O Standards Specifications

Table 15. Differential SSTL I/O Standards Specifications for Intel Cyclone 10 GX Devices

I/O Standard	V_{CCIO} (V)			$V_{SWING(DC)}$ (V)		$V_{SWING(AC)}$ (V)		$V_{IX(AC)}$ (V)		
	Min	Typ	Max	Min	Max	Min	Max	Min	Typ	Max
SSTL-18 Class I, II	1.71	1.8	1.89	0.25	V_{CCIO} + 0.6	0.5	V_{CCIO} + 0.6	$V_{CCIO}/2$ – 0.175	—	$V_{CCIO}/2$ + 0.175
SSTL-15 Class I, II	1.425	1.5	1.575	0.2	(22)	2($V_{IH(AC)}$ – V_{REF})	2(V_{REF} – $V_{IL(AC)}$)	$V_{CCIO}/2$ – 0.15	—	$V_{CCIO}/2$ + 0.15

continued...

DSP Block Specifications

Table 32. DSP Block Performance Specifications for Intel Cyclone 10 GX Devices

Mode	Performance				Unit
	–E5	–I5	–E6	–I6	
Fixed-point 18 × 19 multiplication mode	456	438	364	346	MHz
Fixed-point 27 × 27 multiplication mode	450	434	358	344	MHz
Fixed-point 18 × 18 multiplier adder mode	459	440	370	351	MHz
Fixed-point 18 × 18 multiplier adder summed with 36-bit input mode	444	422	349	326	MHz
Fixed-point 18 × 19 systolic mode	459	440	370	351	MHz
Complex 18 × 19 multiplication mode	456	438	364	346	MHz
Floating point multiplication mode	447	427	347	326	MHz
Floating point adder or subtract mode	388	369	288	266	MHz
Floating point multiplier adder or subtract mode	386	368	290	270	MHz
Floating point multiplier accumulate mode	418	393	326	294	MHz
Floating point vector one mode	404	382	306	282	MHz
Floating point vector two mode	383	367	293	278	MHz

Memory Block Specifications

To achieve the maximum memory block performance, use a memory block clock that comes through global clock routing from an on-chip PLL and set to **50%** output duty cycle. Use the Intel Quartus Prime software to report timing for the memory block clocking schemes.

When you use the error detection cyclical redundancy check (CRC) feature, there is no degradation in f_{MAX}.