



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                |
| Core Processor             | PIC                                                                                                                                                                   |
| Core Size                  | 8-Bit                                                                                                                                                                 |
| Speed                      | 32MHz                                                                                                                                                                 |
| Connectivity               | I <sup>2</sup> C, LINbus, SPI, UART/USART                                                                                                                             |
| Peripherals                | Brown-out Detect/Reset, POR, PWM, WDT                                                                                                                                 |
| Number of I/O              | 18                                                                                                                                                                    |
| Program Memory Size        | 7KB (4K x 14)                                                                                                                                                         |
| Program Memory Type        | FLASH                                                                                                                                                                 |
| EEPROM Size                | -                                                                                                                                                                     |
| RAM Size                   | 512 x 8                                                                                                                                                               |
| Voltage - Supply (Vcc/Vdd) | 1.8V ~ 3.6V                                                                                                                                                           |
| Data Converters            | A/D 12x10b; D/A 1x8b                                                                                                                                                  |
| Oscillator Type            | Internal                                                                                                                                                              |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                     |
| Mounting Type              | Surface Mount                                                                                                                                                         |
| Package / Case             | 20-SOIC (0.295", 7.50mm Width)                                                                                                                                        |
| Supplier Device Package    | 20-SOIC                                                                                                                                                               |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic16lf1708t-i-so">https://www.e-xfl.com/product-detail/microchip-technology/pic16lf1708t-i-so</a> |

# PIC16(L)F1704/8

---

## 4.0 DEVICE CONFIGURATION

Device configuration consists of Configuration Words, Code Protection and Device ID.

### 4.1 Configuration Words

There are several Configuration Word bits that allow different oscillator and memory protection options. These are implemented as Configuration Word 1 at 8007h and Configuration Word 2 at 8008h.

|                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Note:</b> The <math>\overline{\text{DEBUG}}</math> bit in Configuration Words is managed automatically by device development tools including debuggers and programmers. For normal device operation, this bit should be maintained as a '1'.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## REGISTER 4-2: CONFIG2: CONFIGURATION WORD 2

| R/P-1              | R/P-1                | R/P-1 | R/P-1               | R/P-1  | R/P-1 |
|--------------------|----------------------|-------|---------------------|--------|-------|
| LVP <sup>(1)</sup> | DEBUG <sup>(2)</sup> | LPBOR | BORV <sup>(3)</sup> | STVREN | PLLEN |
| bit 13             |                      |       |                     |        | bit 8 |

| R/P-1  | U-1 | U-1 | U-1 | U-1 | R/P-1   | R/P-1    | R/P-1 |
|--------|-----|-----|-----|-----|---------|----------|-------|
| ZCDDIS | —   | —   | —   | —   | PPS1WAY | WRT<1:0> |       |
| bit 7  |     |     |     |     |         |          | bit 0 |

### Legend:

R = Readable bit

P = Programmable bit

U = Unimplemented bit, read as '1'

'0' = Bit is cleared

'1' = Bit is set

-n = Value when blank or after Bulk Erase

- bit 13 **LVP:** Low-Voltage Programming Enable bit<sup>(1)</sup>  
1 = Low-voltage programming enabled  
0 = High-voltage on MCLR must be used for programming
- bit 12 **DEBUG:** In-Circuit Debugger Mode bit<sup>(2)</sup>  
1 = In-Circuit Debugger disabled, ICSPCLK and ICSPDAT are general purpose I/O pins  
0 = In-Circuit Debugger enabled, ICSPCLK and ICSPDAT are dedicated to the debugger
- bit 11 **LPBOR:** Low-Power BOR Enable bit  
1 = Low-Power Brown-out Reset is disabled  
0 = Low-Power Brown-out Reset is enabled
- bit 10 **BORV:** Brown-out Reset Voltage Selection bit<sup>(3)</sup>  
1 = Brown-out Reset voltage (VBOR), low trip point selected.  
0 = Brown-out Reset voltage (VBOR), high trip point selected.
- bit 9 **STVREN:** Stack Overflow/Underflow Reset Enable bit  
1 = Stack Overflow or Underflow will cause a Reset  
0 = Stack Overflow or Underflow will not cause a Reset
- bit 8 **PLLEN:** PLL Enable bit  
1 = 4xPLL enabled  
0 = 4xPLL disabled
- bit 7 **ZCDDIS:** ZCD Disable bit  
1 = ZCD disabled. ZCD can be enabled by setting the ZCDSEN bit of ZCDCON  
0 = ZCD always enabled
- bit 6-3 **Unimplemented:** Read as '1'
- bit 2 **PPS1WAY:** PPSLOCK Bit One-Way Set Enable bit  
1 = The PPSLOCK bit can only be set once after an unlocking sequence is executed; once PPSLOCK is set, all future changes to PPS registers are prevented  
0 = The PPSLOCK bit can be set and cleared as needed (provided an unlocking sequence is executed)
- bit 1-0 **WRT<1:0>:** Flash Memory Self-Write Protection bits  
4 kW Flash memory  
11 = Write protection off  
10 = 000h to 1FFh write protected, 200h to FFFh may be modified by PMCON control  
01 = 000h to 7FFh write protected, 800h to FFFh may be modified by PMCON control  
00 = 000h to FFFh write protected, no addresses may be modified by PMCON control

- Note 1:** The LVP bit cannot be programmed to '0' when Programming mode is entered via LVP.
- Note 2:** The DEBUG bit in Configuration Words is managed automatically by device development tools including debuggers and programmers. For normal device operation, this bit should be maintained as a '1'.
- Note 3:** See VBOR parameter for specific trip point voltages.

## REGISTER 7-5: PIR1: PERIPHERAL INTERRUPT REQUEST REGISTER 1

|         |         |       |       |         |         |         |         |
|---------|---------|-------|-------|---------|---------|---------|---------|
| R/W-0/0 | R/W-0/0 | R-0/0 | R-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 |
| TMR1GIF | ADIF    | RCIF  | TXIF  | SSP1IF  | CCP1IF  | TMR2IF  | TMR1IF  |
| bit 7   |         |       |       |         |         |         | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

- bit 7 **TMR1GIF:** Timer1 Gate Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 6 **ADIF:** Analog-to-Digital Converter (ADC) Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 5 **RCIF:** USART Receive Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 4 **TXIF:** USART Transmit Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 3 **SSP1IF:** Synchronous Serial Port (MSSP) Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 2 **CCP1IF:** CCP1 Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 1 **TMR2IF:** Timer2 to PR2 Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending
- bit 0 **TMR1IF:** Timer1 Overflow Interrupt Flag bit  
1 = Interrupt is pending  
0 = Interrupt is not pending

**Note:** Interrupt flag bits are set when an interrupt condition occurs, regardless of the state of its corresponding enable bit or the Global Enable bit, GIE, of the INTCON register. User software should ensure the appropriate interrupt flag bits are clear prior to enabling an interrupt.

# PIC16(L)F1704/8

## REGISTER 10-5: PMCON1: PROGRAM MEMORY CONTROL 1 REGISTER

| U-1              | R/W-0/0 | R/W-0/0             | R/W/HC-0/0 | R/W/HC-x/q <sup>(2)</sup> | R/W-0/0 | R/S/HC-0/0 | R/S/HC-0/0 |
|------------------|---------|---------------------|------------|---------------------------|---------|------------|------------|
| — <sup>(1)</sup> | CFGFS   | LWLO <sup>(3)</sup> | FREE       | WRERR                     | WREN    | WR         | RD         |
| bit 7            |         |                     |            |                           |         |            | bit 0      |

### Legend:

|                         |                      |                                                       |
|-------------------------|----------------------|-------------------------------------------------------|
| R = Readable bit        | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| S = Bit can only be set | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set        | '0' = Bit is cleared | HC = Bit is cleared by hardware                       |

|       |                                                                                                                                                                                                                                                                                                                    |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 7 | <b>Unimplemented:</b> Read as '1'                                                                                                                                                                                                                                                                                  |
| bit 6 | <b>CFGFS:</b> Configuration Select bit<br>1 = Access Configuration, User ID and Device ID Registers<br>0 = Access Flash program memory                                                                                                                                                                             |
| bit 5 | <b>LWLO:</b> Load Write Latches Only bit <sup>(3)</sup><br>1 = Only the addressed program memory write latch is loaded/updated on the next WR command<br>0 = The addressed program memory write latch is loaded/updated and a write of all program memory write latches will be initiated on the next WR command   |
| bit 4 | <b>FREE:</b> Program Flash Erase Enable bit<br>1 = Performs an erase operation on the next WR command (hardware cleared upon completion)<br>0 = Performs a write operation on the next WR command                                                                                                                  |
| bit 3 | <b>WRERR:</b> Program/Erase Error Flag bit<br>1 = Condition indicates an improper program or erase sequence attempt or termination (bit is set automatically on any set attempt (write '1') of the WR bit).<br>0 = The program or erase operation completed normally                                               |
| bit 2 | <b>WREN:</b> Program/Erase Enable bit<br>1 = Allows program/erase cycles<br>0 = Inhibits programming/erasing of program Flash                                                                                                                                                                                      |
| bit 1 | <b>WR:</b> Write Control bit<br>1 = Initiates a program Flash program/erase operation.<br>The operation is self-timed and the bit is cleared by hardware once operation is complete.<br>The WR bit can only be set (not cleared) in software.<br>0 = Program/erase operation to the Flash is complete and inactive |
| bit 0 | <b>RD:</b> Read Control bit<br>1 = Initiates a program Flash read. Read takes one cycle. RD is cleared in hardware. The RD bit can only be set (not cleared) in software.<br>0 = Does not initiate a program Flash read                                                                                            |

- Note** 1: Unimplemented bit, read as '1'.  
2: The WRERR bit is automatically set by hardware when a program memory write or erase operation is started (WR = 1).  
3: The LWLO bit is ignored during a program memory erase operation (FREE = 1).



# PIC16(L)F1704/8

## REGISTER 13-4: IOCBP: INTERRUPT-ON-CHANGE PORTB POSITIVE EDGE REGISTER<sup>(1)</sup>

|         |         |         |         |     |     |     |       |
|---------|---------|---------|---------|-----|-----|-----|-------|
| R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | U-0 | U-0 | U-0 | U-0   |
| IOCBP7  | IOCBP6  | IOCBP5  | IOCBP4  | —   | —   | —   | —     |
| bit 7   |         |         |         |     |     |     | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

bit 7-4

**IOCBP<7:4>:** Interrupt-on-Change PORTB Positive Edge Enable bits

1 = Interrupt-on-Change enabled on the pin for a positive going edge. IOCBFx bit and IOCIF flag will be set upon detecting an edge.

0 = Interrupt-on-Change disabled for the associated pin.

bit 3-0

**Unimplemented:** Read as '0'

**Note 1:** PIC16(L)F1708 only.

## REGISTER 13-5: IOCBN: INTERRUPT-ON-CHANGE PORTB NEGATIVE EDGE REGISTER<sup>(1)</sup>

|         |         |         |         |     |     |     |       |
|---------|---------|---------|---------|-----|-----|-----|-------|
| R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | U-0 | U-0 | U-0 | U-0   |
| IOCBN7  | IOCBN6  | IOCBN5  | IOCBN4  | —   | —   | —   | —     |
| bit 7   |         |         |         |     |     |     | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

bit 7-4

**IOCBN<7:4>:** Interrupt-on-Change PORTB Negative Edge Enable bits

1 = Interrupt-on-Change enabled on the pin for a negative going edge. IOCBFx bit and IOCIF flag will be set upon detecting an edge.

0 = Interrupt-on-Change disabled for the associated pin.

bit 3-0

**Unimplemented:** Read as '0'

**Note 1:** PIC16(L)F1708 only.

## REGISTER 13-6: IOCBF: INTERRUPT-ON-CHANGE PORTB FLAG REGISTER<sup>(1)</sup>

|            |            |            |            |     |     |     |       |
|------------|------------|------------|------------|-----|-----|-----|-------|
| R/W/HS-0/0 | R/W/HS-0/0 | R/W/HS-0/0 | R/W/HS-0/0 | U-0 | U-0 | U-0 | U-0   |
| IOCBF7     | IOCBF6     | IOCBF5     | IOCBF4     | —   | —   | —   | —     |
| bit 7      |            |            |            |     |     |     | bit 0 |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

HS - Bit is set in hardware

bit 7-4

**IOCBF<7:4>:** Interrupt-on-Change PORTB Flag bits

1 = An enabled change was detected on the associated pin.

Set when IOCBPx = 1 and a rising edge was detected on RBx, or when IOCBNx = 1 and a falling edge was detected on RBx.

0 = No change was detected, or the user cleared the detected change.

bit 3-0

**Unimplemented:** Read as '0'

**Note 1:** PIC16(L)F1708 only.

## 18.1.4 HALF-BRIDGE MODE

In half-bridge mode, the COG generates a two output complementary PWM waveform from rising and falling event sources. In the simplest configuration, the rising and falling event sources are the same signal, which is a PWM signal with the desired period and duty cycle. The COG converts this single PWM input into a dual complementary PWM output. The frequency and duty cycle of the dual PWM output match those of the single input PWM signal. The off-to-on transition of each output can be delayed from the on-to-off transition of the other output, thereby, creating a time immediately after the PWM transition where neither output is driven. This is referred to as dead time and is covered in **Section 18.5 “Dead-Band Control”**.

A typical operating waveform, with dead-band, generated from a single CCP1 input is shown in Figure 18-9.

The primary output can be steered to either or both COGxA and COGxC. The complementary output can be steered to either or both COGxB and COGxD.

Half-Bridge mode is selected by setting the GxMD bits of the COGxCON0 register to ‘100’.

## 18.1.5 PUSH-PULL MODE

In Push-Pull mode, the COG generates a single PWM output that alternates, every PWM period, between the two pairs of the COG outputs. COGxA has the same signal as COGxC. COGxB has the same signal as COGxD. The output drive activates with the rising input event and terminates with the falling event input. Each rising event starts a new period and causes the output to switch to the COG pair not used in the previous period.

The push-pull configuration is shown in Figure 18-6. A typical push-pull waveform generated from a single CCP1 input is shown in Figure 18-11.

Push-Pull mode is selected by setting the GxMD bits of the COGxCON0 register to ‘101’.

## 18.1.6 EVENT DRIVEN PWM (ALL MODES)

Besides generating PWM and complementary outputs from a single PWM input, the COG can also generate PWM waveforms from a periodic rising event and a separate falling event. In this case, the falling event is usually derived from analog feedback within the external PWM driver circuit. In this configuration, high power switching transients may trigger a false falling event that needs to be blanked out. The COG can be configured to blank falling (and rising) event inputs for a period of time immediately following the rising (and falling) event drive output. This is referred to as input blanking and is covered in **Section 18.6 “Blanking Control”**.

It may be necessary to guard against the possibility of circuit faults. In this case, the active drive must be terminated before the Fault condition causes damage. This is referred to as auto-shutdown and is covered in **Section 18.8 “Auto-shutdown Control”**.

The COG can be configured to operate in phase delayed conjunction with another PWM. The active drive cycle is delayed from the rising event by a phase delay timer. Phase delay is covered in more detail in **Section 18.7 “Phase Delay”**.

A typical operating waveform, with phase delay and dead-band, generated from a single CCP1 input is shown in Figure 18-10.

## REGISTER 18-6: COGxFSIM: COG FALLING EVENT SOURCE INPUT MODE REGISTER

| U-0   | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0 |
|-------|---------|---------|---------|---------|---------|---------|---------|
| —     | GxFSIM6 | GxFSIM5 | GxFSIM4 | GxFSIM3 | GxFSIM2 | GxFSIM1 | GxFSIM0 |
| bit 7 |         |         |         |         |         |         | bit 0   |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

q = Value depends on condition

bit 7 **Unimplemented:** Read as '0'

bit 6 **GxFSIM6:** COGx Falling Event Input Source 6 Mode bit

GxFSIM6 = 1:

1 = PWM3 output high-to-low transition will cause a falling event after falling event phase delay

0 = PWM3 output low level will cause an immediate falling event

GxFSIM6 = 0:

PWM3 output has no effect on falling event

bit 5 **GxFSIM5:** COGx Falling Event Input Source 5 Mode bit

GxFSIM5 = 1:

1 = CCP2 output high-to-low transition will cause a falling event after falling event phase delay

0 = CCP2 output low level will cause an immediate falling event

GxFSIM5 = 0:

CCP2 output has no effect on falling event

bit 4 **GxFSIM4:** COGx Falling Event Input Source 4 Mode bit

GxFSIM4 = 1:

1 = CCP1 high-to-low transition will cause a falling event after falling event phase delay

0 = CCP1 low level will cause an immediate falling event

GxFSIM4 = 0:

CCP1 has no effect on falling event

bit 3 **GxFSIM3:** COGx Falling Event Input Source 3 Mode bit

GxFSIM3 = 1:

1 = CLC1 output high-to-low transition will cause a falling event after falling event phase delay

0 = CLC1 output low level will cause an immediate falling event

GxFSIM3 = 0:

CLC1 output has no effect on falling event

bit 2 **GxFSIM2:** COGx Falling Event Input Source 2 Mode bit

GxFSIM2 = 1:

1 = Comparator 2 high-to-low transition will cause a falling event after falling event phase delay

0 = Comparator 2 low level will cause an immediate falling event

GxFSIM2 = 0:

Comparator 2 has no effect on falling event

bit 1 **GxFSIM1:** COGx Falling Event Input Source 1 Mode bit

GxFSIM1 = 1:

1 = Comparator 1 high-to-low transition will cause a falling event after falling event phase delay

0 = Comparator 1 low level will cause an immediate falling event

GxFSIM1 = 0:

Comparator 1 has no effect on falling event

bit 0 **GxFSIM0:** COGx Falling Event Input Source 0 Mode bit

GxFSIM0 = 1:

1 = Pin selected with COGxPPS control high-to-low transition will cause a falling event after falling event phase delay

0 = Pin selected with COGxPPS control low level will cause an immediate falling event

GxFSIM0 = 0:

Pin selected with COGxPPS control has no effect on falling event

# PIC16(L)F1704/8

**TABLE 19-3: SUMMARY OF REGISTERS ASSOCIATED WITH CLCx**

| Name                  | Bit7                  | Bit6                  | Bit5                 | Bit4                 | Bit3             | Bit2         | Bit1     | Bit0     | Register on Page |
|-----------------------|-----------------------|-----------------------|----------------------|----------------------|------------------|--------------|----------|----------|------------------|
| ANSELA                | —                     | —                     | —                    | ANSA4                | —                | ANSA2        | ANSA1    | ANSA0    | 122              |
| ANSELB <sup>(1)</sup> | —                     | —                     | ANSB5                | ANSB4                | —                | —            | —        | —        | 128              |
| ANSELC                | ANSC7 <sup>(1)</sup>  | ANSC6 <sup>(1)</sup>  | ANSC5 <sup>(2)</sup> | ANSC4 <sup>(2)</sup> | ANSC3            | ANSC2        | ANSC1    | ANSC0    | 133              |
| CLC1CON               | LC1EN                 | —                     | LC1OUT               | LC1INTP              | LC1INTN          | LC1MODE<2:0> |          |          | 207              |
| CLC2CON               | LC2EN                 | —                     | LC2OUT               | LC2INTP              | LC2INTN          | LC2MODE<2:0> |          |          | 207              |
| CLC3CON               | LC3EN                 | —                     | LC3OUT               | LC3INTP              | LC3INTN          | LC3MODE<2:0> |          |          | 207              |
| CLCDATA               | —                     | —                     | —                    | —                    | —                | MLC3OUT      | MLC2OUT  | MLC1OUT  | 215              |
| CLC1GLS0              | LC1G1D4T              | LC1G1D4N              | LC1G1D3T             | LC1G1D3N             | LC1G1D2T         | LC1G1D2N     | LC1G1D1T | LC1G1D1N | 211              |
| CLC1GLS1              | LC1G2D4T              | LC1G2D4N              | LC1G2D3T             | LC1G2D3N             | LC1G2D2T         | LC1G2D2N     | LC1G2D1T | LC1G2D1N | 212              |
| CLC1GLS2              | LC1G3D4T              | LC1G3D4N              | LC1G3D3T             | LC1G3D3N             | LC1G3D2T         | LC1G3D2N     | LC1G3D1T | LC1G3D1N | 213              |
| CLC1GLS3              | LC1G4D4T              | LC1G4D4N              | LC1G4D3T             | LC1G4D3N             | LC1G4D2T         | LC1G4D2N     | LC1G4D1T | LC1G4D1N | 214              |
| CLC1POL               | LC1POL                | —                     | —                    | —                    | LC1G4POL         | LC1G3POL     | LC1G2POL | LC1G1POL | 208              |
| CLC1SEL0              | —                     | —                     | —                    | LC1D1S<4:0>          |                  |              |          |          | 209              |
| CLC1SEL1              | —                     | —                     | —                    | LC1D2S<4:0>          |                  |              |          |          | 209              |
| CLC1SEL2              | —                     | —                     | —                    | LC1D3S<4:0>          |                  |              |          |          | 209              |
| CLC1SEL3              | —                     | —                     | —                    | LC1D4S<4:0>          |                  |              |          |          | 210              |
| CLC2GLS0              | LC2G1D4T              | LC2G1D4N              | LC2G1D3T             | LC2G1D3N             | LC2G1D2T         | LC2G1D2N     | LC2G1D1T | LC2G1D1N | 211              |
| CLC2GLS1              | LC2G2D4T              | LC2G2D4N              | LC2G2D3T             | LC2G2D3N             | LC2G2D2T         | LC2G2D2N     | LC2G2D1T | LC2G2D1N | 212              |
| CLC2GLS2              | LC2G3D4T              | LC2G3D4N              | LC2G3D3T             | LC2G3D3N             | LC2G3D2T         | LC2G3D2N     | LC2G3D1T | LC2G3D1N | 213              |
| CLC2GLS3              | LC2G4D4T              | LC2G4D4N              | LC2G4D3T             | LC2G4D3N             | LC2G4D2T         | LC2G4D2N     | LC2G4D1T | LC2G4D1N | 214              |
| CLC2POL               | LC2POL                | —                     | —                    | —                    | LC2G4POL         | LC2G3POL     | LC2G2POL | LC2G1POL | 208              |
| CLC2SEL0              | —                     | —                     | —                    | LC2D1S<4:0>          |                  |              |          |          | 209              |
| CLC2SEL1              | —                     | —                     | —                    | LC2D2S<4:0>          |                  |              |          |          | 209              |
| CLC2SEL2              | —                     | —                     | —                    | LC2D3S<4:0>          |                  |              |          |          | 209              |
| CLC2SEL3              | —                     | —                     | —                    | LC2D4S<4:0>          |                  |              |          |          | 210              |
| CLC3GLS0              | LC3G1D4T              | LC3G1D4N              | LC3G1D3T             | LC3G1D3N             | LC3G1D2T         | LC3G1D2N     | LC3G1D1T | LC3G1D1N | 211              |
| CLC3GLS1              | LC3G2D4T              | LC3G2D4N              | LC3G2D3T             | LC3G2D3N             | LC3G2D2T         | LC3G2D2N     | LC3G2D1T | LC3G2D1N | 212              |
| CLC3GLS2              | LC3G3D4T              | LC3G3D4N              | LC3G3D3T             | LC3G3D3N             | LC3G3D2T         | LC3G3D2N     | LC3G3D1T | LC3G3D1N | 213              |
| CLC3GLS3              | LC3G4D4T              | LC3G4D4N              | LC3G4D3T             | LC3G4D3N             | LC3G4D2T         | LC3G4D2N     | LC3G4D1T | LC3G4D1N | 214              |
| CLC3POL               | LC3POL                | —                     | —                    | —                    | LC3G4POL         | LC3G3POL     | LC3G2POL | LC3G1POL | 208              |
| CLC3SEL0              | —                     | —                     | —                    | LC3D1S<4:0>          |                  |              |          |          | 209              |
| CLC3SEL1              | —                     | —                     | —                    | LC3D2S<4:0>          |                  |              |          |          | 209              |
| CLC3SEL2              | —                     | —                     | —                    | LC3D3S<4:0>          |                  |              |          |          | 209              |
| CLC3SEL3              | —                     | —                     | —                    | LC3D4S<4:0>          |                  |              |          |          | 210              |
| CLCxPPS               | —                     | —                     | —                    | CLCxPPS<4:0>         |                  |              |          |          | 138, 139         |
| INTCON                | GIE                   | PEIE                  | TMR0IE               | INTE                 | IOCF             | TMR0IF       | INTF     | IOCF     | 85               |
| PIE3                  | —                     | —                     | COGIE                | ZCDIE                | —                | CLC3IE       | CLC2IE   | CLC1IE   | 88               |
| PIR3                  | —                     | —                     | COGIF                | ZCDIF                | —                | CLC3IF       | CLC2IF   | CLC1IF   | 91               |
| RxyPPS                | —                     | —                     | —                    | RxyPPS<4:0>          |                  |              |          |          | 140              |
| TRISA                 | —                     | —                     | TRISA5               | TRISA4               | — <sup>(3)</sup> | TRISA2       | TRISA1   | TRISA0   | 121              |
| TRISB <sup>(4)</sup>  | TRISB7                | TRISB6                | TRISB5               | TRISB4               | —                | —            | —        | —        | 127              |
| TRISC                 | TRISC7 <sup>(4)</sup> | TRISC6 <sup>(4)</sup> | TRISC5               | TRISC4               | TRISC3           | TRISC2       | TRISC1   | TRISC0   | 132              |

**Legend:** — = unimplemented read as '0'. Shaded cells are not used for CLC module.

- Note**
- 1: PIC16(L)F1708 only.
  - 2: PIC16(L)F1704 only.
  - 3: Unimplemented, read as '1'.

## 27.0 CAPTURE/COMPARE/PWM MODULES

The Capture/Compare/PWM module is a peripheral which allows the user to time and control different events, and to generate Pulse-Width Modulation (PWM) signals. In Capture mode, the peripheral allows the timing of the duration of an event. The Compare mode allows the user to trigger an external event when a predetermined amount of time has expired. The PWM mode can generate Pulse-Width Modulated signals of varying frequency and duty cycle.

This family of devices contains two standard Capture/Compare/PWM modules (CCP1 and CCP2).

The Capture and Compare functions are identical for all CCP modules.

**Note 1:** In devices with more than one CCP module, it is very important to pay close attention to the register names used. A number placed after the module acronym is used to distinguish between separate modules. For example, the CCP1CON and CCP2CON control the same operational aspects of two completely different CCP modules.

2: Throughout this section, generic references to a CCP module in any of its operating modes may be interpreted as being equally applicable to CCPx module. Register names, module signals, I/O pins, and bit names may use the generic designator 'x' to indicate the use of a numeral to distinguish a particular module, when required.

### 27.1 Capture Mode

The Capture mode function described in this section is available and identical for all CCP modules.

Capture mode makes use of the 16-bit Timer1 resource. When an event occurs on the CCPx pin, the 16-bit CCPRxH:CCPRxL register pair captures and stores the 16-bit value of the TMR1H:TMR1L register pair, respectively. An event is defined as one of the following and is configured by the CCPxM<3:0> bits of the CCPxCON register:

- Every falling edge
- Every rising edge
- Every 4th rising edge
- Every 16th rising edge

When a capture is made, the Interrupt Request Flag bit CCPxIF of the PIRx register is set. The interrupt flag must be cleared in software. If another capture occurs before the value in the CCPRxH, CCPRxL register pair is read, the old captured value is overwritten by the new captured value.


Figure 27-1 shows a simplified diagram of the capture operation.

#### 27.1.1 CCP PIN CONFIGURATION

In Capture mode, the CCPx pin should be configured as an input by setting the associated TRIS control bit.

**Note:** If the CCPx pin is configured as an output, a write to the port can cause a capture condition.

**FIGURE 27-1: CAPTURE MODE OPERATION BLOCK DIAGRAM**

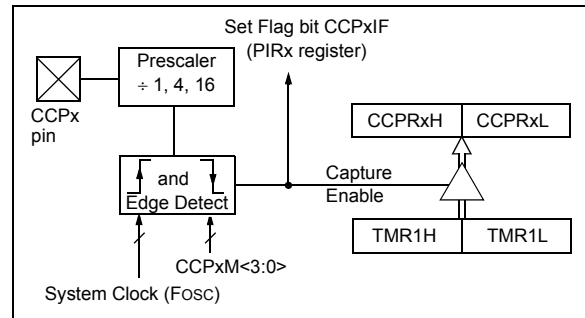

# PIC16(L)F1704/8

## 27.1.2 TIMER1 MODE RESOURCE

Timer1 must be running in Timer mode or Synchronized Counter mode for the CCP module to use the capture feature. In Asynchronous Counter mode, the capture operation may not work.

See **Section 25.0 “Timer1 Module with Gate Control”** for more information on configuring Timer1.

## 27.1.3 SOFTWARE INTERRUPT MODE

When the Capture mode is changed, a false capture interrupt may be generated. The user should keep the CCPxIE interrupt enable bit of the PIRx register clear to avoid false interrupts. Additionally, the user should clear the CCPxIF interrupt flag bit of the PIRx register following any change in Operating mode.

**Note:** Clocking Timer1 from the system clock (FOSC) should not be used in Capture mode. In order for Capture mode to recognize the trigger event on the CCPx pin, Timer1 must be clocked from the instruction clock (FOSC/4) or from an external clock source.

## 27.1.4 CCP PRESCALER

There are four prescaler settings specified by the CCPxM<3:0> bits of the CCPxCON register. Whenever the CCP module is turned off, or the CCP module is not in Capture mode, the prescaler counter is cleared. Any Reset will clear the prescaler counter.

Switching from one capture prescaler to another does not clear the prescaler and may generate a false interrupt. To avoid this unexpected operation, turn the module off by clearing the CCPxCON register before changing the prescaler. Example 27-1 demonstrates the code to perform this function.

### EXAMPLE 27-1: CHANGING BETWEEN CAPTURE PRESCALERS

```
BANKSEL CCPxCON    ;Set Bank bits to point
                    ;to CCPxCON
CLRf    CCPxCON     ;Turn CCP module off
MOVLW   NEW_CAPT_PS ;Load the W reg with
                    ;the new prescaler
MOVWF   CCPxCON     ;move value and CCP ON
                    ;Load CCPxCON with this
                    ;value
```

## 27.1.5 CAPTURE DURING SLEEP

Capture mode depends upon the Timer1 module for proper operation. There are two options for driving the Timer1 module in Capture mode. It can be driven by the instruction clock (FOSC/4), or by an external clock source.

When Timer1 is clocked by FOSC/4, Timer1 will not increment during Sleep. When the device wakes from Sleep, Timer1 will continue from its previous state.

Capture mode will operate during Sleep when Timer1 is clocked by an external clock source.

## 27.2 Compare Mode

The Compare mode function described in this section is available and identical for all CCP modules.

Compare mode makes use of the 16-bit Timer1 resource. The 16-bit value of the CCPRxH:CCPRxL register pair is constantly compared against the 16-bit value of the TMR1H:TMR1L register pair. When a match occurs, one of the following events can occur:


- Toggle the CCPx output
- Set the CCPx output
- Clear the CCPx output
- Generate an Auto-conversion Trigger
- Generate a Software Interrupt

The action on the pin is based on the value of the CCPxM<3:0> control bits of the CCPxCON register. At the same time, the interrupt flag CCPxIF bit is set.

All Compare modes can generate an interrupt.

Figure 27-2 shows a simplified diagram of the compare operation.

**FIGURE 27-2: COMPARE MODE OPERATION BLOCK DIAGRAM**

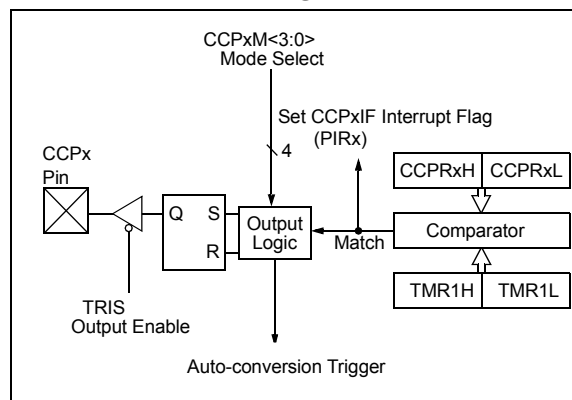

## 28.2.2 SPI MODE OPERATION

When initializing the SPI, several options need to be specified. This is done by programming the appropriate control bits (SSPCON1<5:0> and SSPSTAT<7:6>). These control bits allow the following to be specified:

- Master mode (SCK is the clock output)
- Slave mode (SCK is the clock input)
- Clock Polarity (Idle state of SCK)
- Data Input Sample Phase (middle or end of data output time)
- Clock Edge (output data on rising/falling edge of SCK)
- Clock Rate (Master mode only)
- Slave Select mode (Slave mode only)

To enable the serial port, SSP Enable bit, SSPEN of the SSPCON1 register, must be set. To reset or reconfigure SPI mode, clear the SSPEN bit, re-initialize the SSPCONx registers and then set the SSPEN bit. This configures the SDI, SDO, SCK and  $\overline{SS}$  pins as serial port pins. For the pins to behave as the serial port function, some must have their data direction bits (in the TRIS register) appropriately programmed as follows:

- SDI must have corresponding TRIS bit set
- SDO must have corresponding TRIS bit cleared
- SCK (Master mode) must have corresponding TRIS bit cleared
- SCK (Slave mode) must have corresponding TRIS bit set
- $\overline{SS}$  must have corresponding TRIS bit set

Any serial port function that is not desired may be overridden by programming the corresponding data direction (TRIS) register to the opposite value.

The MSSP consists of a transmit/receive shift register (SSPSR) and a buffer register (SSPBUF). The SSPSR shifts the data in and out of the device, MSb first. The SSPBUF holds the data that was written to the SSPSR until the received data is ready. Once the eight bits of data have been received, that byte is moved to the SSPBUF register. Then, the Buffer Full Detect bit, BF of the SSPSTAT register, and the interrupt flag bit, SSPIF, are set. This double-buffering of the received data (SSPBUF) allows the next byte to start reception before reading the data that was just received. Any write to the SSPBUF register during transmission/reception of data will be ignored and the write collision detect bit WCOL of the SSPCON1 register, will be set. User software must clear the WCOL bit to allow the following write(s) to the SSPBUF register to complete successfully.

When the application software is expecting to receive valid data, the SSPBUF should be read before the next byte of data to transfer is written to the SSPBUF. The Buffer Full bit, BF of the SSPSTAT register, indicates when SSPBUF has been loaded with the received data (transmission is complete). When the SSPBUF is read, the BF bit is cleared. This data may be irrelevant if the SPI is only a transmitter. Generally, the MSSP interrupt is used to determine when the transmission/reception has completed. If the interrupt method is not going to be used, then software polling can be done to ensure that a write collision does not occur.

The SSPSR is not directly readable or writable and can only be accessed by addressing the SSPBUF register. Additionally, the SSPSTAT register indicates the various Status conditions.

\_\_\_\_\_



## 29.1.1.5 TSR Status

The TRMT bit of the TXSTA register indicates the status of the TSR register. This is a read-only bit. The TRMT bit is set when the TSR register is empty and is cleared when a character is transferred to the TSR register from the TXREG. The TRMT bit remains clear until all bits have been shifted out of the TSR register. No interrupt logic is tied to this bit, so the user has to poll this bit to determine the TSR status.

**Note:** The TSR register is not mapped in data memory, so it is not available to the user.

## 29.1.1.6 Transmitting 9-Bit Characters


The EUSART supports 9-bit character transmissions. When the TX9 bit of the TXSTA register is set, the EUSART will shift nine bits out for each character transmitted. The TX9D bit of the TXSTA register is the ninth, and Most Significant data bit. When transmitting 9-bit data, the TX9D data bit must be written before writing the eight Least Significant bits into the TXREG. All nine bits of data will be transferred to the TSR shift register immediately after the TXREG is written.

A special 9-bit Address mode is available for use with multiple receivers. See **Section 29.1.2.7 “Address Detection”** for more information on the Address mode.

## 29.1.1.7 Asynchronous Transmission Set-up:

1. Initialize the SPBRGH, SPBRGL register pair and the BRGH and BRG16 bits to achieve the desired baud rate (see **Section 29.4 “EUSART Baud Rate Generator (BRG)”**).
2. Enable the asynchronous serial port by clearing the SYNC bit and setting the SPEN bit.
3. If 9-bit transmission is desired, set the TX9 control bit. A set ninth data bit will indicate that the eight Least Significant data bits are an address when the receiver is set for address detection.
4. Set SCKP bit if inverted transmit is desired.
5. Enable the transmission by setting the TXEN control bit. This will cause the TXIF interrupt bit to be set.
6. If interrupts are desired, set the TXIE interrupt enable bit of the PIE1 register. An interrupt will occur immediately provided that the GIE and PEIE bits of the INTCON register are also set.
7. If 9-bit transmission is selected, the ninth bit should be loaded into the TX9D data bit.
8. Load 8-bit data into the TXREG register. This will start the transmission.

**FIGURE 29-3: ASYNCHRONOUS TRANSMISSION**

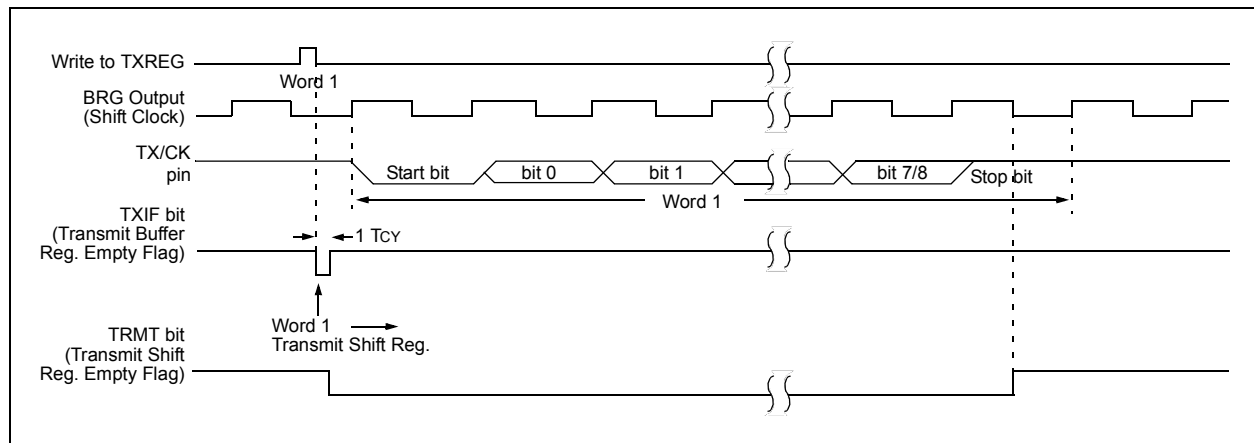

## 29.1.2 EUSART ASYNCHRONOUS RECEIVER

The Asynchronous mode is typically used in RS-232 systems. The receiver block diagram is shown in Figure 29-2. The data is received on the RX/DT pin and drives the data recovery block. The data recovery block is actually a high-speed shifter operating at 16 times the baud rate, whereas the serial Receive Shift Register (RSR) operates at the bit rate. When all eight or nine bits of the character have been shifted in, they are immediately transferred to a two character First-In-First-Out (FIFO) memory. The FIFO buffering allows reception of two complete characters and the start of a third character before software must start servicing the EUSART receiver. The FIFO and RSR registers are not directly accessible by software. Access to the received data is via the RCREG register.

### 29.1.2.1 Enabling the Receiver

The EUSART receiver is enabled for asynchronous operation by configuring the following three control bits:

- CREN = 1
- SYNC = 0
- SPEN = 1

All other EUSART control bits are assumed to be in their default state.

Setting the CREN bit of the RCSTA register enables the receiver circuitry of the EUSART. Clearing the SYNC bit of the TXSTA register configures the EUSART for asynchronous operation. Setting the SPEN bit of the RCSTA register enables the EUSART. The programmer must set the corresponding TRIS bit to configure the RX/DT I/O pin as an input.

**Note:** If the RX/DT function is on an analog pin, the corresponding ANSEL bit must be cleared for the receiver to function.

### 29.1.2.2 Receiving Data

The receiver data recovery circuit initiates character reception on the falling edge of the first bit. The first bit, also known as the Start bit, is always a zero. The data recovery circuit counts one-half bit time to the center of the Start bit and verifies that the bit is still a zero. If it is not a zero then the data recovery circuit aborts character reception, without generating an error, and resumes looking for the falling edge of the Start bit. If the Start bit zero verification succeeds then the data recovery circuit counts a full bit time to the center of the next bit. The bit is then sampled by a majority detect circuit and the resulting '0' or '1' is shifted into the RSR. This repeats until all data bits have been sampled and shifted into the RSR. One final bit time is measured and the level sampled. This is the Stop bit, which is always a '1'. If the data recovery circuit samples a '0' in the Stop bit position then a framing error is set for this character, otherwise the framing error is cleared for this character. See **Section 29.1.2.4 "Receive Framing Error"** for more information on framing errors.

Immediately after all data bits and the Stop bit have been received, the character in the RSR is transferred to the EUSART receive FIFO and the RCIF interrupt flag bit of the PIR1 register is set. The top character in the FIFO is transferred out of the FIFO by reading the RCREG register.

**Note:** If the receive FIFO is overrun, no additional characters will be received until the overrun condition is cleared. See **Section 29.1.2.5 "Receive Overrun Error"** for more information on overrun errors.

### 29.1.2.3 Receive Interrupts

The RCIF interrupt flag bit of the PIR1 register is set whenever the EUSART receiver is enabled and there is an unread character in the receive FIFO. The RCIF interrupt flag bit is read-only, it cannot be set or cleared by software.

RCIF interrupts are enabled by setting all of the following bits:

- RCIE, Interrupt Enable bit of the PIE1 register
- PEIE, Peripheral Interrupt Enable bit of the INTCON register
- GIE, Global Interrupt Enable bit of the INTCON register

The RCIF interrupt flag bit will be set when there is an unread character in the FIFO, regardless of the state of interrupt enable bits.

# PIC16(L)F1704/8

---

## DECFSZ      Decrement f, Skip if 0

---

Syntax:      [*label*] DECFSZ f,d

Operands:       $0 \leq f \leq 127$   
                     $d \in [0,1]$

Operation:       $(f) - 1 \rightarrow (\text{destination})$ ;  
                    skip if result = 0

Status Affected:      None

Description:      The contents of register 'f' are decremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'. If the result is '1', the next instruction is executed. If the result is '0', then a NOP is executed instead, making it a 2-cycle instruction.

---

## INCFSZ      Increment f, Skip if 0

---

Syntax:      [*label*] INCFSZ f,d

Operands:       $0 \leq f \leq 127$   
                     $d \in [0,1]$

Operation:       $(f) + 1 \rightarrow (\text{destination})$ ,  
                    skip if result = 0

Status Affected:      None

Description:      The contents of register 'f' are incremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'. If the result is '1', the next instruction is executed. If the result is '0', a NOP is executed instead, making it a 2-cycle instruction.

---

## GOTO      Unconditional Branch

---

Syntax:      [*label*] GOTO k

Operands:       $0 \leq k \leq 2047$

Operation:       $k \rightarrow PC<10:0>$   
                     $PCLATH<6:3> \rightarrow PC<14:11>$

Status Affected:      None

Description:      GOTO is an unconditional branch. The 11-bit immediate value is loaded into PC bits <10:0>. The upper bits of PC are loaded from PCLATH<4:3>. GOTO is a 2-cycle instruction.

---

## IORLW      Inclusive OR literal with W

---

Syntax:      [*label*] IORLW k

Operands:       $0 \leq k \leq 255$

Operation:       $(W) .OR. k \rightarrow (W)$

Status Affected:      Z

Description:      The contents of the W register are OR'ed with the 8-bit literal 'k'. The result is placed in the W register.

---

## INCF      Increment f

---

Syntax:      [*label*] INCF f,d

Operands:       $0 \leq f \leq 127$   
                     $d \in [0,1]$

Operation:       $(f) + 1 \rightarrow (\text{destination})$

Status Affected:      Z

Description:      The contents of register 'f' are incremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.

---

## IORWF      Inclusive OR W with f

---

Syntax:      [*label*] IORWF f,d

Operands:       $0 \leq f \leq 127$   
                     $d \in [0,1]$

Operation:       $(W) .OR. (f) \rightarrow (\text{destination})$

Status Affected:      Z

Description:      Inclusive OR the W register with register 'f'. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.

# PIC16(L)F1704/8

## 32.3 DC Characteristics

TABLE 32-1: SUPPLY VOLTAGE


| PIC16LF1704/8 |        |                                                                             | Standard Operating Conditions (unless otherwise stated) |        |            |        |                                                     |
|---------------|--------|-----------------------------------------------------------------------------|---------------------------------------------------------|--------|------------|--------|-----------------------------------------------------|
| PIC16F1704/8  |        |                                                                             | Standard Operating Conditions (unless otherwise stated) |        |            |        |                                                     |
| Param. No.    | Sym.   | Characteristic                                                              | Min.                                                    | Typ.†  | Max.       | Units  | Conditions                                          |
| D001          | VDD    | <b>Supply Voltage</b>                                                       |                                                         |        |            |        |                                                     |
|               |        | PIC16LF1704/8                                                               | 1.8<br>2.5                                              | —<br>— | 3.6<br>3.6 | V<br>V | FOSC ≤ 16 MHz<br>FOSC ≤ 32 MHz (Note 2)             |
| D001          |        | PIC16F1704/8                                                                | 2.3<br>2.5                                              | —<br>— | 5.5<br>5.5 | V<br>V | FOSC ≤ 16 MHz:<br>FOSC ≤ 32 MHz (Note 2)            |
| D002*         | VDR    | <b>RAM Data Retention Voltage<sup>(1)</sup></b>                             |                                                         |        |            |        |                                                     |
|               |        | PIC16LF1704/8                                                               | 1.5                                                     | —      | —          | V      | Device in Sleep mode                                |
| D002*         |        | PIC16F1704/8                                                                | 1.7                                                     | —      | —          | V      | Device in Sleep mode                                |
| D002A*        | VPOR   | <b>Power-on Reset Release Voltage<sup>(3)</sup></b>                         |                                                         |        |            |        |                                                     |
|               |        | PIC16LF1704/8                                                               | —                                                       | 1.6    | —          | V      |                                                     |
| D002A*        |        | PIC16F1704/8                                                                | —                                                       | 1.6    | —          | V      |                                                     |
| D002B*        | VPORR* | <b>Power-on Reset Rearm Voltage<sup>(3)</sup></b>                           |                                                         |        |            |        |                                                     |
|               |        | PIC16LF1704/8                                                               | —                                                       | 0.8    | —          | V      |                                                     |
| D002B*        |        | PIC16F1704/8                                                                | —                                                       | 1.5    | —          | V      |                                                     |
| D003          | VFVR   | <b>Fixed Voltage Reference Voltage</b>                                      |                                                         |        |            |        |                                                     |
|               |        | 1x gain (1.024 nominal)                                                     | -4                                                      | —      | +4         | %      | VDD ≥ 2.5V, -40°C to 85°C                           |
|               |        | 2x gain (2.048 nominal)                                                     | -4                                                      | —      | +4         | %      | VDD ≥ 2.5V, -40°C to 85°C                           |
|               |        | 4x gain (4.096 nominal)                                                     | -5                                                      | —      | +5         | %      | VDD ≥ 4.75V, -40°C to 85°C                          |
| D004*         | SVDD   | <b>VDD Rise Rate to ensure internal Power-on Reset signal<sup>(2)</sup></b> | 0.05                                                    | —      | —          | V/ms   | See Section 5.1 "Power-On Reset (POR)" for details. |

\* These parameters are characterized but not tested.

† Data in "Typ." column is at 3.3V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

- Note** 1: This is the limit to which VDD can be lowered in Sleep mode without losing RAM data.  
 2: PLL required for 32 MHz operation.  
 3: See Figure 32-3: POR and POR Rearm with Slow Rising VDD.

**FIGURE 32-21: I<sup>2</sup>C BUS START/STOP BITS TIMING**

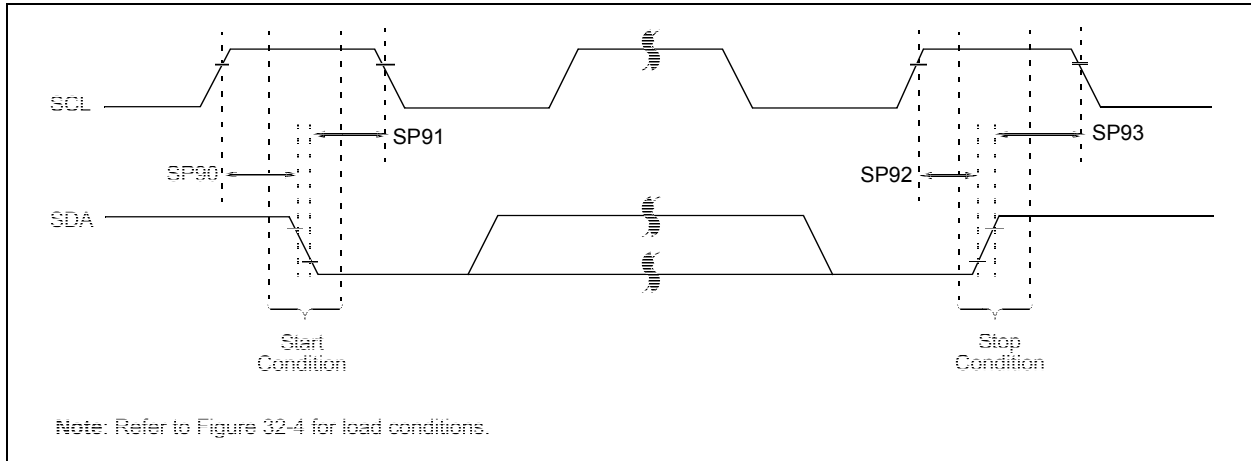


**TABLE 32-24: I<sup>2</sup>C BUS START/STOP BITS REQUIREMENTS**

| Standard Operating Conditions (unless otherwise stated) |         |                 |              |      |      |      |       |                                                       |
|---------------------------------------------------------|---------|-----------------|--------------|------|------|------|-------|-------------------------------------------------------|
| Param. No.                                              | Symbol  | Characteristic  |              | Min. | Typ. | Max. | Units | Conditions                                            |
| SP90*                                                   | TSU:STA | Start condition | 100 kHz mode | 4700 | —    | —    | ns    | Only relevant for repeated Start condition            |
|                                                         |         | Setup time      | 400 kHz mode | 600  | —    | —    |       |                                                       |
| SP91*                                                   | THD:STA | Start condition | 100 kHz mode | 4000 | —    | —    | ns    | After this period, the first clock pulse is generated |
|                                                         |         | Hold time       | 400 kHz mode | 600  | —    | —    |       |                                                       |
| SP92*                                                   | TSU:STO | Stop condition  | 100 kHz mode | 4700 | —    | —    | ns    |                                                       |
|                                                         |         | Setup time      | 400 kHz mode | 600  | —    | —    |       |                                                       |
| SP93                                                    | THD:STO | Stop condition  | 100 kHz mode | 4000 | —    | —    | ns    |                                                       |
|                                                         |         | Hold time       | 400 kHz mode | 600  | —    | —    |       |                                                       |


\* These parameters are characterized but not tested.

**FIGURE 32-22: I<sup>2</sup>C BUS DATA TIMING**

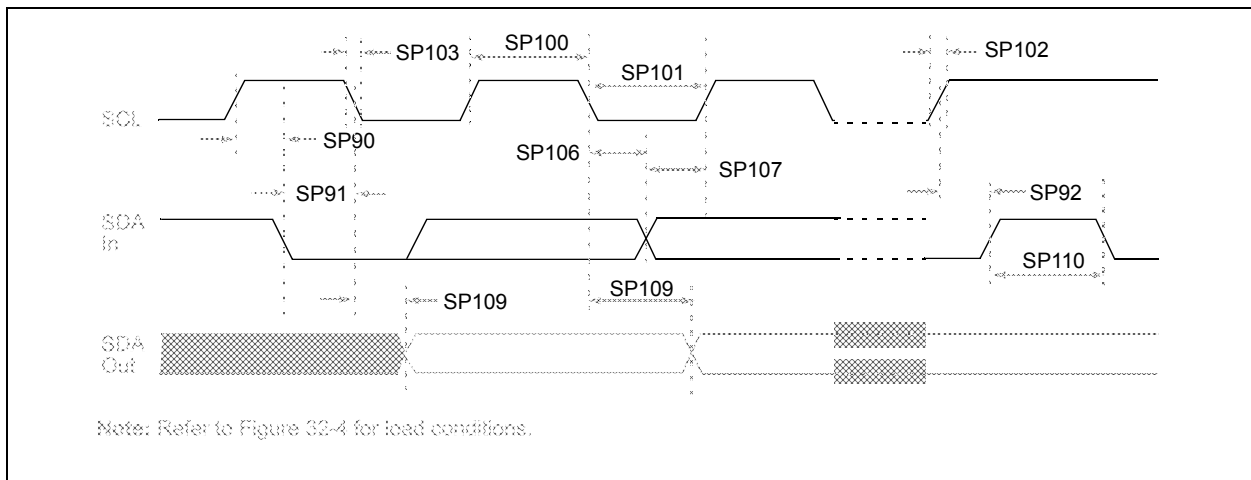


# PIC16(L)F1704/8


**Note:** Unless otherwise noted,  $V_{IN} = 5V$ ,  $F_{OSC} = 500\text{ kHz}$ ,  $C_{IN} = 0.1\text{ }\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$ .

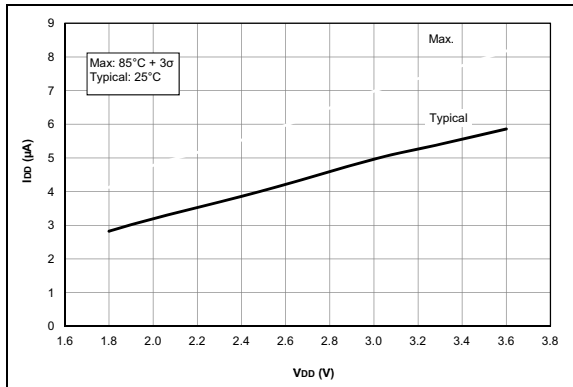


**FIGURE 33-19:**  $I_{DD}$ , LFINTOSC Mode,  $F_{osc} = 31\text{ kHz}$ . PIC16LF1704/8 Only.

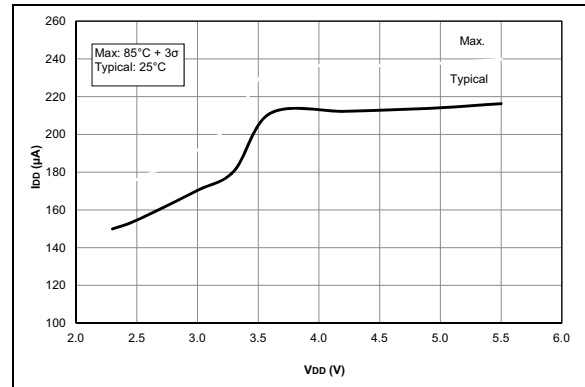


**FIGURE 33-22:**  $I_{DD}$ , MFINTOSC Mode,  $F_{osc} = 500\text{ kHz}$ . PIC16F1704/8 Only.

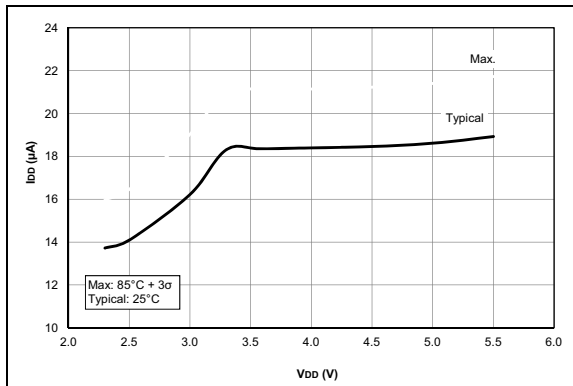


**FIGURE 33-20:**  $I_{DD}$ , LFINTOSC Mode,  $F_{osc} = 31\text{ kHz}$ . PIC16F1704/8 Only.

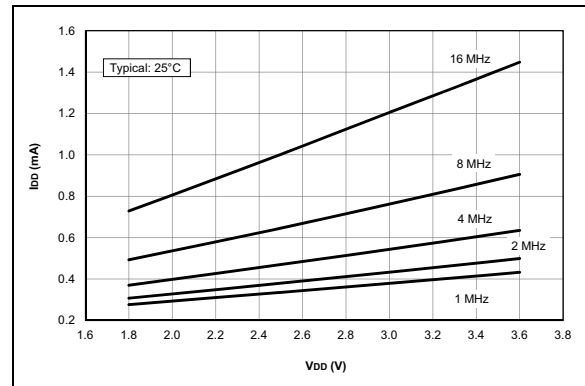

**FIGURE 33-23:**  $I_{DD}$  Typical, HFINTOSC Mode. PIC16LF1704/8 Only.

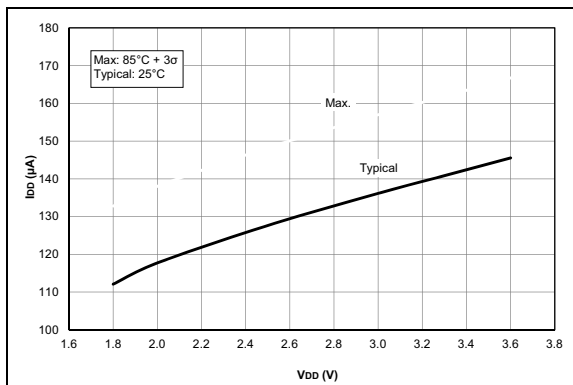

**FIGURE 33-21:**  $I_{DD}$ , MFINTOSC Mode,  $F_{osc} = 500\text{ kHz}$ . PIC16LF1704/8 Only.

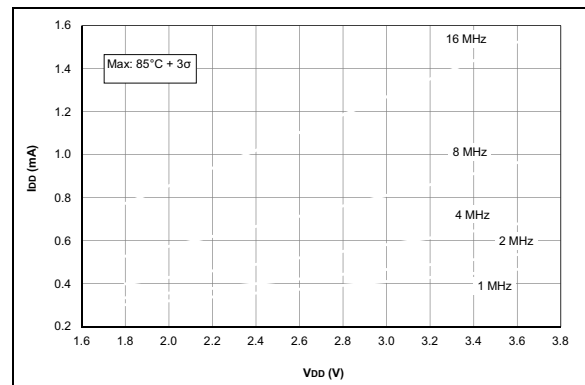

**FIGURE 33-24:**  $I_{DD}$  Maximum, HFINTOSC Mode. PIC16LF1704/8 Only.

## THE MICROCHIP WEB SITE

Microchip provides online support via our web site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at [www.microchip.com](http://www.microchip.com). Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: <http://www.microchip.com/support>**