



Welcome to [E-XFL.COM](#)

[Embedded - Microcontrollers - Application Specific](#): Tailored Solutions for Precision and Performance

[Embedded - Microcontrollers - Application Specific](#) represents a category of microcontrollers designed with unique features and capabilities tailored to specific application needs. Unlike general-purpose microcontrollers, application-specific microcontrollers are optimized for particular tasks, offering enhanced performance, efficiency, and functionality to meet the demands of specialized applications.


What Are [Embedded - Microcontrollers - Application Specific](#)?

Application specific microcontrollers are engineered to

Details

| | |
|-------------------------|---|
| Product Status | Obsolete |
| Applications | Capacitive Sensing |
| Core Processor | M8C |
| Program Memory Type | FLASH (32kB) |
| Controller Series | CY8C20xx6A |
| RAM Size | 2K x 8 |
| Interface | I ² C, SPI, USB |
| Number of I/O | 36 |
| Voltage - Supply | 1.71V ~ 5.5V |
| Operating Temperature | -40°C ~ 85°C |
| Mounting Type | Surface Mount |
| Package / Case | 48-VFQFN Exposed Pad |
| Supplier Device Package | 48-QFN (7x7) |
| Purchase URL | https://www.e-xfl.com/product-detail/infineon-technologies/cy8c20666a-24ltxit |

Logic Block Diagram

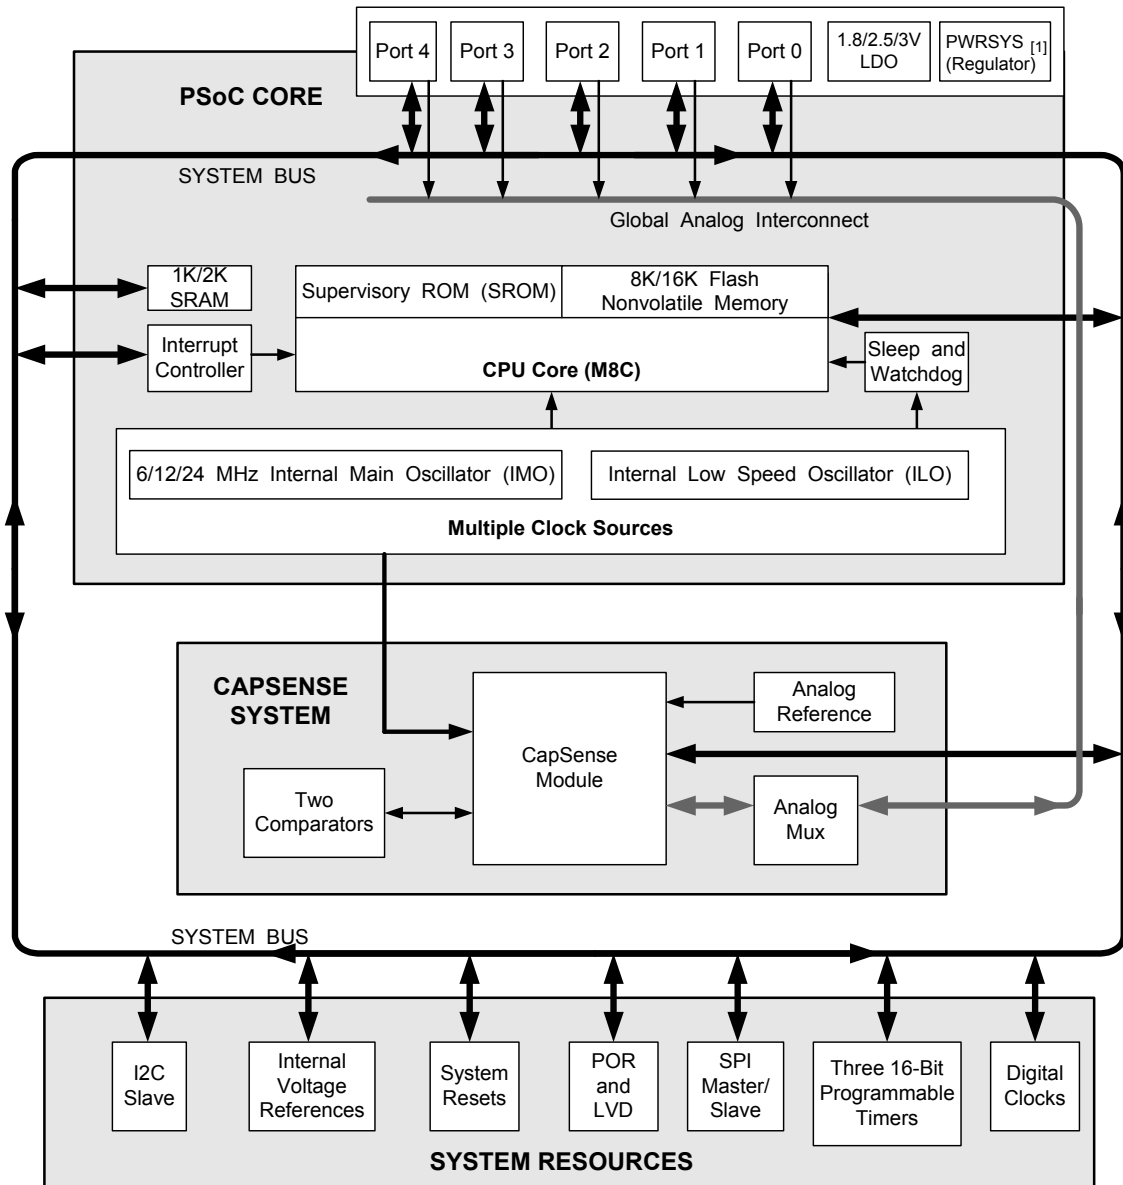

Note

1. Internal voltage regulator for internal circuitry

Contents

| | | | |
|--|-----------|--|-----------|
| PSoC® Functional Overview | 4 | AC Chip-Level Specifications | 18 |
| PSoC Core | 4 | AC General Purpose I/O Specifications | 19 |
| CapSense System | 4 | AC Comparator Specifications | 20 |
| Haptics TS2000 Controller | 4 | AC External Clock Specifications | 20 |
| Additional System Resources | 5 | AC Programming Specifications | 21 |
| Getting Started | 5 | AC I2C Specifications | 22 |
| Application Notes | 5 | Packaging Information | 26 |
| Development Kits | 5 | Thermal Impedances | 28 |
| Training | 5 | Capacitance on Crystal Pins | 28 |
| CYPs Consultants | 5 | Solder Reflow Peak Temperature | 28 |
| Solutions Library | 5 | Development Tool Selection | 29 |
| Technical Support | 5 | Software | 29 |
| Development Tools | 6 | Development Kits | 29 |
| PSoC Designer Software Subsystems | 6 | Evaluation Tools | 29 |
| Designing with PSoC Designer | 7 | Device Programmers | 30 |
| Select User Modules | 7 | Accessories (Emulation and Programming) | 30 |
| Configure User Modules | 7 | Third Party Tools | 30 |
| Organize and Connect | 7 | Build a PSoC Emulator into Your Board | 30 |
| Generate, Verify, and Debug | 7 | Ordering Information | 31 |
| Pinouts | 8 | Ordering Code Definitions | 31 |
| 24-Pin QFN | 8 | Document Conventions | 32 |
| 32-Pin QFN | 9 | Acronyms Used | 32 |
| 48-Pin QFN OCD | 10 | Units of Measure | 32 |
| Electrical Specifications | 11 | Numeric Naming | 32 |
| Absolute Maximum Ratings | 11 | Glossary | 33 |
| Operating Temperature | 11 | Reference Documents | 33 |
| DC Chip-Level Specifications | 12 | Document History Page | 34 |
| DC General Purpose I/O Specifications | 13 | Sales, Solutions, and Legal Information | 35 |
| DC Analog Mux Bus Specifications | 15 | Worldwide Sales and Design Support | 35 |
| DC Low Power Comparator Specifications | 15 | Products | 35 |
| Comparator User Module Electrical Specifications | 16 | PSoC Solutions | 35 |
| ADC Electrical Specifications | 16 | | |
| DC POR and LVD Specifications | 17 | | |
| DC Programming Specifications | 17 | | |

PSoC® Functional Overview

The PSoC family consists of on-chip controller devices, which are designed to replace multiple traditional microcontroller unit (MCU)-based components with one, low-cost single-chip programmable component. A PSoC device includes configurable analog and digital blocks, and programmable interconnect. This architecture allows the user to create customized peripheral configurations, to match the requirements of each individual application. Additionally, a fast CPU, flash program memory, SRAM data memory, and configurable I/O are included in a range of convenient pinouts.

The architecture for this device family, as shown in the [Logic Block Diagram on page 2](#), consists of three main areas:

- The core
- CapSense analog system
- System resources (including a full-speed USB port).

A common, versatile bus allows connection between the I/O and the analog system.

Each CY8C20336H/446H PSoC device includes a dedicated CapSense block that provides sensing and scanning control circuitry for capacitive sensing applications. Depending on the PSoC package, up to 28 GPIOs are also included. The GPIOs provide access to the MCU and analog mux.

PSoC Core

The PSoC core is a powerful engine that supports a rich instruction set. It encompasses SRAM for data storage, an interrupt controller, sleep and watchdog timers, and IMO and ILO. The CPU core, called the M8C, is a powerful processor with speeds up to 24 MHz. The M8C is a 4-MIPS, 8-bit Harvard-architecture microprocessor.

CapSense System

The analog system contains the capacitive sensing hardware. Several hardware algorithms are supported. This hardware performs capacitive sensing and scanning without requiring external components. The analog system is composed of the CapSense PSoC block and an internal 1-V or 1.2-V analog reference, which together support capacitive sensing of up to 28 inputs^[2]. Capacitive sensing is configurable on each GPIO pin. Scanning of enabled CapSense pins are completed quickly and easily across multiple ports.


SmartSense™

SmartSense is an innovative solution from Cypress that removes manual tuning of CapSense applications. This solution is easy-to-use and provides a robust noise immunity. It is the only auto-tuning solution that establishes, monitors, and maintains all required tuning parameters. SmartSense allows engineers to go from prototyping to mass production without re-tuning for manufacturing variations in PCB and/or overlay material properties.

Note

2. 36 GPIOs = 33 pins for capacitive sensing + 2 pins for I²C + 1 pin for modulator capacitor.

Figure 1. CapSense System Block Diagram

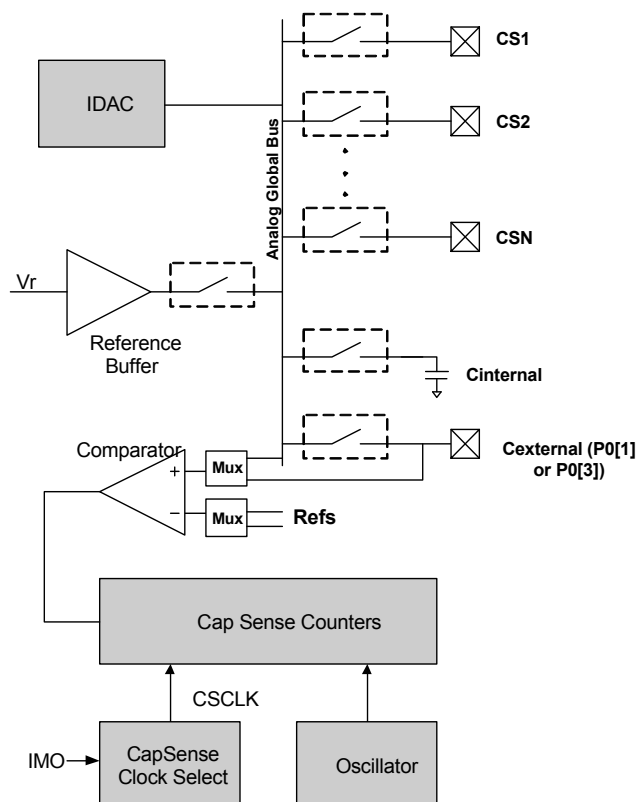

Analog Multiplexer System

The analog mux bus can connect to every GPIO pin. Pins are connected to the bus individually or in any combination. The bus also connects to the analog system for analysis with the CapSense block comparator.

Switch-control logic enables selected pins to precharge continuously under hardware control. This enables capacitive measurement for applications such as touch sensing. Other multiplexer applications include:

- Complex capacitive sensing interfaces, such as sliders and touchpads.
- Chip-wide mux that allows analog input from any I/O pin.
- [Crosspoint connection](#) between any I/O pin combinations.

Haptics TS2000 Controller

The CY8C20336H/CY8C20446H family of devices feature an easy-to-use Haptics controller resource with up to 14 different effects. These effects are available for use with three different, selectable ERM modules.

Additional System Resources

System resources provide additional capability, such as configurable USB and I²C slave, SPI master/slave communication interface, three 16-bit programmable timers, and various system resets supported by the M8C.

These system resources provide additional capability useful to complete systems. Additional resources include low voltage detection and power on reset. The merits of each system resource are listed here:

- The I²C slave/SPI master-slave module provides 50/100/400 kHz communication over two wires. SPI communication over three or four wires runs at speeds of 46.9 kHz to 3 MHz (lower for a slower system clock).
- The I²C hardware address recognition feature reduces the already low power consumption by eliminating the need for CPU intervention until a packet addressed to the target device is received.
- The I²C enhanced slave interface appears as a 32-byte RAM buffer to the external I²C master. Using a simple predefined protocol, the master controls the read and write pointers into the RAM. When this method is enabled, the slave does not stall the bus when receiving data bytes in active mode. For usage details, refer to the application note [I2C Enhanced Slave Operation - AN56007](#).
- Low voltage detection (LVD) interrupts can signal the application of falling voltage levels, while the advanced power-on-reset (POR) circuit eliminates the need for a system supervisor.
- An internal reference provides an absolute reference for capacitive sensing.
- A register-controlled bypass mode allows the user to disable the LDO regulator.

Getting Started

For in depth information, along with detailed programming details, see the PSoC® [Technical Reference Manual](#).

For up-to-date ordering, packaging, and electrical specification information, see the latest [PSoC device datasheets](#) on the web.

Application Notes

[Cypress application notes](#) are an excellent introduction to the wide variety of possible PSoC designs.

Development Kits

[PSoC Development Kits](#) are available online from and through a growing number of regional and global distributors, which include Arrow, Avnet, Digi-Key, Farnell, Future Electronics, and Newark.

Training

[Free PSoC technical training](#) (on demand, webinars, and workshops), which is available online via www.cypress.com, covers a wide variety of topics and skill levels to assist you in your designs.

CYPros Consultants

Certified PSoC consultants offer everything from technical assistance to completed PSoC designs. To contact or become a PSoC consultant go to the [CYPros Consultants](#) web site.

Solutions Library

Visit our growing [library of solution focused designs](#). Here you can find various application designs that include firmware and hardware design files that enable you to complete your designs quickly.

Technical Support

[Technical support](#) – including a searchable Knowledge Base articles and technical forums – is also available online. If you cannot find an answer to your question, call our Technical Support hotline at 1-800-541-4736.

Development Tools

PSoC Designer™ is the revolutionary integrated design environment (IDE) that you can use to customize PSoC to meet your specific application requirements. PSoC Designer software accelerates system design and time to market. Develop your applications using a library of precharacterized analog and digital peripherals (called user modules) in a drag-and-drop design environment. Then, customize your design by leveraging the dynamically generated application programming interface (API) libraries of code. Finally, debug and test your designs with the integrated debug environment, including in-circuit emulation and standard software debug features. PSoC Designer includes:

- Application editor graphical user interface (GUI) for device and user module configuration and dynamic reconfiguration
- Extensive user module catalog
- Integrated source-code editor (C and assembly)
- Free C compiler with no size restrictions or time limits
- Built-in debugger
- In-circuit emulation
- Built-in support for communication interfaces:
 - Hardware and software I²C slaves and masters
 - Full-speed USB 2.0
 - Up to four full-duplex universal asynchronous receiver/transmitters (UARTs), SPI master and slave, and wireless

PSoC Designer supports the entire library of PSoC 1 devices and runs on Windows XP, Windows Vista, and Windows 7.

PSoC Designer Software Subsystems

Design Entry

In the chip-level view, choose a base device to work with. Then select different onboard analog and digital components that use the PSoC blocks, which are called user modules. Examples of user modules are analog-to-digital converters (ADCs), digital-to-analog converters (DACs), amplifiers, and filters. Configure the user modules for your chosen application and connect them to each other and to the proper pins. Then generate your project. This prepopulates your project with APIs and libraries that you can use to program your application.

The tool also supports easy development of multiple configurations and dynamic reconfiguration. Dynamic reconfiguration makes it possible to change configurations at run time. In essence, this lets you to use more than 100 percent of PSoC's resources for an application.

Code Generation Tools

The code generation tools work seamlessly within the PSoC Designer interface and have been tested with a full range of debugging tools. You can develop your design in C, assembly, or a combination of the two.

Assemblers. The assemblers allow you to merge assembly code seamlessly with C code. Link libraries automatically use absolute addressing or are compiled in relative mode, and linked with other software modules to get absolute addressing.

C Language Compilers. C language compilers are available that support the PSoC family of devices. The products allow you to create complete C programs for the PSoC family devices. The optimizing C compilers provide all of the features of C, tailored to the PSoC architecture. They come complete with embedded libraries providing port and bus operations, standard keypad and display support, and extended math functionality.

Debugger

PSoC Designer has a debug environment that provides hardware in-circuit emulation, allowing you to test the program in a physical system while providing an internal view of the PSoC device. Debugger commands allow you to read and program and read and write data memory, and read and write I/O registers. You can read and write CPU registers, set and clear breakpoints, and provide program run, halt, and step control. The debugger also lets you to create a trace buffer of registers and memory locations of interest.

Online Help System

The online help system displays online, context-sensitive help. Designed for procedural and quick reference, each functional subsystem has its own context-sensitive help. This system also provides tutorials and links to FAQs and an Online Support Forum to aid the designer.

In-Circuit Emulator

A low-cost, high-functionality in-circuit emulator (ICE) is available for development support. This hardware can program single devices.

The emulator consists of a base unit that connects to the PC using a USB port. The base unit is universal and operates with all PSoC devices. Emulation pods for each device family are available separately. The emulation pod takes the place of the PSoC device in the target board and performs full-speed (24 MHz) operation.

Designing with PSoC Designer

The development process for the PSoC device differs from that of a traditional fixed-function microprocessor. The configurable analog and digital hardware blocks give the PSoC architecture a unique flexibility that pays dividends in managing specification change during development and lowering inventory costs. These configurable resources, called PSoC blocks, have the ability to implement a wide variety of user-selectable functions. The PSoC development process is:

1. Select [user modules](#).
2. Configure user modules.
3. Organize and connect.
4. Generate, verify, and debug.

Select User Modules

PSoC Designer provides a library of prebuilt, pretested hardware peripheral components called “user modules.” User modules make selecting and implementing peripheral devices, both analog and digital, simple.

Configure User Modules

Each user module that you select establishes the basic register settings that implement the selected function. They also provide parameters and properties that allow you to tailor their precise configuration to your particular application. For example, a PWM User Module configures one or more digital PSoC blocks, one for each eight bits of resolution. Using these parameters, you can establish the pulse width and duty cycle. Configure the parameters and properties to correspond to your chosen application. Enter values directly or by selecting values from drop-down menus. All of the user modules are documented in datasheets that may be viewed directly in PSoC Designer or on the Cypress website. These [user module datasheets](#) explain the internal operation of the user module and provide performance specifications. Each datasheet describes the use of each user module parameter, and other information that you may need to successfully implement your design.

Organize and Connect

Build signal chains at the chip level by interconnecting user modules to each other and the I/O pins. Perform the selection, configuration, and routing so that you have complete control over all on-chip resources.

Generate, Verify, and Debug

When you are ready to test the hardware configuration or move on to developing code for the project, perform the “Generate Configuration Files” step. This causes PSoC Designer to generate source code that automatically configures the device to your specification and provides the software for the system. The generated code provides APIs with high-level functions to control and respond to hardware events at run time, and interrupt service routines that you can adapt as needed.

A complete code development environment lets you to develop and customize your applications in C, assembly language, or both.

The last step in the development process takes place inside PSoC Designer's Debugger (accessed by clicking the Connect icon). PSoC Designer downloads the HEX image to the ICE where it runs at full-speed. PSoC Designer debugging capabilities rival those of systems costing many times more. In addition to traditional single-step, run-to-breakpoint, and watch-variable features, the debug interface provides a large trace buffer. It lets you to define complex breakpoint events that include monitoring address and data bus values, memory locations, and external signals.

Pinouts


The CY8C20336H/CY8C20446H PSoC device is available in a variety of packages which are listed and illustrated in the following tables. Every port pin (labeled with a “P”) is capable of digital I/O and connection to the common analog bus. However, V_{SS} , V_{DD} , and XRES are not capable of digital I/O.

24-Pin QFN

Table 1. Pin Definitions - CY8C20336H [3, 4]

| Pin No. | Type | | Name | Description |
|---------|---------|--------|-----------------|--|
| | Digital | Analog | | |
| 1 | I/O | I | P2[5] | Crystal output (XOut) |
| 2 | I/O | I | P2[3] | Crystal input (XIn) |
| 3 | I/O | I | P2[1] | |
| 4 | IOHR | I | P1[7] | I ² C SCL, SPI SS |
| 5 | IOHR | I | P1[5] | I ² C SDA, SPI MISO |
| 6 | IOHR | I | P1[3] | SPI CLK |
| 7 | IOHR | I | P1[1] | ISSP CLK ^[5] , I ² C SCL, SPI MOSI |
| 8 | | | NC | No connection |
| 9 | Power | | V _{SS} | Ground connection |
| 10 | IOHR | I | P1[0] | ISSP DATA ^[5] , I ² C SDA, SPI CLK |
| 11 | IOHR | I | P1[2] | |
| 12 | IOHR | I | P1[4] | Optional external clock input (EXTCLK) |
| 13 | IOHR | I | P1[6] | |
| 14 | Input | | XRES | Active high external reset with internal pull down |
| 15 | I/O | I | P2[0] | |
| 16 | IOH | I | P0[0] | |
| 17 | IOH | I | P0[2] | |
| 18 | IOH | I | P0[4] | |
| 19 | IOH | I | P0[6] | |
| 20 | Power | | V _{DD} | Supply voltage |
| 21 | IOH | I | P0[7] | |
| 22 | IOH | I | P0[5] | |
| 23 | IOH | I | P0[3] | Integrating input |
| 24 | IOH | I | P0[1] | Integrating input |
| CP | Power | | V _{SS} | Center pad must be connected to ground |

Figure 2. CY8C20336H PSoC Device

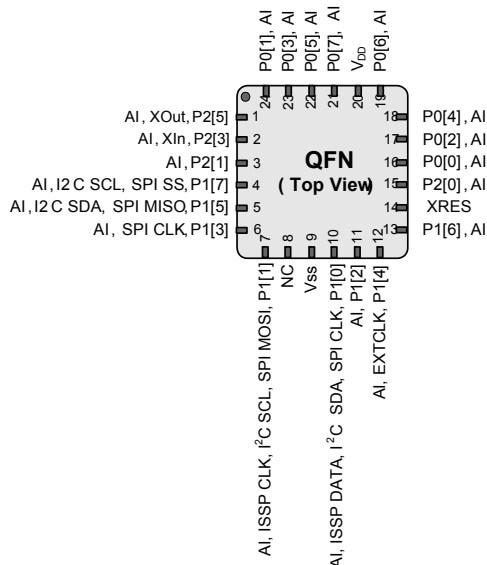

LEGEND A = Analog, I = Input, O = Output, OH = 5 mA High Output Drive, R = Regulated Output.

Notes

- During power-up or reset event, device P1[1] and P1[0] may disturb the I²C bus. Use alternate pins if you encounter any issues.
- The center pad (CP) on the QFN package must be connected to ground (V_{SS}) for best mechanical, thermal, and electrical performance. If not connected to ground, it must be electrically floated and not connected to any other signal.
- These are the ISSP pins, which are not High Z at POR (Power On Reset).

32-Pin QFN

Table 2. Pin Definitions - CY8C20446H PSoC Device [6, 7]


| Pin No. | Type | | Name | Description |
|---------|---------|--------|-----------------|---|
| | Digital | Analog | | |
| 1 | IOH | I | P0[1] | Integrating input |
| 2 | I/O | I | P2[7] | |
| 3 | I/O | I | P2[5] | Crystal output (XOut) |
| 4 | I/O | I | P2[3] | Crystal input (XIn) |
| 5 | I/O | I | P2[1] | |
| 6 | I/O | I | P3[3] | |
| 7 | I/O | I | P3[1] | |
| 8 | IOHR | I | P1[7] | I ² C SCL, SPI SS |
| 9 | IOHR | I | P1[5] | I ² C SDA, SPI MISO |
| 10 | IOHR | I | P1[3] | SPI CLK. |
| 11 | IOHR | I | P1[1] | ISSP CLK ^[8] , I ² C SCL, SPI MOSI. |
| 12 | Power | | Vss | Ground connection. |
| 13 | IOHR | I | P1[0] | ISSP DATA ^[8] , I ² C SDA., SPI CLK |
| 14 | IOHR | I | P1[2] | |
| 15 | IOHR | I | P1[4] | Optional external clock input (EXTCLK) |
| 16 | IOHR | I | P1[6] | |
| 17 | Input | | XRES | Active high external reset with internal pull down |
| 18 | I/O | I | P3[0] | |
| 19 | I/O | I | P3[2] | |
| 20 | I/O | I | P2[0] | |
| 21 | I/O | I | P2[2] | |
| 22 | I/O | I | P2[4] | |
| 23 | I/O | I | P2[6] | |
| 24 | IOH | I | P0[0] | |
| 25 | IOH | I | P0[2] | |
| 26 | IOH | I | P0[4] | |
| 27 | IOH | I | P0[6] | |
| 28 | Power | | V _{DD} | Supply voltage |
| 29 | IOH | I | P0[7] | |
| 30 | IOH | I | P0[5] | |
| 31 | IOH | I | P0[3] | Integrating input |
| 32 | Power | | Vss | Ground connection |
| CP | Power | | Vss | Center pad must be connected to ground |

LEGEND A = Analog, I = Input, O = Output, OH = 5 mA High Output Drive, R = Regulated Output.

Notes

- During power-up or reset event, device P1[1] and P1[0] may disturb the I²C bus. Use alternate pins if you encounter any issues.
- The center pad (CP) on the QFN package must be connected to ground (Vss) for best mechanical, thermal, and electrical performance. If not connected to ground, it must be electrically floated and not connected to any other signal.
- These are the ISSP pins, which are not High Z at POR (Power On Reset).


Figure 3. CY8C20446H PSoC Device

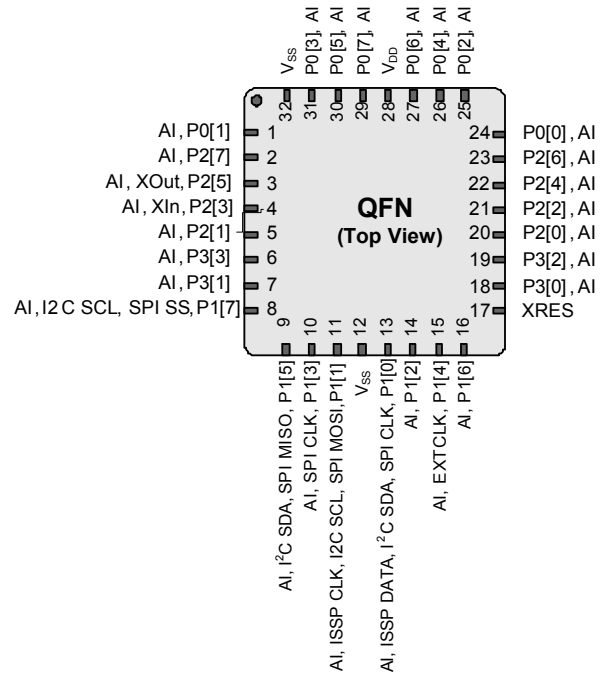

Electrical Specifications

This section presents the DC and AC electrical specifications of the CY8C20x36H/46H PSoC devices. For the latest electrical specifications, confirm that you have the most recent data sheet by visiting the web at <http://www.cypress.com/psoc>.

Figure 5. Voltage versus CPU Frequency

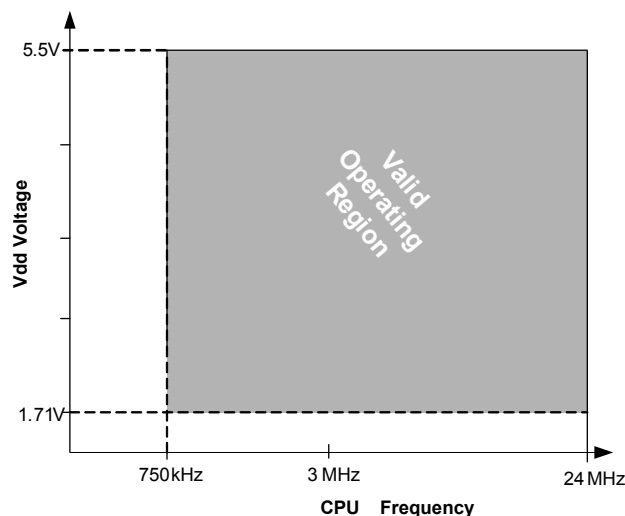

Absolute Maximum Ratings

Exceeding maximum ratings may shorten the useful life of the device. User guidelines are not tested.

Table 4. Absolute Maximum Ratings

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|------------------|--|---|-----------------------|-----|-----------------------|-------|
| T _{STG} | Storage temperature | Higher storage temperatures reduce data retention time. Recommended Storage Temperature is +25 °C ± 25 °C. Extended duration storage temperatures above 85 °C degrades reliability. | -55 | +25 | +125 | °C |
| V _{DD} | Supply voltage relative to V _{SS} | | -0.5 | – | +6.0 | V |
| V _{IO} | DC input voltage | | V _{SS} – 0.5 | – | V _{DD} + 0.5 | V |
| V _{IOZ} | DC voltage applied to tristate | | V _{SS} – 0.5 | – | V _{DD} + 0.5 | V |
| I _{MIO} | Maximum current into any port pin | | -25 | – | +50 | mA |
| ESD | Electrostatic discharge voltage | Human body model ESD | 2000 | – | – | V |
| LU | Latch up current | In accordance with JESD78 standard | – | – | 200 | mA |

Operating Temperature

Table 5. Operating Temperature

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|----------------|------------------------------|---|-----|-----|------|-------|
| T _A | Ambient temperature | | -40 | – | +85 | °C |
| T _C | Commercial temperature range | | 0 | – | 70 | °C |
| T _J | Operational die temperature | The temperature rise from ambient to junction is package specific. Refer the table Thermal Impedances per Package on page 28 . The user must limit the power consumption to comply with this requirement. | -40 | – | +100 | °C |

Comparator User Module Electrical Specifications

The following table lists the guaranteed maximum and minimum specifications. Unless stated otherwise, the specifications are for the entire device voltage and temperature operating range: $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$, $1.71\text{ V} \leq V_{DD} \leq 5.5\text{ V}$.

Table 13. Comparator User Module Electrical Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|-------------------|--------------------------|---|-----|-----|-----|---------------|
| T_{COMP} | Comparator response time | 50-mV overdrive | – | 70 | 100 | ns |
| Offset | | Valid from 0.2 V to $V_{DD} - 0.2\text{ V}$ | – | 2.5 | 30 | mV |
| Current | | Average DC current, 50 mV overdrive | – | 20 | 80 | μA |
| PSRR | Supply voltage > 2 V | Power supply rejection ratio | – | 80 | – | dB |
| | Supply voltage < 2 V | Power supply rejection ratio | – | 40 | – | dB |
| Input Range | | | 0 | – | 1.5 | V |

ADC Electrical Specifications

Table 14. ADC User Module Electrical Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|------------------------|---------------------------------------|---|---|---|---|----------|
| Input | | | | | | |
| V_{IN} | Input voltage range | | 0 | – | V_{REFADC} | V |
| C_{IIN} | Input capacitance | | – | – | 5 | pF |
| R_{IN} | Input resistance | Equivalent switched cap input resistance for 8-, 9-, or 10-bit resolution | $1/(500\text{fF} \times \text{data clock})$ | $1/(400\text{fF} \times \text{data clock})$ | $1/(300\text{fF} \times \text{data clock})$ | Ω |
| Reference | | | | | | |
| V_{REFADC} | ADC reference voltage | | 1.14 | – | 1.26 | V |
| Conversion Rate | | | | | | |
| F_{CLK} | Data clock | Source is chip's internal main oscillator. See AC Chip-Level Specifications on page 18 for accuracy | 2.25 | – | 6 | MHz |
| S8 | 8-bit sample rate | Data clock set to 6 MHz. Sample Rate = $0.001/(2^{\text{Resolution}}/\text{Data clock})$ | – | 23.43 | – | ksps |
| S10 | 10-bit sample rate | Data clock set to 6 MHz. Sample Rate = $0.001/(2^{\text{Resolution}}/\text{Data clock})$ | – | 5.85 | – | ksps |
| DC Accuracy | | | | | | |
| RES | Resolution | Can be set to 8-, 9-, or 10-bit | 8 | – | 10 | bits |
| DNL | Differential nonlinearity | | –1 | – | +2 | LSB |
| INL | Integral nonlinearity | | –2 | – | +2 | LSB |
| E_{OFFSET} | Offset error | 8-bit resolution | 0 | 3.20 | 19.20 | LSB |
| | | 10-bit resolution | 0 | 12.80 | 76.80 | LSB |
| E_{GAIN} | Gain error | For any resolution | –5 | – | +5 | %FSR |
| Power | | | | | | |
| I_{ADC} | Operating current | | – | 2.10 | 2.60 | mA |
| PSRR | Power supply rejection ratio | PSRR ($V_{DD} > 3.0\text{ V}$) | – | 24 | – | dB |
| | | PSRR ($V_{DD} < 3.0\text{ V}$) | – | 30 | – | dB |

AC General Purpose I/O Specifications

The following table lists guaranteed maximum and minimum specifications for the entire voltage and temperature ranges.

Table 18. AC GPIO Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|---------------|--|---|-----|-----|---|-------|
| F_{GPIO} | GPIO operating frequency | Normal strong mode port 0, 1 | 0 | – | 6 MHz for $1.71\text{ V} < V_{DD} < 2.40\text{ V}$ 12 MHz for $2.40\text{ V} < V_{DD} < 5.50\text{ V}$ | MHz |
| T_{RISE23} | Rise time, strong mode, Cload = 50 pF ports 2 or 3 | $V_{DD} = 3.0\text{ to }3.6\text{ V}$, 10% – 90% | 15 | – | 80 | ns |
| $T_{RISE23L}$ | Rise time, strong mode low supply, Clload = 50 pF, ports 2 or 3 | $V_{DD} = 1.71\text{ to }3.0\text{ V}$, 10% – 90% | 15 | – | 80 | ns |
| T_{RISE01} | Rise time, strong mode, Clload = 50 pF ports 0 or 1 | $V_{DD} = 3.0\text{ to }3.6\text{ V}$, 10% – 90% LDO enabled or disabled | 10 | – | 50 | ns |
| $T_{RISE01L}$ | Rise time, strong mode low supply, Clload = 50 pF, ports 0 or 1 | $V_{DD} = 1.71\text{ to }3.0\text{ V}$, 10% – 90% LDO enabled or disabled | 10 | – | 80 | ns |
| T_{FALL} | Fall time, strong mode, Clload = 50 pF all ports | $V_{DD} = 3.0\text{ to }3.6\text{ V}$, 10% – 90% | 10 | – | 50 | ns |
| T_{FALLL} | Fall time, strong mode low supply, Clload = 50 pF, all ports | $V_{DD} = 1.71\text{ to }3.0\text{ V}$, 10% – 90% | 10 | – | 70 | ns |

Figure 6. GPIO Timing Diagram

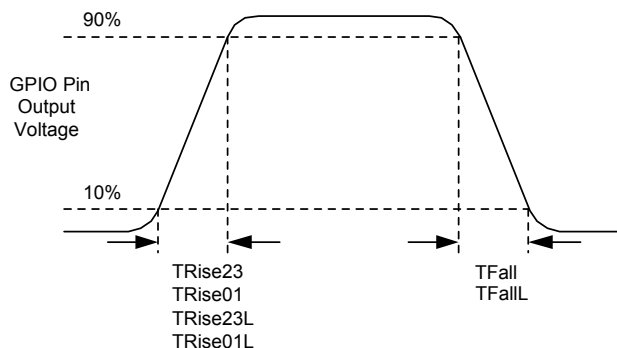


Table 19. AC Characteristics – USB Data Timings

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|--------------------|--|--------------------|------------|-----|------------|-------|
| T _{DRATE} | Full-speed data rate | Average bit rate | 12 – 0.25% | 12 | 12 + 0.25% | MHz |
| T _{JR1} | Receiver jitter tolerance | To next transition | –18.5 | – | 18.5 | ns |
| T _{JR2} | Receiver jitter tolerance | To pair transition | –9 | – | 9 | ns |
| T _{DJ1} | FS driver jitter | To next transition | –3.5 | – | 3.5 | ns |
| T _{DJ2} | FS driver jitter | To pair transition | –4.0 | – | 4.0 | ns |
| T _{FDEOP} | Source jitter for differential transition | To SE0 transition | –2 | – | 5 | ns |
| T _{FEOPT} | Source SE0 interval of EOP | | 160 | – | 175 | ns |
| T _{FEOPR} | Receiver SE0 interval of EOP | | 82 | – | | ns |
| T _{FST} | Width of SE0 interval during differential transition | | – | – | 14 | ns |

Table 20. AC Characteristics – USB Driver

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|-----------------------------------|---------------------------------|------------|------|-----|------|-------|
| T _{FR} | Transition rise time | 50 pF | 4 | – | 20 | ns |
| T _{FF} | Transition fall time | 50 pF | 4 | – | 20 | ns |
| T _{FRFM} ^[19] | Rise/fall time matching | | 90 | – | 111 | % |
| V _{crs} | Output signal crossover voltage | | 1.30 | – | 2.00 | V |

AC Comparator Specifications

The following table lists guaranteed maximum and minimum specifications for the entire voltage and temperature ranges.

Table 21. AC Low Power Comparator Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|------------------|---|--|-----|-----|-----|-------|
| T _{LPC} | Comparator response time, 50 mV overdrive | 50 mV overdrive does not include offset voltage. | – | – | 100 | ns |

AC External Clock Specifications

The following table lists guaranteed maximum and minimum specifications for the entire voltage and temperature ranges.

Table 22. AC External Clock Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|---------------------|---|------------|-------|-----|-------|-------|
| F _{OSCEXT} | Frequency (external oscillator frequency) | | 0.75 | – | 25.20 | MHz |
| | High period | | 20.60 | – | 5300 | ns |
| | Low period | | 20.60 | – | – | ns |
| | Power-up IMO to switch | | 150 | – | – | μs |

Note

19. T_{FRFM} is not met under all conditions. There is a corner case at lower supply voltages, such as those under 3.3 V. This condition does not affect USB communications. Signal integrity tests show an excellent eye diagram at 3.15 V.


AC I²C Specifications

The following table lists guaranteed maximum and minimum specifications for the entire voltage and temperature ranges.

Table 24. AC Characteristics of the I²C SDA and SCL Pins

| Symbol | Description | Standard Mode | | Fast Mode | | Units |
|--------------|--|---------------|------|---------------------|-----|---------|
| | | Min | Max | Min | Max | |
| f_{SCL} | SCL clock frequency | 0 | 100 | 0 | 400 | kHz |
| $t_{HD;STA}$ | Hold time (repeated) START condition. After this period, the first clock pulse is generated. | 4.0 | — | 0.6 | — | μ s |
| t_{LOW} | LOW period of the SCL clock | 4.7 | — | 1.3 | — | μ s |
| t_{HIGH} | HIGH period of the SCL clock | 4.0 | — | 0.6 | — | μ s |
| $t_{SU;STA}$ | Setup time for a repeated START condition | 4.7 | — | 0.6 | — | μ s |
| $t_{HD;DAT}$ | Data hold time | 0 | 3.45 | 0 | 0.9 | μ s |
| $t_{SU;DAT}$ | Data setup time | 250 | — | 100 ^[20] | — | ns |
| $t_{SU;STO}$ | Setup time for STOP condition | 4.0 | — | 0.6 | — | μ s |
| t_{BUF} | Bus-free time between a STOP and START condition | 4.7 | — | 1.3 | — | μ s |
| t_{SP} | Pulse width of spikes are suppressed by the input filter. | — | — | 0 | 50 | ns |

Figure 8. Definition for Timing for Fast/Standard Mode on the I²C Bus

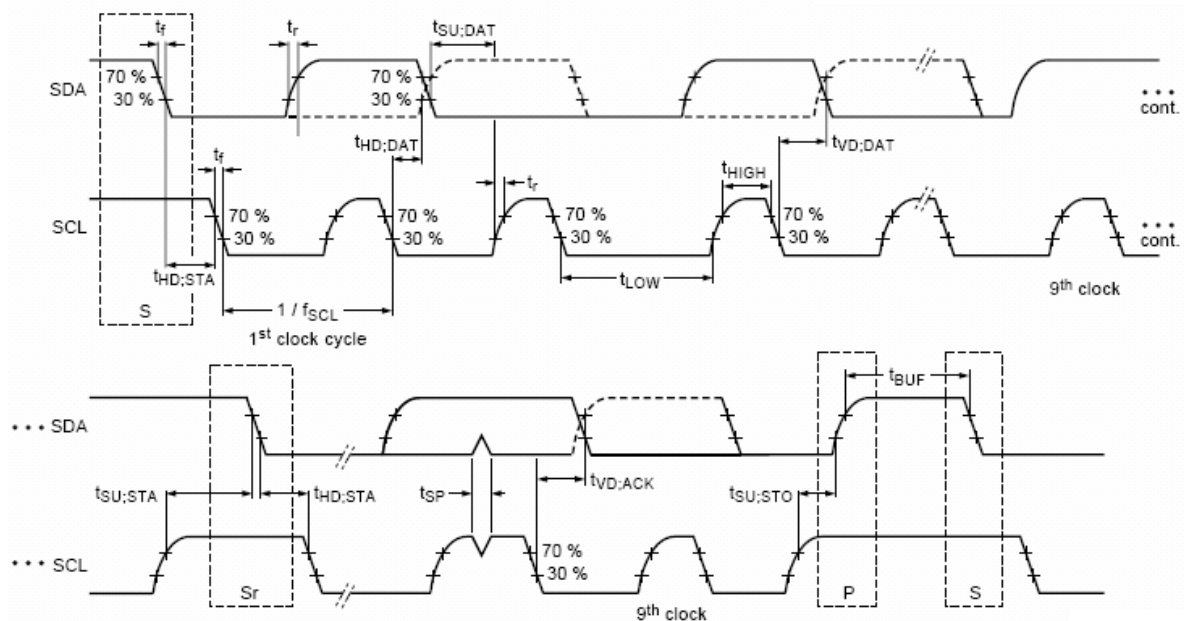

Note

20. A Fast-Mode I²C-bus device can be used in a Standard Mode I²C-bus system, but the requirement $t_{SU;DAT} \geq 250$ ns must then be met. This automatically be the case if the device does not stretch the LOW period of the SCL signal. If such device does stretch the LOW period of the SCL signal, it must output the next data bit to the SDA line $t_{rmax} + t_{SU;DAT} = 1000 + 250 = 1250$ ns (according to the Standard-Mode I²C-bus specification) before the SCL line is released.

Table 25. SPI Master AC Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|----------------|-------------------------|---|-----------|--------|--------|-------|
| F_{SCLK} | SCLK clock frequency | $V_{DD} \geq 2.4\text{ V}$ $V_{DD} < 2.4\text{ V}$ | — — | — — | 6 3 | MHz |
| DC | SCLK duty cycle | | — | 50 | — | % |
| T_{SETUP} | MISO to SCLK setup time | $V_{DD} \geq 2.4\text{ V}$ $V_{DD} < 2.4\text{ V}$ | 60 100 | — — | — — | ns |
| T_{HOLD} | SCLK to MISO hold time | | 40 | — | — | ns |
| T_{OUT_VAL} | SCLK to MOSI valid time | | — | — | 40 | ns |
| T_{OUT_H} | MOSI high time | | 40 | — | — | ns |

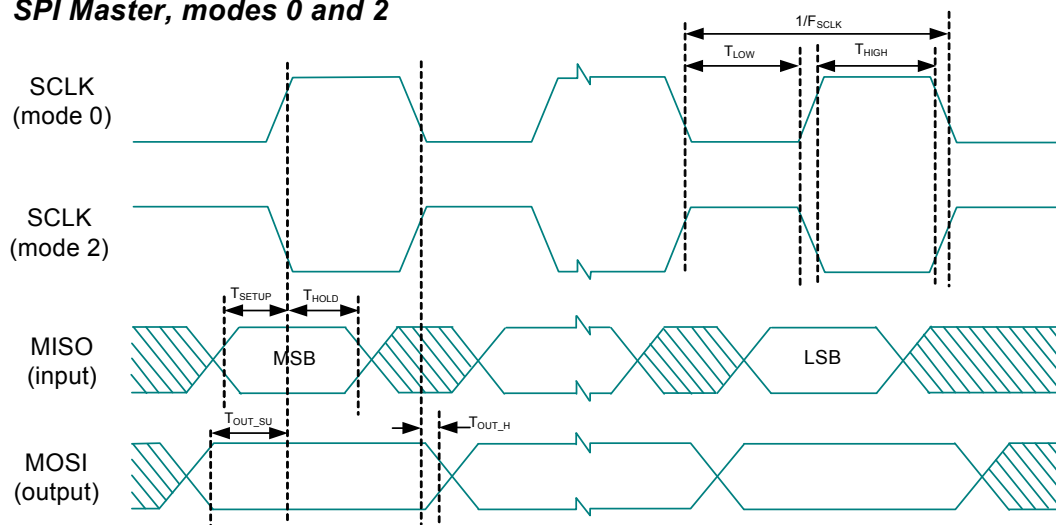
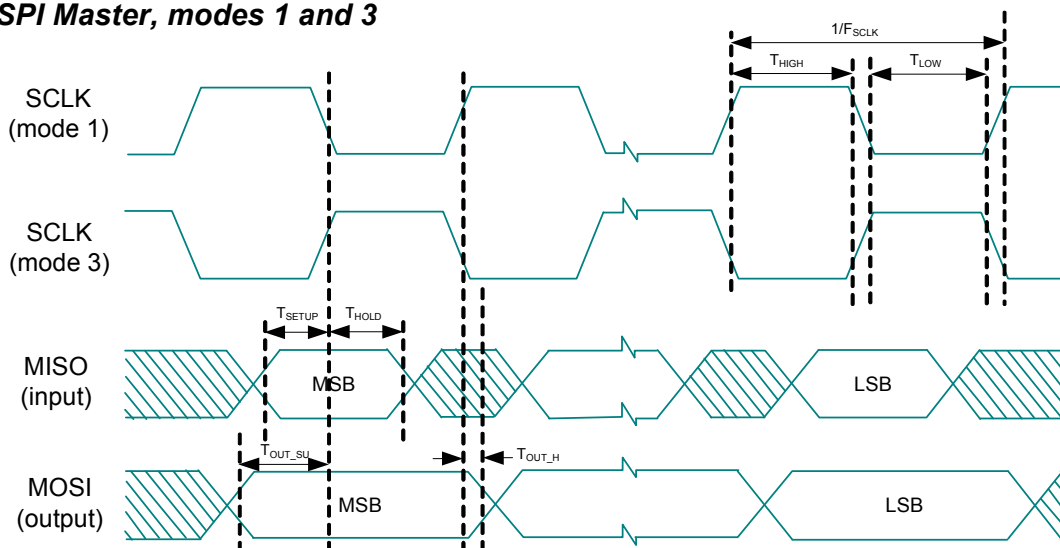
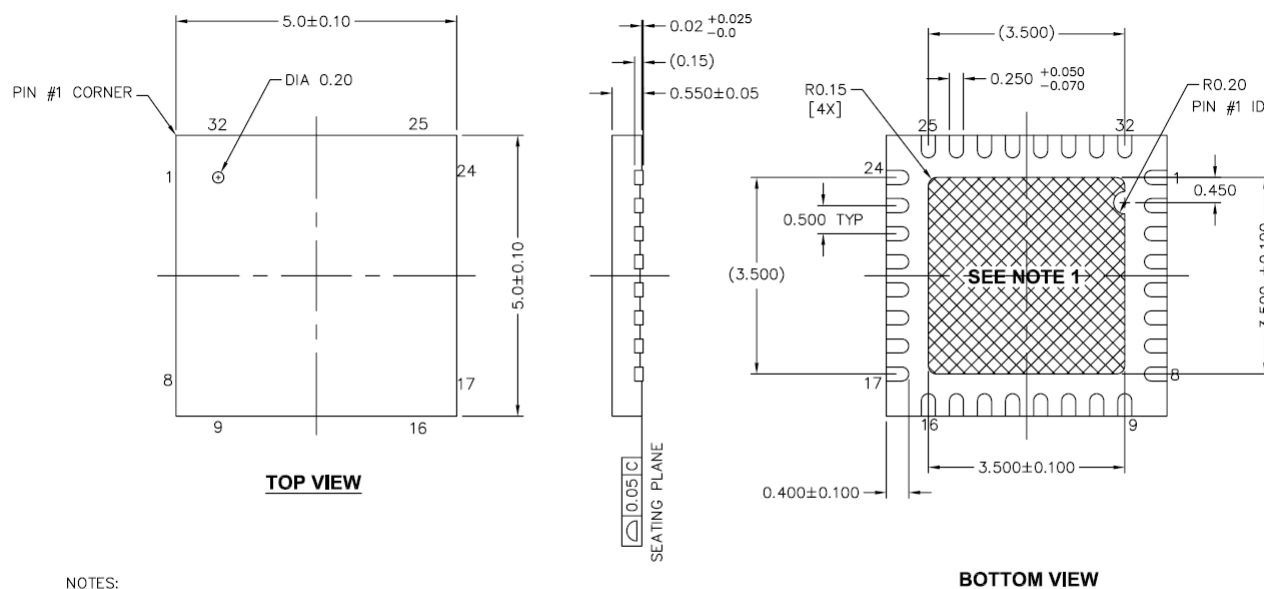
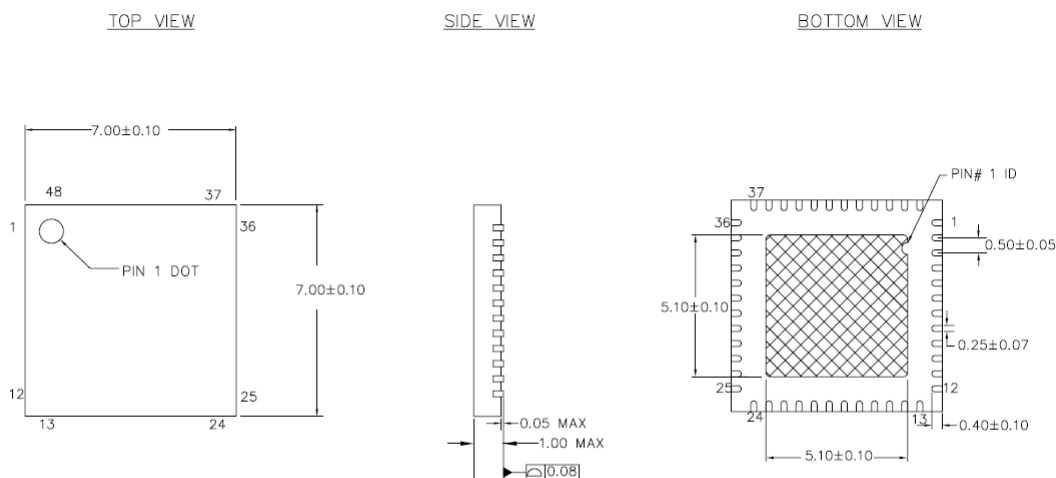
Figure 9. SPI Master Mode 0 and 2
SPI Master, modes 0 and 2


Figure 10. SPI Master Mode 1 and 3
SPI Master, modes 1 and 3

Table 26. SPI Slave AC Specifications

| Symbol | Description | Conditions | Min | Typ | Max | Units |
|------------------|--------------------------------|------------|--------|-----|-----|-------|
| F_{SCLK} | SCLK clock frequency | — | — | — | 4 | MHz |
| T_{LOW} | SCLK low time | — | 42 | — | — | ns |
| T_{HIGH} | SCLK high time | — | 42 | — | — | ns |
| T_{SETUP} | MOSI to SCLK setup time | — | 30 | — | — | ns |
| T_{HOLD} | SCLK to MOSI hold time | — | 50 | — | — | ns |
| T_{SS_MISO} | SS high to MISO valid | — | — | — | 153 | ns |
| T_{SCLK_MISO} | SCLK to MISO valid | — | — | — | 125 | ns |
| T_{SS_HIGH} | SS high time | — | 50 | — | — | ns |
| T_{SS_CLK} | Time from SS low to first SCLK | — | 2/SCLK | — | — | ns |
| T_{CLK_SS} | Time from last SCLK to SS high | — | 2/SCLK | — | — | ns |

Figure 14. 32-Pin (5 × 5 × 0.55 mm) QFN


001-42168 *E

Figure 15. 48-Pin (7 × 7 × 1.0 mm) QFN


001-13191 *G

Important Notes

- For information on the preferred dimensions for mounting QFN packages, see the following Application Note at http://www.amkor.com/products/notes_papers/MLFAppNote.pdf.
- Pinned vias for thermal conduction are not required for the low power PSoC device.

Thermal Impedances

Table 27. Thermal Impedances per Package

| Package | Typical θ_{JA} ^[21] |
|------------------------|---------------------------------------|
| 24-QFN ^[22] | 20.90 °C/W |
| 32-QFN ^[22] | 19.51 °C/W |
| 48-QFN ^[22] | 17.68 °C/W |

Capacitance on Crystal Pins

Table 28. Typical Package Capacitance on Crystal Pins

| Package | Package Capacitance |
|------------|---------------------|
| 32-pin QFN | 3.2 pF |
| 48-pin QFN | 3.3 pF |

Solder Reflow Peak Temperature

This table lists the minimum solder reflow peak temperature to achieve good solderability.

Table 29. Solder Reflow Peak Temperature

| Package | Maximum Peak Temperature | Time at Maximum Peak Temperature |
|------------|--------------------------|----------------------------------|
| 24-pin QFN | 260 °C | 30 s |
| 32-pin QFN | 260 °C | 30 s |
| 48-pin QFN | 260 °C | 30 s |

Notes

21. $T_J = T_A + \text{Power} \times \theta_{JA}$.

22. To achieve the thermal impedance specified for the QFN package, the center thermal pad must be soldered to the PCB ground plane.

23. Higher temperatures may be required based on the solder melting point. Typical temperatures for solder are 220 ± 5 °C with Sn-Pb or 245 ± 5 °C with Sn-Ag-Cu paste. Refer to the solder manufacturer specifications.

Device Programmers

All device programmers are purchased from the Cypress Online Store.

CY3216 Modular Programmer

The **CY3216 Modular Programmer kit** features a modular programmer and the MiniProg1 programming unit. The modular programmer includes three programming module cards and supports multiple Cypress products. The kit includes:

- Modular Programmer Base
- Three Programming Module Cards
- MiniProg Programming Unit
- PSoC Designer Software CD

- Getting Started Guide

- USB 2.0 Cable

CY3207ISSP In-System Serial Programmer (ISSP)

The **CY3207ISSP** is a production programmer. It includes protection circuitry and an industrial case that is more robust than the MiniProg in a production programming environment. Note that CY3207ISSP needs special software and is not compatible with PSoC Programmer. The kit includes:

- CY3207 Programmer Unit
- PSoC ISSP Software CD
- 110 ~ 240 V Power Supply, Euro-Plug Adapter
- USB 2.0 Cable

Accessories (Emulation and Programming)

Table 30. Emulation and Programming Accessories

| Part Number | Pin Package | Flex-Pod Kit ^[24] | Foot Kit ^[25] | Adapter ^[26] |
|-------------------|-------------|------------------------------|--------------------------|-------------------------|
| CY8C20336H-24LQXI | 24-pin QFN | CY3250-20366QFN | CY3250-24QFN-FK | See note 24 |
| CY8C20446H-24LQXI | 32-pin QFN | CY3250-20466QFN | CY3250-32QFN-FK | See note 26 |

Third Party Tools

Several tools have been specially designed by the following third-party vendors to accompany PSoC devices during development and production. Specific details for each of these tools can be found at <http://www.cypress.com> under Documentation > Evaluation Boards.

Build a PSoC Emulator into Your Board

For details on how to emulate your circuit before going to volume production using an on-chip debug (OCD) non-production PSoC device, refer Application Note "Debugging - Build a PSoC Emulator into Your Board - AN2323" at <http://www.cypress.com/?rID2748>.

Notes

24. Flex-Pod kit includes a practice flex-pod and a practice PCB, in addition to two flex-pods.

25. Foot kit includes surface mount feet that can be soldered to the target PCB.

26. Programming adapter converts non-DIP package to DIP footprint. Specific details and ordering information for each of the adapters can be found at <http://www.emulation.com>.

27. Dual-function digital I/O pins also connect to the common analog mux.

28. This part is available in limited quantities for in-circuit debugging during prototype development. It is not available in production volumes.


Ordering Information

The following table lists the CY8C20336H/CY8C20446H PSoC devices' key package features and ordering codes.

Table 31. PSoC Device Key Features and Ordering Information

| Package | Ordering Code | Flash (KB) | SRAM (KB) | CapSense Blocks | Digital I/O Pins | Analog Inputs ^[27] | XRES Pin | USB |
|---|-------------------|------------|-----------|-----------------|------------------|-------------------------------|----------|-----|
| 24-pin (4 × 4 × 0.6mm) QFN | CY8C20336H-24LQXI | 8 | 1 | 1 | 20 | 20 | Yes | No |
| 32 pin (5 × 5 × 0.6 mm) QFN | CY8C20446H-24LQXI | 16 | 2 | 1 | 28 | 28 | Yes | No |
| 48 pin (7 × 7 mm) QFN (OCD) ^[28] | CY8C20066A-24LTXI | 32 | 2 | 1 | 36 | 36 | Yes | Yes |

Ordering Code Definitions

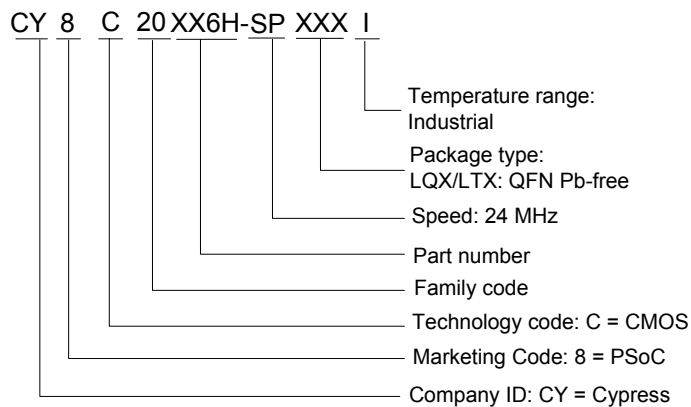

Document Conventions

Acronyms Used

The following table lists the acronyms that are used in this document.

| Acronym | Description |
|------------------|---|
| AC | alternating current |
| ADC | analog-to-digital converter |
| API | application programming interface |
| CMOS | complementary metal oxide semiconductor |
| CPU | central processing unit |
| DAC | digital-to-analog converter |
| DC | direct current |
| EOP | end of packet |
| FSR | full scale range |
| GPIO | general purpose input/output |
| GUI | graphical user interface |
| I ² C | inter-integrated circuit |
| ICE | in-circuit emulator |
| IDAC | digital analog converter current |
| ILO | internal low speed oscillator |
| IMO | internal main oscillator |
| I/O | input/output |
| ISSP | in-system serial programming |
| LCD | liquid crystal display |
| LDO | low dropout (regulator) |
| LSB | least-significant bit |
| LVD | low voltage detect |
| MCU | micro-controller unit |
| MIPS | mega instructions per second |
| MISO | master in slave out |
| MOSI | master out slave in |
| MSB | most-significant bit |
| OCD | on-chip debugger |
| POR | power on reset |
| PPOR | precision power on reset |
| PSRR | power supply rejection ratio |
| PWRSYS | power system |
| PSoC® | Programmable System-on-Chip |
| SLIMO | slow internal main oscillator |
| SRAM | static random access memory |
| SNR | signal to noise ratio |
| QFN | quad flat no-lead |
| SCL | serial I ² C clock |
| SDA | serial I ² C data |
| SDATA | serial ISSP data |
| SPI | serial peripheral interface |
| SS | slave select |
| SSOP | shrink small outline package |
| TC | test controller |
| USB | universal serial bus |
| USB D+ | USB Data + |
| USB D- | USB Data- |
| WLCSP | wafer level chip scale package |
| XTAL | crystal |

Units of Measure

Table 32 lists all the abbreviations used to measure the PSoC devices.

Numeric Naming

Hexadecimal numbers are represented with all letters in uppercase with an appended lowercase 'h' (for example, '14h' or '3Ah'). Hexadecimal numbers may also be represented by a '0x' prefix, the C coding convention. Binary numbers have an appended lowercase 'b' (for example, '01010100b' or '01000011b'). Numbers not indicated by an 'h', 'b', or 0x are decimal.

Table 32. Units of Measure

| Symbol | Unit of Measure |
|--------|-------------------------------|
| °C | degree Celsius |
| dB | decibels |
| fF | femto farad |
| g | gram |
| Hz | hertz |
| KB | 1024 bytes |
| Kbit | 1024 bits |
| KHz | kilohertz |
| Ksps | kilo samples per second |
| kΩ | kilohm |
| MHz | megahertz |
| MΩ | megaohm |
| μA | microampere |
| μF | microfarad |
| μH | microhenry |
| μs | microsecond |
| μW | microwatts |
| mA | milli-ampere |
| ms | milli-second |
| mV | milli-volts |
| nA | nanoampere |
| ns | nanosecond |
| nV | nanovolts |
| Ω | ohm |
| pA | picoampere |
| pF | picofarad |
| pp | peak-to-peak |
| ppm | parts per million |
| ps | picosecond |
| sps | samples per second |
| s | sigma: one standard deviation |
| V | volts |
| W | watt |