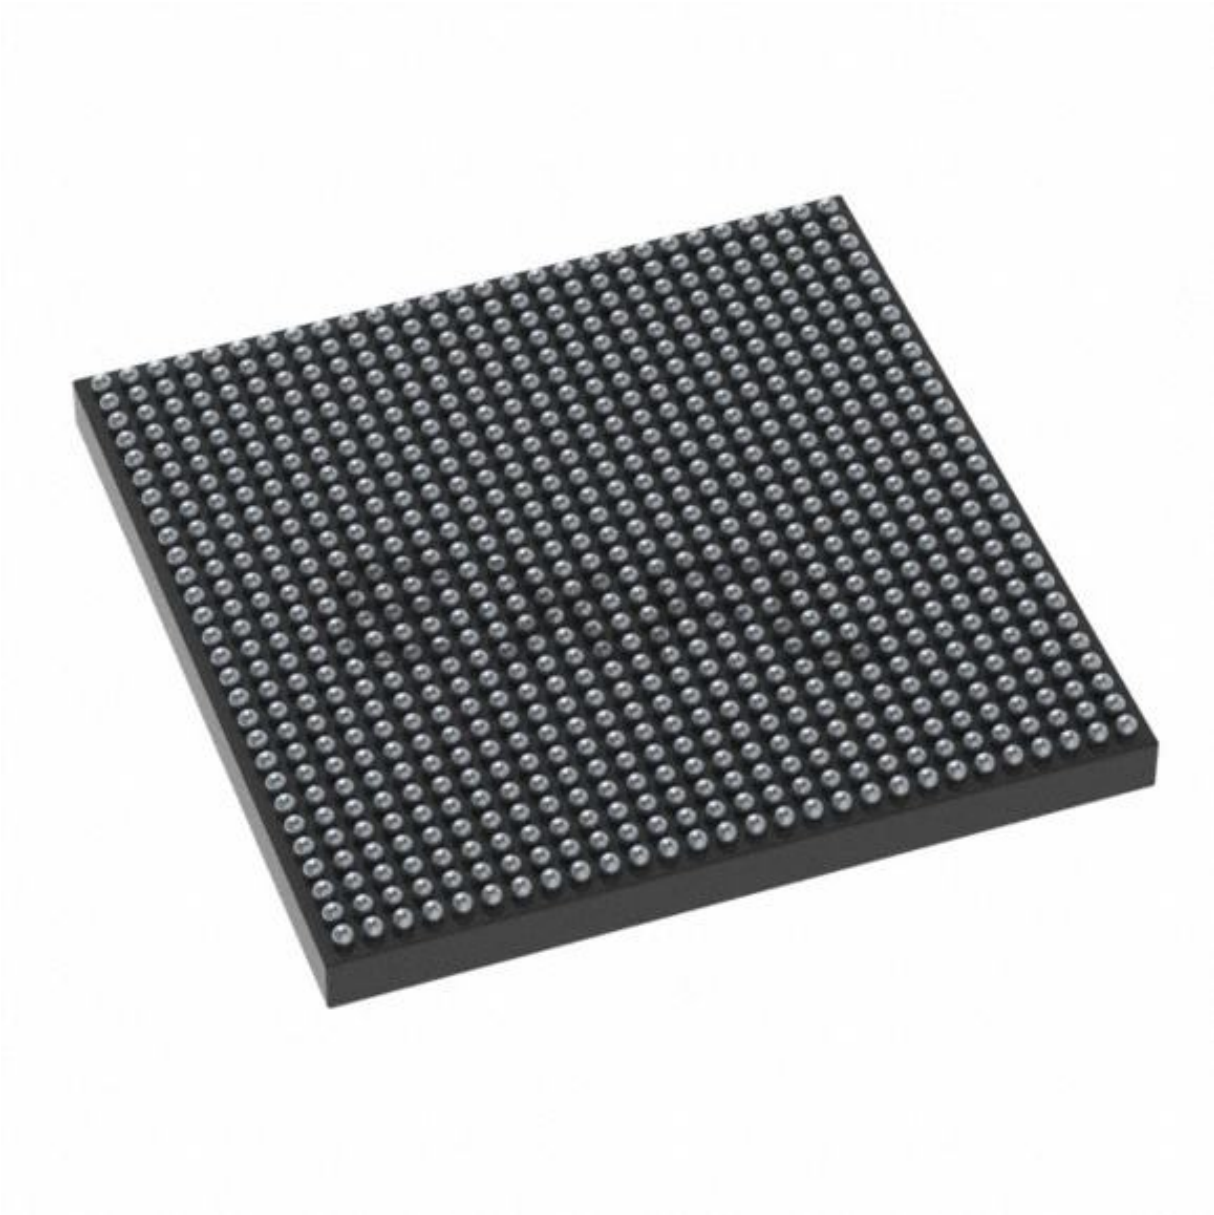

Welcome to E-XFL.COM

Embedded - System On Chip (SoC): The Heart of Modern Embedded Systems

Embedded - System On Chip (SoC) refers to an integrated circuit that consolidates all the essential components of a computer system into a single chip. This includes a microprocessor, memory, and other peripherals, all packed into one compact and efficient package. SoCs are designed to provide a complete computing solution, optimizing both space and power consumption, making them ideal for a wide range of embedded applications.

What are Embedded - System On Chip (SoC)?

System On Chip (SoC) integrates multiple functions of a computer or electronic system onto a single chip. Unlike traditional multi-chip solutions, SoCs combine a central

Details	
Product Status	Active
Architecture	MCU, FPGA
Core Processor	Dual ARM® Cortex®-A53 MPCore™ with CoreSight™, Dual ARM®Cortex™-R5 with CoreSight™
Flash Size	-
RAM Size	256KB
Peripherals	DMA, WDT
Connectivity	CANbus, EBI/EMI, Ethernet, I²C, MMC/SD/SDIO, SPI, UART/USART, USB OTG
Speed	500MHz, 1.2GHz
Primary Attributes	Zynq®UltraScale+™ FPGA, 192K+ Logic Cells
Operating Temperature	0°C ~ 100°C (TJ)
Package / Case	784-BFBGA, FCBGA
Supplier Device Package	784-FCBGA (23x23)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xczu4cg-l2sfvc784e

Table 2: Recommended Operating Conditions [1][2] ***(Cont'd)***

Symbol	Description	Min	Typ	Max	Units
PL System Monitor					
V_{CCADC}	PL System Monitor supply relative to GNDADC.	1.746	1.800	1.854	V
V_{REFP}	PL System Monitor externally supplied reference voltage relative to GNDADC.	1.200	1.250	1.300	V
Temperature					
T_j[13]	Junction temperature operating range for extended (E) temperature devices.[14]	0	–	100	°C
	Junction temperature operating range for industrial (I) temperature devices.	–40	–	100	°C
	Junction temperature operating range for eFUSE programming.	–40	–	125	°C

Notes:

1. All voltages are relative to GND.
2. For the design of the power distribution system consult UltraScale Architecture PCB Design Guide (UG583).
3. $V_{CC\_PSINTFP\_DDR}$ must be tied to $V_{CC\_PSINTFP}$.
4. Includes V_{CCO_PSDDR} of 1.2V, 1.35V, 1.5V at ±5% and 1.1V +0.07V/–0.04V depending upon the tolerances required by specific memory standards.
5. Applies to all PS I/O supply banks. Includes V_{CCO_PSIO} of 1.8V, 2.5V, and 3.3V at ±5%.
6. If the battery-backed RAM or RTC is not used, connect V_{CC_PSBATT} to GND or V_{CC_PSAUX}. The V_{CC_PSAUX} maximum of 1.89V is acceptable on an unused V_{CC_PSBATT}.
7. V_{CCINT_IO} must be connected to V_{CCBRAM}.
8. Includes V_{CCO} of 1.0V (HP I/O only), 1.2V, 1.35V, 1.5V, 1.8V, 2.5V (HD I/O only) at ±5%, and 3.3V (HD I/O only) at +3/–5%.
9. V_{CCAUX_IO} must be connected to V_{CCAUX}.
10. The lower absolute voltage specification always applies.
11. A total of 200 mA per bank should not be exceeded.
12. Each voltage listed requires filtering as described in UltraScale Architecture GTH Transceiver User Guide (UG576) or UltraScale Architecture GTY Transceiver User Guide (UG578).
13. Xilinx recommends measuring the Tj of a device using the system monitor as described in the UltraScale Architecture System Monitor User Guide (UG580). The SYSMON temperature measurement errors (that are described in Table 69 and Table 124) must be accounted for in your design. For example, when using the PL system monitor with an external reference of 1.25V, when SYSMON reports 97°C, there is a measurement error ±3°C. A reading of 97°C is considered the maximum adjusted Tj (100°C – 3°C = 97°C).
14. Devices labeled with the speed/temperature grade of -2LE normally operate under Extended (E) temperature grade specifications with a maximum junction temperature of 100°C. However, E temperature grade devices can operate for a limited time at a junction temperature of 110°C. Timing parameters adhere to the same speed file at 110°C as they do at 100°C, regardless of operating voltage (nominal voltage of 0.85V or a low-voltage of 0.72V). Operation at Tj = 110°C is limited to 1% of the device lifetime and can occur sequentially or at regular intervals as long as the total time does not exceed 1% of the device lifetime.

Table 15: SelectIO DC Input and Output Levels for HP I/O Banks [1][2][3]

I/O Standard	V_{IL}		V_{IH}		V_{OL}	V_{OH}	I_{OL}	I_{OH}
	V, Min	V, Max	V, Min	V, Max	V, Max	V, Min	mA	mA
HSTL_I	–0.300	V_{REF} – 0.100	V_{REF} + 0.100	V_{CCO} + 0.300	0.400	V_{CCO} – 0.400	5.8	–5.8
HSTL_I_12	–0.300	V_{REF} – 0.080	V_{REF} + 0.080	V_{CCO} + 0.300	25% V_{CCO}	75% V_{CCO}	4.1	–4.1
HSTL_I_18	–0.300	V_{REF} – 0.100	V_{REF} + 0.100	V_{CCO} + 0.300	0.400	V_{CCO} – 0.400	6.2	–6.2
HSUL_12	–0.300	V_{REF} – 0.130	V_{REF} + 0.130	V_{CCO} + 0.300	20% V_{CCO}	80% V_{CCO}	0.1	–0.1
LVCMOS12	–0.300	35% V_{CCO}	65% V_{CCO}	V_{CCO} + 0.300	0.400	V_{CCO} – 0.400	Note 4	Note 4
LVCMOS15	–0.300	35% V_{CCO}	65% V_{CCO}	V_{CCO} + 0.300	0.450	V_{CCO} – 0.450	Note 5	Note 5
LVCMOS18	–0.300	35% V_{CCO}	65% V_{CCO}	V_{CCO} + 0.300	0.450	V_{CCO} – 0.450	Note 5	Note 5
LVDCI_15	–0.300	35% V_{CCO}	65% V_{CCO}	V_{CCO} + 0.300	0.450	V_{CCO} – 0.450	7.0	–7.0
LVDCI_18	–0.300	35% V_{CCO}	65% V_{CCO}	V_{CCO} + 0.300	0.450	V_{CCO} – 0.450	7.0	–7.0
SSTL12	–0.300	V_{REF} – 0.100	V_{REF} + 0.100	V_{CCO} + 0.300	V_{CCO}/2 – 0.150	V_{CCO}/2 + 0.150	8.0	–8.0
SSTL135	–0.300	V_{REF} – 0.090	V_{REF} + 0.090	V_{CCO} + 0.300	V_{CCO}/2 – 0.150	V_{CCO}/2 + 0.150	9.0	–9.0
SSTL15	–0.300	V_{REF} – 0.100	V_{REF} + 0.100	V_{CCO} + 0.300	V_{CCO}/2 – 0.175	V_{CCO}/2 + 0.175	10.0	–10.0
SSTL18_I	–0.300	V_{REF} – 0.125	V_{REF} + 0.125	V_{CCO} + 0.300	V_{CCO}/2 – 0.470	V_{CCO}/2 + 0.470	7.0	–7.0
MIPI_DPHY_DCI_LP[6]	–0.300	0.550	0.880	V_{CCO} + 0.300	0.050	1.100	0.01	–0.01

Notes:

1. Tested according to relevant specifications.
2. Standards specified using the default I/O standard configuration. For details, see the UltraScale Architecture SelectIO Resources User Guide (UG571).
3. POD10 and POD12 DC input and output levels are shown in Table 16, Table 20, Table 21, and Table 22.
4. Supported drive strengths of 2, 4, 6, or 8 mA in HP I/O banks.
5. Supported drive strengths of 2, 4, 6, 8, or 12 mA in HP I/O banks.
6. Low-power option for MIPI_DPHY_DCI.

Table 16: DC Input Levels for Single-ended POD10 and POD12 I/O Standards [1][2]

I/O Standard	V_{IL}		V_{IH}	
	V, Min	V, Max	V, Min	V, Max
POD10	–0.300	V_{REF} – 0.068	V_{REF} + 0.068	V_{CCO} + 0.300
POD12	–0.300	V_{REF} – 0.068	V_{REF} + 0.068	V_{CCO} + 0.300

Notes:

1. Tested according to relevant specifications.
2. Standards specified using the default I/O standard configuration. For details, see the UltraScale Architecture SelectIO Resources User Guide (UG571).

Table 26: Speed Grade Designations by Device *(Cont'd)*

Device	Speed Grade, Temperature Ranges, and V_{CCINT} Operating Voltages		
	Advance	Preliminary	Production
XCZU11EG	-3E (V_{CCINT} = 0.90V), -2E (V_{CCINT} = 0.85V) -2I (V_{CCINT} = 0.85V), -2LE (V_{CCINT} = 0.85V) -1E (V_{CCINT} = 0.85V), -1I (V_{CCINT} = 0.85V) -1LI (V_{CCINT} = 0.85V) -2LE (V_{CCINT} = 0.72V), -1LI (V_{CCINT} = 0.72V)		
XCZU15EG	-3E (V_{CCINT} = 0.90V), -2E (V_{CCINT} = 0.85V) -2I (V_{CCINT} = 0.85V), -2LE (V_{CCINT} = 0.85V) -1E (V_{CCINT} = 0.85V), -1I (V_{CCINT} = 0.85V) -1LI (V_{CCINT} = 0.85V) -2LE (V_{CCINT} = 0.72V), -1LI (V_{CCINT} = 0.72V)		
XCZU17EG	-3E (V_{CCINT} = 0.90V), -2E (V_{CCINT} = 0.85V) -2I (V_{CCINT} = 0.85V), -2LE (V_{CCINT} = 0.85V) -1E (V_{CCINT} = 0.85V), -1I (V_{CCINT} = 0.85V) -1LI (V_{CCINT} = 0.85V) -2LE (V_{CCINT} = 0.72V), -1LI (V_{CCINT} = 0.72V)		
XCZU19EG	-3E (V_{CCINT} = 0.90V), -2E (V_{CCINT} = 0.85V) -2I (V_{CCINT} = 0.85V), -2LE (V_{CCINT} = 0.85V) -1E (V_{CCINT} = 0.85V), -1I (V_{CCINT} = 0.85V) -1LI (V_{CCINT} = 0.85V) -2LE (V_{CCINT} = 0.72V), -1LI (V_{CCINT} = 0.72V)		

Notes:

1. The lowest power -1L and -2L devices, where V_{CCINT} = 0.72V, are listed in the Vivado Design Suite as -1LV and -2LV respectively.

Processor System (PS) Performance Characteristics

Table 28: Processor Performance

Symbol	Description	Speed Grade			Units
		-3	-2	-1	
F_{APUMAX}	Maximum APU clock frequency.	1500	1333	1200	MHz
F_{RPUMAX}	Maximum RPU clock frequency.	600	533	500	MHz
F_{GPUMAX}	Maximum GPU clock frequency.	667	600	600	MHz

Table 29: Configuration and Security Unit Performance

Symbol	Description	Speed Grade			Units
		-3	-2	-1	
$F_{CSUCIBMAX}$	Maximum CSU crypto interface block frequency.	400	400	400	MHz

Table 30: PS DDR Performance

Memory Standard	Package	DRAM Type	Speed Grade						Units
			-3		-2		-1		
			Min	Max	Min	Max	Min	Max	
DDR4	All FFV packages, FBVB900, and SFVC784	Single rank component	664	2400	664	2400	664	2400	Mb/s
		1 rank DIMM(1)(2)	664	2133	664	2133	664	2133	Mb/s
		2 rank DIMM(1)(3)	664	1866	664	1866	664	1866	Mb/s
	SFVA625	Single rank component	664	2133	664	2133	664	2133	Mb/s
		1 rank DIMM(1)(2)	664	1866	664	1866	664	1866	Mb/s
		2 rank DIMM(1)(3)	664	1600	664	1600	664	1600	Mb/s
	SBVA484	Single rank component	664	1066	664	1066	664	1066	Mb/s
		1 rank DIMM(1)(2)	664	1066	664	1066	664	1066	Mb/s
		2 rank DIMM(1)(3)	664	1066	664	1066	664	1066	Mb/s
LPDDR4	All FFV packages, FBVB900 and SFVC784	Single die package(5)	664	2400	664	2400	664	2400	Mb/s
		Dual die package(4)(5)	664	2133	664	2133	664	2133	Mb/s
	SFVA625	Single die package(5)	664	2133	664	2133	664	2133	Mb/s
		Dual die package(4)(5)	664	1866	664	1866	664	1866	Mb/s
	SBVA484	Single die package(5)	664	1066	664	1066	664	1066	Mb/s
		Dual die package(4)(5)	664	1066	664	1066	664	1066	Mb/s

PS Switching Characteristics

PS Clocks

Table 34: PS Reference Clock Requirements (1)

Symbol	Description	Min	Typ	Max	Units
$T_{RMSJPSCLK}$	PS_REF_CLK input RMS clock jitter.	–	–	3	ps
$T_{PJPSCLK}$	PS_REF_CLK input period jitter (peak-to-peak). Number of clock cycles = 10,000	–	–	50	ps
$T_{DCPSCLK}$	PS_REF_CLK duty cycle.	45	–	55	%
$T_{RFPSCLK}$	PS_REF_CLK rise time (20%–80%) and fall time (80%–20%).	–	–	2.22	ns
F_{PSCLK}	PS_REF_CLK frequency.	27	–	60	MHz

Notes:

1. The values in this table are applicable to alternative PS reference clock inputs ALT_REF_CLK, AUX_REF_CLK, and VIDEO_CLK.

Table 35: PS RTC Crystal Requirements (1)

Symbol	Description	Min	Typ	Max	Units
F_{XTAL}	Parallel resonance crystal frequency.	–	32.8	–	KHz
T_{FTXTAL}	Frequency tolerance.	–20	–	20	ppm
C_{XTAL}	Load capacitance for crystal parallel resonance.	–	12.5	–	pF
R_{ESR}	Crystal ESR (16.8 and 19.2 MHz).	–	70	–	KΩ
C_{SHUNT}	Crystal shunt capacitance.	–	1.4	–	pF

Notes:

1. Required board components: Feedback resistor = 4.7 MΩ, PCB and pad capacitance = 1.5 pF, C_1 and C_2 capacitance = 21 pF.

Table 36: PS PLL Switching Characteristics

Symbol	Description	Speed Grade			Units
		-3	-2	-1	
$F_{LOCKPSPLL}$	PLL maximum lock time.	100	100	100	µs
$F_{PSPLLMAX}$	PLL maximum output frequency.	1600	1600	1600	MHz
$F_{PSPLLMIN}$	PLL minimum output frequency.	750	750	750	MHz
$F_{PSPLLVCOMAX}$	PLL maximum VCO frequency.	3000	3000	3000	MHz
$F_{PSPLLVCOMIN}$	PLL minimum VCO frequency.	1500	1500	1500	MHz

PS eMMC Standard Interface

Table 46: eMMC Standard Interface [(1)]

Symbol	Description	Min	Max	Units
eMMC Standard Interface				
$T_{DCEMMCHSCLK}$	eMMC clock duty cycle.	45	55	%
$T_{EMMCHSCKO}$	Clock to output delay, all outputs.	–2.0	4.5	ns
$T_{EMMCHSDCK}$	Input setup time, all inputs.	2.0	–	ns
$T_{EMMCHSCKD}$	Input hold time, all inputs.	2.0	–	ns
$F_{EMMCHSCLK}$	eMMC clock frequency.	–	25	MHz
eMMC High-Speed SDR Interface				
$T_{DCEMMCHSCLK}$	eMMC high-speed SDR clock duty cycle.	45	55	%
$T_{EMMCHSCKO}$	Clock to output delay, all outputs.[(2)]	3.2	16.8	ns
$T_{EMMCHSDIVW}$	Input valid data window.[(3)]	0.4	–	UI
$F_{EMMCHSCLK}$	eMMC high speed SDR clock frequency.	–	50	MHz
eMMC High-Speed DDR Interface				
$T_{DCEMMCDDRCLK}$	eMMC high-speed DDR clock duty cycle.	45	55	%
$T_{EMMCDDRSCKO1}$	Data clock to output delay.[(2)]	2.7	7.3	ns
$T_{EMMCSDRIVW}$	Input valid data window.[(3)]	3.5	–	ns
$T_{EMMCDDRSCKO2}$	Command clock to output delay.	3.2	16	ns
$T_{EMMCDDRDCK2}$	Command input setup time.	3.9	–	ns
$T_{EMMCDDRCKD2}$	Command input hold time.	2.5	–	ns
$F_{EMMCDDRCLK}$	eMMC high-speed DDR clock frequency.	–	50	MHz
eMMC HS200 Interface				
$T_{DCEMMCHS200CLK}$	eMMC HS200 clock duty cycle.	40	60	%
$T_{EMMCHS200CKO}$	Clock to output delay, all outputs.[(2)]	1.0	3.4	ns
$T_{EMMCSDR1IVW}$	Input valid data window.[(3)]	0.4	–	UI
$F_{EMMCHS200CLK}$	eMMC HS200 clock frequency.	–	200	MHz

Notes:

1. The test conditions for eMMC standard mode use an 8 mA drive strength, fast slew rate, and a 30 pF load. For eMMC high-speed mode, the test conditions use a 12 mA drive strength, fast slew rate, and a 30 pF load. For other eMMC modes, the test conditions use a 12 mA drive strength, fast slew rate, and a 15 pF load.
2. This specification is achieved using pre-determined DLL tuning.
3. This specification is required for capturing input data using DLL tuning.

PS DAP Interface

Table 50: DAP Interface [(1)]

Symbol	Description [(2)]	Min	Max	Units
$T_{PDAPDCK}$	PS DAP input setup time.	3.0	–	ns
$T_{PDAPCKD}$	PS DAP input hold time.	2.0	–	ns
$T_{PDAPCKO}$	PS DAP clock to out delay.	–	10.86	ns
$T_{PDAPCLK}$	PS DAP clock frequency.	–	44	MHz

Notes:

1. The test conditions are configured to the LVCMOS 3.3V I/O standard with a 12 mA drive strength, fast slew rate, and a 15 pF load.
2. PS DAP interface signals connect to MIO pins.

PS UART Interface

Table 51: UART Interface [(1)]

Symbol	Description	Min	Max	Units
$BAUD_{TXMAX}$	Transmit baud rate.	–	6.25	Mb/s
$BAUD_{RXMAX}$	Receive baud rate.	–	6.25	Mb/s
$F_{UART\_REF\_CLK}$	UART reference clock frequency.	–	100	MHz

Notes:

1. The test conditions are configured to the LVCMOS 3.3V I/O standard with a 12 mA drive strength, fast slew rate, and a 15 pF load.

PS General Purpose I/O Interface

Table 52: General Purpose I/O (GPIO) Interface

Symbol	Description	Min	Max	Units
$T_{PWGPIOH}$	Input High pulse width.	10 x $1/F_{LPD\_LSBUS\_CTRLMAX}$	–	µs
$T_{PWGPIOL}$	Input Low pulse width.	10 x $1/F_{LPD\_LSBUS\_CTRLMAX}$	–	µs

PS Trace Interface

Table 53: Trace Interface [(1)]

Symbol	Description	Min	Max	Units
T_{TCECKO}	Trace clock to output delay, all outputs.	–0.5	0.5	ns
$T_{DCTCECLK}$	Trace clock duty cycle.	45	55	%
F_{TCECLK}	Trace clock frequency.	–	125	MHz

Notes:

1. The test conditions are configured to the LVCMOS 3.3V I/O standard with a 12 mA drive strength, fast slew rate, and a 15 pF load.

Table 63: PS-GTR Transceiver Receiver Switching Characteristics

Symbol	Description	Condition	Min	Typ	Max	Units
F_{GTRRX}	Serial data rate.		1.25	–	6	Gb/s
RX_{SST}	Receiver spread-spectrum tracking.	Modulated at 33 KHz	–5000	–	0	ppm
RX_{PPMTOL}	Data/REFCLK PPM offset tolerance.	All data rates	–350	–	350	ppm

Table 64: PCI Express Protocol Characteristics (PS-GTR Transceivers) [(1)]

Standard	Description	Line Rate (Mb/s)	Min	Max	Units
PCI Express Transmitter Jitter Generation					
PCI Express Gen 1	Total transmitter jitter.	2500	–	0.25	UI
PCI Express Gen 2	Total transmitter jitter.	5000	–	0.25	UI
PCI Express Receiver High Frequency Jitter Tolerance					
PCI Express Gen 1	Total receiver jitter tolerance.	2500	0.65	–	UI
PCI Express Gen 2[(2)]	Receiver inherent timing error.	5000	0.4	–	UI
	Receiver inherent deterministic timing error.	5000	0.3	–	UI

Notes:
1. Tested per card electromechanical (CEM) methodology.
2. Between 1 MHz and 10 MHz the minimum sinusoidal jitter roll-off with a slope of 20 dB/decade.

Table 65: Serial ATA (SATA) Protocol Characteristics (PS-GTR Transceivers)

Standard	Description	Line Rate (Mb/s)	Min	Max	Units
Serial ATA Transmitter Jitter Generation					
SATA Gen 1	Total transmitter jitter.	1500	–	0.37	UI
SATA Gen 2	Total transmitter jitter.	3000	–	0.37	UI
SATA Gen 3	Total transmitter jitter.	6000	–	0.52	UI
Serial ATA Receiver High Frequency Jitter Tolerance					
SATA Gen 1	Total receiver jitter tolerance.	1500	0.27	–	UI
SATA Gen 2	Total receiver jitter tolerance.	3000	0.27	–	UI
SATA Gen 2	Total receiver jitter tolerance.	6000	0.16	–	UI

Table 66: DisplayPort Protocol Characteristics (PS-GTR Transceivers) [(1)]

Standard	Description	Line Rate (Mb/s)	Min	Max	Units
DisplayPort Transmitter Jitter Generation					
RBR	Total transmitter jitter.	1620	–	0.42	UI
HBR	Total transmitter jitter.	2700	–	0.42	UI
HBR2 D10.2	Total transmitter jitter.	5400	–	0.40	UI
HBR2 CPAT	Total transmitter jitter.	5400	–	0.58	UI

Notes:
1. Only the transmitter is supported.

Table 67: USB 3.0 Protocol Characteristics (PS-GTR Transceivers)

Standard	Description	Line Rate (Mb/s)	Min	Max	Units
USB 3.0 Transmitter Jitter Generation					
USB 3.0	Total transmitter jitter.	5000	–	0.66	UI
USB 3.0 Receiver High Frequency Jitter Tolerance					
USB 3.0	Total receiver jitter tolerance.	5000	0.2	–	UI

Table 68: Serial-GMII Protocol Characteristics (PS-GTR Transceivers)

Standard	Description	Line Rate (Mb/s)	Min	Max	Units
Serial-GMII Transmitter Jitter Generation					
SGMII	Deterministic transmitter jitter.	1250	–	0.25	UI
Serial-GMII Receiver High Frequency Jitter Tolerance					
SGMII	Total receiver jitter tolerance.	1250	0.25	–	UI

PS System Monitor Specifications

Table 69: PS SYSMON Specifications

Parameter	Comments	Conditions	Min	Typ	Max	Units
V_{CC_PSADC} = 1.8V ±3%, T_j = –40°C to 100°C, typical values at T_j = 40°C						
ADC Accuracy (T_j = –55°C to 125°C)[1]						
Resolution			10	–	–	Bits
Sample rate			–	–	1	MS/s
RMS code noise	On-chip reference		–	1	–	LSBs
On-Chip Sensor Accuracy						
Temperature sensor error		T_j = –55°C to 110°C	–	–	±3.5	°C
		T_j = 110°C to 125°C	–	–	±5	°C
Supply sensor error[2]	Supply voltages less than or electrically connected to V_{CC_PSADC}.	T_j = –40°C to 125°C	–	–	±1	%
	Supply voltages nominally at 1.8V but with the potential to go above V_{CC_PSADC}.	T_j = –40°C to 125°C	–	–	±1.5	%
	Supply voltages nominally in the 2.0V to 3.3V range.	T_j = –40°C to 125°C	–	–	±2.5	%

Notes:

1. ADC offset errors are removed by enabling the ADC automatic offset calibration feature. The values are specified for when this feature is enabled.
2. Supply sensor offset and gain errors are removed by enabling the automatic offset and gain calibration feature. The values are specified for when this feature is enabled.

Table 72: MIPI D-PHY Performance

Description	I/O Bank Type	Speed Grade and V_{CCINT} Operating Voltages					Units
		0.90V	0.85V		0.72V		
		-3 [1]	-2 [1]	-1	-2	-1	
MIPI D-PHY transmitter or receiver.	HP	1500	1500	1260	1260	1260	Mb/s

Notes:

1. In the SBVA484 package, the data rate is 1260 Mb/s.

Table 73: LVDS Native-Mode 1000BASE-X Support [1]

Description	I/O Bank Type	Speed Grade and V_{CCINT} Operating Voltages				
		0.90V	0.85V		0.72V	
		-3	-2	-1	-2	-1
1000BASE-X	HP	Yes				

Notes:

1. 1000BASE-X support is based on the IEEE Standard for CSMA/CD Access Method and Physical Layer Specifications (IEEE Std 802.3-2008).

Table 74 provides the maximum data rates for applicable memory standards using the Zynq UltraScale+ MPSoC memory PHY. Refer to Memory Interfaces for the complete list of memory interface standards supported and detailed specifications. The final performance of the memory interface is determined through a complete design implemented in the Vivado Design Suite, following guidelines in the *UltraScale Architecture PCB Design Guide* (UG583), electrical analysis, and characterization of the system.

Table 74: Maximum Physical Interface (PHY) Rate for Memory Interfaces

Memory Standard	Package [1]	DRAM Type	Speed Grade and V_{CCINT} Operating Voltages					Units
			0.90V	0.85V		0.72V		
			-3	-2	-1	-2	-1	
DDR4	All FFV packages and FBVB900	Single rank component	2666	2666	2400	2400	2133	Mb/s
		1 rank DIMM[2][3][4]	2400	2400	2133	2133	1866	Mb/s
		2 rank DIMM[2][5]	2133	2133	1866	1866	1600	Mb/s
		4 rank DIMM[2][6]	1600	1600	1333	1333	N/A	Mb/s
	SFVC784	Single rank component	2400	2400	2133	2133	1866	Mb/s
		1 rank DIMM[2][3]	2133	2133	1866	1866	1600	Mb/s
		2 rank DIMM[2][5]	1866	1866	1600	1600	1600	Mb/s
DDR3	All FFV packages and FBVB900	Single rank component	2133	2133	2133	2133	1866	Mb/s
		1 rank DIMM[2][3]	1866	1866	1866	1866	1600	Mb/s
		2 rank DIMM[2][5]	1600	1600	1600	1600	1333	Mb/s
		4 rank DIMM[2][6]	1066	1066	1066	1066	800	Mb/s
	SFVC784	Single rank component	1866	1866	1866	1866	1600	Mb/s
		1 rank DIMM[2][3]	1600	1600	1600	1600	1600	Mb/s
		2 rank DIMM[2][5]	1600	1600	1600	1600	1333	Mb/s
		4 rank DIMM[2][6]	1066	1066	1066	1066	800	Mb/s

Programmable Logic (PL) Switching Characteristics

Table 75 (high-density IOB (HD)) and Table 76 (high-performance IOB (HP)) summarizes the values of standard-specific data input delay adjustments, output delays terminating at pads (based on standard) and 3-state delays.

- $T_{INBUF\_DELAY\_PAD\_I}$ is the delay from IOB pad through the input buffer to the I-pin of an IOB pad. The delay varies depending on the capability of the SelectIO input buffer.
- $T_{OUTBUF\_DELAY\_O\_PAD}$ is the delay from the O pin to the IOB pad through the output buffer of an IOB pad. The delay varies depending on the capability of the SelectIO output buffer.
- $T_{OUTBUF\_DELAY\_TD\_PAD}$ is the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is disabled. The delay varies depending on the SelectIO capability of the output buffer. In HP I/O banks, the internal DCI termination turn-on time is always faster than $T_{OUTBUF\_DELAY\_TD\_PAD}$ when the DCITERMDISABLE pin is used. In HD I/O banks, the on-die termination turn-on time is always faster than $T_{OUTBUF\_DELAY\_TD\_PAD}$ when the INTERMDISABLE pin is used.

IOB High Density (HD) Switching Characteristics

Table 75: IOB High Density (HD) Switching Characteristics

I/O Standards	$T_{INBUF\_DELAY\_PAD\_I}$					$T_{OUTBUF\_DELAY\_O\_PAD}$					$T_{OUTBUF\_DELAY\_TD\_PAD}$					Units
	0.90V	0.85V		0.72V		0.90V	0.85V		0.72V		0.90V	0.85V		0.72V		
	-3	-2	-1	-2	-1	-3	-2	-1	-2	-1	-3	-2	-1	-2	-1	
DIFF_HSTL_I_18_F	0.978	0.978	1.058	0.978	1.058	1.574	1.574	1.718	1.574	1.718	1.160	1.160	1.271	1.160	1.271	ns
DIFF_HSTL_I_18_S	0.978	0.978	1.058	0.978	1.058	1.805	1.805	1.950	1.805	1.950	1.748	1.748	1.867	1.748	1.867	ns
DIFF_HSTL_I_F	0.978	0.978	1.058	0.978	1.058	1.611	1.611	1.762	1.611	1.762	1.313	1.313	1.417	1.313	1.417	ns
DIFF_HSTL_I_S	0.978	0.978	1.058	0.978	1.058	1.798	1.798	1.913	1.798	1.913	1.630	1.630	1.780	1.630	1.780	ns
DIFF_HSUL_12_F	0.911	0.911	0.977	0.911	0.977	1.573	1.573	1.703	1.573	1.703	1.222	1.222	1.335	1.222	1.335	ns
DIFF_HSUL_12_S	0.911	0.911	0.977	0.911	0.977	1.711	1.711	1.864	1.711	1.864	1.536	1.536	1.665	1.536	1.665	ns
DIFF_SSTL12_F	0.906	0.906	0.977	0.906	0.977	1.643	1.643	1.792	1.643	1.792	1.285	1.285	1.423	1.285	1.423	ns
DIFF_SSTL12_S	0.906	0.906	0.977	0.906	0.977	1.784	1.784	1.948	1.784	1.948	1.567	1.567	1.706	1.567	1.706	ns
DIFF_SSTL135_F	0.927	0.927	0.995	0.927	0.995	1.625	1.625	1.765	1.625	1.765	1.341	1.341	1.458	1.341	1.458	ns
DIFF_SSTL135_II_F	0.927	0.927	0.995	0.927	0.995	1.623	1.623	1.770	1.623	1.770	1.325	1.325	1.470	1.325	1.470	ns
DIFF_SSTL135_II_S	0.927	0.927	0.995	0.927	0.995	1.768	1.768	1.916	1.768	1.916	1.722	1.722	1.911	1.722	1.911	ns
DIFF_SSTL135_S	0.927	0.927	0.995	0.927	0.995	1.869	1.869	2.025	1.869	2.025	1.814	1.814	1.976	1.814	1.976	ns
DIFF_SSTL15_F	0.928	0.928	1.020	0.928	1.020	1.628	1.628	1.771	1.628	1.771	1.374	1.374	1.483	1.374	1.483	ns
DIFF_SSTL15_II_F	0.928	0.928	1.020	0.928	1.020	1.622	1.622	1.778	1.622	1.778	1.356	1.356	1.442	1.356	1.442	ns
DIFF_SSTL15_II_S	0.928	0.928	1.020	0.928	1.020	1.821	1.821	1.987	1.821	1.987	1.895	1.895	2.047	1.895	2.047	ns
DIFF_SSTL15_S	0.928	0.928	1.020	0.928	1.020	1.824	1.824	1.977	1.824	1.977	1.743	1.743	1.907	1.743	1.907	ns
DIFF_SSTL18_II_F	0.961	0.961	1.038	0.961	1.038	1.729	1.729	1.880	1.729	1.880	1.377	1.377	1.492	1.377	1.492	ns
DIFF_SSTL18_II_S	0.961	0.961	1.038	0.961	1.038	1.796	1.796	1.965	1.796	1.965	1.616	1.616	1.800	1.616	1.800	ns
DIFF_SSTL18_I_F	0.961	0.961	1.038	0.961	1.038	1.609	1.609	1.755	1.609	1.755	1.220	1.220	1.313	1.220	1.313	ns
DIFF_SSTL18_I_S	0.961	0.961	1.038	0.961	1.038	1.786	1.786	1.942	1.786	1.942	1.677	1.677	1.836	1.677	1.836	ns
HSTL_I_18_F	0.947	0.947	1.021	0.947	1.021	1.574	1.574	1.718	1.574	1.718	1.160	1.160	1.271	1.160	1.271	ns
HSTL_I_18_S	0.947	0.947	1.021	0.947	1.021	1.805	1.805	1.950	1.805	1.950	1.748	1.748	1.867	1.748	1.867	ns

IOB High Performance (HP) Switching Characteristics

Table 76: IOB High Performance (HP) Switching Characteristics

I/O Standards	$T_{INBUF\_DELAY\_PAD\_I}$					$T_{OUTBUF\_DELAY\_O\_PAD}$					$T_{OUTBUF\_DELAY\_TD\_PAD}$					Units
	0.90V	0.85V		0.72V		0.90V	0.85V		0.72V		0.90V	0.85V		0.72V		
	-3	-2	-1	-2	-1	-3	-2	-1	-2	-1	-3	-2	-1	-2	-1	
DIFF_HSTL_I_12_F	0.394	0.394	0.402	0.394	0.402	0.423	0.423	0.443	0.423	0.443	0.553	0.553	0.582	0.553	0.582	ns
DIFF_HSTL_I_12_M	0.394	0.394	0.402	0.394	0.402	0.552	0.552	0.583	0.552	0.583	0.641	0.641	0.679	0.641	0.679	ns
DIFF_HSTL_I_12_S	0.394	0.394	0.402	0.394	0.402	0.752	0.752	0.800	0.752	0.800	0.813	0.813	0.868	0.813	0.868	ns
DIFF_HSTL_I_18_F	0.319	0.319	0.339	0.319	0.339	0.456	0.456	0.474	0.456	0.474	0.576	0.576	0.606	0.576	0.606	ns
DIFF_HSTL_I_18_M	0.319	0.319	0.339	0.319	0.339	0.570	0.570	0.603	0.570	0.603	0.653	0.653	0.692	0.653	0.692	ns
DIFF_HSTL_I_18_S	0.319	0.319	0.339	0.319	0.339	0.782	0.782	0.834	0.782	0.834	0.816	0.816	0.871	0.816	0.871	ns
DIFF_HSTL_I_DCI_12_F	0.394	0.394	0.402	0.394	0.402	0.406	0.406	0.429	0.406	0.429	0.534	0.534	0.564	0.534	0.564	ns
DIFF_HSTL_I_DCI_12_M	0.394	0.394	0.402	0.394	0.402	0.557	0.557	0.587	0.557	0.587	0.653	0.653	0.694	0.653	0.694	ns
DIFF_HSTL_I_DCI_12_S	0.394	0.394	0.402	0.394	0.402	0.755	0.755	0.806	0.755	0.806	0.842	0.842	0.907	0.842	0.907	ns
DIFF_HSTL_I_DCI_18_F	0.323	0.323	0.339	0.323	0.339	0.445	0.445	0.461	0.445	0.461	0.566	0.566	0.595	0.566	0.595	ns
DIFF_HSTL_I_DCI_18_M	0.323	0.323	0.339	0.323	0.339	0.555	0.555	0.586	0.555	0.586	0.643	0.643	0.684	0.643	0.684	ns
DIFF_HSTL_I_DCI_18_S	0.323	0.323	0.339	0.323	0.339	0.762	0.762	0.818	0.762	0.818	0.836	0.836	0.900	0.836	0.900	ns
DIFF_HSTL_I_DCI_F	0.397	0.397	0.417	0.397	0.417	0.431	0.431	0.445	0.431	0.445	0.555	0.555	0.575	0.555	0.575	ns
DIFF_HSTL_I_DCI_M	0.397	0.397	0.417	0.397	0.417	0.553	0.553	0.583	0.553	0.583	0.644	0.644	0.684	0.644	0.684	ns
DIFF_HSTL_I_DCI_S	0.397	0.397	0.417	0.397	0.417	0.767	0.767	0.823	0.767	0.823	0.848	0.848	0.912	0.848	0.912	ns
DIFF_HSTL_I_F	0.404	0.404	0.417	0.404	0.417	0.423	0.423	0.443	0.423	0.443	0.549	0.549	0.581	0.549	0.581	ns
DIFF_HSTL_I_M	0.404	0.404	0.417	0.404	0.417	0.555	0.555	0.586	0.555	0.586	0.640	0.640	0.677	0.640	0.677	ns
DIFF_HSTL_I_S	0.404	0.404	0.417	0.404	0.417	0.767	0.767	0.818	0.767	0.818	0.811	0.811	0.866	0.811	0.866	ns
DIFF_HSUL_12_DCI_F	0.381	0.381	0.400	0.381	0.400	0.425	0.425	0.443	0.425	0.443	0.558	0.558	0.586	0.558	0.586	ns
DIFF_HSUL_12_DCI_M	0.381	0.381	0.400	0.381	0.400	0.557	0.557	0.587	0.557	0.587	0.653	0.653	0.694	0.653	0.694	ns
DIFF_HSUL_12_DCI_S	0.381	0.381	0.400	0.381	0.400	0.737	0.737	0.787	0.737	0.787	0.822	0.822	0.885	0.822	0.885	ns
DIFF_HSUL_12_F	0.394	0.394	0.402	0.394	0.402	0.412	0.412	0.430	0.412	0.430	0.538	0.538	0.566	0.538	0.566	ns
DIFF_HSUL_12_M	0.394	0.394	0.402	0.394	0.402	0.552	0.552	0.583	0.552	0.583	0.641	0.641	0.679	0.641	0.679	ns
DIFF_HSUL_12_S	0.394	0.394	0.402	0.394	0.402	0.752	0.752	0.800	0.752	0.800	0.813	0.813	0.868	0.813	0.868	ns
DIFF_POD10_DCI_F	0.411	0.411	0.430	0.411	0.430	0.425	0.425	0.444	0.425	0.444	0.555	0.555	0.584	0.555	0.584	ns
DIFF_POD10_DCI_M	0.411	0.411	0.430	0.411	0.430	0.542	0.542	0.571	0.542	0.571	0.640	0.640	0.681	0.640	0.681	ns
DIFF_POD10_DCI_S	0.411	0.411	0.430	0.411	0.430	0.754	0.754	0.815	0.754	0.815	0.850	0.850	0.917	0.850	0.917	ns
DIFF_POD10_F	0.411	0.411	0.433	0.411	0.433	0.438	0.438	0.459	0.438	0.459	0.569	0.569	0.601	0.569	0.601	ns
DIFF_POD10_M	0.411	0.411	0.433	0.411	0.433	0.538	0.538	0.568	0.538	0.568	0.630	0.630	0.667	0.630	0.667	ns
DIFF_POD10_S	0.411	0.411	0.433	0.411	0.433	0.766	0.766	0.821	0.766	0.821	0.836	0.836	0.894	0.836	0.894	ns
DIFF_POD12_DCI_F	0.407	0.407	0.432	0.407	0.432	0.425	0.425	0.443	0.425	0.443	0.558	0.558	0.586	0.558	0.586	ns
DIFF_POD12_DCI_M	0.407	0.407	0.432	0.407	0.432	0.543	0.543	0.572	0.543	0.572	0.638	0.638	0.678	0.638	0.678	ns
DIFF_POD12_DCI_S	0.407	0.407	0.432	0.407	0.432	0.772	0.772	0.822	0.772	0.822	0.862	0.862	0.929	0.862	0.929	ns
DIFF_POD12_F	0.409	0.409	0.430	0.409	0.430	0.455	0.455	0.476	0.455	0.476	0.595	0.595	0.626	0.595	0.626	ns
DIFF_POD12_M	0.409	0.409	0.430	0.409	0.430	0.551	0.551	0.582	0.551	0.582	0.641	0.641	0.679	0.641	0.679	ns
DIFF_POD12_S	0.409	0.409	0.430	0.409	0.430	0.767	0.767	0.817	0.767	0.817	0.832	0.832	0.889	0.832	0.889	ns
DIFF_SSTL12_DCI_F	0.381	0.381	0.400	0.381	0.400	0.425	0.425	0.443	0.425	0.443	0.558	0.558	0.586	0.558	0.586	ns
DIFF_SSTL12_DCI_M	0.381	0.381	0.400	0.381	0.400	0.557	0.557	0.587	0.557	0.587	0.654	0.654	0.694	0.654	0.694	ns
DIFF_SSTL12_DCI_S	0.381	0.381	0.400	0.381	0.400	0.754	0.754	0.803	0.754	0.803	0.842	0.842	0.908	0.842	0.908	ns

Table 76: IOB High Performance (HP) Switching Characteristics ***(Cont'd)***

I/O Standards	$T_{INBUF\_DELAY\_PAD\_I}$					$T_{OUTBUF\_DELAY\_O\_PAD}$					$T_{OUTBUF\_DELAY\_TD\_PAD}$					Units
	0.90V	0.85V		0.72V		0.90V	0.85V		0.72V		0.90V	0.85V		0.72V		
	-3	-2	-1	-2	-1	-3	-2	-1	-2	-1	-3	-2	-1	-2	-1	
SSTL135_DCI_S	0.366	0.366	0.399	0.366	0.399	0.746	0.746	0.799	0.746	0.799	0.829	0.829	0.893	0.829	0.893	ns
SSTL135_F	0.378	0.378	0.399	0.378	0.399	0.408	0.408	0.428	0.408	0.428	0.528	0.528	0.561	0.528	0.561	ns
SSTL135_M	0.378	0.378	0.399	0.378	0.399	0.555	0.555	0.585	0.555	0.585	0.641	0.641	0.679	0.641	0.679	ns
SSTL135_S	0.378	0.378	0.399	0.378	0.399	0.772	0.772	0.823	0.772	0.823	0.827	0.827	0.878	0.827	0.878	ns
SSTL15_DCI_F	0.402	0.402	0.417	0.402	0.417	0.412	0.412	0.429	0.412	0.429	0.531	0.531	0.563	0.531	0.563	ns
SSTL15_DCI_M	0.402	0.402	0.417	0.402	0.417	0.553	0.553	0.583	0.553	0.583	0.645	0.645	0.685	0.645	0.685	ns
SSTL15_DCI_S	0.402	0.402	0.417	0.402	0.417	0.768	0.768	0.822	0.768	0.822	0.847	0.847	0.912	0.847	0.912	ns
SSTL15_F	0.371	0.371	0.400	0.371	0.400	0.408	0.408	0.428	0.408	0.428	0.530	0.530	0.556	0.530	0.556	ns
SSTL15_M	0.371	0.371	0.400	0.371	0.400	0.554	0.554	0.585	0.554	0.585	0.639	0.639	0.677	0.639	0.677	ns
SSTL15_S	0.371	0.371	0.400	0.371	0.400	0.767	0.767	0.817	0.767	0.817	0.813	0.813	0.867	0.813	0.867	ns
SSTL18_I_DCI_F	0.329	0.329	0.336	0.329	0.336	0.445	0.445	0.461	0.445	0.461	0.566	0.566	0.595	0.566	0.595	ns
SSTL18_I_DCI_M	0.329	0.329	0.336	0.329	0.336	0.554	0.554	0.585	0.554	0.585	0.644	0.644	0.683	0.644	0.683	ns
SSTL18_I_DCI_S	0.329	0.329	0.336	0.329	0.336	0.762	0.762	0.818	0.762	0.818	0.837	0.837	0.899	0.837	0.899	ns
SSTL18_I_F	0.316	0.316	0.337	0.316	0.337	0.454	0.454	0.476	0.454	0.476	0.578	0.578	0.608	0.578	0.608	ns
SSTL18_I_M	0.316	0.316	0.337	0.316	0.337	0.571	0.571	0.603	0.571	0.603	0.652	0.652	0.692	0.652	0.692	ns
SSTL18_I_S	0.316	0.316	0.337	0.316	0.337	0.782	0.782	0.835	0.782	0.835	0.816	0.816	0.870	0.816	0.870	ns
SUB_LVDS	0.539	0.539	0.620	0.539	0.620	0.660	0.660	0.692	0.660	0.692	969.863	969.863	969.863	969.863	969.863	ns

IOB 3-state Output Switching Characteristics

Table 77 specifies the values of $T_{OUTBUF\_DELAY\_TE\_PAD}$ and $T_{INBUF\_DELAY\_IBUFDIS\_O}$. $T_{OUTBUF\_DELAY\_TE\_PAD}$ is the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is enabled (i.e., a high impedance state). $T_{INBUF\_DELAY\_IBUFDIS\_O}$ is the IOB delay from IBUFDISABLE to O output. In HP I/O banks, the internal DCI termination turn-off time is always faster than $T_{OUTBUF\_DELAY\_TE\_PAD}$ when the DCITERMDISABLE pin is used. In HD I/O banks, the internal IN_TERM termination turn-off time is always faster than $T_{OUTBUF\_DELAY\_TE\_PAD}$ when the INTERMDISABLE pin is used.

Table 77: IOB 3-state Output Switching Characteristics

Symbol	Description	Speed Grade and V_{CCINT} Operating Voltages					Units
		0.90V	0.85V		0.72V		
		-3	-2	-1	-2	-1	
$T_{OUTBUF\_DELAY\_TE\_PAD}$	T input to pad high-impedance for HD I/O banks	6.318	6.318	6.369	6.318	6.369	ns
	T input to pad high-impedance for HP I/O banks	5.330	5.330	5.341	5.330	5.341	ns
$T_{INBUF\_DELAY\_IBUFDIS\_O}$	IBUF turn-on time from IBUFDISABLE to O output for HD I/O banks	2.266	2.266	2.430	2.266	2.430	ns
	IBUF turn-on time from IBUFDISABLE to O output for HP I/O banks	0.936	0.936	1.037	0.936	1.037	ns

Table 91: Global Clock Input Setup and Hold With MMCM

Symbol	Description		Device	Speed Grade and V_{CCINT} Operating Voltages					Units
				0.90V	0.85V		0.72V		
				-3	-2	-1	-2	-1	
Input Setup and Hold Time Relative to Global Clock Input Signal using SSTL15 Standard. (1)(2)(3)									
$T_{PSMMCMCC\_ZU2}$	Global clock input and input flip-flop (or latch) with MMCM.	Setup	XCZU2	N/A	1.83	1.96	2.29	2.48	ns
$T_{PHMMCMCC\_ZU2}$		Hold			–0.19	–0.19	0.13	0.13	ns
$T_{PSMMCMCC\_ZU3}$		Setup	XCZU3	N/A	1.83	1.96	2.29	2.48	ns
$T_{PHMMCMCC\_ZU3}$		Hold			–0.19	–0.19	0.13	0.13	ns
$T_{PSMMCMCC\_ZU4}$		Setup	XCZU4	1.96	1.96	2.10	2.49	2.59	ns
$T_{PHMMCMCC\_ZU4}$		Hold		–0.12	–0.12	–0.12	0.27	0.48	ns
$T_{PSMMCMCC\_ZU5}$		Setup	XCZU5	1.96	1.96	2.10	2.49	2.59	ns
$T_{PHMMCMCC\_ZU5}$		Hold		–0.12	–0.12	–0.12	0.27	0.48	ns
$T_{PSMMCMCC\_ZU6}$		Setup	XCZU6	1.97	2.00	2.12	2.26	2.44	ns
$T_{PHMMCMCC\_ZU6}$		Hold		–0.11	–0.11	–0.11	0.16	0.18	ns
$T_{PSMMCMCC\_ZU7}$		Setup	XCZU7	1.91	1.91	2.02	2.45	2.70	ns
$T_{PHMMCMCC\_ZU7}$		Hold		–0.14	–0.14	–0.14	0.37	0.38	ns
$T_{PSMMCMCC\_ZU9}$		Setup	XCZU9	1.97	2.00	2.12	2.26	2.44	ns
$T_{PHMMCMCC\_ZU9}$		Hold		–0.11	–0.11	–0.11	0.16	0.18	ns
$T_{PSMMCMCC\_ZU11}$		Setup	XCZU11	2.08	2.08	2.23	2.59	2.75	ns
$T_{PHMMCMCC\_ZU11}$		Hold		–0.08	–0.08	0.04	0.35	0.74	ns
$T_{PSMMCMCC\_ZU15}$		Setup	XCZU15	1.96	1.99	2.12	2.26	2.44	ns
$T_{PHMMCMCC\_ZU15}$		Hold		–0.10	–0.10	–0.10	0.17	0.19	ns
$T_{PSMMCMCC\_ZU17}$		Setup	XCZU17	1.89	1.89	2.03	2.36	2.55	ns
$T_{PHMMCMCC\_ZU17}$		Hold		–0.16	–0.16	–0.16	0.31	0.34	ns
$T_{PSMMCMCC\_ZU19}$		Setup	XCZU19	1.89	1.89	2.03	2.36	2.55	ns
$T_{PHMMCMCC\_ZU19}$		Hold		–0.16	–0.16	–0.16	0.31	0.34	ns

Notes:

1. Setup and hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the global clock input signal using the slowest process, slowest temperature, and slowest voltage. Hold time is measured relative to the global clock input signal using the fastest process, fastest temperature, and fastest voltage.
2. This table lists representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible I/O and CLB flip-flops are clocked by the global clock net.
3. Use IBIS to determine any duty-cycle distortion incurred using various standards.

Table 103: GTH Transceiver Transmitter Switching Characteristics

Symbol	Description	Condition	Min	Typ	Max	Units
F_{GTHTX}	Serial data rate range		0.500	–	F_{GTHMAX}	Gb/s
T_{RTX}	TX rise time	20%–80%	–	21	–	ps
T_{FTX}	TX fall time	80%–20%	–	21	–	ps
T_{LLSKEW}	TX lane-to-lane skew[1]		–	–	500.00	ps
$T_{J16.375}$	Total jitter[2][4]	16.375 Gb/s	–	–	0.28	UI
$D_{J16.375}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J15.0}$	Total jitter[2][4]	15.0 Gb/s	–	–	0.28	UI
$D_{J15.0}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J14.1}$	Total jitter[2][4]	14.1 Gb/s	–	–	0.28	UI
$D_{J14.1}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J14.1}$	Total jitter[2][4]	14.025 Gb/s	–	–	0.28	UI
$D_{J14.1}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J13.1}$	Total jitter[2][4]	13.1 Gb/s	–	–	0.28	UI
$D_{J13.1}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J12.5\_QPLL}$	Total jitter[2][4]	12.5 Gb/s	–	–	0.28	UI
$D_{J12.5\_QPLL}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J12.5\_CPLL}$	Total jitter[3][4]	12.5 Gb/s	–	–	0.33	UI
$D_{J12.5\_CPLL}$	Deterministic jitter[3][4]		–	–	0.17	UI
$T_{J11.3\_QPLL}$	Total jitter[2][4]	11.3 Gb/s	–	–	0.28	UI
$D_{J11.3\_QPLL}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J10.3125\_QPLL}$	Total jitter[2][4]	10.3125 Gb/s	–	–	0.28	UI
$D_{J10.3125\_QPLL}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J10.3125\_CPLL}$	Total jitter[3][4]	10.3125 Gb/s	–	–	0.33	UI
$D_{J10.3125\_CPLL}$	Deterministic jitter[3][4]		–	–	0.17	UI
$T_{J9.953\_QPLL}$	Total jitter[2][4]	9.953 Gb/s	–	–	0.28	UI
$D_{J9.953\_QPLL}$	Deterministic jitter[2][4]		–	–	0.17	UI
$T_{J9.953\_CPLL}$	Total jitter[3][4]	9.953 Gb/s	–	–	0.33	UI
$D_{J9.953\_CPLL}$	Deterministic jitter[3][4]		–	–	0.17	UI
$T_{J8.0}$	Total jitter[3][4]	8.0 Gb/s	–	–	0.32	UI
$D_{J8.0}$	Deterministic jitter[3][4]		–	–	0.17	UI
$T_{J6.6}$	Total jitter[3][4]	6.6 Gb/s	–	–	0.30	UI
$D_{J6.6}$	Deterministic jitter[3][4]		–	–	0.15	UI
$T_{J5.0}$	Total jitter[3][4]	5.0 Gb/s	–	–	0.30	UI
$D_{J5.0}$	Deterministic jitter[3][4]		–	–	0.15	UI
$T_{J4.25}$	Total jitter[3][4]	4.25 Gb/s	–	–	0.30	UI
$D_{J4.25}$	Deterministic jitter[3][4]		–	–	0.15	UI
$T_{J4.0}$	Total jitter[3][4]	4.0 Gb/s	–	–	0.32	UI
$D_{J4.0}$	Deterministic jitter[3][4]		–	–	0.16	UI
$T_{J3.20}$	Total jitter[3][4]	3.20 Gb/s[5]	–	–	0.20	UI
$D_{J3.20}$	Deterministic jitter[3][4]		–	–	0.10	UI

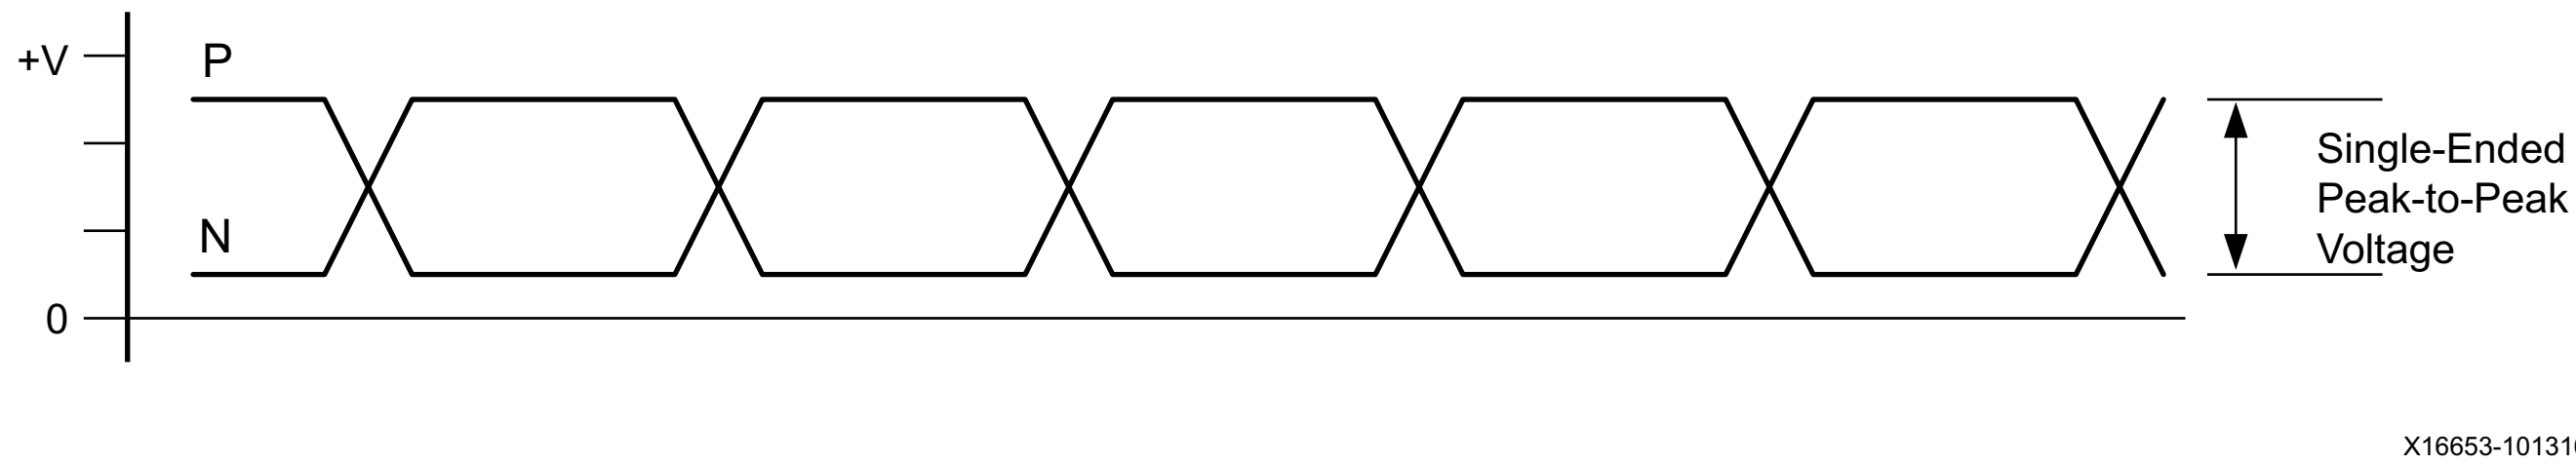

Figure 5: **Single-Ended Peak-to-Peak Voltage**

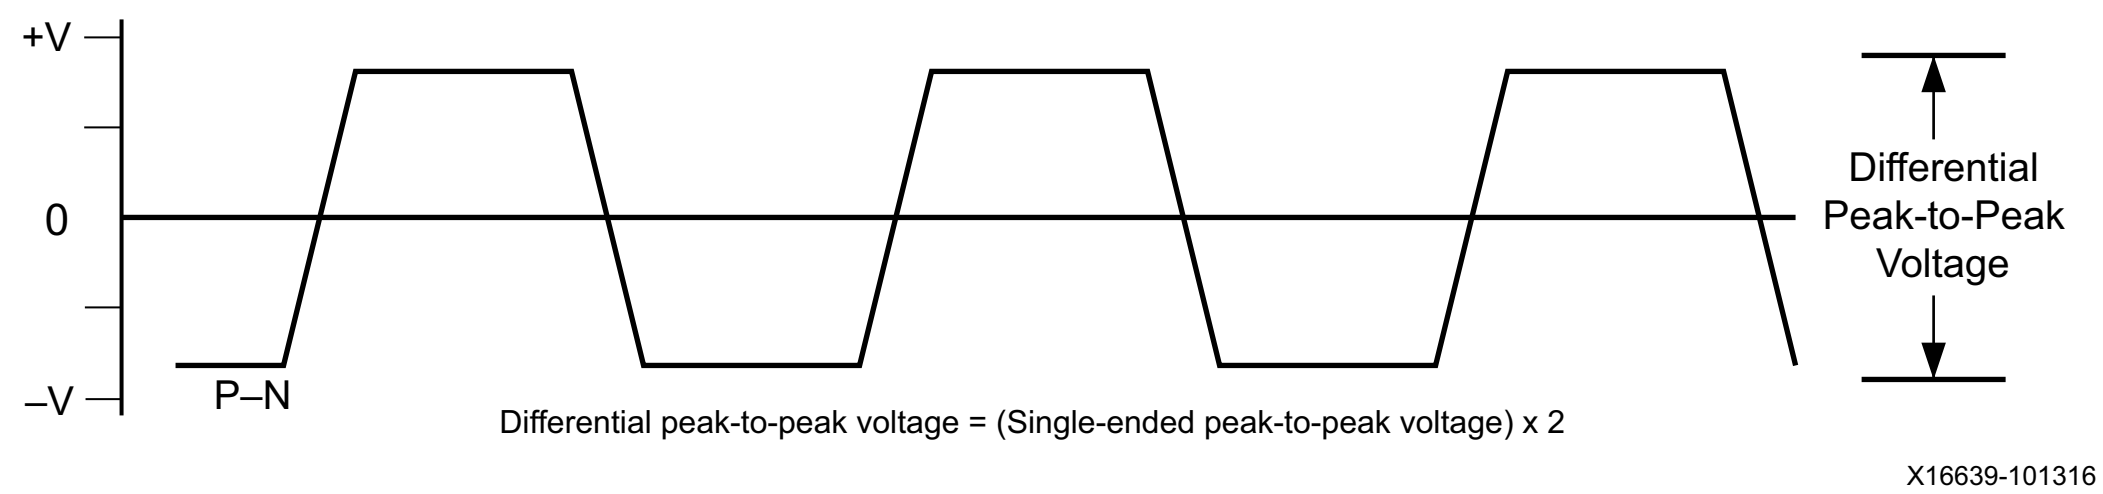

Figure 6: **Differential Peak-to-Peak Voltage**

Table 107 and Table 108 summarize the DC specifications of the clock input of the GTY transceivers in Zynq UltraScale+ MPSoCs. Consult the *UltraScale Architecture GTY Transceiver User Guide* (UG578) for further details.

Table 107: GTY Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V_{IDIFF}	Differential peak-to-peak input voltage	250	–	2000	mV
R_{IN}	Differential input resistance	–	100	–	Ω
C_{EXT}	Required external AC coupling capacitor	–	10	–	nF

Table 108: GTY Transceiver Clock Output Level Specification

Symbol	Description	Conditions	Min	Typ	Max	Units
V_{OL}	Output Low voltage for P and N	R_T = 100Ω across P and N signals	100	–	330	mV
V_{OH}	Output High voltage for P and N	R_T = 100Ω across P and N signals	500	–	700	mV
V_{DDOUT}	Differential output voltage (P–N), P = High (N–P), N = High	R_T = 100Ω across P and N signals	300	–	430	mV
V_{CMOUT}	Common mode voltage	R_T = 100Ω across P and N signals	300	–	500	mV