


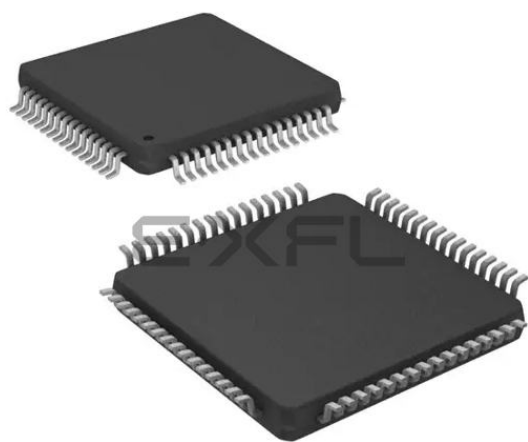

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                                   |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                            |
| Core Processor             | MIPS32® M-Class                                                                                                                                                                   |
| Core Size                  | 32-Bit Single-Core                                                                                                                                                                |
| Speed                      | 200MHz                                                                                                                                                                            |
| Connectivity               | CANbus, Ethernet, I <sup>2</sup> C, PMP, SPI, SQI, UART/USART, USB OTG                                                                                                            |
| Peripherals                | Brown-out Detect/Reset, DMA, I <sup>2</sup> S, POR, PWM, WDT                                                                                                                      |
| Number of I/O              | 46                                                                                                                                                                                |
| Program Memory Size        | 2MB (2M x 8)                                                                                                                                                                      |
| Program Memory Type        | FLASH                                                                                                                                                                             |
| EEPROM Size                | -                                                                                                                                                                                 |
| RAM Size                   | 512K x 8                                                                                                                                                                          |
| Voltage - Supply (Vcc/Vdd) | 2.1V ~ 3.6V                                                                                                                                                                       |
| Data Converters            | A/D 24x12b                                                                                                                                                                        |
| Oscillator Type            | Internal                                                                                                                                                                          |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                                 |
| Mounting Type              | Surface Mount                                                                                                                                                                     |
| Package / Case             | 64-TQFP                                                                                                                                                                           |
| Supplier Device Package    | 64-TQFP (10x10)                                                                                                                                                                   |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic32mz2048efm064t-i-pt">https://www.e-xfl.com/product-detail/microchip-technology/pic32mz2048efm064t-i-pt</a> |

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

**TABLE 1-1: ADC PINOUT I/O DESCRIPTIONS**

| Pin Name | Pin Number       |              |              |                    | Pin Type | Buffer Type | Description           |
|----------|------------------|--------------|--------------|--------------------|----------|-------------|-----------------------|
|          | 64-pin QFN/ TQFP | 100-pin TQFP | 124-pin VTLA | 144-pin TQFP/ LQFP |          |             |                       |
| AN0      | 16               | 25           | A18          | 36                 | I        | Analog      | Analog Input Channels |
| AN1      | 15               | 24           | A17          | 35                 | I        | Analog      |                       |
| AN2      | 14               | 23           | A16          | 34                 | I        | Analog      |                       |
| AN3      | 13               | 22           | A14          | 31                 | I        | Analog      |                       |
| AN4      | 12               | 21           | A13          | 26                 | I        | Analog      |                       |
| AN5      | 23               | 34           | B19          | 49                 | I        | Analog      |                       |
| AN6      | 24               | 35           | A24          | 50                 | I        | Analog      |                       |
| AN7      | 27               | 41           | A27          | 59                 | I        | Analog      |                       |
| AN8      | 28               | 42           | B23          | 60                 | I        | Analog      |                       |
| AN9      | 29               | 43           | A28          | 61                 | I        | Analog      |                       |
| AN10     | 30               | 44           | B24          | 62                 | I        | Analog      |                       |
| AN11     | 10               | 16           | B9           | 21                 | I        | Analog      |                       |
| AN12     | 6                | 12           | B7           | 16                 | I        | Analog      |                       |
| AN13     | 5                | 11           | A8           | 15                 | I        | Analog      |                       |
| AN14     | 4                | 10           | B6           | 14                 | I        | Analog      |                       |
| AN15     | 3                | 5            | A4           | 5                  | I        | Analog      |                       |
| AN16     | 2                | 4            | B2           | 4                  | I        | Analog      |                       |
| AN17     | 1                | 3            | A3           | 3                  | I        | Analog      |                       |
| AN18     | 64               | 100          | A67          | 144                | I        | Analog      |                       |
| AN19     | —                | 9            | A7           | 13                 | I        | Analog      |                       |
| AN20     | —                | 8            | B5           | 12                 | I        | Analog      |                       |
| AN21     | —                | 7            | A6           | 11                 | I        | Analog      |                       |
| AN22     | —                | 6            | B3           | 6                  | I        | Analog      |                       |
| AN23     | —                | 1            | A2           | 1                  | I        | Analog      |                       |
| AN24     | —                | 17           | A11          | 22                 | I        | Analog      |                       |
| AN25     | —                | 18           | B10          | 23                 | I        | Analog      |                       |
| AN26     | —                | 19           | A12          | 24                 | I        | Analog      |                       |
| AN27     | —                | 28           | B15          | 39                 | I        | Analog      |                       |
| AN28     | —                | 29           | A20          | 40                 | I        | Analog      |                       |
| AN29     | —                | 38           | B21          | 56                 | I        | Analog      |                       |
| AN30     | —                | 39           | A26          | 57                 | I        | Analog      |                       |
| AN31     | —                | 40           | B22          | 58                 | I        | Analog      |                       |
| AN32     | —                | 47           | B27          | 69                 | I        | Analog      |                       |
| AN33     | —                | 48           | A32          | 70                 | I        | Analog      |                       |
| AN34     | —                | 2            | B1           | 2                  | I        | Analog      |                       |
| AN35     | —                | —            | A5           | 7                  | I        | Analog      |                       |

**Legend:** CMOS = CMOS-compatible input or output  
ST = Schmitt Trigger input with CMOS levels  
TTL = Transistor-transistor Logic input buffer

Analog = Analog input  
O = Output  
PPS = Peripheral Pin Select

P = Power  
I = Input

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

**TABLE 1-22: JTAG, TRACE, AND PROGRAMMING/DEBUGGING PINOUT I/O DESCRIPTIONS**

| Pin Name              | Pin Number       |              |              |                    | Pin Type | Buffer Type | Description                                                                |
|-----------------------|------------------|--------------|--------------|--------------------|----------|-------------|----------------------------------------------------------------------------|
|                       | 64-pin QFN/ TQFP | 100-pin TQFP | 124-pin VTLA | 144-pin TQFP/ LQFP |          |             |                                                                            |
| JTAG                  |                  |              |              |                    |          |             |                                                                            |
| TCK                   | 27               | 38           | B21          | 56                 | I        | ST          | JTAG Test Clock Input Pin                                                  |
| TDI                   | 28               | 39           | A26          | 57                 | I        | ST          | JTAG Test Data Input Pin                                                   |
| TDO                   | 24               | 40           | B22          | 58                 | O        | —           | JTAG Test Data Output Pin                                                  |
| TMS                   | 23               | 17           | A11          | 22                 | I        | ST          | JTAG Test Mode Select Pin                                                  |
| Trace                 |                  |              |              |                    |          |             |                                                                            |
| TRCLK                 | 57               | 89           | A61          | 129                | O        | —           | Trace Clock                                                                |
| TRD0                  | 58               | 97           | B55          | 141                | O        | —           | Trace Data bits 0-3                                                        |
| TRD1                  | 61               | 96           | A65          | 140                | O        | —           |                                                                            |
| TRD2                  | 62               | 95           | B54          | 139                | O        | —           |                                                                            |
| TRD3                  | 63               | 90           | B51          | 130                | O        | —           |                                                                            |
| Programming/Debugging |                  |              |              |                    |          |             |                                                                            |
| PGED1                 | 16               | 25           | A18          | 36                 | I/O      | ST          | Data I/O pin for Programming/Debugging Communication Channel 1             |
| PGEC1                 | 15               | 24           | A17          | 35                 | I        | ST          | Clock input pin for Programming/Debugging Communication Channel 1          |
| PGED2                 | 18               | 27           | A19          | 38                 | I/O      | ST          | Data I/O pin for Programming/Debugging Communication Channel 2             |
| PGEC2                 | 17               | 26           | B14          | 37                 | I        | ST          | Clock input pin for Programming/Debugging Communication Channel 2          |
| MCLR                  | 9                | 15           | A10          | 20                 | I/P      | ST          | Master Clear (Reset) input. This pin is an active-low Reset to the device. |

**Legend:** CMOS = CMOS-compatible input or output  
ST = Schmitt Trigger input with CMOS levels  
TTL = Transistor-transistor Logic input buffer

Analog = Analog input  
O = Output  
PPS = Peripheral Pin Select

P = Power  
I = Input

**TABLE 4-9: SYSTEM BUS TARGET 1 REGISTER MAP**

| Virtual Address<br>(BF8F_#) | Register<br>Name | Bit Range | Bits        |       |       |           |       |       |      |             |      |      |      |      |          |            |        |        | All<br>Resets |
|-----------------------------|------------------|-----------|-------------|-------|-------|-----------|-------|-------|------|-------------|------|------|------|------|----------|------------|--------|--------|---------------|
|                             |                  |           | 31/15       | 30/14 | 29/13 | 28/12     | 27/11 | 26/10 | 25/9 | 24/8        | 23/7 | 22/6 | 21/5 | 20/4 | 19/3     | 18/2       | 17/1   | 16/0   |               |
| 8420                        | SBT1ELOG1        | 31:16     | MULTI       | —     | —     | CODE<3:0> |       |       |      |             | —    | —    | —    | —    | —        | —          | —      | 0000   |               |
|                             |                  | 15:0      | INITID<7:0> |       |       |           |       |       |      | REGION<3:0> |      |      |      | —    | CMD<2:0> |            |        | 0000   |               |
| 8424                        | SBT1ELOG2        | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | 0000   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | GROUP<1:0> |        | 0000   |               |
| 8428                        | SBT1ECON         | 31:16     | —           | —     | —     | —         | —     | —     | ERRP | —           | —    | —    | —    | —    | —        | —          | —      | 0000   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | 0000   |               |
| 8430                        | SBT1ECLRS        | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | 0000   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | CLEAR  | 0000   |               |
| 8438                        | SBT1ECLRM        | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | 0000   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | CLEAR  | 0000   |               |
| 8440                        | SBT1REG0         | 31:16     | BASE<21:6>  |       |       |           |       |       |      |             |      |      |      |      |          |            |        | xxxx   |               |
|                             |                  | 15:0      | BASE<5:0>   |       |       |           |       | PRI   | —    | SIZE<4:0>   |      |      |      |      | —        | —          | —      | xxxx   |               |
| 8450                        | SBT1RD0          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 8458                        | SBT1WR0          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 8480                        | SBT1REG2         | 31:16     | BASE<21:6>  |       |       |           |       |       |      |             |      |      |      |      |          |            |        | xxxx   |               |
|                             |                  | 15:0      | BASE<5:0>   |       |       |           |       | PRI   | —    | SIZE<4:0>   |      |      |      |      | —        | —          | —      | xxxx   |               |
| 8490                        | SBT1RD2          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 8498                        | SBT1WR2          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 84A0                        | SBT1REG3         | 31:16     | BASE<21:6>  |       |       |           |       |       |      |             |      |      |      |      |          |            |        | xxxx   |               |
|                             |                  | 15:0      | BASE<5:0>   |       |       |           |       | PRI   | —    | SIZE<4:0>   |      |      |      |      | —        | —          | —      | xxxx   |               |
| 84B0                        | SBT1RD3          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 84B8                        | SBT1WR3          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 84C0                        | SBT1REG4         | 31:16     | BASE<21:6>  |       |       |           |       |       |      |             |      |      |      |      |          |            |        | xxxx   |               |
|                             |                  | 15:0      | BASE<5:0>   |       |       |           |       | PRI   | —    | SIZE<4:0>   |      |      |      |      | —        | —          | —      | xxxx   |               |
| 84D0                        | SBT1RD4          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |
| 84D8                        | SBT1WR4          | 31:16     | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | —        | —          | —      | xxxx   |               |
|                             |                  | 15:0      | —           | —     | —     | —         | —     | —     | —    | —           | —    | —    | —    | —    | GROUP3   | GROUP2     | GROUP1 | GROUP0 | xxxx          |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note:** For reset values listed as 'xxxx', please refer to Table 4-6 for the actual reset values.

### REGISTER 4-3: SBTxELOG1: SYSTEM BUS TARGET 'x' ERROR LOG REGISTER 1 ( 'x' = 0-13) (CONTINUED)

- bit 7-4    **REGION<3:0>**: Requested Region Number bits  
          1111 - 0000 = Target's region that reported a permission group violation
- bit 3     **Unimplemented**: Read as '0'
- bit 2-0   **CMD<2:0>**: Transaction Command of the Requester bits  
          111 = Reserved  
          110 = Reserved  
          101 = Write (a non-posted write)  
          100 = Reserved  
          011 = Read (a locked read caused by a Read-Modify-Write transaction)  
          010 = Read  
          001 = Write  
          000 = Idle

|                                                                                           |
|-------------------------------------------------------------------------------------------|
| <b>Note:</b> Refer to Table 4-6 for the list of available targets and their descriptions. |
|-------------------------------------------------------------------------------------------|

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

**REGISTER 8-8: CLKSTAT: OSCILLATOR CLOCK STATUS REGISTER**

| Bit Range | Bit 31/23/15/7 | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1     | Bit 24/16/8/0 |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|-------------------|---------------|
| 31:24     | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—          | U-0<br>—      |
| 23:16     | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—          | U-0<br>—      |
| 15:8      | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—       | U-0<br>—          | U-0<br>—      |
| 7:0       | U-0<br>—       | U-0<br>—       | R-0<br>LPRCRDY | R-0<br>SOSCRDY | U-0<br>—       | R-0<br>POSCRDY | R-0<br>DIVSPLLRDY | R-0<br>FRCRDY |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-6 **Unimplemented:** Read as '0'

bit 5 **LPRCRDY:** Low-Power RC (LPRC) Oscillator Ready Status bit

1 = LPRC is stable and ready

0 = LPRC is disabled or not operating

bit 4 **SOSCRDY:** Secondary Oscillator (Sosc) Ready Status bit

1 = Sosc is stable and ready

0 = Sosc is disabled or not operating

bit 3 **Unimplemented:** Read as '0'

bit 2 **POSCRDY:** Primary Oscillator (Posc) Ready Status bit

1 = Posc is stable and ready

0 = Posc is disabled or not operating

bit 1 **DIVSPLLRDY:** Divided System PLL Ready Status bit

1 = Divided System PLL is ready

0 = Divided System PLL is not ready

bit 0 **FRCRDY:** Fast RC (FRC) Oscillator Ready Status bit

1 = FRC is stable and ready

0 = FRC is disabled for not operating

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

## REGISTER 10-7: DCHxCON: DMA CHANNEL x CONTROL REGISTER

| Bit Range | Bit 31/23/15/7      | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0         |
|-----------|---------------------|----------------|----------------|----------------|----------------|----------------|---------------|-----------------------|
| 31:24     | R/W-0               | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0         | R/W-0                 |
|           | CHPIGN<7:0>         |                |                |                |                |                |               |                       |
| 23:16     | U-0                 | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0                   |
|           | —                   | —              | —              | —              | —              | —              | —             | —                     |
| 15:8      | R/W-0               | U-0            | R/W-0          | U-0            | R/W-0          | U-0            | U-0           | R/W-0                 |
|           | CHBUSY              | —              | CHIPGNEN       | —              | CHPATLEN       | —              | —             | CHCHNS <sup>(1)</sup> |
| 7:0       | R/W-0               | R/W-0          | R/W-0          | R/W-0          | U-0            | R-0            | R/W-0         | R/W-0                 |
|           | CHEN <sup>(2)</sup> | CHAED          | CHCHN          | CHAEN          | —              | CHEDET         | CHPRI<1:0>    |                       |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-24 **CHPIGN<7:0>**: Channel Register Data bits

Pattern Terminate mode:

Any byte matching these bits during a pattern match may be ignored during the pattern match determination when the CHIPGNEN bit is set. If a byte is read that is identical to this data byte, the pattern match logic will treat it as a "don't care" when the pattern matching logic is enabled and the CHPIGNEN bit is set.

bit 23-16 **Unimplemented**: Read as '0'

bit 15 **CHBUSY**: Channel Busy bit

1 = Channel is active or has been enabled

0 = Channel is inactive or has been disabled

bit 14 **Unimplemented**: Read as '0'

bit 13 **CHIPGNEN**: Enable Pattern Ignore Byte bit

1 = Treat any byte that matches the CHPIGN<7:0> bits as a "don't care" when pattern matching is enabled

0 = Disable this feature

bit 12 **Unimplemented**: Read as '0'

bit 11 **CHPATLEN**: Pattern Length bit

1 = 2 byte length

0 = 1 byte length

bit 10-9 **Unimplemented**: Read as '0'

bit 8 **CHCHNS**: Chain Channel Selection bit<sup>(1)</sup>

1 = Chain to channel lower in natural priority (CH1 will be enabled by CH2 transfer complete)

0 = Chain to channel higher in natural priority (CH1 will be enabled by CH0 transfer complete)

bit 7 **CHEN**: Channel Enable bit<sup>(2)</sup>

1 = Channel is enabled

0 = Channel is disabled

bit 6 **CHAED**: Channel Allow Events If Disabled bit

1 = Channel start/abort events will be registered, even if the channel is disabled

0 = Channel start/abort events will be ignored if the channel is disabled

bit 5 **CHCHN**: Channel Chain Enable bit

1 = Allow channel to be chained

0 = Do not allow channel to be chained

**Note 1:** The chain selection bit takes effect when chaining is enabled (i.e., CHCHN = 1).

**2:** When the channel is suspended by clearing this bit, the user application should poll the CHBUSY bit (if available on the device variant) to see when the channel is suspended, as it may take some clock cycles to complete a current transaction before the channel is suspended.

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

## REGISTER 10-12: DCHxSSIZ: DMA CHANNEL x SOURCE SIZE REGISTER

| Bit Range | Bit 31/23/15/7 | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|---------------|---------------|
| 31:24     | U-0            | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —              | —              | —              | —             | —             |
| 23:16     | U-0            | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —              | —              | —              | —             | —             |
| 15:8      | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0         | R/W-0         |
|           | CHSSIZ<15:8>   |                |                |                |                |                |               |               |
| 7:0       | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0         | R/W-0         |
|           | CHSSIZ<7:0>    |                |                |                |                |                |               |               |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-16 **Unimplemented:** Read as '0'

bit 15-0 **CHSSIZ<15:0>:** Channel Source Size bits

1111111111111111 = 65,535 byte source size

.

.

0000000000000010 = 2 byte source size

0000000000000001 = 1 byte source size

0000000000000000 = 65,536 byte source size

## REGISTER 10-13: DCHxDSIZ: DMA CHANNEL x DESTINATION SIZE REGISTER

| Bit Range | Bit 31/23/15/7 | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|---------------|---------------|
| 31:24     | U-0            | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —              | —              | —              | —             | —             |
| 23:16     | U-0            | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —              | —              | —              | —             | —             |
| 15:8      | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0         | R/W-0         |
|           | CHDSIZ<15:8>   |                |                |                |                |                |               |               |
| 7:0       | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0         | R/W-0         |
|           | CHDSIZ<7:0>    |                |                |                |                |                |               |               |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-16 **Unimplemented:** Read as '0'

bit 15-0 **CHDSIZ<15:0>:** Channel Destination Size bits

1111111111111111 = 65,535 byte destination size

.

.

0000000000000010 = 2 byte destination size

0000000000000001 = 1 byte destination size

0000000000000000 = 65,536 byte destination size

**TABLE 11-1: USB REGISTER MAP 1 (CONTINUED)**

| Virtual Address<br>(BF8E #) | Register<br>Name | Bit Range | Bits          |               |       |                |               |       |               |          |               |              |       |               |               |          |         | All Resets |      |
|-----------------------------|------------------|-----------|---------------|---------------|-------|----------------|---------------|-------|---------------|----------|---------------|--------------|-------|---------------|---------------|----------|---------|------------|------|
|                             |                  |           | 31/15         | 30/14         | 29/13 | 28/12          | 27/11         | 26/10 | 25/9          | 24/8     | 23/7          | 22/6         | 21/5  | 20/4          | 19/3          | 18/2     | 17/1    |            | 16/0 |
| 3028                        | USB<br>FIFO2     | 31:16     | DATA<31:16>   |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | DATA<15:0>    |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 302C                        | USB<br>FIFO3     | 31:16     | DATA<31:16>   |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | DATA<15:0>    |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 3030                        | USB<br>FIFO4     | 31:16     | DATA<31:16>   |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | DATA<15:0>    |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 3034                        | USB<br>FIFO5     | 31:16     | DATA<31:16>   |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | DATA<15:0>    |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 3038                        | USB<br>FIFO6     | 31:16     | DATA<31:16>   |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | DATA<15:0>    |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 303C                        | USB<br>FIFO7     | 31:16     | DATA<31:16>   |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | DATA<15:0>    |               |       |                |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 3060                        | USBOTG           | 31:16     | —             | —             | —     | RXDPB          | RXFIFOSZ<3:0> |       |               | —        | —             | —            | TXDPB | TXFIFOSZ<3:0> |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | TXEDMA        | RXEDMA   | BDEV          | FSDEV        | LSDEV | VBUS<1:0>     |               | HOSTMODE | HOSTREQ | SESSION    | 0000 |
| 3064                        | USB<br>FIFOA     | 31:16     | —             | —             | —     | RXFIFOAD<12:0> |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | TXFIFOAD<12:0> |               |       |               |          |               |              |       |               |               |          |         | 0000       |      |
| 306C                        | USB<br>HWVER     | 31:16     | —             | —             | —     | —              | —             | —     | —             | —        | —             | —            | —     | —             | —             | —        | —       | 0000       |      |
|                             |                  | 15:0      | RC            | VERMAJOR<4:0> |       |                |               |       | VERMINOR<9:0> |          |               |              |       |               |               |          |         | 0800       |      |
| 3078                        | USB<br>INFO      | 31:16     | VPLEN<7:0>    |               |       |                |               |       |               |          | WTCON<3:0>    |              |       |               | WTID<3:0>     |          |         |            | 3C5C |
|                             |                  | 15:0      | DMACHANS<3:0> |               |       |                | RAMBITS<3:0>  |       |               |          | RXENDPTS<3:0> |              |       |               | TXENDPTS<3:0> |          |         |            | 8C77 |
| 307C                        | USB<br>EOFRST    | 31:16     | —             | —             | —     | —              | —             | —     | NRSTX         | NRST     | LSEOF<7:0>    |              |       |               |               |          |         | 0072       |      |
|                             |                  | 15:0      | FSEOF<7:0>    |               |       |                |               |       |               |          | HSEOF<7:0>    |              |       |               |               |          |         | 7780       |      |
| 3080                        | USB<br>E0TXA     | 31:16     | —             | TXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | TXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | TXFADDR<6:0> |       |               |               |          |         |            | 0000 |
| 3084                        | USB<br>E0RXA     | 31:16     | —             | RXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | RXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | —            | —     | —             | —             | —        | —       | 0000       |      |
| 3088                        | USB<br>E1TXA     | 31:16     | —             | TXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | TXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | TXFADDR<6:0> |       |               |               |          |         |            | 0000 |
| 308C                        | USB<br>E1RXA     | 31:16     | —             | RXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | RXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | RXFADDR<6:0> |       |               |               |          |         |            | 0000 |
| 3090                        | USB<br>E2TXA     | 31:16     | —             | TXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | TXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | TXFADDR<6:0> |       |               |               |          |         |            | 0000 |
| 3094                        | USB<br>E2RXA     | 31:16     | —             | RXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | RXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | RXFADDR<6:0> |       |               |               |          |         |            | 0000 |
| 3098                        | USB<br>E3TXA     | 31:16     | —             | TXHUBPRT<6:0> |       |                |               |       |               | MULTTRAN | TXHUBADD<6:0> |              |       |               |               |          |         | 0000       |      |
|                             |                  | 15:0      | —             | —             | —     | —              | —             | —     | —             | —        | —             | TXFADDR<6:0> |       |               |               |          |         |            | 0000 |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

- Note**
- 1: Device mode.
  - 2: Host mode.
  - 3: Definition for Endpoint 0 (ENDPOINT<3:0> (USBCSR<19:16>) = 0).
  - 4: Definition for Endpoints 1-7 (ENDPOINT<3:0> (USBCSR<19:16>) = 1 through 7).

**TABLE 12-12: PORTE REGISTER MAP FOR 64-PIN DEVICES ONLY**

| Virtual Address<br>(BF86_#) | Register<br>Name(s) | Bit Range | Bits  |       |       |       |                |       |      |      |              |              |              |              |              |              |              |              | All<br>Resets |
|-----------------------------|---------------------|-----------|-------|-------|-------|-------|----------------|-------|------|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
|                             |                     |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11          | 26/10 | 25/9 | 24/8 | 23/7         | 22/6         | 21/5         | 20/4         | 19/3         | 18/2         | 17/1         | 16/0         |               |
| 0400                        | ANSELE              | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | ANSE7        | ANSE6        | ANSE5        | ANSE4        | —            | —            | —            | —            | 00F0          |
| 0410                        | TRISE               | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | TRISE7       | TRISE6       | TRISE5       | TRISE4       | TRISE3       | TRISE2       | TRISE1       | TRISE0       | 00FF          |
| 0420                        | PORTE               | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | RE7          | RE6          | RE5          | RE4          | RE3          | RE2          | RE1          | RE0          | xxxx          |
| 0430                        | LATE                | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | LATE7        | LATE6        | LATE5        | LATE4        | LATE3        | LATE2        | LATE1        | LATE0        | xxxx          |
| 0440                        | ODCE                | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | ODCE7        | ODCE6        | ODCE5        | ODCE4        | ODCE3        | ODCE2        | ODCE1        | ODCE0        | 0000          |
| 0450                        | CNPUE               | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | CNPUE7       | CNPUE6       | CNPUE5       | CNPUE4       | CNPUE3       | CNPUE2       | CNPUE1       | CNPUE0       | 0000          |
| 0460                        | CNPDE               | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | CNPDE7       | CNPDE6       | CNPDE5       | CNPDE4       | CNPDE3       | CNPDE2       | CNPDE1       | CNPDE0       | 0000          |
| 0470                        | CNCONE              | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | ON    | —     | —     | —     | EDGE<br>DETECT | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
| 0480                        | CNENE               | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | CNENE7       | CNENE6       | CNENE5       | CNENE4       | CNENE3       | CNENE2       | CNENE1       | CNENE0       | 0000          |
| 0490                        | CNSTATE             | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | CN<br>STATE7 | CN<br>STATE6 | CN<br>STATE5 | CN<br>STATE4 | CN<br>STATE3 | CN<br>STATE2 | CN<br>STATE1 | CN<br>STATE0 | 0000          |
| 04A0                        | CNNEE               | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | CNNEE7       | CNNEE6       | CNNEE5       | CNNEE4       | CNNEE3       | CNNEE2       | CNNEE1       | CNNEE0       | 0000          |
| 04B0                        | CNFE                | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | CNFE7        | CNFE6        | CNFE5        | CNFE4        | CNFE3        | CNFE2        | CNFE1        | CNFE0        | 0000          |
| 04C0                        | SRCON0E             | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | SR0E3        | SR0E2        | SR0E1        | SR0E0        | 0000          |
| 04D0                        | SRCON1E             | 31:16     | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | —            | —            | —            | —            | 0000          |
|                             |                     | 15:0      | —     | —     | —     | —     | —              | —     | —    | —    | —            | —            | —            | —            | SR1E3        | SR1E2        | SR1E1        | SR1E0        | 0000          |

**Legend:** x = Unknown value on Reset; — = Unimplemented, read as '0'; Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET and INV registers at its virtual address, plus an offset of 0x4, 0x8 and 0xC, respectively. See **Section 12.3 “CLR, SET, and INV Registers”** for more information.

TABLE 12-23: PERIPHERAL PIN SELECT OUTPUT REGISTER MAP (CONTINUED)

| Virtual Address<br>(BF80_#) | Register<br>Name      | Bit Range | Bits  |       |       |       |       |       |      |      |      |      |      |      |             |      |      |      | All Resets |
|-----------------------------|-----------------------|-----------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|-------------|------|------|------|------------|
|                             |                       |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4 | 19/3        | 18/2 | 17/1 | 16/0 |            |
| 1620                        | RPE8R <sup>(1)</sup>  | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPE8R<3:0>  |      |      |      | 0000       |
| 1624                        | RPE9R <sup>(1)</sup>  | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPE9R<3:0>  |      |      |      | 0000       |
| 1640                        | RPF0R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF0R<3:0>  |      |      |      | 0000       |
| 1644                        | RPF1R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF1R<3:0>  |      |      |      | 0000       |
| 1648                        | RPF2R <sup>(1)</sup>  | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF2R<3:0>  |      |      |      | 0000       |
| 164C                        | RPF3R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF3R<3:0>  |      |      |      | 0000       |
| 1650                        | RPF4R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF4R<3:0>  |      |      |      | 0000       |
| 1654                        | RPF5R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF5R<3:0>  |      |      |      | 0000       |
| 1660                        | RPF8R <sup>(1)</sup>  | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF8R<3:0>  |      |      |      | 0000       |
| 1670                        | RPF12R <sup>(1)</sup> | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF12R<3:0> |      |      |      | 0000       |
| 1674                        | RPF13R <sup>(1)</sup> | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPF13R<3:0> |      |      |      | 0000       |
| 1680                        | RPG0R <sup>(1)</sup>  | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPG0R<3:0>  |      |      |      | 0000       |
| 1684                        | RPG1R <sup>(1)</sup>  | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPG1R<3:0>  |      |      |      | 0000       |
| 1698                        | RPG6R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPG6R<3:0>  |      |      |      | 0000       |
| 169C                        | RPG7R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPG7R<3:0>  |      |      |      | 0000       |
| 16A0                        | RPG8R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPG8R<3:0>  |      |      |      | 0000       |
| 16A4                        | RPG9R                 | 31:16     | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | —           | —    | —    | —    | 0000       |
|                             |                       | 15:0      | —     | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —    | RPG9R<3:0>  |      |      |      | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

- Note** 1: This register is not available on 64-pin devices.  
 2: This register is not available on 64-pin and 100-pin devices.

## 18.1 Output Compare Control Registers

**TABLE 18-2: OUTPUT COMPARE 1 THROUGH OUTPUT COMPARE 9 REGISTER MAP**

| Virtual Address<br>(BF84_#) | Register<br>Name <sup>(1)</sup> | Bit Range     | Bits        |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | All Resets   |
|-----------------------------|---------------------------------|---------------|-------------|-------|-------|-------|-------|-------|------|------|------|------|------|-------|--------|----------|------|------|--------------|
|                             |                                 |               | 31/15       | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7 | 22/6 | 21/5 | 20/4  | 19/3   | 18/2     | 17/1 | 16/0 |              |
| 4000                        | OC1CON                          | 31:16         | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000         |
|                             |                                 | 15:0          | ON          | —     | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000         |
| 4010                        | OC1R                            | 31:16         | OC1R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4020                        | OC1RS                           | 31:16         | OC1RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4200                        | OC2CON                          | 31:16         | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000         |
|                             |                                 | 15:0          | ON          | —     | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000         |
| 4210                        | OC2R                            | 31:16         | OC2R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4220                        | OC2RS                           | 31:16         | OC2RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4400                        | OC3CON                          | 31:16         | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000         |
|                             |                                 | 15:0          | ON          | —     | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000         |
| 4410                        | OC3R                            | 31:16         | OC3R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4420                        | OC3RS                           | 31:16<br>15:0 | OC3RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX<br>XXXX |
| 4600                        | OC4CON                          | 31:16         | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000         |
|                             |                                 | 15:0          | ON          | —     | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000         |
| 4610                        | OC4R                            | 31:16         | OC4R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4620                        | OC4RS                           | 31:16<br>15:0 | OC4RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX<br>XXXX |
|                             |                                 |               |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      |              |
| 4800                        | OC5CON                          | 31:16         | —           | —     | —     | —     | —     | —     | —    | —    | —    | —    | —    | —     | —      | —        | —    | —    | 0000         |
|                             |                                 | 15:0          | ON          | —     | SIDL  | —     | —     | —     | —    | —    | —    | —    | OC32 | OCFLT | OCTSEL | OCM<2:0> |      |      | 0000         |
| 4810                        | OC5R                            | 31:16         | OC5R<31:0>  |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
| 4820                        | OC5RS                           | 31:16         | OC5RS<31:0> |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |
|                             |                                 | 15:0          |             |       |       |       |       |       |      |      |      |      |      |       |        |          |      |      | XXXX         |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET and INV registers at their virtual addresses, plus offsets of 0x4, 0x8 and 0xC, respectively. See **Section 12.3 “CLR, SET, and INV Registers”** for more information.

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

**REGISTER 18-1: OCxCON: OUTPUT COMPARE 'x' CONTROL REGISTER**

| Bit Range | Bit 31/23/15/7 | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4       | Bit 27/19/11/3        | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|----------------|----------------|----------------|----------------------|-----------------------|----------------|---------------|---------------|
| 31:24     | U-0            | U-0            | U-0            | U-0                  | U-0                   | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —                    | —                     | —              | —             | —             |
| 23:16     | U-0            | U-0            | U-0            | U-0                  | U-0                   | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —                    | —                     | —              | —             | —             |
| 15:8      | R/W-0          | U-0            | R/W-0          | U-0                  | U-0                   | U-0            | U-0           | U-0           |
|           | ON             | —              | SIDL           | —                    | —                     | —              | —             | —             |
| 7:0       | U-0            | U-0            | R/W-0          | R-0                  | R/W-0                 | R/W-0          | R/W-0         | R/W-0         |
|           | —              | —              | OC32           | OCFLT <sup>(1)</sup> | OCTSEL <sup>(2)</sup> | OCM<2:0>       |               |               |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-16 **Unimplemented:** Read as '0'

bit 15 **ON:** Output Compare Peripheral On bit

1 = Output Compare peripheral is enabled

0 = Output Compare peripheral is disabled

bit 14 **Unimplemented:** Read as '0'

bit 13 **SIDL:** Stop in Idle Mode bit

1 = Discontinue operation when CPU enters Idle mode

0 = Continue operation in Idle mode

bit 12-6 **Unimplemented:** Read as '0'

bit 5 **OC32:** 32-bit Compare Mode bit

1 = OCxR<31:0> and/or OCxRS<31:0> are used for comparisons to the 32-bit timer source

0 = OCxR<15:0> and OCxRS<15:0> are used for comparisons to the 16-bit timer source

bit 4 **OCFLT:** PWM Fault Condition Status bit<sup>(1)</sup>

1 = PWM Fault condition has occurred (cleared in HW only)

0 = No PWM Fault condition has occurred

bit 3 **OCTSEL:** Output Compare Timer Select bit<sup>(2)</sup>

1 = Timery is the clock source for this Output Compare module

0 = Timerx is the clock source for this Output Compare module

bit 2-0 **OCM<2:0>:** Output Compare Mode Select bits

111 = PWM mode on OCx; Fault pin is enabled

110 = PWM mode on OCx; Fault pin is disabled

101 = Initialize OCx pin low; generate continuous output pulses on OCx pin

100 = Initialize OCx pin low; generate single output pulse on OCx pin

011 = Compare event toggles OCx pin

010 = Initialize OCx pin high; compare event forces OCx pin low

001 = Initialize OCx pin low; compare event forces OCx pin high

000 = Output compare peripheral is disabled but continues to draw current

**Note 1:** This bit is only used when OCM<2:0> = '111'. It is read as '0' in all other modes.

**2:** Refer to Table 18-1 for Timerx and Timery selections.

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

## 26.2 Crypto Engine Buffer Descriptors

Host software creates a linked list of buffer descriptors and the hardware updates them. Table 26-3 provides a list of the Crypto Engine buffer descriptors, followed by format descriptions of each buffer descriptor (see Figure 26-2 through Figure 26-9).

**TABLE 26-3: CRYPTO ENGINE BUFFER DESCRIPTORS**

| Name (see Note 1) | Bit<br>31/23/15/7 | Bit<br>30/22/14/6  | Bit<br>29/21/13/5 | Bit<br>28/20/12/4 | Bit<br>27/19/11/3 | Bit<br>26/18/10/2 | Bit<br>25/17/9/1 | Bit<br>24/16/8/0 |
|-------------------|-------------------|--------------------|-------------------|-------------------|-------------------|-------------------|------------------|------------------|
| BD_CTRL           | 31:24             | DESC_EN            | —                 | CRY_MODE<2:0>     |                   | —                 | —                | —                |
|                   | 23:16             | —                  | SA_FETCH_EN       | —                 | LAST_BD           | LIFM              | PKT_INT_EN       | CBD_INT_EN       |
|                   | 15:8              | BD_BUFLEN<15:8>    |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | BD_BUFLEN<7:0>     |                   |                   |                   |                   |                  |                  |
| BD_SA_ADDR        | 31:24             | BD_SAADDR<31:24>   |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | BD_SAADDR<23:16>   |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | BD_SAADDR<15:8>    |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | BD_SAADDR<7:0>     |                   |                   |                   |                   |                  |                  |
| BD_SCRADDR        | 31:24             | BD_SRCADDR<31:24>  |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | BD_SRCADDR<23:16>  |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | BD_SRCADDR<15:8>   |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | BD_SRCADDR<7:0>    |                   |                   |                   |                   |                  |                  |
| BD_DSTADDR        | 31:24             | BD_DSTADDR<31:24>  |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | BD_DSTADDR<23:16>  |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | BD_DSTADDR<15:8>   |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | BD_DSTADDR<7:0>    |                   |                   |                   |                   |                  |                  |
| BD_NXTPTR         | 31:24             | BD_NXTADDR<31:24>  |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | BD_NXTADDR<23:16>  |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | BD_NXTADDR<15:8>   |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | BD_NXTADDR<7:0>    |                   |                   |                   |                   |                  |                  |
| BD_UPDPTR         | 31:24             | BD_UPDADDR<31:24>  |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | BD_UPDADDR<23:16>  |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | BD_UPDADDR<15:8>   |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | BD_UPDADDR<7:0>    |                   |                   |                   |                   |                  |                  |
| BD_MSG_LEN        | 31:24             | MSG_LENGTH<31:24>  |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | MSG_LENGTH<23:16>  |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | MSG_LENGTH<15:8>   |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | MSG_LENGTH<7:0>    |                   |                   |                   |                   |                  |                  |
| BD_ENC_OFF        | 31:24             | ENCR_OFFSET<31:24> |                   |                   |                   |                   |                  |                  |
|                   | 23:16             | ENCR_OFFSET<23:16> |                   |                   |                   |                   |                  |                  |
|                   | 15:8              | ENCR_OFFSET<15:8>  |                   |                   |                   |                   |                  |                  |
|                   | 7:0               | ENCR_OFFSET<7:0>   |                   |                   |                   |                   |                  |                  |

**Note 1:** The buffer descriptor must be allocated in memory on a 64-bit boundary.

NOTES:

## REGISTER 29-16: C<sub>i</sub>FLTCON6: CAN FILTER CONTROL REGISTER 6 (CONTINUED)

- bit 15     **FLTEN25:** Filter 25 Enable bit  
          1 = Filter is enabled  
          0 = Filter is disabled
- bit 14-13   **MSEL25<1:0>:** Filter 25 Mask Select bits  
          11 = Acceptance Mask 3 selected  
          10 = Acceptance Mask 2 selected  
          01 = Acceptance Mask 1 selected  
          00 = Acceptance Mask 0 selected
- bit 12-8    **FSEL25<4:0>:** FIFO Selection bits  
          11111 = Message matching filter is stored in FIFO buffer 31  
          11110 = Message matching filter is stored in FIFO buffer 30  
          •  
          •  
          •  
          00001 = Message matching filter is stored in FIFO buffer 1  
          00000 = Message matching filter is stored in FIFO buffer 0
- bit 7       **FLTEN24:** Filter 24 Enable bit  
          1 = Filter is enabled  
          0 = Filter is disabled
- bit 6-5     **MSEL24<1:0>:** Filter 24 Mask Select bits  
          11 = Acceptance Mask 3 selected  
          10 = Acceptance Mask 2 selected  
          01 = Acceptance Mask 1 selected  
          00 = Acceptance Mask 0 selected
- bit 4-0     **FSEL24<4:0>:** FIFO Selection bits  
          11111 = Message matching filter is stored in FIFO buffer 31  
          11110 = Message matching filter is stored in FIFO buffer 30  
          •  
          •  
          •  
          00001 = Message matching filter is stored in FIFO buffer 1  
          00000 = Message matching filter is stored in FIFO buffer 0

|                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Note:</b> The bits in this register can only be modified if the corresponding filter enable (FLTEN <sub>n</sub> ) bit is '0'. |
|----------------------------------------------------------------------------------------------------------------------------------|

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

Table 30-1, Table 30-2, Table 30-3 and Table 30-4 show four interfaces and the associated pins that can be used with the Ethernet Controller.

**TABLE 30-1: MII MODE DEFAULT INTERFACE SIGNALS (FMIIEN = 1, FETHIO = 1)**

| Pin Name | Description          |
|----------|----------------------|
| EMDC     | Management Clock     |
| EMDIO    | Management I/O       |
| ETXCLK   | Transmit Clock       |
| ETXEN    | Transmit Enable      |
| ETXD0    | Transmit Data        |
| ETXD1    | Transmit Data        |
| ETXD2    | Transmit Data        |
| ETXD3    | Transmit Data        |
| ETXERR   | Transmit Error       |
| ERXCLK   | Receive Clock        |
| ERXDV    | Receive Data Valid   |
| ERXD0    | Receive Data         |
| ERXD1    | Receive Data         |
| ERXD2    | Receive Data         |
| ERXD3    | Receive Data         |
| ERXERR   | Receive Error        |
| ECRS     | Carrier Sense        |
| ECOL     | Collision Indication |

**TABLE 30-2: RMII MODE DEFAULT INTERFACE SIGNALS (FMIIEN = 0, FETHIO = 1)**

| Pin Name | Description                        |
|----------|------------------------------------|
| EMDC     | Management Clock                   |
| EMDIO    | Management I/O                     |
| ETXEN    | Transmit Enable                    |
| ETXD0    | Transmit Data                      |
| ETXD1    | Transmit Data                      |
| EREFCLK  | Reference Clock                    |
| ECRSDV   | Carrier Sense – Receive Data Valid |
| ERXD0    | Receive Data                       |
| ERXD1    | Receive Data                       |
| ERXERR   | Receive Error                      |

**Note:** Ethernet controller pins that are not used by selected interface can be used by other peripherals.

**TABLE 30-3: MII MODE ALTERNATE INTERFACE SIGNALS (FMIIEN = 1, FETHIO = 0)**

| Pin Name | Description          |
|----------|----------------------|
| AEMDC    | Management Clock     |
| AEMDIO   | Management I/O       |
| AETXCLK  | Transmit Clock       |
| AETXEN   | Transmit Enable      |
| AETXD0   | Transmit Data        |
| AETXD1   | Transmit Data        |
| AETXD2   | Transmit Data        |
| AETXD3   | Transmit Data        |
| AETXERR  | Transmit Error       |
| AERXCLK  | Receive Clock        |
| AERXDV   | Receive Data Valid   |
| AERXD0   | Receive Data         |
| AERXD1   | Receive Data         |
| AERXD2   | Receive Data         |
| AERXD3   | Receive Data         |
| AERXERR  | Receive Error        |
| AECRS    | Carrier Sense        |
| AECOL    | Collision Indication |

**Note:** The MII mode Alternate Interface is not available on 64-pin devices.

**TABLE 30-4: RMII MODE ALTERNATE INTERFACE SIGNALS (FMIIEN = 0, FETHIO = 0)**

| Pin Name | Description                        |
|----------|------------------------------------|
| AEMDC    | Management Clock                   |
| AEMDIO   | Management I/O                     |
| AETXEN   | Transmit Enable                    |
| AETXD0   | Transmit Data                      |
| AETXD1   | Transmit Data                      |
| AEREFCLK | Reference Clock                    |
| AECRSDV  | Carrier Sense – Receive Data Valid |
| AERXD0   | Receive Data                       |
| AERXD1   | Receive Data                       |
| AERXERR  | Receive Error                      |

**TABLE 30-5: ETHERNET CONTROLLER REGISTER SUMMARY (CONTINUED)**

| Virtual Address<br>(BF88_#) | Register<br>Name <sup>(1)</sup> | Bit Range | Bits          |       |       |       |       |       |      |      |               |      |      |          |          |      |          |      | All Resets |
|-----------------------------|---------------------------------|-----------|---------------|-------|-------|-------|-------|-------|------|------|---------------|------|------|----------|----------|------|----------|------|------------|
|                             |                                 |           | 31/15         | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8 | 23/7          | 22/6 | 21/5 | 20/4     | 19/3     | 18/2 | 17/1     | 16/0 |            |
| 22B0                        | EMAC1<br>MWTD                   | 31:16     | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | —        | —        | —    | —        | —    | 0000       |
|                             |                                 | 15:0      | MWTD<15:0>    |       |       |       |       |       |      |      |               |      |      |          |          |      |          |      | 0000       |
| 22C0                        | EMAC1<br>MRDD                   | 31:16     | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | —        | —        | —    | —        | —    | 0000       |
|                             |                                 | 15:0      | MRDD<15:0>    |       |       |       |       |       |      |      |               |      |      |          |          |      |          |      | 0000       |
| 22D0                        | EMAC1<br>MIND                   | 31:16     | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | —        | —        | —    | —        | —    | 0000       |
|                             |                                 | 15:0      | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | LINKFAIL | NOTVALID | SCAN | MIIMBUSY | 0000 |            |
| 2300                        | EMAC1<br>SA0 <sup>(2)</sup>     | 31:16     | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | —        | —        | —    | —        | —    | XXXX       |
|                             |                                 | 15:0      | STNADDR6<7:0> |       |       |       |       |       |      |      | STNADDR5<7:0> |      |      |          |          |      |          |      | XXXX       |
| 2310                        | EMAC1<br>SA1 <sup>(2)</sup>     | 31:16     | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | —        | —        | —    | —        | —    | XXXX       |
|                             |                                 | 15:0      | STNADDR4<7:0> |       |       |       |       |       |      |      | STNADDR3<7:0> |      |      |          |          |      |          |      | XXXX       |
| 2320                        | EMAC1<br>SA2 <sup>(2)</sup>     | 31:16     | —             | —     | —     | —     | —     | —     | —    | —    | —             | —    | —    | —        | —        | —    | —        | —    | XXXX       |
|                             |                                 | 15:0      | STNADDR2<7:0> |       |       |       |       |       |      |      | STNADDR1<7:0> |      |      |          |          |      |          |      | XXXX       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table (with the exception of ETHSTAT) have corresponding CLR, SET and INV registers at their virtual addresses, plus offsets of 0x4, 0x8 and 0xC, respectively. See **Section 12.3 “CLR, SET, and INV Registers”** for more information.

**Note 2:** Reset values default to the factory programmed value.

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

## REGISTER 30-23: EMAC1CFG1: ETHERNET CONTROLLER MAC CONFIGURATION 1 REGISTER

| Bit Range | Bit 31/23/15/7 | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|---------------|---------------|
| 31:24     | U-0            | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —              | —              | —              | —             | —             |
| 23:16     | U-0            | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —              | —              | —              | —              | —              | —              | —             | —             |
| 15:8      | RW-1           | RW-0           | U-0            | U-0            | RW-0           | RW-0           | RW-0          | RW-0          |
|           | SOFT RESET     | SIM RESET      | —              | —              | RESET RMCS     | RESET RFUN     | RESET TMCS    | RESET TFUN    |
| 7:0       | U-0            | U-0            | U-0            | RW-0           | RW-1           | RW-1           | RW-0          | RW-1          |
|           | —              | —              | —              | LOOPBACK       | TX PAUSE       | RX PAUSE       | PASSALL       | RX ENABLE     |

### Legend:

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 31-16 **Unimplemented:** Read as '0'

bit 15 **SOFTRESET:** Soft Reset bit

Setting this bit will put the MACMII in reset. Its default value is '1'.

bit 14 **SIMRESET:** Simulation Reset bit

Setting this bit will cause a reset to the random number generator within the Transmit Function.

bit 13-12 **Unimplemented:** Read as '0'

bit 11 **RESETRMCS:** Reset MCS/RX bit

Setting this bit will put the MAC Control Sub-layer/Receive domain logic in reset.

bit 10 **RESETRFUN:** Reset RX Function bit

Setting this bit will put the MAC Receive function logic in reset.

bit 9 **RESETTMCS:** Reset MCS/TX bit

Setting this bit will put the MAC Control Sub-layer/TX domain logic in reset.

bit 8 **RESETRFUN:** Reset TX Function bit

Setting this bit will put the MAC Transmit function logic in reset.

bit 7-5 **Unimplemented:** Read as '0'

bit 4 **LOOPBACK:** MAC Loopback mode bit

1 = MAC Transmit interface is loop backed to the MAC Receive interface  
0 = MAC normal operation

bit 3 **TXPAUSE:** MAC TX Flow Control bit

1 = PAUSE Flow Control frames are allowed to be transmitted  
0 = PAUSE Flow Control frames are blocked

bit 2 **RXPAUSE:** MAC RX Flow Control bit

1 = The MAC acts upon received PAUSE Flow Control frames  
0 = Received PAUSE Flow Control frames are ignored

bit 1 **PASSALL:** MAC Pass all Receive Frames bit

1 = The MAC will accept all frames regardless of type (Normal vs. Control)  
0 = The received Control frames are ignored

bit 0 **RXENABLE:** MAC Receive Enable bit

1 = Enable the MAC receiving of frames  
0 = Disable the MAC receiving of frames

**Note:** Both 16-bit and 32-bit accesses are allowed to these registers (including the SET, CLR and INV registers). 8-bit accesses are not allowed and are ignored by the hardware.

# PIC32MZ Embedded Connectivity with Floating Point Unit (EF) Family

## REGISTER 34-11: DEVID: DEVICE AND REVISION ID REGISTER

| Bit Range | Bit 31/23/15/7              | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3              | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|-----------------------------|----------------|----------------|----------------|-----------------------------|----------------|---------------|---------------|
| 31:24     | R                           | R              | R              | R              | R                           | R              | R             | R             |
|           | VER<3:0> <sup>(1)</sup>     |                |                |                | DEVID<27:24> <sup>(1)</sup> |                |               |               |
| 23:16     | R                           | R              | R              | R              | R                           | R              | R             | R             |
|           | DEVID<23:16> <sup>(1)</sup> |                |                |                |                             |                |               |               |
| 15:8      | R                           | R              | R              | R              | R                           | R              | R             | R             |
|           | DEVID<15:8> <sup>(1)</sup>  |                |                |                |                             |                |               |               |
| 7:0       | R                           | R              | R              | R              | R                           | R              | R             | R             |
|           | DEVID<7:0> <sup>(1)</sup>   |                |                |                |                             |                |               |               |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-28 **VER<3:0>**: Revision Identifier bits<sup>(1)</sup>

bit 27-0 **DEVID<27:0>**: Device ID<sup>(1)</sup>

**Note 1:** Refer to “*PIC32 Embedded Connectivity with Floating Point Unit (EF) Family Silicon Errata and Data Sheet Clarification*” (DS80000663) for a list of Revision and Device ID values.

## REGISTER 34-12: DEVS<sub>Nx</sub>: DEVICE SERIAL NUMBER REGISTER 'x' ('x' = 0, 1)

| Bit Range | Bit 31/23/15/7 | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|----------------|----------------|----------------|----------------|----------------|----------------|---------------|---------------|
| 31:24     | R              | R              | R              | R              | R              | R              | R             | R             |
|           | SN<31:24>      |                |                |                |                |                |               |               |
| 23:16     | R              | R              | R              | R              | R              | R              | R             | R             |
|           | SN<23:16>      |                |                |                |                |                |               |               |
| 15:8      | R              | R              | R              | R              | R              | R              | R             | R             |
|           | SN<15:8>       |                |                |                |                |                |               |               |
| 7:0       | R              | R              | R              | R              | R              | R              | R             | R             |
|           | SN<7:0>        |                |                |                |                |                |               |               |

### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR


'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-0 **SN<31:0>**: Device Unique Serial Number bits

**FIGURE 37-30: EJTAG TIMING CHARACTERISTICS**

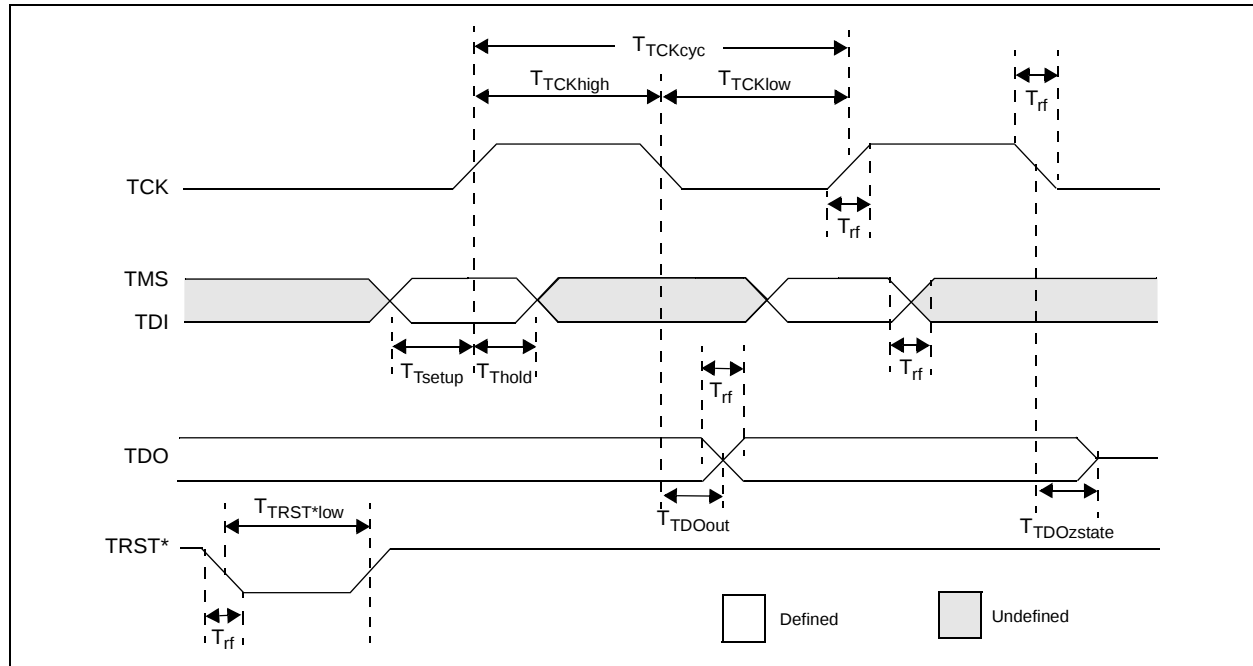

**TABLE 37-49: EJTAG TIMING REQUIREMENTS**

| AC CHARACTERISTICS |            |                                                  | Standard Operating Conditions: 2.1V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |      |       |            |
|--------------------|------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------|
| Param. No.         | Symbol     | Description <sup>(1)</sup>                       | Min.                                                                                                                                                                                                                                              | Max. | Units | Conditions |
| EJ1                | TTCKCYC    | TCK Cycle Time                                   | 25                                                                                                                                                                                                                                                | —    | ns    | —          |
| EJ2                | TTCKHIGH   | TCK High Time                                    | 10                                                                                                                                                                                                                                                | —    | ns    | —          |
| EJ3                | TTCKLOW    | TCK Low Time                                     | 10                                                                                                                                                                                                                                                | —    | ns    | —          |
| EJ4                | TTSETUP    | TAP Signals Setup Time Before Rising TCK         | 5                                                                                                                                                                                                                                                 | —    | ns    | —          |
| EJ5                | TTHOLD     | TAP Signals Hold Time After Rising TCK           | 3                                                                                                                                                                                                                                                 | —    | ns    | —          |
| EJ6                | TTDOOUT    | TDO Output Delay Time from Falling TCK           | —                                                                                                                                                                                                                                                 | 5    | ns    | —          |
| EJ7                | TTDOZSTATE | TDO 3-State Delay Time from Falling TCK          | —                                                                                                                                                                                                                                                 | 5    | ns    | —          |
| EJ8                | TTRSTLOW   | TRST Low Time                                    | 25                                                                                                                                                                                                                                                | —    | ns    | —          |
| EJ9                | TRF        | TAP Signals Rise/Fall Time, All Input and Output | —                                                                                                                                                                                                                                                 | —    | ns    | —          |

**Note 1:** These parameters are characterized, but not tested in manufacturing.