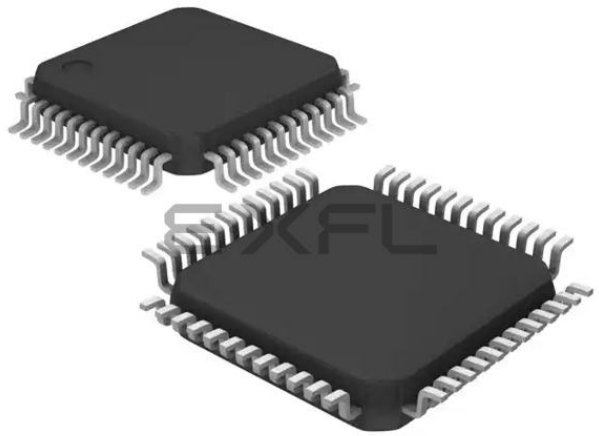

Welcome to E-XFL.COM

What is "Embedded - Microcontrollers"?

"Embedded - Microcontrollers" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "Embedded - Microcontrollers"

Details	
Product Status	Active
Core Processor	H8/300H
Core Size	16-Bit
Speed	20MHz
Connectivity	SCI
Peripherals	PWM, WDT
Number of I/O	30
Program Memory Size	16KB (16K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	2K x 8
Voltage - Supply (Vcc/Vdd)	3V ~ 5.5V
Data Converters	A/D 4x10b
Oscillator Type	Internal
Operating Temperature	-20°C ~ 75°C (TA)
Mounting Type	Surface Mount
Package / Case	48-LQFP
Supplier Device Package	48-LQFP (10x10)
Purchase URL	https://www.e-xfl.com/product-detail/renesas-electronics-america/df36012fxv

1.3 Pin Arrangement

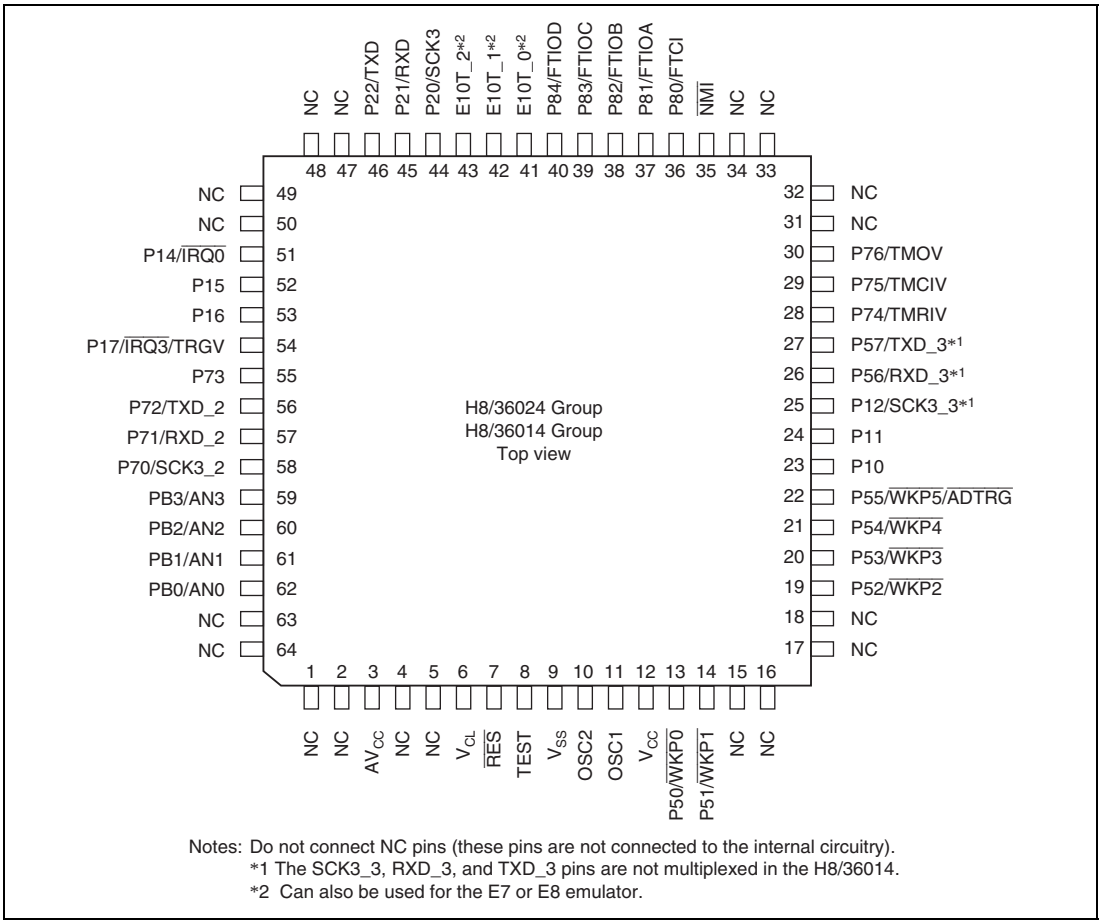

Notes: Do not connect NC pins (these pins are not connected to the internal circuitry).
*1 The SCK3_3, RXD_3, and TXD_3 pins are not multiplexed in the H8/36014.
*2 Can also be used for the E7 or E8 emulator.

Figure 1.2 Pin Arrangement (FP-64E)

9.3.1 Port Mode Register 5 (PMR5)

PMR5 switches the functions of pins in port 5.

Bit	Bit Name	Initial Value	R/W	Description
7	POF57	0	R/W	P57 Pin Function Switch 0: General I/O port 1: NMOS open-drain output
6	POF56	0	R/W	P56 Pin Function Switch 0: General I/O port 1: NMOS open-drain output
5	WKP5	0	R/W	P55/$\overline{\text{WKP5}}$/$\overline{\text{ADTRG}}$ Pin Function Switch Selects whether pin P55/$\overline{\text{WKP5}}$/$\overline{\text{ADTRG}}$ is used as P55 or as $\overline{\text{WKP5}}$/$\overline{\text{ADTRG}}$ input. 0: General I/O port 1: $\overline{\text{WKP5}}$/$\overline{\text{ADTRG}}$ input pin
4	WKP4	0	R/W	P54/$\overline{\text{WKP4}}$ Pin Function Switch Selects whether pin P54/$\overline{\text{WKP4}}$ is used as P54 or as $\overline{\text{WKP4}}$. 0: General I/O port 1: $\overline{\text{WKP4}}$ input pin
3	WKP3	0	R/W	P53/$\overline{\text{WKP3}}$ Pin Function Switch Selects whether pin P53/$\overline{\text{WKP3}}$ is used as P53 or as $\overline{\text{WKP3}}$. 0: General I/O port 1: $\overline{\text{WKP3}}$ input pin
2	WKP2	0	R/W	P52/$\overline{\text{WKP2}}$ Pin Function Switch Selects whether pin P52/$\overline{\text{WKP2}}$ is used as P52 or as $\overline{\text{WKP2}}$. 0: General I/O port 1: $\overline{\text{WKP2}}$ input pin
1	WKP1	0	R/W	P51/$\overline{\text{WKP1}}$ Pin Function Switch Selects whether pin P51/$\overline{\text{WKP1}}$ is used as P51 or as $\overline{\text{WKP1}}$. 0: General I/O port 1: $\overline{\text{WKP1}}$ input pin

- P54/$\overline{\text{WKP4}}$ pin

Register	PMR5	PCR5	
Bit Name	**WKP4**	**PCR54**	**Pin Function**
Setting Value	0	0	P54 input pin
		1	P54 output pin
	1	X	$\overline{\text{WKP4}}$ input pin

Legend X: Don't care.

- P53/$\overline{\text{WKP3}}$ pin

Register	PMR5	PCR5	
Bit Name	**WKP3**	**PCR53**	**Pin Function**
Setting Value	0	0	P53 input pin
		1	P53 output pin
	1	X	$\overline{\text{WKP3}}$ input pin

Legend X: Don't care.

- P52/$\overline{\text{WKP2}}$ pin

Register	PMR5	PCR5	
Bit Name	**WKP2**	**PCR52**	**Pin Function**
Setting Value	0	0	P52 input pin
		1	P52 output pin
	1	X	$\overline{\text{WKP2}}$ input pin

Legend X: Don't care.

- P51/$\overline{\text{WKP1}}$ pin

Register	PMR5	PCR5	
Bit Name	**WKP1**	**PCR51**	**Pin Function**
Setting Value	0	0	P51 input pin
		1	P51 output pin
	1	X	$\overline{\text{WKP1}}$ input pin

Legend X: Don't care.

- P50/$\overline{\text{WKP0}}$ pin

Register	PMR5	PCR5	
Bit Name	**WKP0**	**PCR50**	**Pin Function**
Setting Value	0	0	P50 input pin
		1	P50 output pin
	1	X	$\overline{\text{WKP0}}$ input pin

Legend X: Don't care.

9.4 Port 7

Port 7 is a general I/O port also functioning as a timer V I/O pin. Each pin of the port 7 is shown in figure 9.4. The register setting of TCSRV in timer V has priority for functions of pin P76/TMOV. The pins, P75/TMCIV and P74/TMRIV, are also functioning as timer V input ports that are connected to the timer V regardless of the register setting of port 7.

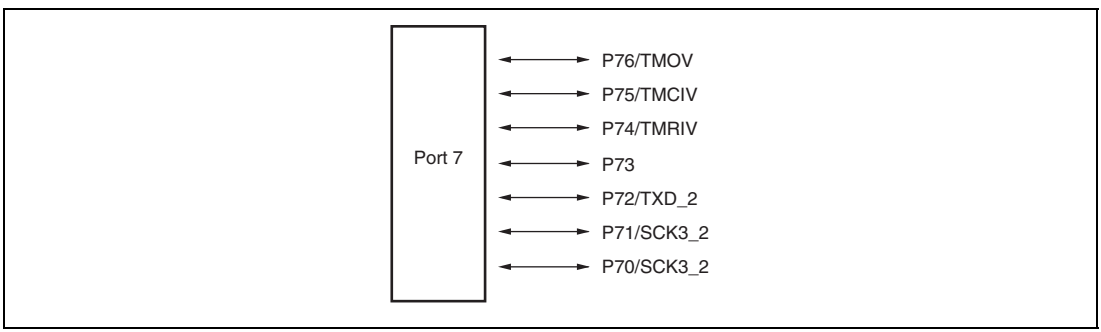

Figure 9.4 Port 7 Pin Configuration

Port 7 has the following registers.

- Port control register 7 (PCR7)
- Port data register 7 (PDR7)

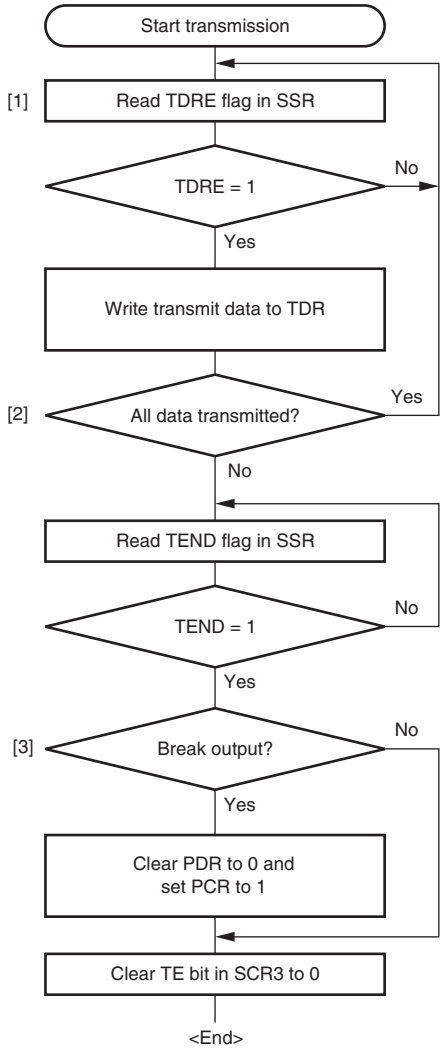

[1] Read SSR and check that the TDRE flag is set to 1, then write transmit data to TDR. When data is written to TDR, the TDRE flag is automaticaly cleared to 0.

[2] To continue serial transmission, read 1 from the TDRE flag to confirm that writing is possible, then write data to TDR. When data is written to TDR, the TDRE flag is automaticaly cleared to 0.

[3] To output a break in serial transmission, after setting PCR to 1 and PDR to 0, clear TxD in PMR1 to 0, then clear the TE bit in SCR3 to 0.

Figure 13.6 Sample Serial Transmission Data Flowchart (Asynchronous Mode)

9.4.3 Pin Functions

The correspondence between the register specification and the port functions is shown below.

- P76/TMOV pin

Register	TCSRV	PCR7	
Bit Name	OS3 to OS0	PCR76	Pin Function
Setting Value	0000	0	P76 input pin
		1	P76 output pin
	Other than the above values	X	TMOV output pin

Legend X: Don't care.

- P75/TMCIV pin

Register	PCR7	
Bit Name	PCR75	Pin Function
Setting Value	0	P75 input/TMCIV input pin
	1	P75 output/TMCIV input pin

- P74/TMRIV pin

Register	PCR7	
Bit Name	PCR74	Pin Function
Setting Value	0	P74 input/TMRIV input pin
	1	P74 output/TMRIV input pin

- P73 pin

Register	PCR7	
Bit Name	PCR73	Pin Function
Setting Value	0	P73 input pin
	1	P73 output pin

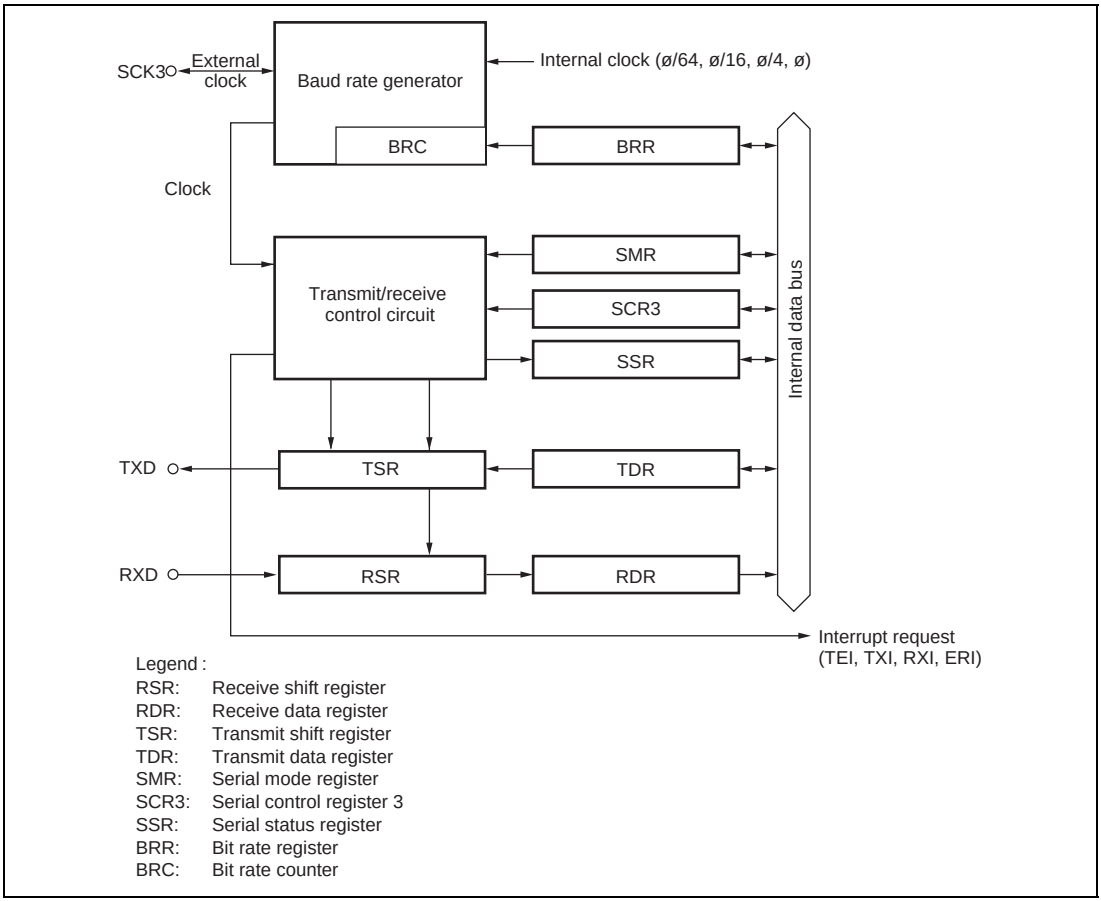

Figure 13.1 Block Diagram of SCI3

18.3.6 Power-Supply-Voltage Detection Circuit Characteristics (Optional)

Table 18.15 Power-Supply-Voltage Detection Circuit Characteristics

V_{SS} = 0.0 V, T_a = −20 to +75°C, unless otherwise indicated.

Item	Symbol	Test Condition	Values			Unit
			Min	Typ	Max	
Power-supply falling detection voltage	Vint (D)	LVDSEL = 0	3.3	3.7	—	V
Power-supply rising detection voltage	Vint (U)	LVDSEL = 0	—	4.0	4.5	V
Reset detection voltage 1*[1]	Vreset1	LVDSEL = 0	—	2.3	2.7	V
Reset detection voltage 2*[2]	Vreset2	LVDSEL = 1	3.0	3.6	4.2	V
Lower-limit voltage of LVDR operation*[3]	$V_{LVDRmin}$		1.0	—	—	V
LVD stabilization time	t_{LVDON}		50	—	—	µs
Current consumption in standby mode	I_{STBY}	LVDE = 1, Vcc = 5.0 V, When a 32-kHz crystal resonator is not used	—	—	350	µA

Notes: 1. This voltage should be used when the falling and rising voltage detection function is used.
2. Select the low-voltage reset 2 when only the low-voltage detection reset is used.
3. When the power-supply voltage (Vcc) falls below $V_{LVDRmin}$ = 1.0 V and then rises, a reset may not occur. Therefore sufficient evaluation is required.

2. Arithmetic instructions

Mnemonic		Operand Size	Addressing Mode and Instruction Length (bytes)									Operation	Condition Code						No. of States *1	
			#xx	Rn	@ERn	@(d, ERn)	@ ERn/@ERn+	@aa	@(d, PC)	@@aa			I	H	N	Z	V	C	Normal	Advanced
ADD	ADD.B #xx:8, Rd	B	2									Rd8+#xx:8 → Rd8	—	↕	↕	↕	↕	↕	2	
	ADD.B Rs, Rd	B		2								Rd8+Rs8 → Rd8	—	↕	↕	↕	↕	↕	2	
	ADD.W #xx:16, Rd	W	4									Rd16+#xx:16 → Rd16	—	(1)	↕	↕	↕	↕	4	
	ADD.W Rs, Rd	W		2								Rd16+Rs16 → Rd16	—	(1)	↕	↕	↕	↕	2	
	ADD.L #xx:32, ERd	L	6									ERd32+#xx:32 → ERd32	—	(2)	↕	↕	↕	↕	6	
	ADD.L ERs, ERd	L		2								ERd32+ERs32 → ERd32	—	(2)	↕	↕	↕	↕	2	
ADDX	ADDX.B #xx:8, Rd	B	2									Rd8+#xx:8 +C → Rd8	—	↕	↕	(3)	↕	↕	2	
	ADDX.B Rs, Rd	B		2								Rd8+Rs8 +C → Rd8	—	↕	↕	(3)	↕	↕	2	
ADDS	ADDS.L #1, ERd	L		2								ERd32+1 → ERd32	—	—	—	—	—	—	2	
	ADDS.L #2, ERd	L		2								ERd32+2 → ERd32	—	—	—	—	—	—	2	
	ADDS.L #4, ERd	L		2								ERd32+4 → ERd32	—	—	—	—	—	—	2	
INC	INC.B Rd	B		2								Rd8+1 → Rd8	—	—	↕	↕	↕	—	2	
	INC.W #1, Rd	W		2								Rd16+1 → Rd16	—	—	↕	↕	↕	—	2	
	INC.W #2, Rd	W		2								Rd16+2 → Rd16	—	—	↕	↕	↕	—	2	
	INC.L #1, ERd	L		2								ERd32+1 → ERd32	—	—	↕	↕	↕	—	2	
	INC.L #2, ERd	L		2								ERd32+2 → ERd32	—	—	↕	↕	↕	—	2	
DAA	DAA Rd	B		2								Rd8 decimal adjust → Rd8	—	*	↕	↕	*	—	2	
SUB	SUB.B Rs, Rd	B		2								Rd8–Rs8 → Rd8	—	↕	↕	↕	↕	↕	2	
	SUB.W #xx:16, Rd	W	4									Rd16–#xx:16 → Rd16	—	(1)	↕	↕	↕	↕	4	
	SUB.W Rs, Rd	W		2								Rd16–Rs16 → Rd16	—	(1)	↕	↕	↕	↕	2	
	SUB.L #xx:32, ERd	L	6									ERd32–#xx:32 → ERd32	—	(2)	↕	↕	↕	↕	6	
	SUB.L ERs, ERd	L		2								ERd32–ERs32 → ERd32	—	(2)	↕	↕	↕	↕	2	
SUBX	SUBX.B #xx:8, Rd	B	2									Rd8–#xx:8–C → Rd8	—	↕	↕	(3)	↕	↕	2	
	SUBX.B Rs, Rd	B		2								Rd8–Rs8–C → Rd8	—	↕	↕	(3)	↕	↕	2	
SUBS	SUBS.L #1, ERd	L		2								ERd32–1 → ERd32	—	—	—	—	—	—	2	
	SUBS.L #2, ERd	L		2								ERd32–2 → ERd32	—	—	—	—	—	—	2	
	SUBS.L #4, ERd	L		2								ERd32–4 → ERd32	—	—	—	—	—	—	2	
DEC	DEC.B Rd	B		2								Rd8–1 → Rd8	—	—	↕	↕	↕	—	2	
	DEC.W #1, Rd	W		2								Rd16–1 → Rd16	—	—	↕	↕	↕	—	2	
	DEC.W #2, Rd	W		2								Rd16–2 → Rd16	—	—	↕	↕	↕	—	2	

7. System control instructions

Mnemonic		Operand Size	Addressing Mode and Instruction Length (bytes)								Operation	Condition Code						No. of States *1	
			#xx	Rn	@ERn	@(d, ERn)	@ ERn/@ERn+	@aa	@(d, PC)	@@aa		I	H	N	Z	V	C	Normal	Advanced
TRAPA	TRAPA #x:2	—									2	PC → @–SP CCR → @–SP <vector> → PC	1	—	—	—	—	—	14	16
RTE	RTE	—										CCR ← @SP+ PC ← @SP+	↕	↕	↕	↕	↕	↕	10	
SLEEP	SLEEP	—										Transition to power-down state	—	—	—	—	—	—	2	
LDC	LDC #xx:8, CCR	B	2									#xx:8 → CCR	↕	↕	↕	↕	↕	↕	2	
	LDC Rs, CCR	B		2								Rs8 → CCR	↕	↕	↕	↕	↕	↕	2	
	LDC @ERs, CCR	W			4							@ERs → CCR	↕	↕	↕	↕	↕	↕	6	
	LDC @(d:16, ERs), CCR	W				6						@(d:16, ERs) → CCR	↕	↕	↕	↕	↕	↕	8	
	LDC @(d:24, ERs), CCR	W				10						@(d:24, ERs) → CCR	↕	↕	↕	↕	↕	↕	12	
	LDC @ERs+, CCR	W					4					@ERs → CCR ERs32+2 → ERs32	↕	↕	↕	↕	↕	↕	8	
	LDC @aa:16, CCR	W						6				@aa:16 → CCR	↕	↕	↕	↕	↕	↕	8	
	LDC @aa:24, CCR	W						8				@aa:24 → CCR	↕	↕	↕	↕	↕	↕	10	
STC	STC CCR, Rd	B		2								CCR → Rd8	—	—	—	—	—	—	2	
	STC CCR, @ERd	W			4							CCR → @ERd	—	—	—	—	—	—	6	
	STC CCR, @(d:16, ERd)	W				6						CCR → @(d:16, ERd)	—	—	—	—	—	—	8	
	STC CCR, @(d:24, ERd)	W				10						CCR → @(d:24, ERd)	—	—	—	—	—	—	12	
	STC CCR, @–ERd	W					4					ERd32–2 → ERd32 CCR → @ERd	—	—	—	—	—	—	8	
	STC CCR, @aa:16	W						6				CCR → @aa:16	—	—	—	—	—	—	8	
	STC CCR, @aa:24	W						8				CCR → @aa:24	—	—	—	—	—	—	10	
ANDC	ANDC #xx:8, CCR	B	2									CCR∧#xx:8 → CCR	↕	↕	↕	↕	↕	↕	2	
ORC	ORC #xx:8, CCR	B	2									CCR∨#xx:8 → CCR	↕	↕	↕	↕	↕	↕	2	
XORC	XORC #xx:8, CCR	B	2									CCR⊕#xx:8 → CCR	↕	↕	↕	↕	↕	↕	2	
NOP	NOP	—									2	PC ← PC+2	—	—	—	—	—	—	2	