


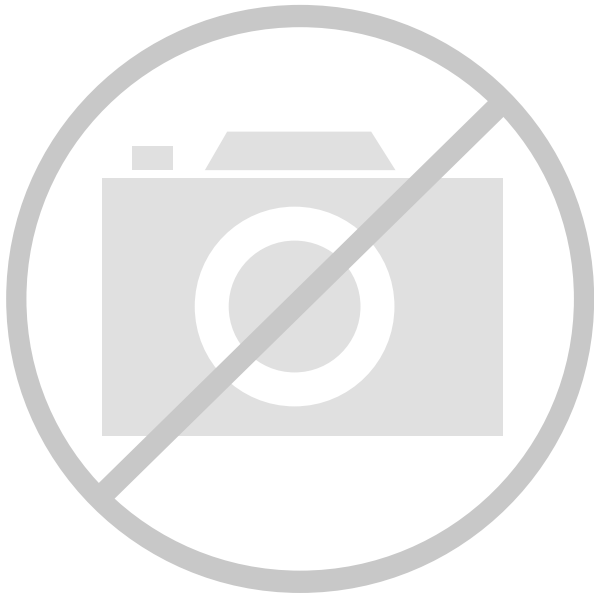

Welcome to [E-XFL.COM](https://www.e-xfl.com)

What is "[Embedded - Microcontrollers](#)"?


"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Obsolete
Core Processor	F ² MC-8FX
Core Size	8-Bit
Speed	16MHz
Connectivity	I ² C, LINbus, SIO, UART/USART
Peripherals	LVD, POR, PWM, WDT
Number of I/O	29
Program Memory Size	36KB (36K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	1K x 8
Voltage - Supply (Vcc/Vdd)	2.4V ~ 5.5V
Data Converters	A/D 8x8/10b
Oscillator Type	External
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	32-WQFN Exposed Pad
Supplier Device Package	32-QFN (5x5)
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/mb95f636knwqn-g-115-sne1

Consumer and Industrial MCU Core Roadmap

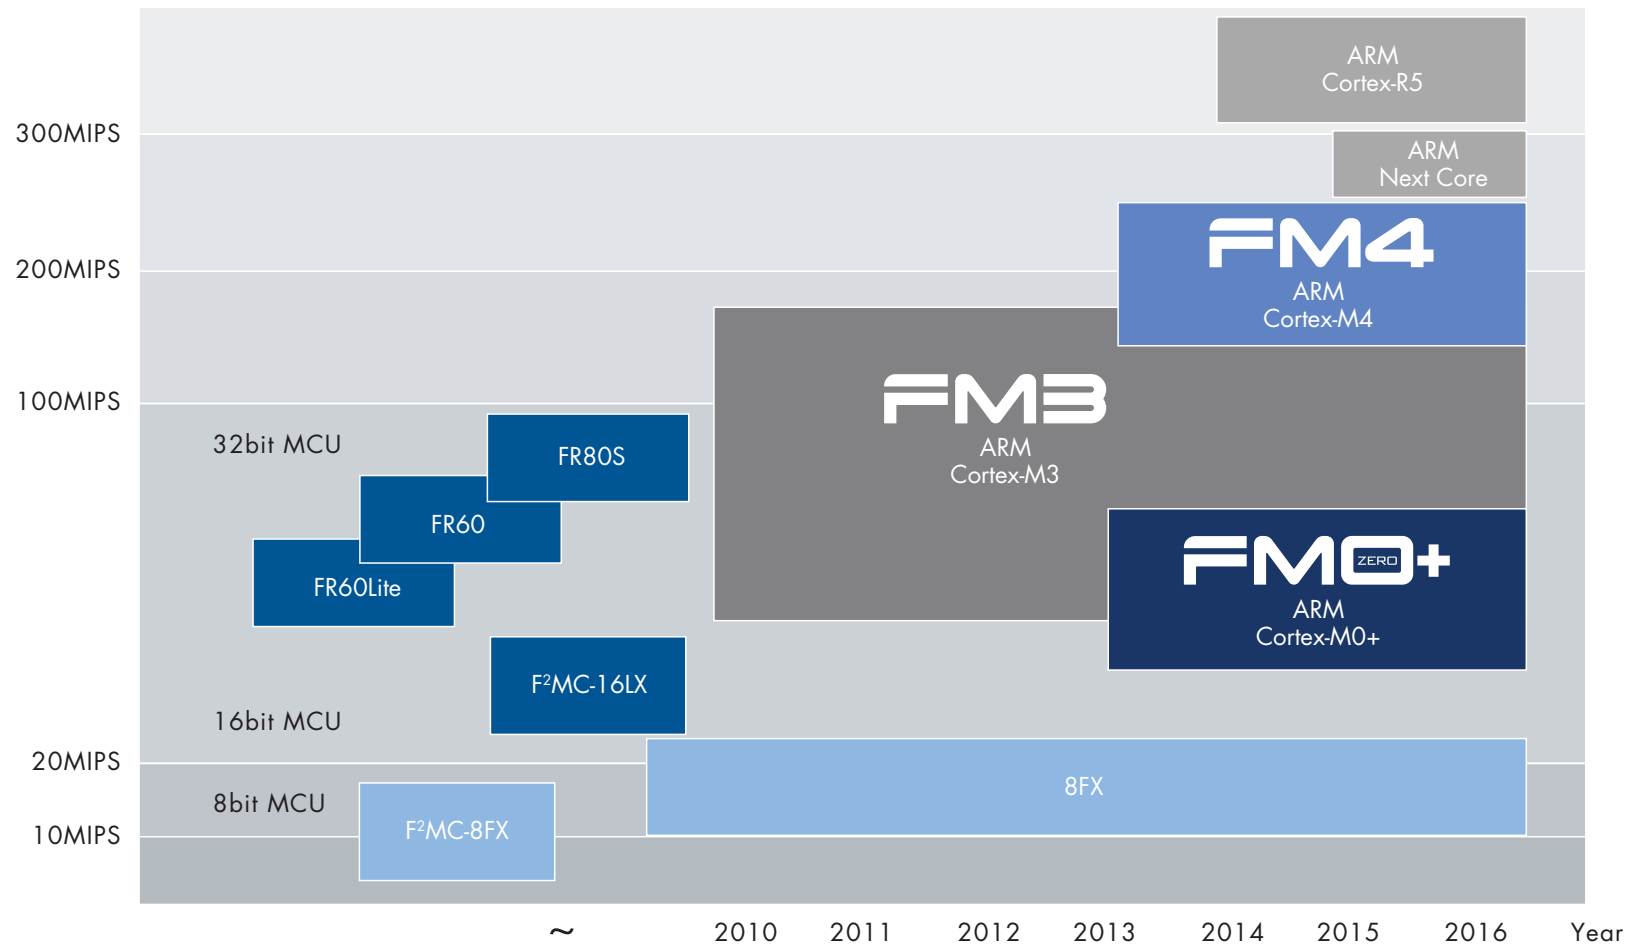

Consumer and Industrial MCU Family




FM4 FAMILY

Cypress ARM® Cortex®-M4F microcontroller family is a high range line providing maximum CPU frequency of 200MHz, a high speed flash memory with DSP and FPU hardware instructions. Customers can select the best fitting device from a range of products, coming in packages from 48 pin to 216 pin and flash memory densities between 256KB and 2MB. The wide operation supply voltage range up to 5.5V which improves the signal to noise ratio, results in a robust design and is unique among Cortex-M4F microcontroller families. The MCUs are designed for applications that require advanced, high-speed computing performance such as general-purpose inverters, servomotors, PLCs and other industrial equipment, as well as inverter-based home appliances such as washing machines and air conditioners.



FM3 FAMILY

Cypress ARM Cortex-M3 microcontroller family is a scalable platform for many industrial applications. Customers can select the best fitting device from a range of products, coming in packages from 32 pin to 176 pin and flash memory densities between 32KB and 1MB. With a maximum CPU frequency of 144MHz and high speed flash memory, FM3 supports the fastest ARM Cortex-M3 devices on the market. The wide operation supply voltage range up to 5.5V, which improves the signal to noise ratio, results in a robust design and is quite unique among Cortex-M3 microcontroller families. The FM3 MCU family is split into four groups: high performance, basic, low power and ultra low leakage groups. The main differences between the groups are CPU operation frequency and supply voltage. All products are based on the same architecture (software compatible), use the same peripherals and are pin compatible in most cases. The ultra low leakage line products are based on an optimized low leakage process technology. Development tools and evaluation boards are offered from different vendors and Cypress.




FM0+ FAMILY

The Cypress FM0+ family, which is based on the ARM Cortex-M0+ core, is designed for low power and cost-sensitive applications such as white goods, sensors, meters, HMI systems, power tools and Internet of Things (IoT) battery powered or energy harvesting wearable devices. These microcontrollers can be easily embedded into systems adopting 8-, 16- or 32-bit MCUs, accelerating product development and reducing development costs. The FM0+ family includes two groups for ultra-low-power and cost-effective applications. The devices in the ultra-low-power group have an operating voltage range of 1.65V to 3.6V, and a maximum CPU clock frequency of 40MHz, a RUN mode current of 70 μ A/MHz, an RTC mode current of 0.7 μ A and wake-up time of approximately 40 μ s.

8FX FAMILY

Cypress 8FX MCU family is a high-performance 8-bit microcontroller utilizing a different embedded flash memory size. This series uses the F2MC-8FX CISC CPU, which offers industry leading class performance of an 8-bit microcontroller unit enabling more instructions to be executed per cycle. On top of delivering industry class performance MCUs, the 8FX family also delivers low power efficient MCU products for the customer's usage. This series also features a variety of on-chip timers, A/D converters, analog and digital peripheral and communication interfaces such as LIN-UART (Local Interconnect Network Universal Asynchronous Receiver-Transmitter), CAN (controller area network) and I2C (Inter-Integrated Circuit) interface for various application usages. For easy development, the 8FX family also employs a 1-line on-chip debug that uses only one pin on the microcontroller, thereby minimizing the number of pins used for debugging in product development. Cypress also provides easy to use and cost competitive development starter kits and development environments for this MCU series.

Automotive MCU Core Roadmap

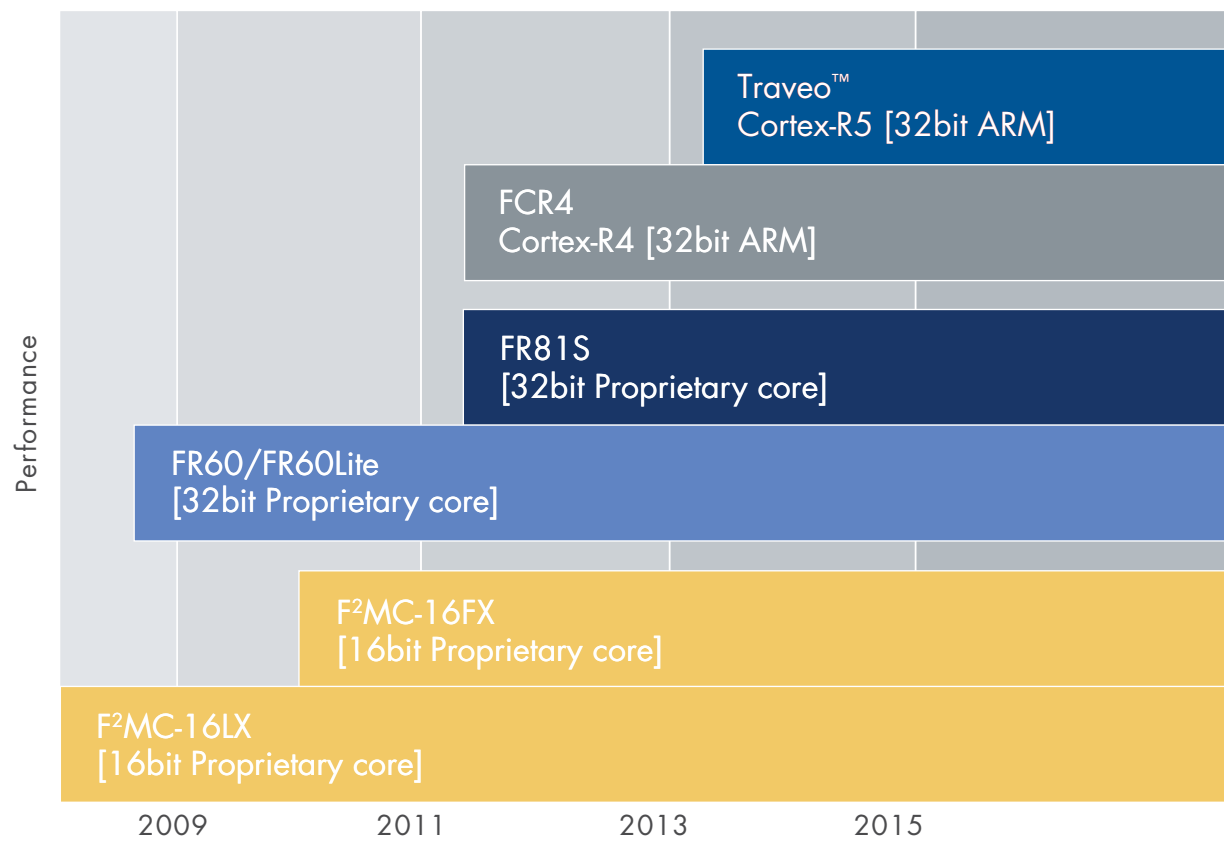

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			L O D Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
S6E2CC-V	S6E2CCAJGA	200	LQFP-176 BGA-192	2.7 to 5.5	✓	Main Flash +Main Flash	2M	256K	-	8	32	✓	152	-	32 (3)	12 x 2	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	3 (2 x CAN + CAN FD)	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC×256ch, SDC, I2S 1ch(without 144pin), HDMI-CEC 2ch, High Speed Quad SPI x1(without 144pin), Programmable CRC, Eth1ch, Chipher, Voice	On-Chip Debug (SWJ-DP/ETM/ HTM)								
	1M		128K																																
	2M		256K																																
	1M		128K																																
S6E2CC w/ Security	S6E2CCAHHA	200	LQFP-144	2.7 to 5.5	✓	Main Flash +Main Flash	2M	256K	-	8	32	✓	120	-	24 (3)	12 x 2	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	3 (2 x CAN + CAN FD)	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC, I2S 1ch(without 144pin), HDMI-CEC 2ch, High Speed Quad SPI x1(without 144pin), Programmable CRC, Eth1ch, Chipher	On-Chip Debug (SWJ-DP/ETM/ HTM)								
	S6E2CCAJHA		LQFP-176 BGA-192																									1.5M	192K	152	32 (3)				
	S6E2CCALHA		LQFP-216																																
	S6E2CC9HHA		LQFP-144																																
	S6E2CC9JHA		LQFP-176 BGA-192				1M	128K					152	32 (3)																					
	S6E2CC9LHA		LQFP-216																																
	S6E2CC8HHA		LQFP-144																																
	S6E2CC8JHA		LQFP-176 BGA-192																																
S6E2CC8LHA	LQFP-216	190	32 (3)																																
S6E2CC	S6E2CCAH0A	200	LQFP-144	2.7 to 5.5	✓	Main Flash +Main Flash	2M	256K	-	8	32	✓	120	-	24 (3)	12 x 2	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	3 (2 x CAN + CAN FD)	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC, I2S 1ch(without 144pin), HDMI-CEC 2ch, High Speed Quad SPI x1(without 144pin), Programmable CRC, Eth1ch	On-Chip Debug (SWJ-DP/ETM/ HTM)								
	S6E2CCAJ0A		LQFP-176 BGA-192																									1.5M	196K	152	32 (3)				
	S6E2CCAL0A		LQFP-216																																
	S6E2CC9H0A		LQFP-144																																
	S6E2CC9J0A		LQFP-176 BGA-192				1M	128K					152	32 (3)																					
	S6E2CC9L0A		LQFP-216																																
	S6E2CC8H0A		LQFP-144																																
	S6E2CC8J0A		LQFP-176 BGA-192																																
S6E2CC8L0A	LQFP-216	190	32 (3)																																
S6E2C5	S6E2C5AH0A	200	LQFP-144	2.7 to 5.5	✓	Main Flash +Main Flash	2M	256K	-	8	32	✓	120	-	24 (3)	12 x 2	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	3 (2 x CAN + CAN FD)	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC, I2S 1ch(without 144pin), HDMI-CEC 2ch, High Speed Quad SPI x1(without 144pin), Programmable CRC	On-Chip Debug (SWJ-DP/ETM/ HTM)								
	S6E2C5AJ0A		LQFP-176 BGA-192																									1.5M	192K	152	32 (3)				
	S6E2C5AL0A		LQFP-216																																
	S6E2C59H0A		LQFP-144																																
	S6E2C59J0A		LQFP-176 BGA-192				1M	128K					152	32 (3)																					
	S6E2C59L0A		LQFP-216																																
	S6E2C58H0A		LQFP-144																																
	S6E2C58J0A		LQFP-176 BGA-192																																
S6E2C58L0A	LQFP-216	190	32 (3)																																

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch](unit)	12bit AD Converter [ch](unit)	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
MB9B160R	MB9BF166M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	16	✓	63	-	16(3)	12 x 2	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)						
	MB9BF166N		LQFP-100 QFP-100 BGA-112																										80	24(3)				
	MB9BF166R		LQFP-120 BGA-144																												100	16(3)		
	MB9BF167M		LQFP-80				63	24(3)																										
	MB9BF167N		LQFP-100 QFP-100 BGA-112										80	24(3)																				
	MB9BF167R		LQFP-120 BGA-144												100														16(3)					
	MB9BF168M		LQFP-80				63	24(3)																										
	MB9BF168N		LQFP-100 QFP-100 BGA-112										80	24(3)																				
	MB9BF168R		LQFP-120 BGA-144												100														24(3)					
MB9B560L	MB9BF564K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	-	-				15	33	8(2)	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I ² C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	✓		CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)			
	MB9BF564L		LQFP-64 QFN-64										16	48																		15(2)		
	MB9BF565K		LQFP-48 QFN-48				15	33							8(2)																			
	MB9BF565L		LQFP-64 QFN-64										16	48		15(2)																		
	MB9BF566K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	-	-			15		33	8(2)	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I ² C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)				
	MB9BF566L		LQFP-64 QFN-64										16	48		15(2)																		

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer								Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
MB9B460L	MB9BF464K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	-	-	-	-	12 x 2		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	MB9BF464L		LQFP-64 QFN-64																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	MB9BF465K		LQFP-48 QFN-48				384K +32K	48K																					-	8	-	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
	MB9BF465L		LQFP-64 QFN-64																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	MB9BF466K		LQFP-48 QFN-48				512K +32K	64K																																								-	8	-	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	MB9BF466L		LQFP-64 QFN-64																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	</

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer								Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																																	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]																																
MB9B160L	MB9BF164K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	-	-	-	-	12 x 2		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																								
	MB9BF164L		LQFP-64 QFN-64																																																																	
	MB9BF165K		LQFP-48 QFN-48				384K +32K	48K																					-	8	-	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																					
	MB9BF165L		LQFP-64 QFN-64																																																																	
	MB9BF166K		LQFP-48 QFN-48																																													512K +32K	64K	-	8	-	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)
	MB9BF166L		LQFP-64 QFN-64																																																																	

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [bit]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [bit]	10bit AD Converter [bit/unit]	12bit AD Converter [bit/unit]	DA Converter [bit x bit]	Timer								Serial			Communication		LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	i²C [bit]	UART/SIO [ch]	SIO [ch]	LIN/UART/SIO [ch]				
HIGH-PERFORMANCE GROUP																																	
MB9BD10T	MB9BFD16T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	2ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Ethernet-MAC x 2ch	On-chip Debu (SWJ-DP/ETM)							
	MB9BFD16S		LQFP-144				122	24(3)																									
	MB9BFD17T		LQFP-176 BGA-192				154	32(3)																									
	MB9BFD17S		LQFP-144				122	24(3)																									
	MB9BFD18T		LQFP-176 BGA-192				154	32(3)																									
	MB9BFD18S		LQFP-144				122	24(3)																									
MB9B610T	MB9BF616T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Ethernet-MAC x 2ch	On-chip Debu (SWJ-DP/ETM)							
	MB9BF616S		LQFP-144				122	24(3)																									
	MB9BF617T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF617S		LQFP-144				122	24(3)																									
	MB9BF618T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF618S		LQFP-144				122	24(3)																									
MB9B510T	MB9BF516T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	2ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debu (SWJ-DP/ETM)							
	MB9BF516S		LQFP-144				122	24(3)																									
	MB9BF517T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF517S		LQFP-144				122	24(3)																									
	MB9BF518T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF518S		LQFP-144				122	24(3)																									
MB9B410T	MB9BF416T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debu (SWJ-DP/ETM)						
	MB9BF416S		LQFP-144				122	24(3)																									
	MB9BF417T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF417S		LQFP-144				122	24(3)																									
	MB9BF418T		LQFP-176 BGA-192				154	32(3)																									
MB9B310T	MB9BF316T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debu (SWJ-DP/ETM)							
	MB9BF316S		LQFP-144				122	24(3)																									
	MB9BF317T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF317S		LQFP-144				122	24(3)																									
	MB9BF318T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF318S		LQFP-144				122	24(3)																									
MB9B210T	MB9BF216T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Ethernet-MAC x 1ch	On-chip Debu (SWJ-DP/ETM)							
	MB9BF216S		LQFP-144				122	24(3)																									
	MB9BF217T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF217S		LQFP-144				122	24(3)																									
	MB9BF218T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF218S		LQFP-144				122	24(3)																									
MB9B110T	MB9BF116T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	-	-	-	✓	Dual Timer	On-chip Debu (SWJ-DP/ETM)						
	MB9BF116S		LQFP-144				122	24(3)																									
	MB9BF117T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF117S		LQFP-144				122	24(3)																									
	MB9BF118T		LQFP-176 BGA-192				154	32(3)																									
	MB9BF118S		LQFP-144				122	24(3)																									

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [bit]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [bit]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer							Serial				Communication			Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [bit]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [bit]	I ² C [ch]	UART/ISI [ch]	SIO [ch]	LN/UART/SIO [ch]	CAN [ch]		
HIGH-PERFORMANCE GROUP																																
MB9B510R	MB9BF512N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)						
	MB9BF512R		LQFP-120				103																									
	MB9BF514N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																			83					
	MB9BF514R		LQFP-120				103																									
	MB9BF515N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																			83					
	MB9BF515R		LQFP-120				103																									
	MB9BF516N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																			83					
	MB9BF516R		LQFP-120				103																									
MB9B410R	MB9BF412N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF412R		LQFP-120				103																									
	MB9BF414N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																				83				
	MB9BF414R		LQFP-120				103																									
	MB9BF415N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																				83				
	MB9BF415R		LQFP-120				103																									
	MB9BF416N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																				83				
	MB9BF416R		LQFP-120				103																									
MB9B310R	MB9BF312N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)						
	MB9BF312R		LQFP-120				103																									
	MB9BF314N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																			83					
	MB9BF314R		LQFP-120				103																									
	MB9BF315N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																			83					
	MB9BF315R		LQFP-120				103																									
	MB9BF316N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																			83					
	MB9BF316R		LQFP-120				103																									
MB9B110R	MB9BF112N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF112R		LQFP-120				103																									
	MB9BF114N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																				83				
	MB9BF114R		LQFP-120				103																									
	MB9BF115N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																				83				
	MB9BF115R		LQFP-120				103																									
	MB9BF116N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																				83				

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [bit]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [bit]	10bit AD Converter [bit(unit)]	12bit AD Converter [bit(unit)]	DA Converter [bit x bit]	Timer								Serial			Communication			Note	Evaluation Device
																	Output Compare [bit]	Free-Run Timer [bit]	Input Capture [bit]	Reload Timer [bit]	PWM Timer [bit]	PWC Timer [bit]	PPG Timer [bit]	Up/Down Counter [bit]	Other timers [bit]	I ² C [bit]	UART/ISI [bit]	SIO [bit]	LIN/UART/SIO [bit]	CAN [bit]		
HIGH-PERFORMANCE GROUP																																
MB9B500B	MB9BF504NB	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	256K	32K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF504RB		LQFP-120				100																									
	MB9BF505NB		LQFP-100 BGA-112				80																									
	MB9BF505RB		LQFP-120				100																									
	MB9BF506NB		LQFP-100 BGA-112				80																									
	MB9BF506RB		LQFP-120				100																									
MB9B400A	MB9BF404NA	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	256K	32K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)				
	MB9BF404RA		LQFP-120				100																									
	MB9BF405NA		LQFP-100 BGA-112				80																									
	MB9BF405RA		LQFP-120				100																									
	MB9BF406NA		LQFP-100 BGA-112				80																									
	MB9BF406RA		LQFP-120				100																									
MB9B300B	MB9BF304NB	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	256K	32K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF304RB		LQFP-120				100																									
	MB9BF305NB		LQFP-100 BGA-112				80																									
	MB9BF305RB		LQFP-120				100																									
	MB9BF306NB		LQFP-100 BGA-112				80																									
	MB9BF306RB		LQFP-120				100																									
MB9B100A	MB9BF102NA	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	128K	16K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF102RA		LQFP-120				100																									
	MB9BF104NA		LQFP-100 BGA-112				80																									
	MB9BF104RA		LQFP-120				100																									
	MB9BF105NA		LQFP-100 BGA-112				80																									
	MB9BF105RA		LQFP-120				100																									
	MB9BF106NA		LQFP-100 BGA-112				80																									
	MB9BF106RA		LQFP-120				100																									
BASIC GROUP																																
MB9B520M	MB9BF521K	72	LQFP-48 QFN-48	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	-	-	14	-	14(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)					
	MB9BF521L		LQFP-64 QFN-64										19		50				23(2)									QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)			
	MB9BF521M		LQFP-80 BGA-96										23		65				26(2)									QPRC x 1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)			
	MB9BF522K		LQFP-48 QFN-48										14		35				14(2)									QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)			
	MB9BF522L		LQFP-64 QFN-64				19	50					23(2)		QPRC x 1				Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)													
	MB9BF522M		LQFP-80 BGA-96				23	65					26(2)																			
	MB9BF524K		LQFP-48 QFN-48				14	35					14(2)																			
	MB9BF524L		LQFP-64 QFN-64				19	50					23(2)																			
	MB9BF524M		LQFP-80 BGA-96				23	65					26(2)																			

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
BASIC GROUP																																			
MB9B320T	MB9BF328S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	-	24(2)	10bit x 2		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)		-	✓	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)							
	MB9BF328T*		LQFP-176 BGA-192				1.5M +64K	192K																											
	MB9BF329S*		LQFP-144																																
	MB9BF329T*		LQFP-176 BGA-192																																
MB9B120T	MB9BF128S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	-	24(2)	10bit x 2		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)							
	MB9BF128T*		LQFP-176 BGA-192				1.5M +64K	192K																											
	MB9BF129S*		LQFP-144																																
	MB9BF129T*		LQFP-176 BGA-192																																
MB9A420L	MB9AF421K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	✓	FLASH	64K	4K	-	-	14	-	36	-	8(1)	10bit x 1	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 3ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)							
	MB9AF421L		LQFP-64 QFN-64								19		51																						
MB9A120L	MB9AF121K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	✓	FLASH	64K	4K	-	-	14	-	36	-	8(1)	10bit x 1	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 3ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)							
	MB9AF121L		LQFP-64 QFN-64								19		51																						

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
BASIC GROUP																																		
MB9A110A	MB9AF111LA	40	LQFP-64 QFN-64	2.7 to 5.5	✓	FLASH	64K	16K	-	8	8	-	51	-	9(2)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)					Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer	On-chip Debug (SWJ-DP)		
	MB9AF111MA		LQFP-80								11		66		12(3)		Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP/ETM)		
	MB9AF111NA		LQFP-100 QFP-100 BGA-112								16	✓	83		16(3)		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP)		
	MB9AF112LA	40	LQFP-64 QFN-64				128K	16K	-	8	8	-	51	9(2)	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)					On-chip Debug (SWJ-DP)														
	MB9AF112MA		LQFP-80				11					66	12(3)	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)					On-chip Debug (SWJ-DP)															
	MB9AF112NA	LQFP-100 QFP-100 BGA-112	16				✓	83	16(3)	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)					On-chip Debug (SWJ-DP/ETM)																			
	MB9AF114LA	40	LQFP-64 QFN-64				256K	32K	-	8	8	-	51	9(2)	-		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP)		
	MB9AF114MA		LQFP-80								11		66	12(3)			Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP/ETM)		
	MB9AF114NA		LQFP-100 QFP-100 BGA-112								16		83	16(3)			Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP)		
	MB9AF115MA		LQFP-80				384K	512K	-	8	11		66	12(3)			Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP)		
	MB9AF115NA		LQFP-100 QFP-100 BGA-112**								16	✓	83	16(3)			Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP/ETM)		
	MB9AF116MA		LQFP-80								11		66	12(3)			Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP)		
	MB9AF116NA		LQFP-100 QFP-100 BGA-112**								16		83	16(3)			Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)															On-chip Debug (SWJ-DP/ETM)		
MB9A310K	MB9AF311K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	64K +32K	16K	-	4	6	-	36	-	8(2)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)					Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Time Clock	On-chip Debug (SWJ-DP)			
	MB9AF312K		128K +32K				Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)																											
MB9A110K	MB9AF111K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	64K+ 32K	16K	-	4	6	-	36	-	8(2)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)					Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	-	-	✓	Dual Timer, Real Time Clock	On-chip Debug (SWJ-DP)

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit/AD Converter [ch/unit]	12bit/AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																		
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]	USB-Function [ch]																
LOW-POWER GROUP																																																				
MB9A340NA	MB9AF341LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	8	-	51	-	12(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)																				
	MB9AF341MB		LQFP-80 BGA-96								11	-	66		17(2)																																					
	MB9AF341NB		LQFP-100 QFP-100 BGA-112								16	✓	83		24(2)																																					
	MB9AF342LB		LQFP-64 QFN-64								8	-	51		12(2)																																					
	MB9AF342MB		LQFP-80 BGA-96				128K +32K	32K			11	-	66		17(2)																	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)
	MB9AF342NB		LQFP-100 QFP-100 BGA-112				16				✓	83	24(2)																																							
	MB9AF344LB		LQFP-64 QFN-64				8				-	51	12(2)																																							
	MB9AF344MB		LQFP-80 BGA-96				11				-	66	17(2)																																							
MB9AF344NB	LQFP-100 QFP-100 BGA-112	16	✓	83	24(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)																									
MB9AF141LB	LQFP-64 QFN-64	8	-	51	12(2)																																															
MB9AF141MB	LQFP-80 BGA-96	11	-	66	17(2)																																															
MB9AF141NB	LQFP-100 QFP-100 BGA-112	16	✓	83	24(2)																																															
MB9AF142LB	LQFP-64 QFN-64	8	-	51	12(2)																						-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)				
MB9AF142MB	LQFP-80 BGA-96	11	-	66	17(2)																																															
MB9AF142NB	LQFP-100 QFP-100 BGA-112	16	✓	83	24(2)																																															
MB9AF144LB	LQFP-64 QFN-64	8	-	51	12(2)																																															
MB9AF144MB	LQFP-80 BGA-96	11	-	66	17(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID																						On-chip Debug (SWJ-DP/ETM)				
MB9AF144NB	LQFP-100 QFP-100 BGA-112	16	✓	83	24(2)																																															

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC[V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/S [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																													
CAN/AUTOMOTIVE																																																																	
MB9D560	MB9DF564MA	200	TEQFP -208	1.1 to 1.3 4.5 to 5.5	-	Main Flash +Work Flash	(640K +64K) x2	64K x2	-	16	8	-	125	32(1)	8(2)	10bit x 2	32bitFree-Run Timer x 5ch	16bit Base Timer x 12ch (PWM/PPG/Reload/PWC Selectable)	32bitInput Capture x 3unit 6ch	16bitFree-Run Timer x 20ch	16bit Input Capture x 8unit 15ch	16bitOutput Compare x 12unit 24ch	Waveform Generator x 4unit 24ch	4	-	Multi Function Serial x 5ch (LIN/UART/SIO Selectable)	3	-	-	-	✓	ARM Cortex-R5 CAN: 64msb, RDC x 2unit, Motor vector accelaretor x 2unit	On-Chip Debug																																
	MB9DF564MG						(896K +64K) x2	96K x2																																																									
	MB9DF565MA						(1152K +64K) x2	128K x2																																																									
	MB9DF565MG						(640K + 64K) x 2	64K x 2																																																									
	MB9DF566MA		(896K + 64K) x 2				96K x 2	MB9DF566MG					(1152K + 64K) x 2	128K x 2	MB9DF564ML	(640K + 64K) x 2	64K x 2	MB9DF564MQ	(896K + 64K) x 2	96K x 2	MB9DF565ML	(1152K + 64K) x 2	128K x 2	MB9DF565MQ	(640K + 64K) x 2	64K x 2	MB9DF566ML	(896K + 64K) x 2	96K x 2	MB9DF566MQ	(1152K + 64K) x 2	128K x 2	MB9DF564LA	(640K + 64K) x 2	64K x 2	MB9DF564LG	(896K + 64K) x 2	96K x 2	MB9DF565LA	(1152K + 64K) x 2	128K x 2	MB9DF566LA	(640K + 64K) x 2	64K x 2	MB9DF566LG	(896K + 64K) x 2	96K x 2	MB9DF564LL	(1152K + 64K) x 2	128K x 2	MB9DF564LQ	(640K + 64K) x 2	64K x 2	MB9DF565LL	(896K + 64K) x 2	96K x 2	MB9DF565LQ	(1152K + 64K) x 2	128K x 2	MB9DF566LL	(640K + 64K) x 2	64K x 2	MB9DF566LQ	(896K + 64K) x 2	96K x 2

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch](unit)]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer										Serial			Communication			Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]		
CAN/AUTOMOTIVE																																		
S6J3110	S6J3118HA	96	TEQFP -144	4.5 to 5.25	-	Main Flash +Work Flash	576K + 48K	TC- RAM: 32KB System - RAM: 16KB Backup - RAM: 8KB	56(2)	Instruction: 16 Data: 16	16	16	-	116	-	-	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	-	RTC x 1ch	Multi Function Serial x 4ch (LIN/UART/SIO Selectable)	CAN - FD x 1ch	-	-	-	-	ARM Cortex-R5, SHE(Secure Hardware Extension),	On-Chip Debug				
	S6J3119HA						832K + 48K	TC- RAM: 48KB System - RAM: 16KB Backup - RAM: 8KB																										
	S6J311AHA						1088K + 48K	TC- RAM: 64KB System - RAM: 16KB Backup - RAM: 8KB																										
	S6J311BHA	144	TEQFP -176				1600K + 112K	192K	64(2)					Multi Function Serial x 22ch (LIN/UART/SIO Selectable)									CAN - FD x 2ch											
	S6J311CHA						2112K + 112K	256K																										
	S6J311DHA						3136K + 112K	320K																										
	S6J311EHA						4160K + 112K	TC- RAM: 64KB System - RAM: 256KB Backup - RAM: 64KB																										
	S6J311BJA						1600K + 112K	192K																										
	S6J311CJA						2112K + 112K	256K																										
	S6J311DJA						3136K + 112K	320K																										
S6J311EJA	4160K + 112K	TC- RAM: 64KB System - RAM: 256KB Backup - RAM: 64KB	150																															

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [Mhz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch](unit)]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer								Serial			Communication			Three-phase Inverter	Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/ISI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				USB-Host [ch]
CAN/AUTOMOTIVE																																		
S6J3120	S6J3128HA	112	TEQFP -144	4.5 to 5.25	-	Main Flash +Work Flash	576K + 48K	TC-RAM: 32KB System - RAM: 16KB Backup - RAM: 8KB	Instruction: 16 Data: 16	16	16	A24/D16	112	50(2)	-	-	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 10ch (LIN/UART/SIO Selectable)	CAN-FD x 3ch	-	-	32 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 4ch, Sound generator x 3ch	On-Chip Debug				
	S6J3129HA						832K + 48K	TC-RAM: 48KB System - RAM: 16KB Backup - RAM: 8KB																										
	S6J312AHA						1088K +112K	TC-RAM: 64KB System - RAM: 16KB Backup - RAM: 8KB																										
S6J3200	S6J32AAKS	160	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	1088K + 112K	TC-RAM: 64KB System - RAM: 128KB Backup - RAM: 16KB VRAM: 1024KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 1ch	On-Chip Debug				
	S6J32AAKU		TEQFP -216 (0.4mm pitch)																								128				50(1)	32 x 4		
	S6J32AALS																																	
	S6J32AALU		TEQFP -208																								120				46(1)	30 x 4		
	S6J32BAKS		TEQFP -208																															
	S6J32BAKU		TEQFP -216 (0.4mm pitch)																								128				50(1)	32 x 4		
	S6J32BALS																																	
	S6J32BALU		TEQFP -208																								120				46(1)	30 x 4		
	S6J32CAKS		TEQFP -216 (0.4mm pitch)																															
	S6J32CAKU		TEQFP -208																								128				50(1)	32 x 4		
	S6J32CALS																																	
	S6J32CALU		TEQFP -216 (0.4mm pitch)																								120				46(1)	32 x 4		
	S6J32DAKS		TEQFP -208																															
	S6J32DAKU		TEQFP -216 (0.4mm pitch)																								128				50(1)	30 x 4		
	S6J32DALS																																	
S6J32DALU	TEQFP -216 (0.4mm pitch)	128	50(1)	32 x 4																														

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
CAN/AUTOMOTIVE																																		
S6J3200	S6J323CKS	240	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	2112K + 112K	TC-RAM: 128KB System - RAM: 128KB Backup - RAM: 16KB VRAM: 2048KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPC/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,	On-Chip Debug					
	S6J323CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J323CLS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J323CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CLS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CLS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J326CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J326CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J326CLS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J326CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J327CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J327CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
S6J327CLS	TEQFP -208	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,																															
S6J327CLU	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,																															
S6J328CKS	TEQFP -208	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,																															
S6J328CKU	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,																															
S6J328CLS	TEQFP -208	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,																															
S6J328CLU	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,																															

Series Name		Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer							Serial			Communication		Note	Evaluation Device																			
																		Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/S [ch]	SIO [ch]			LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter													
CAN/AUTOMOTIVE																																																		
MB91520	MB91F522B	LQFP-64	80	2.7 to 5.5	Main Flash +Work Flash	-	16	16	-	44	13(1) 13(1)	8bit x 1	16bit x 6 32bit x 4	16bit x 4 32bit x 5	Reload Timer x 7ch + PPG Timer x 21ch (Reload/PPG/PWM/PWC Selectable)	2	-	Multi Function Serial x 8ch (LIN/UART/SIO/I2C Selectable)	3	-	-	-	✓	LIN, FPU, MPU, Tuning RAM MB91520B/D/F/J/K/L series: CAN: 64Msg-buffer x 2ch, 128Msg-buffer x 1ch, MB91520R/U/M/Y series: CAN: 128Msg-buffer x 6ch, FlexRay: 1 unit	On-chip Debug																									
	MB91F523B																									320K+64K 56K																								
	MB91F524B																									448K+64K 72K																								
	MB91F525B																									576K+64K 104K																								
	MB91F526B																									832K+64K 136K																								
	MB91F522D																									1088K+64K 160K																								
	MB91F523D																									320K+64K 56K																								
	MB91F524D																									448K+64K 72K																								
	MB91F525D																									576K+64K 104K																								
	MB91F526D																									832K+64K 136K																								
	MB91F522F																									1088K+64K 160K																								
	MB91F523F																									320K+64K 56K																								
	MB91F524F	448K+64K 72K																																																
	MB91F525F	576K+64K 104K																																																
	MB91F526F	832K+64K 136K																																																
	MB91F522J	1088K+64K 160K																																																
	MB91F523J	320K+64K 56K																																																
	MB91F524J	448K+64K 72K																																																
	MB91F525J	576K+64K 104K																																																
	MB91F526J	832K+64K 136K																																																
	MB91F522K	1088K+64K 160K																																																
	MB91F523K	320K+64K 56K																																																
	MB91F524K	448K+64K 72K																																																
	MB91F525K	576K+64K 104K																																																
	MB91F526K	832K+64K 136K																																																
	MB91F527R	1600K+64K 192+16K	LQFP-144 TEQFP-144	2.7 to 5.5	Main Flash +Work Flash	-	16	✓	-	120	16(1) 32(1)	16bit x 6 32bit x 6	16bit x 3 32bit x 3	16bit x 4 32bit x 6	Reload Timer x 8ch + PPG Timer x 44ch + Base Timer x 2ch (Reload/PPG/PWM/PWC Selectable)	2	-	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	3	-	-	-	✓	Details of part number suffix <table><tr><td></td><td colspan="2">Dual clock system</td></tr><tr><td></td><td>xWC</td><td>xJC</td></tr><tr><td>CSV initial value</td><td>ON</td><td>OFF</td></tr></table> <table><tr><td></td><td colspan="2">Single clock system</td></tr><tr><td></td><td>xSC</td><td>xHC</td></tr><tr><td>CSV initial value</td><td>ON</td><td>OFF</td></tr></table>		Dual clock system			xWC	xJC	CSV initial value	ON	OFF		Single clock system			xSC	xHC	CSV initial value	ON	OFF								
		Dual clock system																																																
		xWC																							xJC																									
CSV initial value	ON	OFF																																																
	Single clock system																																																	
	xSC	xHC																																																
CSV initial value	ON	OFF																																																
MB91F528R	2112K+64K 320K+16K																																																	
MB91F522L	320K+64K 56K																																																	
MB91F523L	448K+64K 72K																																																	
MB91F524L	576K+64K 104K																																																	
MB91F525L	832K+64K 136K																																																	
MB91F526L	1088K+64K 160K																																																	
MB91F527U	1600K+64K 192+16K																																																	
MB91F528U	2112K+64K 320K+16K																																																	
MB91F527M	1600K+64K 192+16K																																																	
MB91F528M	2112K+64K 320K+16K																																																	
MB91F527Y	1600K+64K 192+16K																																																	
MB91F528Y	2112K+64K 320K+16K																																																	
MB91550	MB91F552	LQFP-64	80																						4.5 to 5.5	Main Flash +Work Flash	192K+64K	24K	-	8	4	-	30	-	8(1) 4ch S/H(1)	-	-	1	1	Reload Timer x5ch + PWM Timer x6ch(2chx3 pairs) + PWC Timer x2ch + Base Timer x4ch (Reload/PPG/PWM/PWC Selectable)	-	-	Multi Function Serialx3ch (UART/SIO/LIN Selectable)	1	-	-	-	-	Comparator: 3ch, Slope Compensation: 1ch	On-Chip Debug

F²MC-16FX – 16bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer										Serial		Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																														
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/Sl [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]																													
AUTOMOTIVE																																																																	
MB96340	MB96345RS	56	LQFP-100	3.0 to 5.5	-	MASK	160K	8K	-	6	16	✓	82	24(1)	-	-	8	2	8	4 +1 (Dedicated for PPG)	-	16	-	-	-	2	-	-	7	2	-	-	-	Option without CAN	MB96V300C																														
	MB96345RW				✓		288K	16K					80																	1																																			
	MB96346RS				-		160K +64K	8K					82																	-																																			
	MB96346RW				✓								80																	2																																			
	MB96F345DS	-			FLASH	288K							16K																	82						-																													
	MB96F345DW	✓																												80						2																													
	MB96F346AS	-					82	-																																																									
	MB96F346AW	✓					80	2																																																									
	MB96F346RS	-				416K	24K	82					-																																																				
	MB96F346RW	✓						80					2																																																				
	MB96F347AS	-						82					-																																																				
	MB96F347AW	✓						80					2																																																				
	MB96F347RS	-				544K	24K	82					-																																																				
	MB96F347RW	✓						80					2																																																				
	MB96F348AS	-						82					-																																																				
	MB96F348AW	✓						80					2																																																				
	MB96F348RS	-				544K +32K	24K	82					-																																																				
	MB96F348RW	✓						80					2																																																				
	MB96F348HS	-						82					-																																																				
	MB96F348HW	✓						80					4																																																				
MB96350	MB96F353AS	56	LQFP-64	3.0 to 5.5	-	FLASH	96K	8K	-	4	13	✓	51	15(1)	-	-	4	4	6 +3 (Dedicated for LIN)	4 +1 (Dedicated for PPG)	-	-	20	-	-	1	-	-	4	1	-	-	-	Option without CAN	MB96V300C																														
	MB96F353AW				✓								49																	-																																			
	MB96F353RS				-								51																	-																																			
	MB96F353RW				✓								49																	-																																			
	MB96F355AS				-		160K	12K					51																	-																																			
	MB96F355AW				✓								49																	-																																			
	MB96F355RS				-								51																	-																																			
	MB96F355RW				✓								49																	-																																			
	MB96F356AS				-		288K	12K					51																	-																																			
	MB96F356AW				✓								49																	-																																			
	MB96F356RS				-								51																	-																																			
	MB96F356RW				✓								49																	-																																			
MB96370	MB96F378HS	40	LQFP-144	3.0 to 5.5	-	FLASH	544K +32K	28K	-	7	8	✓	120	22(1)	-	-	6	2	8	4 +1 (Dedicated for PPG)	-	-	12	-	-	2	-	-	6	2	-	-	72 x 4	SMC x 6ch Sound generator x 2ch	MB96V300C																														
	MB96F378HW				✓		832K	32K					118																	-																																			
	MB96F379RS				-								120																	-																																			
	MB96F379RW				✓		118	-																																																									
MB96380	MB96384RS	56	LQFP-120	3.0 to 5.5	-	MASK	128K	6K	-	7	8	✓	96	16(1)	-	-	4	2	8	4 +1 (Dedicated for PPG)	5	-	8	-	-	1	-	-	5	1	-	-	65 x 4	SMC x 5ch Sound generator x 2ch	MB96V300C																														
	MB96384RW				✓		160K	8K					94																	-																																			
	MB96385RS				-								96																	-																																			
	MB96385RW				✓								94																	-																																			
	MB96F385RS	-			160K	6K							96																	-																																			
	MB96F385RW	✓					94	-																																																									
	MB96F386RS	-					288K	16K					96																	-																																			
	MB96F386RW	✓											94																	-																																			
	MB96F387RS	-			416K	28K							96																	-																																			
	MB96F387RW	✓											94																	-																																			
	MB96F388HS	-					544K +32K	28K					96																	-																																			
	MB96F388HW	✓											94																	-																																			
	MB96F389RS	-			544K +288K	32K							96																	-																																			
	MB96F389RW	✓											94																	-																																			
	MB96390	MB96393RS					40	LQFP-100					3.0 to 5.5																	-						MASK	96K	5K	-	-	8	-	76	11(1)	-	-	4	2	4	4 +1 (Dedicated for PPG)	4	-	4	-	-	1	-	-	3	1	-	-	49 x 4	SMC x 4ch Sound generator x 1ch	MB96V300C
		MB96393RW																												✓							160K	8K					74																	-					
MB96395RS		-	76	-																																																													
MB96395RW		✓	74	-																																																													
MB96F395RS		-	160K	8K	76	-																																																											
MB96F395RW		✓			74	-																																																											



Cypress Semiconductor Corporation

198 Champion Court, San Jose CA 95134

phone +1 408.943.2600 fax +1 408.943.6848

toll free +1 800.858.1810 (U.S. only) Press "1" to reach your local sales representative

© 2015 Cypress Semiconductor Corporation. All rights reserved. All other trademarks are the property of their respective owners.

Doc# 002-06949 Rev.*A