



Welcome to [E-XFL.COM](#)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Obsolete
Core Processor	F ² MC-8FX
Core Size	8-Bit
Speed	16MHz
Connectivity	I ² C, LINbus, SIO, UART/USART
Peripherals	LVD, POR, PWM, WDT
Number of I/O	29
Program Memory Size	36KB (36K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	1K x 8
Voltage - Supply (Vcc/Vdd)	2.4V ~ 5.5V
Data Converters	A/D 8x8/10b
Oscillator Type	External
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	32-WQFN Exposed Pad
Supplier Device Package	32-QFN (5x5)
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/mb95f636knwqn-g-snere1

Consumer and Industrial MCU Family




FM4 FAMILY

Cypress ARM® Cortex®-M4F microcontroller family is a high range line providing maximum CPU frequency of 200MHz, a high speed flash memory with DSP and FPU hardware instructions. Customers can select the best fitting device from a range of products, coming in packages from 48 pin to 216 pin and flash memory densities between 256KB and 2MB. The wide operation supply voltage range up to 5.5V which improves the signal to noise ratio, results in a robust design and is unique among Cortex-M4F microcontroller families. The MCUs are designed for applications that require advanced, high-speed computing performance such as general-purpose inverters, servomotors, PLCs and other industrial equipment, as well as inverter-based home appliances such as washing machines and air conditioners.



FM3 FAMILY

Cypress ARM Cortex-M3 microcontroller family is a scalable platform for many industrial applications. Customers can select the best fitting device from a range of products, coming in packages from 32 pin to 176 pin and flash memory densities between 32KB and 1MB. With a maximum CPU frequency of 144MHz and high speed flash memory, FM3 supports the fastest ARM Cortex-M3 devices on the market. The wide operation supply voltage range up to 5.5V, which improves the signal to noise ratio, results in a robust design and is quite unique among Cortex-M3 microcontroller families. The FM3 MCU family is split into four groups: high performance, basic, low power and ultra low leakage groups. The main differences between the groups are CPU operation frequency and supply voltage. All products are based on the same architecture (software compatible), use the same peripherals and are pin compatible in most cases. The ultra low leakage line products are based on an optimized low leakage process technology. Development tools and evaluation boards are offered from different vendors and Cypress.




FM0+ FAMILY

The Cypress FM0+ family, which is based on the ARM Cortex-M0+ core, is designed for low power and cost-sensitive applications such as white goods, sensors, meters, HMI systems, power tools and Internet of Things (IoT) battery powered or energy harvesting wearable devices. These microcontrollers can be easily embedded into systems adopting 8-, 16- or 32-bit MCUs, accelerating product development and reducing development costs. The FM0+ family includes two groups for ultra-low-power and cost-effective applications. The devices in the ultra-low-power group have an operating voltage range of 1.65V to 3.6V, and a maximum CPU clock frequency of 40MHz, a RUN mode current of 70 μ A/MHz, an RTC mode current of 0.7 μ A and wake-up time of approximately 40 μ s.

8FX FAMILY

Cypress 8FX MCU family is a high-performance 8-bit microcontroller utilizing a different embedded flash memory size. This series uses the F2MC-8FX CISC CPU, which offers industry leading class performance of an 8-bit microcontroller unit enabling more instructions to be executed per cycle. On top of delivering industry class performance MCUs, the 8FX family also delivers low power efficient MCU products for the customer's usage. This series also features a variety of on-chip timers, A/D converters, analog and digital peripheral and communication interfaces such as LIN-UART (Local Interconnect Network Universal Asynchronous Receiver-Transmitter), CAN (controller area network) and I2C (Inter-Integrated Circuit) interface for various application usages. For easy development, the 8FX family also employs a 1-line on-chip debug that uses only one pin on the microcontroller, thereby minimizing the number of pins used for debugging in product development. Cypress also provides easy to use and cost competitive development starter kits and development environments for this MCU series.

Automotive MCU Core Roadmap

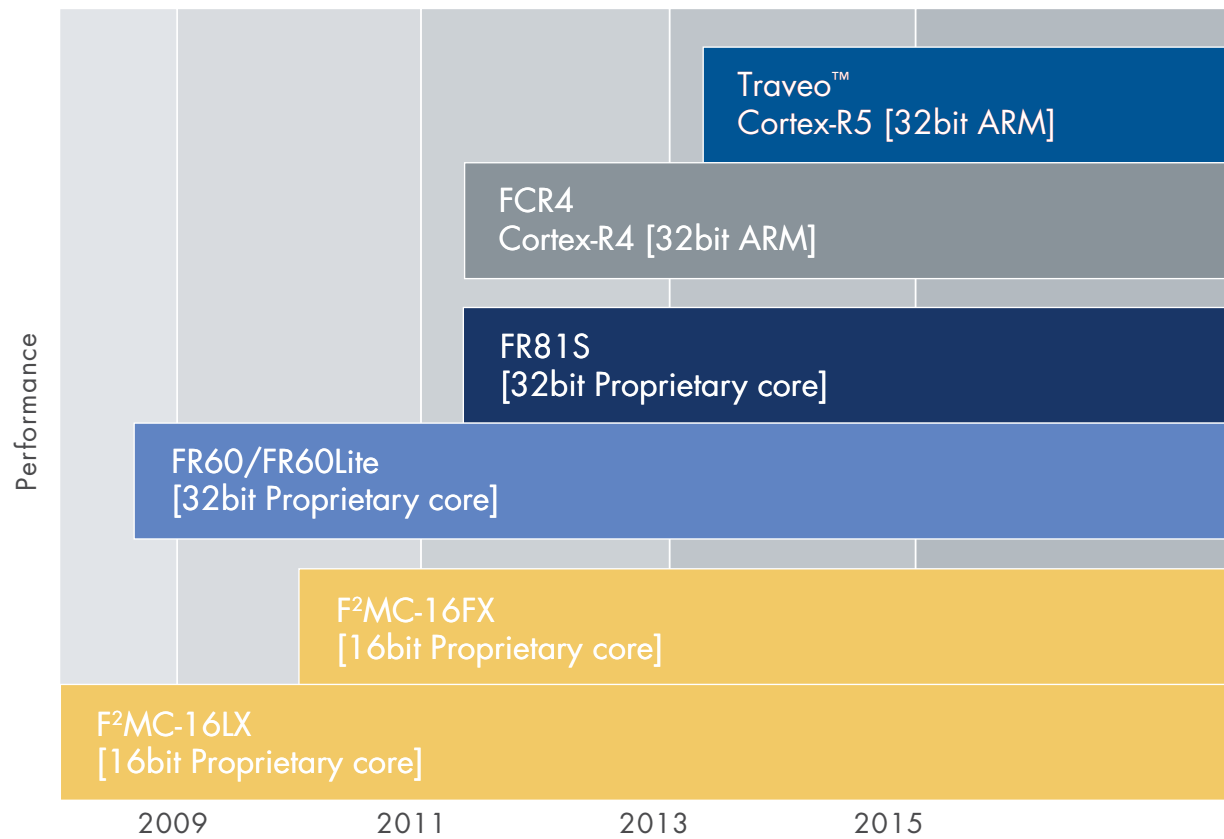

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch](unit)	12bit AD Converter [ch](unit)	DA Converter [bit x ch]	Timer								Serial			Communication		Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]		
S6E2HG	S6E2HG6E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HG6F0A		LQFP-100																									80	24 (3)		
	S6E2HG6G0A		LQFP-120 BGA-121																									100			
	S6E2HG4E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HG4F0A		LQFP-100																									80	24 (3)		
S6E2HG4G0A	LQFP-120 BGA-121		100																												
S6E2HE	S6E2HE6E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HE6F0A		LQFP-100																									80	24 (3)		
	S6E2HE6G0A		LQFP-120 BGA-121																									100			
	S6E2HE4E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HE4F0A		LQFP-100																									80	24 (3)		
S6E2HE4G0A	LQFP-120 BGA-121		100																												
S6E2H4	S6E2H46E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H46F0A		LQFP-100																									80	24 (3)		
	S6E2H46G0A		LQFP-120 BGA-121																									100			
	S6E2H44E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H44F0A		LQFP-100																									80	24 (3)		
S6E2H44G0A	LQFP-120 BGA-121		100																												
S6E2H1	S6E2H16E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H16F0A		LQFP-100																									80	24 (3)		
	S6E2H16G0A		LQFP-120 BGA-121																									100			
	S6E2H14E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H14F0A		LQFP-100																									80	24 (3)		
S6E2H14G0A	LQFP-120 BGA-121		100																												
S6E2GM w/security	S6E2GM8HHA	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121	-	24 (3)	-	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4		Multi Function Serial x 10ch (UART/CSIO/I2C/LIN Selectable)	1	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC×256ch, Tiny I2S, Smart Card I/F, ETH, SDC, Chipher	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2GM8JHA		LQFP-176																									153	32 (3)		
	S6E2GM6HHA		LQFP-144				121	24 (3)																							
	S6E2GM6JHA		LQFP-176				153	32 (3)																							
S6E2GM	S6E2GM8H0A	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121	-	24 (3)	-	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4		Multi Function Serial x 10ch (UART/CSIO/I2C/LIN Selectable)	1	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC×256ch, Tiny I2S, Smart Card I/F, ETH, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2GM8J0A		LQFP-176																									153	32 (3)		
	S6E2GM6H0A		LQFP-144				121	24 (3)																							
	S6E2GM6J0A		LQFP-176				153	32 (3)																							
S6E2GK w/security	S6E2GK8HHA	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121	-	24 (3)	-	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4		Multi Function Serial x 10ch (UART/CSIO/I2C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC×256ch, Tiny I2S, Smart Card I/F, ETH, SDC, Chipher	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2GK8JHA		LQFP-176																									153	32 (3)		
	S6E2GK6HHA		LQFP-144				121	24 (3)																							
	S6E2GK6JHA		LQFP-176				153	32 (3)																							
S6E2GK	S6E2GK8H0A	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121	-	24 (3)	-	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4		Multi Function Serial x 10ch (UART/CSIO/I2C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC×256ch, Tiny I2S, Smart Card I/F, ETH, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2GK8J0A		LQFP-176																									153	32 (3)		
	S6E2GK6H0A		LQFP-144				121	24 (3)																							
	S6E2GK6J0A		LQFP-176				153	32 (3)																							

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer							Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device					
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/ISI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]	USB-Function [ch]			
S6E2C1-E	S6E2C10H2A	200	LQFP-144	2.7 to 5.5	✓	-	0M	256K	-	8	32	✓	120	-	152	12 x 2	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 256ch, SDC, I2S 1ch(without 144pin), HDMI-CEC 2ch, High Speed Quad SPI x1(without 144pin), Programmable CRC, Chipper	On-Chip Debug (SWJ-DP/ETM/HTM)												
	S6E2C10J2A		LQFP-176 BGA-192																																				
	S6E2C10L2A		LQFP-216																																				
MB9B560R	MB9BF566M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	16	✓	80	-	24(3)	12 x 2	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)												
	MB9BF566N		LQFP-100 QFP-100 BGA-112																																				
	MB9BF566R		LQFP-120 BGA-144																																				
	MB9BF567M		LQFP-80																																				
	MB9BF567N		LQFP-100 QFP-100 BGA-112				768K +32K	128K					80	24(3)	Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)													Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)		
	MB9BF567R		LQFP-120 BGA-144																																				
	MB9BF568M		LQFP-80																																				
	MB9BF568N		LQFP-100 QFP-100 BGA-112																																				
	MB9BF568R		LQFP-120 BGA-144																																				
MB9B460R	MB9BF466M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	16	✓	100	-		16(3)	12 x 2	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	-	✓											CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)
	MB9BF466N		LQFP-100 QFP-100 BGA-112																																				
	MB9BF466R		LQFP-120 BGA-144																																				
	MB9BF467M		LQFP-80																																				
	MB9BF467N		LQFP-100 QFP-100 BGA-112				768K +32K	96K					80	24(3)	Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)												QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)		
	MB9BF467R		LQFP-120 BGA-144																																				
	MB9BF468M		LQFP-80																																				
MB9BF468N	LQFP-100 QFP-100 BGA-112	1024K +32K	128K	-	8	16	✓	80	-	24(3)	Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1			Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)															
MB9BF468R	LQFP-120 BGA-144																																						
MB9BF468M	LQFP-80																																						
MB9B360R	MB9BF366M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8															16	✓	63											-	16(3)
	MB9BF366N		LQFP-100 QFP-100 BGA-112																																				
	MB9BF366R		LQFP-120 BGA-144																																				
	MB9BF367M		LQFP-80																																				
	MB9BF367N		LQFP-100 QFP-100 BGA-112				768K +32K	128K			80	24(3)	Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)																
	MB9BF367R		LQFP-120 BGA-144																																				
	MB9BF368M		LQFP-80																																				
	MB9BF368N		LQFP-100 QFP-100 BGA-112																																				
	MB9BF368R		LQFP-120 BGA-144																																				

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
MB9B360L	MB9BF364K	160	LQFP-48 QFN-48	2.7 to 5.5 2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)								Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)			
	MB9BF364L		LQFP-64 QFN-64												Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)																				
	MB9BF365K		LQFP-48 QFN-48												Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)																				
	MB9BF365L		LQFP-64 QFN-64				384K +32K	48K							Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)																				
	MB9BF366K		LQFP-48 QFN-48												Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)																				
	MB9BF366L		LQFP-64 QFN-64												Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)																				

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]	USB-Function [ch]															
MB9B160L	MB9BF164K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	-	-	-	-	12 x 2	12	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																							
	MB9BF164L		LQFP-64 QFN-64																																																
	MB9BF165K		LQFP-48 QFN-48																																																
	MB9BF165L		LQFP-64 QFN-64																																																
	MB9BF166K		LQFP-48 QFN-48																																																
	MB9BF166L		LQFP-64 QFN-64				512K +32K	64K																																											

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer									Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
HIGH-PERFORMANCE GROUP																																			
MB9B510R	MB9BF512N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-		Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)								
	MB9BF512R		LQFP-120																																
	MB9BF514N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																											
	MB9BF514R		LQFP-120																																
	MB9BF515N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																											
	MB9BF515R		LQFP-120																																
	MB9BF516N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																											
	MB9BF516R		LQFP-120																																
MB9B410R	MB9BF412N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-		Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)							
	MB9BF412R		LQFP-120																																
	MB9BF414N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																											
	MB9BF414R		LQFP-120																																
	MB9BF415N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																											
	MB9BF415R		LQFP-120																																
	MB9BF416N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																											
	MB9BF416R		LQFP-120																																
MB9B310R	MB9BF312N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-		Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)								
	MB9BF312R		LQFP-120																																
	MB9BF314N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																											
	MB9BF314R		LQFP-120																																
	MB9BF315N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																											
	MB9BF315R		LQFP-120																																
	MB9BF316N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																											
	MB9BF316R		LQFP-120																																
MB9B110R	MB9BF112N	144	QFP-100 LQFP-100 BGA-112	2.7 to 5.5	✓	Main Flash +Work Flash	128K +32K	16K	-	8	16	✓	-	16(3)	-		Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)							
	MB9BF112R		LQFP-120																																
	MB9BF114N		QFP-100 LQFP-100 BGA-112				256K +32K	32K																											
	MB9BF114R		LQFP-120																																
	MB9BF115N		QFP-100 LQFP-100 BGA-112				384K +32K	48K																											
	MB9BF115R		LQFP-120																																
	MB9BF116N		QFP-100 LQFP-100 BGA-112				512K +32K	64K																											

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [bit]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [bit]	10bit AD Converter [bit(unit)]	12bit AD Converter [bit(unit)]	DA Converter [bit x bit]	Timer								Serial			Communication			Note	Evaluation Device
																	Output Compare [bit]	Free-Run Timer [bit]	Input Capture [bit]	Reload Timer [bit]	PWM Timer [bit]	PWC Timer [bit]	PPG Timer [bit]	Up/Down Counter [bit]	Other timers [bit]	I ² C [bit]	UART/SSI [bit]	SIO [bit]	LIN/UART/SIO [bit]	CAN [bit]		
HIGH-PERFORMANCE GROUP																																
MB9B500B	MB9BF504NB	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	256K	32K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF504RB		LQFP-120				100	80					100															80	100			
	MB9BF505NB		LQFP-100 BGA-112				80	80					100															80	100			
	MB9BF505RB		LQFP-120				100	80					100															80	100			
	MB9BF506NB		LQFP-100 BGA-112				80	80					100															80	100			
	MB9BF506RB		LQFP-120				100	80					100															80	100			
MB9B400A	MB9BF404NA	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	256K	32K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)				
	MB9BF404RA		LQFP-120				100	80					100																80	100		
	MB9BF405NA		LQFP-100 BGA-112				80	80					100																80	100		
	MB9BF405RA		LQFP-120				100	80					100																80	100		
	MB9BF406NA		LQFP-100 BGA-112				80	80					100																80	100		
	MB9BF406RA		LQFP-120				100	80					100																80	100		
MB9B300B	MB9BF304NB	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	256K	32K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)					
	MB9BF304RB		LQFP-120				100	80					100															80	100			
	MB9BF305NB		LQFP-100 BGA-112				80	80					100															80	100			
	MB9BF305RB		LQFP-120				100	80					100															80	100			
	MB9BF306NB		LQFP-100 BGA-112				80	80					100															80	100			
	MB9BF306RB		LQFP-120				100	80					100															80	100			
MB9B100A	MB9BF102NA	80	LQFP-100 BGA-112	2.7 to 5.5	✓	FLASH	128K	16K	-	8	16	✓	80	-	16(3)	-	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)				
	MB9BF102RA		LQFP-120				100	80					100																80	100		
	MB9BF104NA		LQFP-100 BGA-112				80	80					100																80	100		
	MB9BF104RA		LQFP-120				100	80					100																80	100		
	MB9BF105NA		LQFP-100 BGA-112				80	80					100																80	100		
	MB9BF105RA		LQFP-120				100	80					100																80	100		
	MB9BF106NA		LQFP-100 BGA-112				80	80					100																80	100		
	MB9BF106RA		LQFP-120				100	80					100																80	100		
BASIC GROUP																																
MB9B520M	MB9BF521K	72	LQFP-48 QFN-48	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	-	-	14	-	14(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)					
	MB9BF521L		LQFP-64 QFN-64										19		50				23(2)									QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)			
	MB9BF521M		LQFP-80 BGA-96										23		65				26(2)									QPRC x 1		Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)		
	MB9BF522K		LQFP-48 QFN-48										14		35				14(2)									QPRC x 1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)			
	MB9BF522L		LQFP-64 QFN-64				19	50					23(2)		QPRC x 2				Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)													
	MB9BF522M		LQFP-80 BGA-96				23	65					26(2)		QPRC x 1													Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)				
	MB9BF524K		LQFP-48 QFN-48				14	35					14(2)		QPRC x 1				Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)													
	MB9BF524L		LQFP-64 QFN-64				19	50					23(2)		QPRC x 2													Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)				
	MB9BF524M		LQFP-80 BGA-96				23	65					26(2)		QPRC x 2				Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)													

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/ISI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]			USB-Function [ch]
BASIC GROUP																																		
MB9B320M	MB9BF321K	72	LQFP-48 QFN-48	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	14	-	35	-	14(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	1	QPRC x 1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)				
	MB9BF321L		LQFP-64 QFN-64																		19	50	23(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF321M		LQFP-80 BGA-96																		23	65	26(2)	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF322K		LQFP-48 QFN-48																		14	35	14(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF322L		LQFP-64 QFN-64				19	50			23(2)		14(2)		26(2)					65	26(2)	QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF322M		LQFP-80 BGA-96				23	65			26(2)												Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF324K		LQFP-48 QFN-48				14	35			14(2)												Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF324L		LQFP-64 QFN-64				19	50			23(2)												Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF324M		LQFP-80 BGA-96				23	65			26(2)																							
MB9B120M	MB9BF121K	72	LQFP-48 QFN-48	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	14	-	35	-	14(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	1	QPRC x 1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	-	-	-	✓	Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)			
	MB9BF121L		LQFP-64 QFN-64																		19	50	23(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF121M		LQFP-80 BGA-96																		23	65	26(2)	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF122K		LQFP-48 QFN-48																		14	35	14(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF122L		LQFP-64 QFN-64				19	50			23(2)		14(2)		26(2)					65	26(2)	QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF122M		LQFP-80 BGA-96				23	65			26(2)												Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF124K		LQFP-48 QFN-48				14	35			14(2)												Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF124L		LQFP-64 QFN-64				19	50			23(2)																							
	MB9BF124M		LQFP-80 BGA-96				23	65			26(2)																							
MB9B120J	MB9BF121J	72	LQFP-32 QFN-32	2.7 to 5.5	✓	FLASH	64K	8K	-	4	7	-	23	-	8(1)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SW-DP)			
MB9B520T	MB9BF528S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	122	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)				1	1ch (USB-Host/ USB-Function Selectable)		-	✓	CAN: 32Msg-buffer, Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)			
	MB9BF528T*		LQFP-176 BGA-192				154	QPRC x 2																										
	MB9BF529S*		LQFP-144				122	QPRC x 1																										
	MB9BF529T*		LQFP-176 BGA-192				154	QPRC x 2																										
MB9B420T	MB9BF428S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	122	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)				1	-		-	✓	CAN: 32Msg-buffer, Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)			
	MB9BF428T*		LQFP-176 BGA-192				154	QPRC x 2																										
	MB9BF429S*		LQFP-144				122	QPRC x 1																										
	MB9BF429T*		LQFP-176 BGA-192				154	QPRC x 2																										

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer							Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
BASIC GROUP																																		
MB9B320T	MB9BF328S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)								
	MB9BF328T*		LQFP-176 BGA-192																															
	MB9BF329S*		LQFP-144																															
	MB9BF329T*		LQFP-176 BGA-192																															
MB9B120T	MB9BF128S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)							
	MB9BF128T*		LQFP-176 BGA-192																															
	MB9BF129S*		LQFP-144																															
	MB9BF129T*		LQFP-176 BGA-192																															
MB9A420L	MB9AF421K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	✓	FLASH	64K	4K	-	-	14	36	-	8(1)	10bit x 1	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 3ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)							
	MB9AF421L		LQFP-64 QFN-64				19	51																										
MB9A120L	MB9AF121K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	✓	FLASH	64K	4K	-	-	14	36	-	8(1)	10bit x 1	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 3ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)							
	MB9AF121L		LQFP-64 QFN-64				19	51																										

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit/AD Converter [ch/unit]	12bit/AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																																										
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]	USB-Function [ch]																																								
LOW-POWER GROUP																																																																												
MB9A340NA	MB9AF341LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	8	-	51	-	12(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)																																											
	MB9AF341MB		LQFP-80 BGA-96								11	-	66		17(2)																																																													
	MB9AF341NB		LQFP-100 QFP-100 BGA-112								16	✓	83		24(2)																																																													
	MB9AF342LB		LQFP-64 QFN-64								8	-	51		12(2)																																																													
	MB9AF342MB		LQFP-80 BGA-96				128K +32K	32K			-	8	11		-																		66	17(2)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)																					
	MB9AF342NB		LQFP-100 QFP-100 BGA-112										16		✓																		83	24(2)																																										
	MB9AF344LB		LQFP-64 QFN-64										8		-																		51	12(2)																																										
	MB9AF344MB		LQFP-80 BGA-96										11		-																		66	17(2)																																										
MB9AF344NB	LQFP-100 QFP-100 BGA-112	16	✓	83	24(2)																																																																							
MB9A140NA	MB9AF141LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8			8	-	51	-	12(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)																																										
	MB9AF141MB		LQFP-80 BGA-96										11	-	66		17(2)																																																											
	MB9AF141NB		LQFP-100 QFP-100 BGA-112										16	✓	83		24(2)																																																											
	MB9AF142LB		LQFP-64 QFN-64				128K +32K	16K			-	8	8	-	51		-																	12(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)																						
	MB9AF142MB		LQFP-80 BGA-96										11	-	66																			17(2)																																										
	MB9AF142NB		LQFP-100 QFP-100 BGA-112										16	✓	83																			24(2)																																										
	MB9AF144LB		LQFP-64 QFN-64				256K +32K	32K					-	8	8																			-																				51	-	12(2)	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)
	MB9AF144MB		LQFP-80 BGA-96												11																			-																				66		17(2)																				
	MB9AF144NB		LQFP-100 QFP-100 BGA-112												16																			✓																				83		24(2)																				

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer							Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
S6E1A	S6E1A11B0A	40	LQFP-32 QFN-32	2.7 to 5.5	✓	Flash	56K	6K	-	2	8	-	23	-	5(1)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 4ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 3ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, Fast I/O	On-chip Debug (SW-DP/MTB)							
	S6E1A11C0A		LQFP-48 QFN-48																									37	8(1)					
	S6E1A12B0A		LQFP-32 QFN-32				23	5(1)																										
	S6E1A12C0A		LQFP-48 LQFP-52 QFN-48						37	8(1)																								
S6E1B8 w/security	S6E1B86GHA	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K			-	-	24	-	102	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM	Dual Timer, Real Time Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F, Chipher	On-Chip Debug (SWJ-DP/ Boundary SCAN)							
	S6E1B84GHA		256K + 40K				32K	65	16																									
	S6E1B86FHA		LQFP-100				512K + 40K			64K					23																			
	S6E1B84FHA		256K + 40K				32K	64K																										
	S6E1B86EHA		BGA-96/ LQFP-80/ WLCSP-80				512K + 40K		64K																									
	S6E1B84EHA						256K + 40K	32K																										
S6E1B8	S6E1B86G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM	Dual Timer, Real Time Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP/ Boundary SCAN)									
	S6E1B84G0A						256K + 40K	32K																		65	16							
	S6E1B86F0A		LQFP-100				512K + 40K	64K					23																					
	S6E1B84F0A						256K + 40K	32K						64K																				
	S6E1B86E0A						BGA-96/ LQFP-80/ WLCSP-80	512K + 40K					64K																					
	S6E1B84E0A							256K + 40K					32K																					
S6E1B3	S6E1B36G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	Dual Timer, Real Time Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP/ Boundary SCAN)									
	S6E1B34G0A						256K + 40K	32K																		65	16							
	S6E1B36F0A		LQFP-100				512K + 40K	64K					23																					
	S6E1B34F0A						256K + 40K	32K						64K																				
	S6E1B36E0A						BGA-96/ LQFP-80/ WLCSP-80	512K + 40K					64K																					
	S6E1B34E0A							256K + 40K					32K																					
S6E1B1	S6E1B16G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	-	-	Dual Timer, Real Time Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP/ Boundary SCAN)									
	S6E1B14G0A						256K + 40K	32K																		65	16							
	S6E1B16F0A		LQFP-100				512K + 40K	64K					23																					
	S6E1B14F0A						256K + 40K	32K						64K																				
	S6E1B16E0A						LQFP-80	512K + 40K					64K																					
	S6E1B14E0A							256K + 40K					32K																					

8FX – 8bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]
STANDARD																																			
MB95650L	MB95F652E	16	TSSOP-24 SOP-24 QFN-32	1.8 to 5.5	✓	Dual Op. Flash	8K	256	-	-	6	-	21	-	6(1)	-	-	8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	-	-	-	2	1	-	1	-	-	-	-	-	-	-	-	Low-voltage Detection Reset, Clock Supervisor	On-chip Debug
	MB95F652L							20																											
	MB95F653E							21																											
	MB95F653L							20																											
	MB95F654E							21																											
	MB95F654L							20																											
	MB95F656E							21																											
	MB95F656L							20																											
MB95810K	MB95F814K	16	LQFP-64	2.88 to 5.5	✓	Dual Op. Flash	20K	512	-	-	12	-	58	12(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	4	-	-	-	1	-	1	-	-	-	-	-	-	Low-voltage Detection Reset, Clock Supervisor	On-chip Debug		
	MB95F816K						36K	1K																											
	MB95F818K						60K	2K																											

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch](unit)]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer										Serial			Communication			Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]		
CAN/AUTOMOTIVE																																		
S6J3110	S6J3118HA	96	TEQFP -144	4.5 to 5.25	-	Main Flash +Work Flash	576K + 48K	TC-RAM: 32KB System - RAM: 16KB Backup - RAM: 8KB	56(2)	Instruction: 16 Data: 16	16	16	-	116	-	-	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	-	RTC x 1ch	Multi Function Serial x 4ch (LIN/UART/SIO Selectable)	CAN - FD x 1ch	-	-	-	-	ARM Cortex-R5, SHE(Secure Hardware Extension),	On-Chip Debug				
	S6J3119HA						832K + 48K	TC-RAM: 48KB System - RAM: 16KB Backup - RAM: 8KB																										
	S6J311AHA						1088K + 48K	TC-RAM: 64KB System - RAM: 16KB Backup - RAM: 8KB																										
	S6J311BHA	144	TEQFP -176				1600K + 112K	192K	64(2)					Multi Function Serial x 22ch (LIN/UART/SIO Selectable)									CAN - FD x 2ch											
	S6J311CHA						2112K + 112K	256K																										
	S6J311DHA						3136K + 112K	320K																										
	S6J311EHA	4160K + 112K	TC-RAM: 64KB System - RAM: 256KB Backup - RAM: 64KB				150																											
	S6J311BJA	1600K + 112K	192K																															
	S6J311CJA	2112K + 112K	256K																															
	S6J311DJA	3136K + 112K	320K																															
S6J311EJA	4160K + 112K	TC-RAM: 64KB System - RAM: 256KB Backup - RAM: 64KB																																

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
CAN/AUTOMOTIVE																																		
S6J3120	S6J3128HA	112	TEQFP -144	4.5 to 5.25	-	Main Flash +Work Flash	576K + 48K	TC-RAM: 32KB System - RAM: 16KB Backup - RAM: 8KB	Instruction: 16 Data: 16	16	16	A24/D16	112	50(2)	-	-	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 10ch (LIN/UART/SIO Selectable)	CAN - FD x 3ch	-	-	32 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 4ch, Sound generator x 3ch	On-Chip Debug				
	832K + 48K						TC-RAM: 48KB System - RAM: 16KB Backup - RAM: 8KB																											
	1088K +112K						TC-RAM: 64KB System-RAM: 16KB Backup-RAM: 8KB																											
S6J3200	S6J32AAKS	160	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	1088K + 112K	TC-RAM: 128KB System - RAM: 16KB Backup - RAM: 16KB VRAM: 1024KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 1ch	On-Chip Debug				
	S6J32AAKU		TEQFP -216 (0.4mm pitch)																												32 x 4			
	S6J32AALS		TEQFP -208																												30 x 4			
	S6J32AALU		TEQFP -216 (0.4mm pitch)																												32 x 4			
	S6J32BAKS		TEQFP -208																												30 x 4			
	S6J32BAKU		TEQFP -216 (0.4mm pitch)																												32 x 4			
	S6J32BALS		TEQFP -208																												30 x 4			
	S6J32BALU		TEQFP -216 (0.4mm pitch)																												32 x 4			
	S6J32CAKS		TEQFP -208																												30 x 4			
	S6J32CAKU		TEQFP -216 (0.4mm pitch)																												32 x 4			
	S6J32CALS		TEQFP -208																												30 x 4			
	S6J32CALU		TEQFP -216 (0.4mm pitch)																												32 x 4			
	S6J32DAKS		TEQFP -208																												30 x 4			
	S6J32DAKU		TEQFP -216 (0.4mm pitch)																												32 x 4			
S6J32DALS	TEQFP -208	30 x 4																																
S6J32DALU	TEQFP -216 (0.4mm pitch)	32 x 4																																

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
CAN/AUTOMOTIVE																																		
S6J3200	S6J323CKS	240	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	2112K + 112K	TC-RAM: 128KB System - RAM: 128KB Backup - RAM: 16KB VRAM: 2048KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPC/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,	On-Chip Debug					
	S6J323CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J323CLS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J323CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CLS		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CLS		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J326CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J326CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J326CLS		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J326CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J327CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J327CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
S6J327CLS	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,																															
S6J327CLU	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,																															
S6J328CKS	TEQFP -208	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,																															
S6J328CKU	TEQFP -208	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,																															
S6J328CLS	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,																															
S6J328CLU	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,																															

FCR4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer										Serial		Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SPI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
HYBRID AUTOMOTIVE INSTRUMENTS CLUSTER																																			
MB9DF125	MB9DF125PMC	128	LQFP-176	1.1 to 1.3 3.0 to 5.5	✓	FLASH	1088	128	8	8	32	-	123	50(1)	-	-	8	8	8	10	-	-	24	2	-	1	2	3	2	2	-	-	-	ARM Cortex R4, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 4 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 1 ch, NMI (intern/extern): 32/1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug
	MB9DF125EPMC																																ARM Cortex R4, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 6 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 1 ch, NMI (intern/extern): 32/1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug	
MB9DF126	MB9DF126BPMC	128	LQFP-176	1.1 to 1.3 3.0 to 5.5	✓	FLASH	2176	208	16	8	32	-	110	50(1)	-	-	8	8	8	10	-	-	24	2	-	1	2	3	2	3	-	-	-	ARM Cortex R4, APIX Remote handler with 2 ch AIC (APIX Inter Connect), APIX1 Phy: 1 ch, Real Time Clock, Stepper Motor Controller (SMC): 6 ch, Data Flash: 64KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 1 ch, NMI (intern/extern): 32/1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug
MB9EF226	MB9EF226PMC	128	LQFP-176	1.1 to 1.3 3.0 to 5.5	✓	FLASH	2176	128	16	8	32	-	117	50(1)	-	-	8	8	8	10	-	-	24	2	-	1	2	3	2	2	-	-	-	ARM Cortex R4, 2D Graphics Engine: scaler, color palette, gamma correction, blending, raster operation, various alpha blending modes, run-length decoding, hor/ver flip and rotation, affine transformations, Embedded Video-RAM: 1MB, TFT Output Interface: RGB888/RSDS Output, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 4 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 2 ch(1 ch for MCU and 1 ch for Graphic), NMI (intern/extern): 32/1 ch, MediaLB (3 wire): 1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug
	MB9EF226EPMC																																	ARM Cortex R4, 2D Graphics Engine: scaler, color palette, gamma correction, blending, raster operation, various alpha blending modes, run-length decoding, hor/ver flip and rotation, affine transformations, Embedded Video-RAM: 1MB, TFT Output Interface: RGB888/RSDS Output, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 6 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 2 ch(1 ch for MCU and 1 ch for Graphic), NMI (intern/extern): 32/1 ch, MediaLB (3 wire): 1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug

FR Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unt)]	12bit AD Converter [ch(unt)]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
CAN/AUTOMOTIVE																																		
MB91590	MB91F591B	80	LQFP-208	3.0 to 3.6 4.5 to 5.5 (2 power supplies)	Main Flash +Work Flash	Dedicated for GDC External Memory	576K +64K	48K	-	16	16	32(1)	-	-	4	2	6	Reload Timer x 4ch + PPG Timer x 24ch + Base Timer x 2ch (Reload/PPG/PWM/PWC Selectable)	-	Multi Function Serial x 2ch (LIN/UART/ SIO/I2C Selectable)	6	3	-	-	-	-	CAN: 32/64Mseg-buffer, LIN, FPU, MPU, Sound generator, SMC x 6ch, From among the RAM, 8KB can be used as BackUpRAM, Built-in 2D GDC	On-chip Debug						
	MB91F591BS																																	
	MB91F591BH																																	
	MB91F591BHS																																	
	MB91F592B																																	
	MB91F592BS																																	
	MB91F592BH																																	
	MB91F592BHS																																	
	MB91F594B	1088K +64K	72K				-	16							16	32(1)	-	-	4	8	12	Reload Timer x 8ch + PPG Timer x 24ch + Base Timer x 2ch (Reload/PPG/PWM/PWC Selectable)	3	Multi Function Serial x 6ch (LIN/UART SIO/I2C Selectable. However, I2C only supports ch0/ ch1)	6	3			-	-	-	-		
	MB91F594BS																																	
	MB91F594BH																																	
	MB91F594BHS																																	
	MB91F59AC																																	
	MB91F59ACS																																	
	MB91F59ACH																																	
	MB91F59ACHS																																	
MB91F59BC	2112K +64K	264K	-	16	16	32(1)	-	-	4	8	12	Reload Timer x 8ch + PPG Timer x 24ch + Base Timer x 2ch (Reload/PPG/PWM/PWC Selectable)	3	Multi Function Serial x 6ch (LIN/UART SIO/I2C Selectable. However, I2C only supports ch0/ ch1)	6	3	-	-	-	-														
MB91F59BCS																																		
MB91F59BCH																																		
MB91F59BCHS																																		
MB91F599B																																		
MB91F599BS																																		
MB91F599BH																																		
MB91F599BHS																																		

F²MC-16FX – 16bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch[unit]]	12bit AD Converter [ch[unit]]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device		
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]	USB-Function [ch]
AUTOMOTIVE																																				
MB96310	MB96F313AS	56	LQFP-48	3.0 to 5.5	FLASH	96K	8K	-	4	11	-	36	12(1)	-	-	2	4	4 +3 (Dedicated for LIN)	4 +1 (Dedicated for PPG)	-	-	14	-	-	-	-	-	-	3	-	-	-	-	LVD, built-in CR Option without CAN	MB96V300C	
	✓																													34						1
	-																													36						-
	✓																													34						-
	MB96F313AW					✓																								36						-
	MB96F315AS					✓																								34						-
	MB96F315AW					✓																								36						1
	MB96F315RS					✓																								36						-
MB96F315RW	✓	34	-																																	
MB96320	MB96F326AS	56	LQFP-80	3.0 to 5.5	FLASH	288K	12K	-	4	15	✓	66	18(1)	-	-	6	4	12	4 +1 (Dedicated for PPG)	-	-	20	-	-	1	-	-	4	-	-	-	-	LVD, built-in CR Option without CAN	MB96V300C		
	✓											64																	-							
	MB96F326AW											✓																	66						2	
	MB96F326RS											✓																	64						-	
	MB96F326RW											✓																	64						-	
MB96330	MB96F336US	48	LQFP-144	3.0 to 5.5	FLASH	288K	24K	-	10	16	✓	124	36(1)	-	-	12	4	10	4 +1 (Dedicated for PPG)	-	-	20	-	-	2	-	-	8	1	1ch (USB-Host/ USB-Function Selectable)	-	-	LVD, built-in CR	MB96V300C		
	✓											122																	-							
	MB96F338RS					✓	124					-																								
	MB96F338RW					✓	122					-																								
	MB96F338US					✓	120					-																								
	MB96F338UW					✓	118					36(1)	-																							



Cypress Semiconductor Corporation

198 Champion Court, San Jose CA 95134

phone +1 408.943.2600 fax +1 408.943.6848

toll free +1 800.858.1810 (U.S. only) Press "1" to reach your local sales representative

© 2015 Cypress Semiconductor Corporation. All rights reserved. All other trademarks are the property of their respective owners.

Doc# 002-06949 Rev. *A