



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                            |
| Number of LABs/CLBs            | -                                                                                                                                                                 |
| Number of Logic Elements/Cells | -                                                                                                                                                                 |
| Total RAM Bits                 | -                                                                                                                                                                 |
| Number of I/O                  | 104                                                                                                                                                               |
| Number of Gates                | 14000                                                                                                                                                             |
| Voltage - Supply               | 3V ~ 3.6V, 4.5V ~ 5.5V                                                                                                                                            |
| Mounting Type                  | Surface Mount                                                                                                                                                     |
| Operating Temperature          | -40°C ~ 85°C (TA)                                                                                                                                                 |
| Package / Case                 | 176-LQFP                                                                                                                                                          |
| Supplier Device Package        | 176-TQFP (24x24)                                                                                                                                                  |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a42mx09-tqg176i">https://www.e-xfl.com/product-detail/microchip-technology/a42mx09-tqg176i</a> |

- The Transient Current, page 13 is new (SAR 36930).
- Package names were revised according to standards established in *Package Mechanical Drawings* (SAR 34774)

## 1.7 Revision 9.0


The following is a summary of the changes in revision 9.0 of this document

- In Table 20, page 23, the limits in VI were changed from -0.5 to VCCI + 0.5 to -0.5 to VCCA + 0.5
- In Table 22, page 25,  $V_{OH}$  was changed from 3.7 to 2.4 for the min in industrial and military.  $V_{IH}$  had  $V_{CCI}$  and that was changed to VCCA


## 1.8 Revision 6.0

The following is a summary of the changes in revision 6.0 of this document.

- The Ease of Integration, page 1 was updated
- The Temperature Grade Offerings, page 5 is new
- The Speed Grade Offerings, page 5 is new
- The General Description, page 6 was updated
- The MultiPlex I/O Modules, page 11 was updated
- The User Security, page 12 was updated
- Table 6, page 13 was updated
- The Power Dissipation, page 14 was updated.
- The Static Power Component, page 14 was updated
- The Equivalent Capacitance, page 15 was updated
- Figure 13, page 17 was updated
- Table 10, page 18 was updated.
- Figure 14, page 18 was updated.
- Table 11, page 19 was updated.

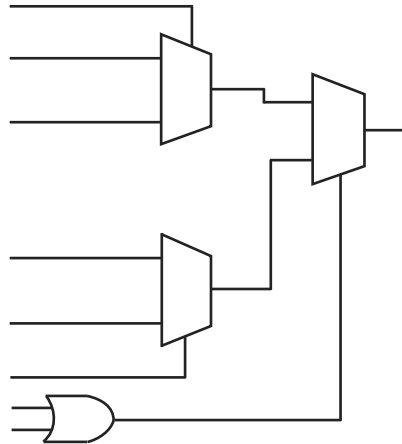**Figure 2 • 42MX C-Module Implementation**


The 42MX devices contain three types of logic modules: combinatorial (C-modules), sequential (S-modules) and decode (D-modules). The following figure illustrates the combinatorial logic module. The S-module, shown in Figure 4, page 8, implements the same combinatorial logic function as the C-module while adding a sequential element. The sequential element can be configured as either a D-flip-flop or a transparent latch. The S-module register can be bypassed so that it implements purely combinatorial logic.

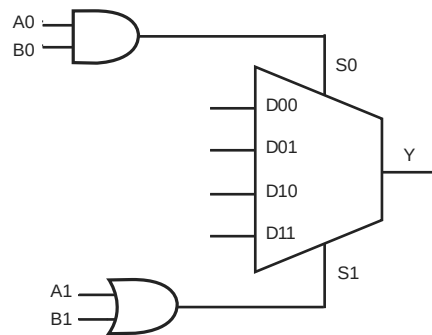**Figure 3 • 42MX C-Module Implementation**

### 3.2.3.3 Antifuse Structures

An antifuse is a “normally open” structure. The use of antifuses to implement a programmable logic device results in highly testable structures as well as efficient programming algorithms. There are no pre-existing connections; temporary connections can be made using pass transistors. These temporary connections can isolate individual antifuses to be programmed and individual circuit structures to be tested, which can be done before and after programming. For instance, all metal tracks can be tested for continuity and shorts between adjacent tracks, and the functionality of all logic modules can be verified.

**Figure 7 • MX Routing Structure**

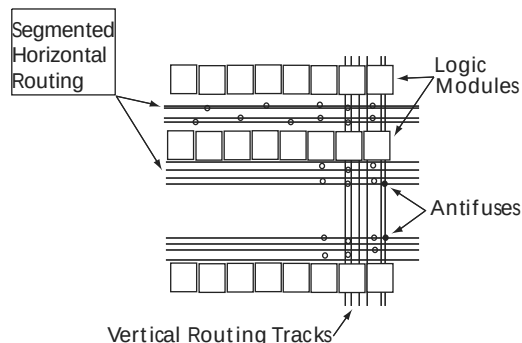

### 3.2.4 Clock Networks

The 40MX devices have one global clock distribution network (CLK). A signal can be put on the CLK network by being routed through the CLKBUF buffer.

In 42MX devices, there are two low-skew, high-fanout clock distribution networks, referred to as CLKA and CLKB. Each network has a clock module (CLKMOD) that can select the source of the clock signal from any of the following (Figure 8, page 11):

- Externally from the CLKA pad, using CLKBUF buffer
- Externally from the CLKB pad, using CLKBUF buffer
- Internally from the CLKINTA input, using CLKINT buffer
- Internally from the CLKINTB input, using CLKINT buffer

The clock modules are located in the top row of I/O modules. Clock drivers and a dedicated horizontal clock track are located in each horizontal routing channel.

Clock input pads in both 40MX and 42MX devices can also be used as normal I/Os, bypassing the clock networks.

The A42MX36 device has four additional register control resources, called quadrant clock networks (Figure 9, page 11). Each quadrant clock provides a local, high-fanout resource to the contiguous logic modules within its quadrant of the device. Quadrant clock signals can originate from specific I/O pins or from the internal array and can be used as a secondary register clock, register clear, or output enable.

### 3.4.9 JTAG Mode Activation

The JTAG test logic circuit is activated in the Designer software by selecting **Tools > Device Selection**. This brings up the Device Selection dialog box as shown in the following figure. The JTAG test logic circuit can be enabled by clicking the “Reserve JTAG Pins” check box. The following table explains the pins' behavior in either mode.

**Figure 15 • Device Selection Wizard**

**Table 11 • Boundary Scan Pin Configuration and Functionality**

| Reserve JTAG | Checked                                                                | Unchecked |
|--------------|------------------------------------------------------------------------|-----------|
| TCK          | BST input; must be terminated to logical HIGH or LOW to avoid floating | User I/O  |
| TDI, TMS     | BST input; may float or be tied to HIGH                                | User I/O  |
| TDO          | BST output; may float or be connected to TDI of another device         | User I/O  |

### 3.4.10 TRST Pin and TAP Controller Reset

An active reset (TRST) pin is not supported; however, MX devices contain power-on circuitry that resets the boundary scan circuitry upon power-up. Also, the TMS pin is equipped with an internal pull-up resistor. This allows the TAP controller to remain in or return to the Test-Logic-Reset state when there is no input or when a logical 1 is on the TMS pin. To reset the controller, TMS must be HIGH for at least five TCK cycles.

### 3.4.11 Boundary Scan Description Language (BSDL) File

Conforming to the IEEE Standard 1149.1 requires that the operation of the various JTAG components be documented. The BSDL file provides the standard format to describe the JTAG components that can be used by automatic test equipment software. The file includes the instructions that are supported, instruction bit pattern, and the boundary-scan chain order. For an in-depth discussion on BSDL files, see the *BSDL Files Format Description* application note.

BSDL files are grouped into two categories - generic and device-specific. The generic files assign all user I/Os as inouts. Device-specific files assign user I/Os as inputs, outputs or inouts.

Generic files for MX devices are available on the Microsemi SoC Product Group's website:

<http://www.microsemi.com/soc/techdocs/models/bsdl.html>.

## 3.5 Development Tool Support


The MX family of FPGAs is fully supported by Libero® Integrated Design Environment (IDE). Libero IDE is a design management environment, seamlessly integrating design tools while guiding the user through the design flow, managing all design and log files, and passing necessary design data among tools. Libero IDE allows users to integrate both schematic and HDL synthesis into a single flow and verify the entire design in a single environment. Libero IDE includes SynplifyPro from Synopsys, ModelSim® HDL Simulator from Mentor Graphics® and Viewdraw.

Libero IDE includes place-and-route and provides a comprehensive suite of backend support tools for FPGA development, including timing-driven place-and-route, and a world-class integrated static timing analyzer and constraints editor.

### 3.10 Timing Models


The following figures show various timing models.

**Figure 17 • 40MX Timing Model\***

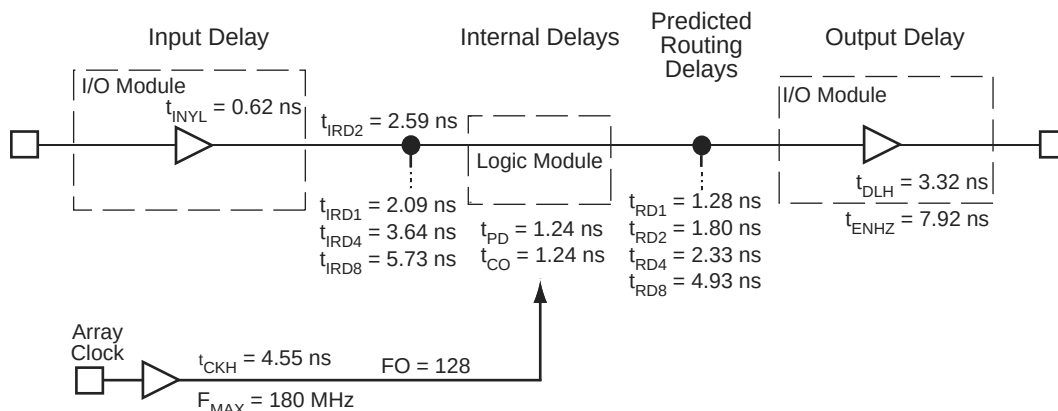

**Note:** Values are shown for 40MX –3 speed devices at 5.0 V worst-case commercial conditions.

**Figure 18 • 42MX Timing Model**

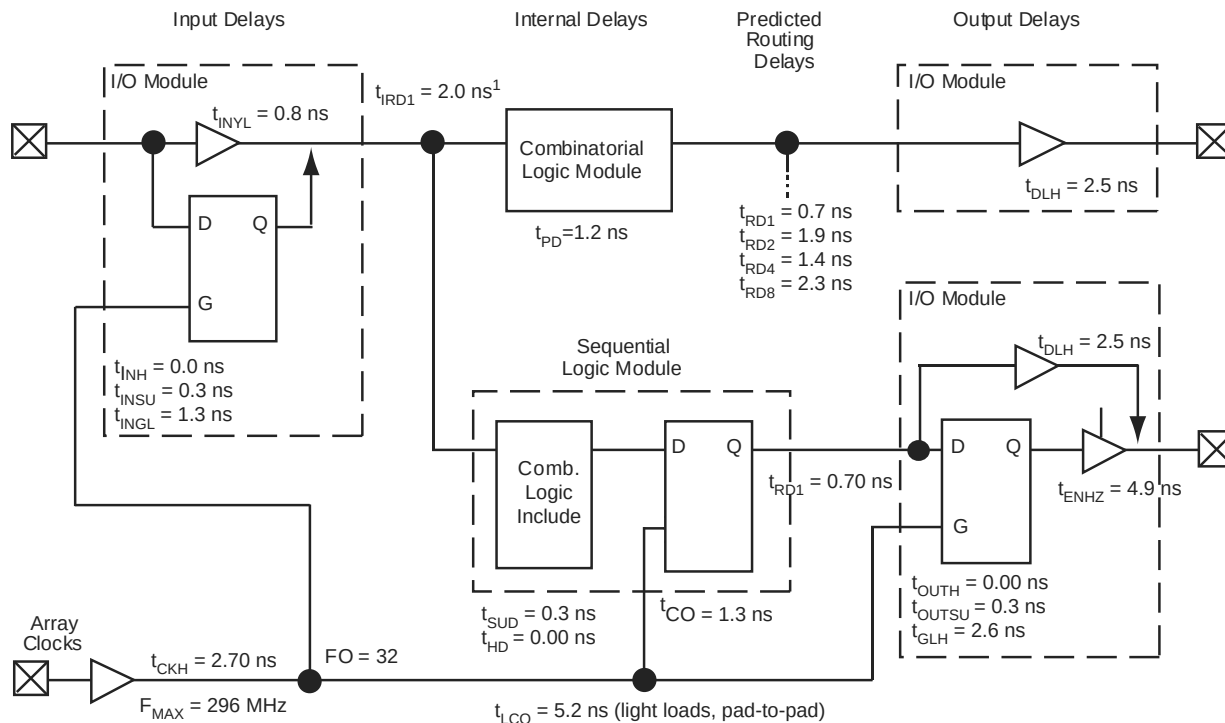

**Note:** 1. Input module predicted routing delay

**Note:** 2. Values are shown for A42MX09 –3 at 5.0 V worst-case commercial conditions.




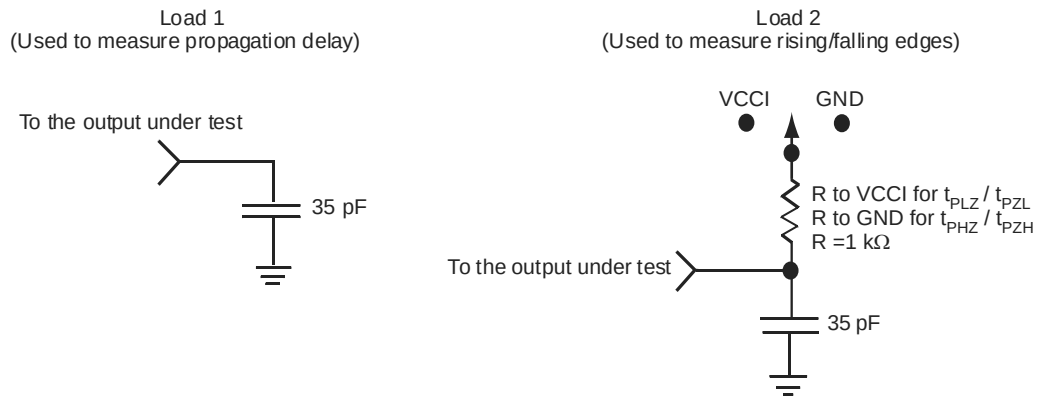
**Figure 22 • AC Test Loads****Figure 23 • Input Buffer Delays****Figure 24 • Module Delays**


Figure 27 • Output Buffer Latches

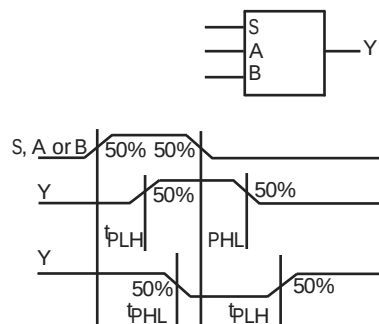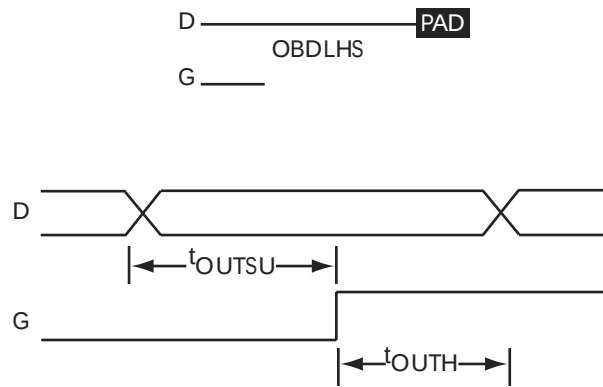

### 3.10.4 Decode Module Timing

The following figure shows decode module timing.


Figure 28 • Decode Module Timing

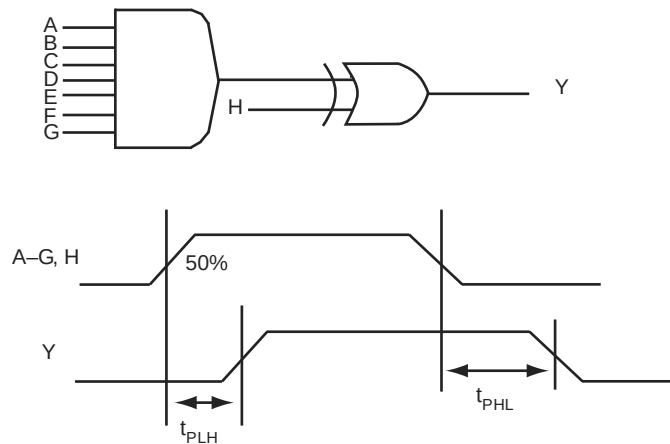

### 3.10.5 SRAM Timing Characteristics

The following figure shows SRAM timing characteristics.

Figure 29 • SRAM Timing Characteristics

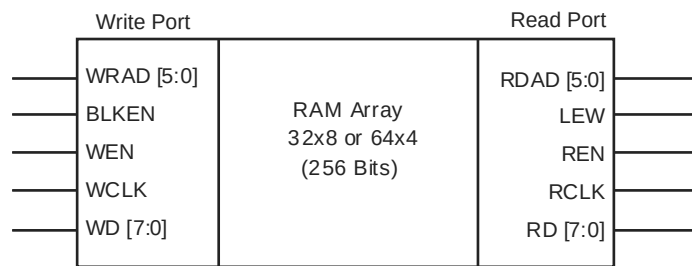

### 3.10.6 Dual-Port SRAM Timing Waveforms

The following figures show dual-port SRAM timing waveforms.



**Table 34 • A40MX02 Timing Characteristics (Nominal 5.0 V Operation) (continued)**  
(Worst-Case Commercial Conditions, VCC = 4.75 V, T<sub>J</sub> = 70°C)

| Parameter / Description                |                      | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------|----------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                      | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| TTL Output Module Timing <sup>4</sup>  |                      |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH     |          | 3.3  |          | 3.8  |          | 4.3  |           | 5.1  |          | 7.2  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW      |          | 4.0  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH |          | 3.7  |          | 4.3  |          | 4.9  |           | 5.8  |          | 8.0  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW  |          | 4.7  |          | 5.4  |          | 6.1  |           | 7.2  |          | 10.1 | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z |          | 7.9  |          | 9.1  |          | 10.4 |           | 12.2 |          | 17.1 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z  |          | 5.9  |          | 6.8  |          | 7.7  |           | 9.0  |          | 12.6 | ns    |
| d <sub>TLH</sub>                       | Delta LOW to HIGH    |          | 0.02 |          | 0.02 |          | 0.03 |           | 0.03 |          | 0.04 | ns/pF |
| d <sub>THL</sub>                       | Delta HIGH to LOW    |          | 0.03 |          | 0.03 |          | 0.03 |           | 0.04 |          | 0.06 | ns/pF |
| CMOS Output Module Timing <sup>4</sup> |                      |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH     |          | 3.9  |          | 4.5  |          | 5.1  |           | 6.05 |          | 8.5  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW      |          | 3.4  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH |          | 3.4  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW  |          | 4.9  |          | 5.6  |          | 6.4  |           | 7.5  |          | 10.5 | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z |          | 7.9  |          | 9.1  |          | 10.4 |           | 12.2 |          | 17.0 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z  |          | 5.9  |          | 6.8  |          | 7.7  |           | 9.0  |          | 12.6 | ns    |
| d <sub>TLH</sub>                       | Delta LOW to HIGH    |          | 0.03 |          | 0.04 |          | 0.04 |           | 0.05 |          | 0.07 | ns/pF |
| d <sub>THL</sub>                       | Delta HIGH to LOW    |          | 0.02 |          | 0.02 |          | 0.03 |           | 0.03 |          | 0.04 | ns/pF |

1. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance
2. Set-up times assume fanout of 3. Further testing information can be obtained from the Timer utility
3. The hold time for the DFME1A macro may be greater than 0 ns. Use the Timer tool from the Designer software to check the hold time for this macro.
4. Delays based on 35pF loading

**Table 35 • A40MX02 Timing Characteristics (Nominal 3.3 V Operation)**  
(Worst-Case Commercial Conditions, VCC = 3.0 V, T<sub>J</sub> = 70°C)

| Parameter / Description                            |                              | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                              | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Propagation Delays                    |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>PD1</sub>                                   | Single Module                |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>PD2</sub>                                   | Dual-Module Macros           |          | 3.7  |          | 4.3  |          | 4.9  |           | 5.7  |          | 8.0  | ns    |
| t <sub>CO</sub>                                    | Sequential Clock-to-Q        |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>GO</sub>                                    | Latch G-to-Q                 |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>RS</sub>                                    | Flip-Flop (Latch) Reset-to-Q |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| Logic Module Predicted Routing Delays <sup>1</sup> |                              |          |      |          |      |          |      |           |      |          |      |       |

**Table 38 • A42MX09 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                |                                                       | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------|-------------------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                                                       | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| CMOS Output Module Timing <sup>5</sup> |                                                       |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH                                      |          | 2.4  |          | 2.7  |          | 3.1  |           | 3.6  |          | 5.1  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW                                       |          | 2.9  |          | 3.2  |          | 3.6  |           | 4.3  |          | 6.0  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH                                  |          | 2.7  |          | 2.9  |          | 3.3  |           | 3.9  |          | 5.5  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW                                   |          | 2.9  |          | 3.2  |          | 3.7  |           | 4.3  |          | 6.1  | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z                                  |          | 4.9  |          | 5.4  |          | 6.2  |           | 7.3  |          | 10.2 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z                                   |          | 5.3  |          | 5.9  |          | 6.7  |           | 7.9  |          | 11.1 | ns    |
| t <sub>GLH</sub>                       | G-to-Pad HIGH                                         |          | 4.2  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>GHL</sub>                       | G-to-Pad LOW                                          |          | 4.2  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>LSU</sub>                       | I/O Latch Set-Up                                      | 0.5      |      | 0.5      |      | 0.6      |      | 0.7       |      | 1.0      |      | ns    |
| t <sub>LH</sub>                        | I/O Latch Hold                                        | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub>                       | I/O Latch Clock-to-Out (Pad-to-Pad), 64 Clock Loading |          | 5.2  |          | 5.8  |          | 6.6  |           | 7.7  |          | 10.8 | ns    |
| t <sub>ACO</sub>                       | Array Clock-to-Out ( Pad-to-Pad), 64 Clock Loading    |          | 7.4  |          | 8.2  |          | 9.3  |           | 10.9 |          | 15.3 | ns    |
| d <sub>TLH</sub>                       | Capacity Loading, LOW to HIGH                         |          | 0.03 |          | 0.03 |          | 0.03 |           | 0.04 |          | 0.06 | ns/pF |
| d <sub>THL</sub>                       | Capacity Loading, HIGH to LOW                         |          | 0.04 |          | 0.04 |          | 0.04 |           | 0.05 |          | 0.07 | ns/pF |

1. For dual-module macros, use t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, t<sub>CO</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, or t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>SUD</sub>, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
3. Data applies to macros based on the S-module. Timing parameters for sequential macros constructed from C-modules can be obtained from the Timer utility.
4. Set-up and hold timing parameters for the input buffer latch are defined with respect to the PAD and the D input. External setup/hold timing parameters must account for delay from an external PAD signal to the G inputs. Delay from an external PAD signal to the G input subtracts (adds) to the internal setup (hold) time.
5. Delays based on 35 pF loading

**Table 39 • A42MX09 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                              | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                              | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Propagation Delays <sup>1</sup>       |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>PD1</sub>                                   | Single Module                |          | 1.6  |          | 1.8  |          | 2.1  |           | 2.5  |          | 3.5  | ns    |
| t <sub>CO</sub>                                    | Sequential Clock-to-Q        |          | 1.8  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.8  | ns    |
| t <sub>GO</sub>                                    | Latch G-to-Q                 |          | 1.7  |          | 1.9  |          | 2.1  |           | 2.5  |          | 3.5  | ns    |
| t <sub>RS</sub>                                    | Flip-Flop (Latch) Reset-to-Q |          | 2.0  |          | 2.2  |          | 2.5  |           | 2.9  |          | 4.1  | ns    |
| Logic Module Predicted Routing Delays <sup>2</sup> |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>RD1</sub>                                   | FO = 1 Routing Delay         |          | 1.0  |          | 1.1  |          | 1.2  |           | 1.4  |          | 2.0  | ns    |
| t <sub>RD2</sub>                                   | FO = 2 Routing Delay         |          | 1.3  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>RD3</sub>                                   | FO = 3 Routing Delay         |          | 1.6  |          | 1.8  |          | 2.0  |           | 2.4  |          | 3.3  | ns    |

**Table 43 • A42MX24 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                           |                                              |                     | –3 Speed   |      | –2 Speed   |      | –1 Speed    |      | Std Speed    |      | –F Speed     |      | Units    |
|---------------------------------------------------|----------------------------------------------|---------------------|------------|------|------------|------|-------------|------|--------------|------|--------------|------|----------|
|                                                   |                                              |                     | Min.       | Max. | Min.       | Max. | Min.        | Max. | Min.         | Max. | Min.         | Max. |          |
| TTL Output Module Timing <sup>5</sup> (continued) |                                              |                     |            |      |            |      |             |      |              |      |              |      |          |
| t <sub>LH</sub>                                   | I/O Latch Output Hold                        |                     | 0.0        |      | 0.0        |      | 0.0         |      | 0.0          |      | 0.0          |      | ns       |
| t <sub>LCO</sub>                                  | I/O Latch Clock-to-Out (Pad-to-Pad) 32 I/O   |                     |            | 7.7  |            | 8.5  |             | 9.6  |              | 11.3 |              | 15.9 | ns       |
| t <sub>ACO</sub>                                  | Array Latch Clock-to-Out (Pad-to-Pad) 32 I/O |                     |            | 14.8 |            | 16.5 |             | 18.7 |              | 22.0 |              | 30.8 | ns       |
| d <sub>TLH</sub>                                  | Capacitive Loading, LOW to HIGH              |                     |            | 0.05 |            | 0.05 |             | 0.06 |              | 0.07 |              | 0.10 | ns/pF    |
| d <sub>THL</sub>                                  | Capacitive Loading, HIGH to LOW              |                     |            | 0.04 |            | 0.04 |             | 0.05 |              | 0.06 |              | 0.08 | ns/pF    |
| CMOS Output Module Timing <sup>5</sup>            |                                              |                     |            |      |            |      |             |      |              |      |              |      |          |
| t <sub>DLH</sub>                                  | Data-to-Pad HIGH                             |                     |            | 4.8  |            | 5.3  |             | 5.5  |              | 6.4  |              | 9.0  | ns       |
| t <sub>DHL</sub>                                  | Data-to-Pad LOW                              |                     |            | 3.5  |            | 3.9  |             | 4.1  |              | 4.9  |              | 6.8  | ns       |
| t <sub>ENZH</sub>                                 | Enable Pad Z to HIGH                         |                     |            | 3.6  |            | 4.0  |             | 4.5  |              | 5.3  |              | 7.4  | ns       |
| t <sub>ENZL</sub>                                 | Enable Pad Z to LOW                          |                     |            | 3.4  |            | 4.0  |             | 5.0  |              | 5.8  |              | 8.2  | ns       |
| t <sub>ENHZ</sub>                                 | Enable Pad HIGH to Z                         |                     |            | 7.2  |            | 8.0  |             | 9.0  |              | 10.7 |              | 14.9 | ns       |
| t <sub>ENLZ</sub>                                 | Enable Pad LOW to Z                          |                     |            | 6.7  |            | 7.5  |             | 8.5  |              | 9.9  |              | 13.9 | ns       |
| t <sub>GLH</sub>                                  | G-to-Pad HIGH                                |                     |            | 6.8  |            | 7.6  |             | 8.6  |              | 10.1 |              | 14.2 | ns       |
| t <sub>GHL</sub>                                  | G-to-Pad LOW                                 |                     |            | 6.8  |            | 7.6  |             | 8.6  |              | 10.1 |              | 14.2 | ns       |
| t <sub>LSU</sub>                                  | I/O Latch Set-Up                             |                     | 0.7        |      | 0.7        |      | 0.8         |      | 1.0          |      | 1.4          |      | ns       |
| t <sub>LH</sub>                                   | I/O Latch Hold                               |                     | 0.0        |      | 0.0        |      | 0.0         |      | 0.0          |      | 0.0          |      | ns       |
| t <sub>LCO</sub>                                  | I/O Latch Clock-to-Out (Pad-to-Pad) 32 I/O   |                     |            | 7.7  |            | 8.5  |             | 9.6  |              | 11.3 |              | 15.9 | ns       |
| t <sub>ACO</sub>                                  | Array Latch Clock-to-Out (Pad-to-Pad) 32 I/O |                     |            | 14.8 |            | 16.5 |             | 18.7 |              | 22.0 |              | 30.8 | ns       |
| d <sub>TLH</sub>                                  | Capacitive Loading, LOW to HIGH              |                     |            | 0.05 |            | 0.05 |             | 0.06 |              | 0.07 |              | 0.10 | ns/pF    |
| d <sub>THL</sub>                                  | Capacitive Loading, HIGH to LOW              |                     |            | 0.04 |            | 0.04 |             | 0.05 |              | 0.06 |              | 0.08 | ns/pF    |
| t <sub>HEXT</sub>                                 | Input Latch External Hold                    | FO = 32<br>FO = 486 | 3.9<br>4.6 |      | 4.3<br>5.2 |      | 4.9<br>5.8  |      | 5.7<br>6.9   |      | 8.1<br>9.6   |      | ns<br>ns |
| t <sub>P</sub>                                    | Minimum Period (1/f <sub>MAX</sub> )         | FO = 32<br>FO = 486 | 7.8<br>8.6 |      | 8.7<br>9.5 |      | 9.5<br>10.4 |      | 10.8<br>11.9 |      | 18.2<br>19.9 |      | ns<br>ns |

1. For dual-module macros, use t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, t<sub>CO</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, or t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>SUD</sub>, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
3. Data applies to macros based on the S-module. Timing parameters for sequential macros constructed from C-modules can be obtained from the Timer utility.
4. Set-up and hold timing parameters for the Input Buffer Latch are defined with respect to the PAD and the D input. External setup/hold timing parameters must account for delay from an external PAD signal to the G inputs. Delay from an external PAD signal to the G input subtracts (adds) to the internal setup (hold) time.
5. Delays based on 35 pF loading.

**Table 53 • PQ208**

| <b>PQ208</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> | <b>A42MX36 Function</b> |
| 58                | I/O                     | WD, I/O                 | WD, I/O                 |
| 59                | I/O                     | I/O                     | I/O                     |
| 60                | VCCI                    | VCCI                    | VCCI                    |
| 61                | NC                      | I/O                     | I/O                     |
| 62                | NC                      | I/O                     | I/O                     |
| 63                | I/O                     | I/O                     | I/O                     |
| 64                | I/O                     | I/O                     | I/O                     |
| 65                | I/O                     | I/O                     | QCLKA, I/O              |
| 66                | I/O                     | WD, I/O                 | WD, I/O                 |
| 67                | NC                      | WD, I/O                 | WD, I/O                 |
| 68                | NC                      | I/O                     | I/O                     |
| 69                | I/O                     | I/O                     | I/O                     |
| 70                | I/O                     | WD, I/O                 | WD, I/O                 |
| 71                | I/O                     | WD, I/O                 | WD, I/O                 |
| 72                | I/O                     | I/O                     | I/O                     |
| 73                | I/O                     | I/O                     | I/O                     |
| 74                | I/O                     | I/O                     | I/O                     |
| 75                | I/O                     | I/O                     | I/O                     |
| 76                | I/O                     | I/O                     | I/O                     |
| 77                | I/O                     | I/O                     | I/O                     |
| 78                | GND                     | GND                     | GND                     |
| 79                | VCCA                    | VCCA                    | VCCA                    |
| 80                | NC                      | VCCI                    | VCCI                    |
| 81                | I/O                     | I/O                     | I/O                     |
| 82                | I/O                     | I/O                     | I/O                     |
| 83                | I/O                     | I/O                     | I/O                     |
| 84                | I/O                     | I/O                     | I/O                     |
| 85                | I/O                     | WD, I/O                 | WD, I/O                 |
| 86                | I/O                     | WD, I/O                 | WD, I/O                 |
| 87                | I/O                     | I/O                     | I/O                     |
| 88                | I/O                     | I/O                     | I/O                     |
| 89                | NC                      | I/O                     | I/O                     |
| 90                | NC                      | I/O                     | I/O                     |
| 91                | I/O                     | I/O                     | QCLKB, I/O              |
| 92                | I/O                     | I/O                     | I/O                     |
| 93                | I/O                     | WD, I/O                 | WD, I/O                 |
| 94                | I/O                     | WD, I/O                 | WD, I/O                 |

**Table 53 • PQ208**

| <b>PQ208</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> | <b>A42MX36 Function</b> |
| 169               | I/O                     | WD, I/O                 | WD, I/O                 |
| 170               | I/O                     | I/O                     | I/O                     |
| 171               | NC                      | I/O                     | QCLKD, I/O              |
| 172               | I/O                     | I/O                     | I/O                     |
| 173               | I/O                     | I/O                     | I/O                     |
| 174               | I/O                     | I/O                     | I/O                     |
| 175               | I/O                     | I/O                     | I/O                     |
| 176               | I/O                     | WD, I/O                 | WD, I/O                 |
| 177               | I/O                     | WD, I/O                 | WD, I/O                 |
| 178               | PRA, I/O                | PRA, I/O                | PRA, I/O                |
| 179               | I/O                     | I/O                     | I/O                     |
| 180               | CLKA, I/O               | CLKA, I/O               | CLKA, I/O               |
| 181               | NC                      | I/O                     | I/O                     |
| 182               | NC                      | VCCI                    | VCCI                    |
| 183               | VCCA                    | VCCA                    | VCCA                    |
| 184               | GND                     | GND                     | GND                     |
| 185               | I/O                     | I/O                     | I/O                     |
| 186               | CLKB, I/O               | CLKB, I/O               | CLKB, I/O               |
| 187               | I/O                     | I/O                     | I/O                     |
| 188               | PRB, I/O                | PRB, I/O                | PRB, I/O                |
| 189               | I/O                     | I/O                     | I/O                     |
| 190               | I/O                     | WD, I/O                 | WD, I/O                 |
| 191               | I/O                     | WD, I/O                 | WD, I/O                 |
| 192               | I/O                     | I/O                     | I/O                     |
| 193               | NC                      | I/O                     | I/O                     |
| 194               | NC                      | WD, I/O                 | WD, I/O                 |
| 195               | NC                      | WD, I/O                 | WD, I/O                 |
| 196               | I/O                     | I/O                     | QCLKC, I/O              |
| 197               | NC                      | I/O                     | I/O                     |
| 198               | I/O                     | I/O                     | I/O                     |
| 199               | I/O                     | I/O                     | I/O                     |
| 200               | I/O                     | I/O                     | I/O                     |
| 201               | NC                      | I/O                     | I/O                     |
| 202               | VCCI                    | VCCI                    | VCCI                    |
| 203               | I/O                     | WD, I/O                 | WD, I/O                 |
| 204               | I/O                     | WD, I/O                 | WD, I/O                 |
| 205               | I/O                     | I/O                     | I/O                     |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 89                | VCCI                    |
| 90                | VCCA                    |
| 91                | LP                      |
| 92                | TCK, I/O                |
| 93                | I/O                     |
| 94                | GND                     |
| 95                | I/O                     |
| 96                | I/O                     |
| 97                | I/O                     |
| 98                | I/O                     |
| 99                | I/O                     |
| 100               | I/O                     |
| 101               | I/O                     |
| 102               | I/O                     |
| 103               | I/O                     |
| 104               | I/O                     |
| 105               | I/O                     |
| 106               | I/O                     |
| 107               | I/O                     |
| 108               | VCCI                    |
| 109               | I/O                     |
| 110               | I/O                     |
| 111               | I/O                     |
| 112               | I/O                     |
| 113               | I/O                     |
| 114               | I/O                     |
| 115               | I/O                     |
| 116               | I/O                     |
| 117               | I/O                     |
| 118               | VCCA                    |
| 119               | GND                     |
| 120               | GND                     |
| 121               | GND                     |
| 122               | I/O                     |
| 123               | SDO, TDO, I/O           |
| 124               | I/O                     |
| 125               | WD, I/O                 |

Figure 47 • VQ100

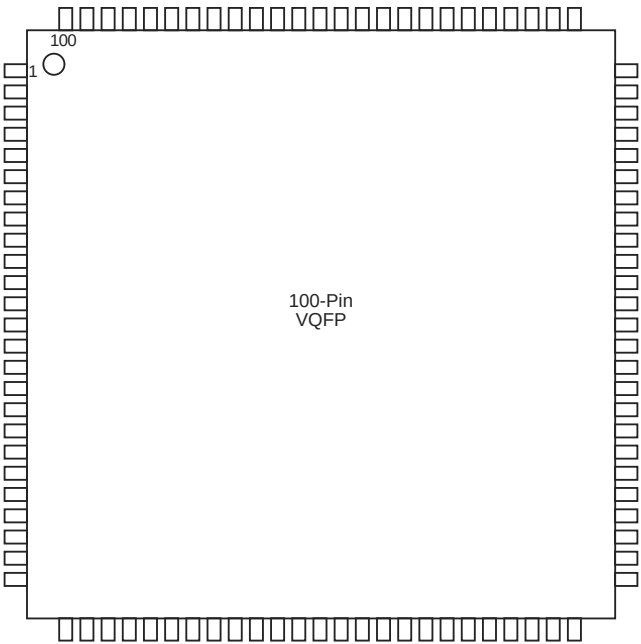


Table 56 • VQ100

| VQ100      |                     |                     |
|------------|---------------------|---------------------|
| Pin Number | A42MX09<br>Function | A42MX16<br>Function |
| 1          | I/O                 | I/O                 |
| 2          | MODE                | MODE                |
| 3          | I/O                 | I/O                 |
| 4          | I/O                 | I/O                 |
| 5          | I/O                 | I/O                 |
| 6          | I/O                 | I/O                 |
| 7          | GND                 | GND                 |
| 8          | I/O                 | I/O                 |
| 9          | I/O                 | I/O                 |
| 10         | I/O                 | I/O                 |
| 11         | I/O                 | I/O                 |
| 12         | I/O                 | I/O                 |
| 13         | I/O                 | I/O                 |
| 14         | VCCA                | NC                  |
| 15         | VCCI                | VCCI                |
| 16         | I/O                 | I/O                 |
| 17         | I/O                 | I/O                 |
| 18         | I/O                 | I/O                 |
| 19         | I/O                 | I/O                 |
| 20         | GND                 | GND                 |


**Table 56 • VQ100**

| <b>VQ100</b>      |                             |                             |
|-------------------|-----------------------------|-----------------------------|
| <b>Pin Number</b> | <b>A42MX09<br/>Function</b> | <b>A42MX16<br/>Function</b> |
| 21                | I/O                         | I/O                         |
| 22                | I/O                         | I/O                         |
| 23                | I/O                         | I/O                         |
| 24                | I/O                         | I/O                         |
| 25                | I/O                         | I/O                         |
| 26                | I/O                         | I/O                         |
| 27                | I/O                         | I/O                         |
| 28                | I/O                         | I/O                         |
| 29                | I/O                         | I/O                         |
| 30                | I/O                         | I/O                         |
| 31                | I/O                         | I/O                         |
| 32                | GND                         | GND                         |
| 33                | I/O                         | I/O                         |
| 34                | I/O                         | I/O                         |
| 35                | I/O                         | I/O                         |
| 36                | I/O                         | I/O                         |
| 37                | I/O                         | I/O                         |
| 38                | VCCA                        | VCCA                        |
| 39                | I/O                         | I/O                         |
| 40                | I/O                         | I/O                         |
| 41                | I/O                         | I/O                         |
| 42                | I/O                         | I/O                         |
| 43                | I/O                         | I/O                         |
| 44                | GND                         | GND                         |
| 45                | I/O                         | I/O                         |
| 46                | I/O                         | I/O                         |
| 47                | I/O                         | I/O                         |
| 48                | I/O                         | I/O                         |
| 49                | I/O                         | I/O                         |
| 50                | SDO, I/O                    | SDO, I/O                    |
| 51                | I/O                         | I/O                         |
| 52                | I/O                         | I/O                         |
| 53                | I/O                         | I/O                         |
| 54                | I/O                         | I/O                         |
| 55                | GND                         | GND                         |
| 56                | I/O                         | I/O                         |



**Table 57 • TQ176**

| <b>TQ176</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> |
| 158               | CLKB, I/O               | CLKB, I/O               | CLKB, I/O               |
| 159               | I/O                     | I/O                     | I/O                     |
| 160               | PRB, I/O                | PRB, I/O                | PRB, I/O                |
| 161               | NC                      | I/O                     | WD, I/O                 |
| 162               | I/O                     | I/O                     | WD, I/O                 |
| 163               | I/O                     | I/O                     | I/O                     |
| 164               | I/O                     | I/O                     | I/O                     |
| 165               | NC                      | NC                      | WD, I/O                 |
| 166               | NC                      | I/O                     | WD, I/O                 |
| 167               | I/O                     | I/O                     | I/O                     |
| 168               | NC                      | I/O                     | I/O                     |
| 169               | I/O                     | I/O                     | I/O                     |
| 170               | NC                      | VCCI                    | VCCI                    |
| 171               | I/O                     | I/O                     | WD, I/O                 |
| 172               | I/O                     | I/O                     | WD, I/O                 |
| 173               | NC                      | I/O                     | I/O                     |
| 174               | I/O                     | I/O                     | I/O                     |
| 175               | DCLK, I/O               | DCLK, I/O               | DCLK, I/O               |
| 176               | I/O                     | I/O                     | I/O                     |

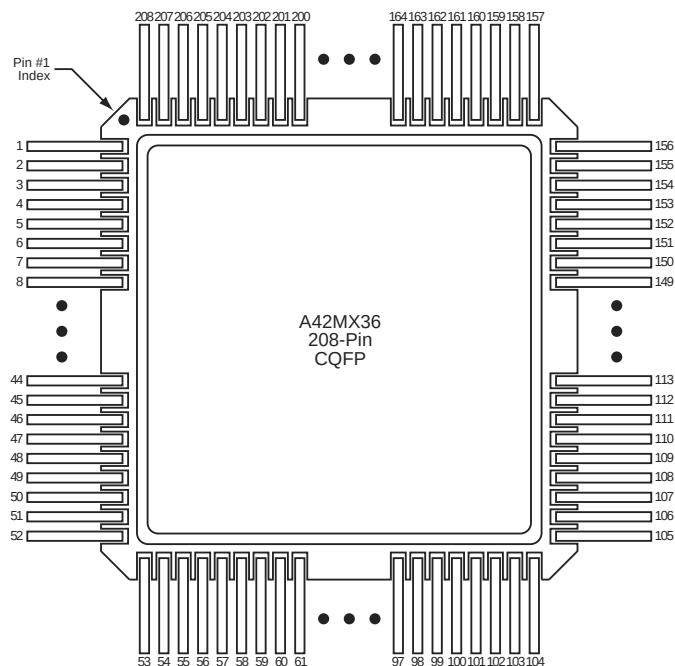**Figure 49 • CQ208**

**Table 58 • CQ208**

| <b>CQ208</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 1                 | GND                     |
| 2                 | VCCA                    |
| 3                 | MODE                    |
| 4                 | I/O                     |
| 5                 | I/O                     |
| 6                 | I/O                     |
| 7                 | I/O                     |
| 8                 | I/O                     |
| 9                 | I/O                     |
| 10                | I/O                     |
| 11                | I/O                     |
| 12                | I/O                     |
| 13                | I/O                     |
| 14                | I/O                     |
| 15                | I/O                     |
| 16                | I/O                     |
| 17                | VCCA                    |
| 18                | I/O                     |
| 19                | I/O                     |
| 20                | I/O                     |
| 21                | I/O                     |
| 22                | GND                     |
| 23                | I/O                     |
| 24                | I/O                     |
| 25                | I/O                     |
| 26                | I/O                     |
| 27                | GND                     |
| 28                | VCCI                    |
| 29                | VCCA                    |
| 30                | I/O                     |
| 31                | I/O                     |
| 32                | VCCA                    |
| 33                | I/O                     |
| 34                | I/O                     |
| 35                | I/O                     |
| 36                | I/O                     |

**Table 58 • CQ208**

| <b>CQ208</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 37                | I/O                     |
| 38                | I/O                     |
| 39                | I/O                     |
| 40                | I/O                     |
| 41                | I/O                     |
| 42                | I/O                     |
| 43                | I/O                     |
| 44                | I/O                     |
| 45                | I/O                     |
| 46                | I/O                     |
| 47                | I/O                     |
| 48                | I/O                     |
| 49                | I/O                     |
| 50                | I/O                     |
| 51                | I/O                     |
| 52                | GND                     |
| 53                | GND                     |
| 54                | TMS, I/O                |
| 55                | TDI, I/O                |
| 56                | I/O                     |
| 57                | WD, I/O                 |
| 58                | WD, I/O                 |
| 59                | I/O                     |
| 60                | VCCI                    |
| 61                | I/O                     |
| 62                | I/O                     |
| 63                | I/O                     |
| 64                | I/O                     |
| 65                | QCLKA, I/O              |
| 66                | WD, I/O                 |
| 67                | WD, I/O                 |
| 68                | I/O                     |
| 69                | I/O                     |
| 70                | WD, I/O                 |
| 71                | WD, I/O                 |
| 72                | I/O                     |
| 73                | I/O                     |

**Table 60 • BG272**

| <b>BG272</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| C3                | GND                     |
| C4                | I/O                     |
| C5                | WD, I/O                 |
| C6                | I/O                     |
| C7                | QCLKC, I/O              |
| C8                | I/O                     |
| C9                | I/O                     |
| C10               | CLKB                    |
| C11               | PRA, I/O                |
| C12               | WD, I/O                 |
| C13               | I/O                     |
| C14               | QCLKD, I/O              |
| C15               | I/O                     |
| C16               | WD, I/O                 |
| C17               | SDI, I/O                |
| C18               | I/O                     |
| C19               | I/O                     |
| C20               | I/O                     |
| D1                | I/O                     |
| D2                | I/O                     |
| D3                | I/O                     |
| D4                | I/O                     |
| D5                | VCCI                    |
| D6                | I/O                     |
| D7                | I/O                     |
| D8                | VCCA                    |
| D9                | WD, I/O                 |
| D10               | VCCI                    |
| D11               | I/O                     |
| D12               | VCCI                    |
| D13               | I/O                     |
| D14               | VCCI                    |
| D15               | I/O                     |
| D16               | VCCA                    |
| D17               | GND                     |
| D18               | I/O                     |
| D19               | I/O                     |

**Table 62 • CQ172**

|    |      |
|----|------|
| 60 | I/O  |
| 61 | I/O  |
| 62 | I/O  |
| 63 | I/O  |
| 64 | I/O  |
| 65 | GND  |
| 66 | VCC  |
| 67 | I/O  |
| 68 | I/O  |
| 69 | I/O  |
| 70 | I/O  |
| 71 | I/O  |
| 72 | I/O  |
| 73 | I/O  |
| 74 | I/O  |
| 75 | GND  |
| 76 | I/O  |
| 77 | I/O  |
| 78 | I/O  |
| 79 | I/O  |
| 80 | VCCI |
| 81 | I/O  |
| 82 | I/O  |
| 83 | I/O  |
| 84 | I/O  |
| 85 | SDO  |
| 86 | I/O  |
| 87 | I/O  |
| 88 | I/O  |
| 89 | I/O  |
| 90 | I/O  |
| 91 | I/O  |
| 92 | I/O  |
| 93 | I/O  |
| 94 | I/O  |
| 95 | I/O  |
| 96 | I/O  |
| 97 | I/O  |
| 98 | GND  |