



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - CPLDs \(Complex Programmable Logic Devices\)](#)

Embedded - CPLDs, or Complex Programmable Logic Devices, are highly versatile digital logic devices used in electronic systems. These programmable components are designed to perform complex logical operations and can be customized for specific applications. Unlike fixed-function ICs, CPLDs offer the flexibility to reprogram their configuration, making them an ideal choice for various embedded systems. They consist of a set of logic gates and programmable interconnects, allowing designers to implement complex logic circuits without needing custom hardware.

Applications of Embedded - CPLDs

Details

Product Status	Obsolete
Programmable Type	In System Programmable
Delay Time tpd(1) Max	12 ns
Voltage Supply - Internal	4.5V ~ 5.5V
Number of Logic Elements/Blocks	-
Number of Macrocells	128
Number of Gates	-
Number of I/O	68
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	100-BQFP
Supplier Device Package	100-PQFP (14x20)
Purchase URL	https://www.e-xfl.com/product-detail/lattice-semiconductor/m5-128-68-12yi-1


- ◆ Global clock (0, 1, 2, or 3) with positive and negative edge clock enable (biphase)

Clock Line 2 Options

- ◆ Global clock (0, 1, 2, or 3) with clock enable


Clock Line 3 Options

- ◆ Complement of clock line 2 (same clock enable)
- ◆ Product-term clock (if clock line 2 does not use clock enable)

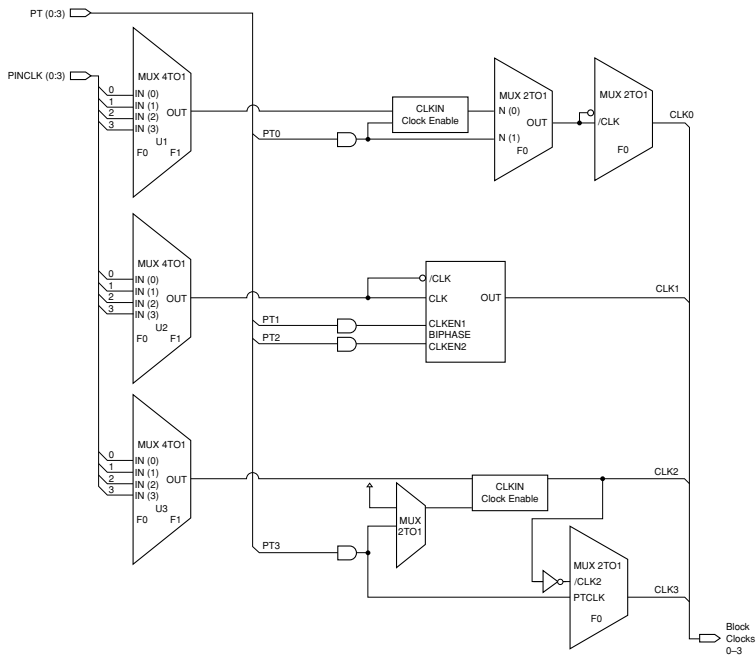

20446G-004

Figure 4. Clock Generator

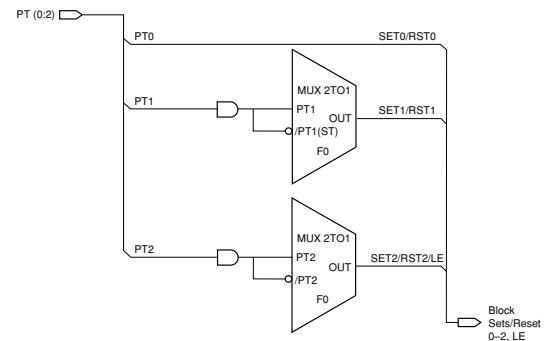

20446G-005

Figure 5. Set/Reset Generator

The set/reset generation portion of the control generator (Figure 5) creates three set/reset lines for the PAL block. Each macrocell can choose one of these three lines or choose no set/reset at all. All three lines can be configured for product term set/reset and two of the three lines can be configured as sum term set/reset and one of the lines can be configured as product-term or sum-term latch enable. While the set/reset signals are generated in the control generator, whether that signal sets or resets a flip-flop is determined within the individual macrocell. The same signal can set one flip-flop and reset another. PT2 or /PT2 can also be used as a latch enable for macrocells configured as latches.

**Select devices have been discontinued.
See Ordering Information section for product status.**

OE Generator

There is one output enable (OE) generator per PAL block that generates two product-term driven output enables. Each I/O cell is simply an output buffer. Each I/O cell within the PAL block can choose to be permanently enabled, permanently disabled, or choose one of the two product term output enables per PAL block (Figure 6).

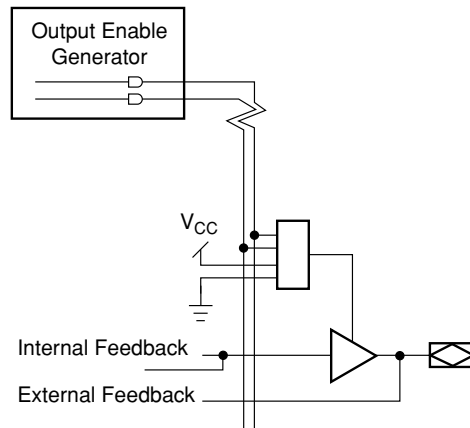


Figure 6. Output Enable Generator and I/O Cell

20446G-006

Select devices have been discontinued.
See Ordering Information section for product status.



MULTIPLE I/O AND DENSITY OPTIONS

The MACH 5 family offers six macrocell densities in a number of I/O options. This allows designers to choose a device close to their logic density and I/O requirements, thus minimizing costs. For the same package type, every density has the same pin-out. With proper design considerations, a design can be moved to a higher or lower density part as required.

IEEE 1149.1 - COMPLIANT BOUNDARY SCAN TESTABILITY

Most MACH 5 devices have boundary scan registers and are compliant to the IEEE 1149.1 standard. This allows functional testing of the circuit board on which the device is mounted through a serial scan path that can access all critical logic nodes. Internal registers are linked internally, allowing test data to be shifted in and loaded directly onto test nodes, or test node data to be captured and shifted out for verification. In addition, these devices can be linked into a board-level serial scan path for more complete board-level testing.

IEEE 1149.1 - COMPLIANT IN-SYSTEM PROGRAMMING

Programming devices in-system provides a number of significant benefits including: rapid prototyping, lower inventory levels, higher quality, and the ability to make in-field modifications. All MACH 5 devices provide in-system programming (ISP) capability through their IEEE 1149.1-compliant Boundary Scan Test Access Port. By using the IEEE 1149.1-compliant Boundary Scan Test Access Port as the communication interface through which ISP is achieved, customers get the benefit of a standard, well-defined interface.

MACH 5 devices can be programmed across the commercial temperature and voltage range. The PC-based LatticePRO software facilitates in-system programming of MACH 5 devices. LatticePRO software takes the JEDEC file output produced by design implementation software, along with information about the Boundary Scan chain, and creates a set of vectors that are used to drive the Boundary Scan chain. LatticePRO software can use these vectors to drive a Boundary Scan chain via the parallel port of a PC. Alternatively, LatticePRO software can output files in formats understood by common automated test equipment. This equipment can then be used to program MACH 5 devices during the testing of a circuit board.

PCI COMPLIANT

MACH 5 devices in the -5/-6/-7/-10/-12 speed grades are compliant with the *PCI Local Bus Specification* version 2.1, published by the PCI Special Interest Group (SIG). The 5-V devices are fully PCI-compliant. The 3.3-V devices are mostly compliant but do not meet the PCI condition to clamp the inputs as they rise above V_{CC} because of their 5-V input tolerant feature. MACH 5 devices provide the speed, drive, density, output enables and I/Os for the most complex PCI designs.

Select devices have been discontinued.
See Ordering Information section for product status.

SAFE FOR MIXED SUPPLY VOLTAGE SYSTEM DESIGNS ¹

Both the 3.3-V and 5-V V_{CC} MACH 5 devices are safe for mixed supply voltage system designs. The 5-V devices will not overdrive 3.3-V devices above the output voltage of 3.3 V, while they accept inputs from other 3.3-V devices. The 3.3-V devices will accept inputs up to 5.5 V. Both the 3.3-V and 5-V versions have the same high-speed performance and provide easy-to-use mixed-voltage design capability.

Note:

1. Excludes original M5-128, M5-192, and M5-256 while M5-128/1, M3-192/1 and M5-256/1 are supported. Please refer to Application Note titled "Hot Socketing and Mixed Supply Design with MACH 4 and MACH 5 Devices".

BUS-FRIENDLY INPUTS AND I/OS

All MACH 5 devices have inputs and I/Os which feature the Bus-Friendly circuitry incorporating two inverters in series which loop back to the input. This double inversion weakly holds the input at its last driven logic state. While it is a good design practice to tie unused pins to a known state, the Bus-Friendly input structure pulls pins away from the input threshold voltage where noise can cause high-frequency switching. At power-up, the Bus-Friendly latches are reset to a logic level "1." For the circuit diagram, please refer to the document entitled *MACH Endurance Characteristics* on the Lattice Data Book CD-ROM or Lattice web site.

POWER MANAGEMENT

There are 4 power/speed options in each MACH 5 PAL block (Table 5). The speed and power tradeoff can be tailored for each design. The signal speed paths in the lower-power PAL blocks will be slower than those in the higher-power PAL blocks. This feature allows speed critical paths to run at maximum frequency while the rest of the signal paths operate in a lower-power mode. In large designs, there may be several different speed requirements for different portions of the design.

Table 5. Power Levels

High Speed/High Power	100% Power
Medium High Speed/Medium High Power	67% Power
Medium Low Speed/Medium Low Power	40% Power
Low Speed/Low Power	20% Power

PROGRAMMABLE SLEW RATE

Each MACH 5 device I/O has an individually programmable output slew rate control bit. Each output can be individually configured for the higher speed transition (3 V/ns) or for the lower noise transition (1 V/ns). For high-speed designs with long, unterminated traces, the slow-slew rate will introduce fewer reflections, less noise, and keep ground bounce to a minimum. For designs with short traces or well terminated lines, the fast slew rate can be used to achieve the highest speed. The slew rate is adjusted independent of power.

POWER-UP RESET/SET

All flip-flops power up to a known state for predictable system initialization. If a macrocell is configured to SET on a signal from the control generator, then that macrocell will be SET during device power-up. If a macrocell is configured to RESET on a signal from the control generator or is not configured for set/reset, then that macrocell will RESET on power-up. To guarantee initialization values, the V_{CC} rise must be monotonic and the clock must be inactive until the reset delay time has elapsed.

Select devices have been discontinued. See Ordering Information section for product status.




SECURITY BIT

A programmable security bit is provided on the MACH 5 devices as a deterrent to unauthorized copying of the array configuration patterns. Once programmed, this bit defeats readback of the programmed pattern by a device programmer, securing proprietary designs from competitors. Programming and verification are also defeated by the security bit. The bit can only be reset by erasing the entire device.

**Select devices have been discontinued.
See Ordering Information section for product status.**

BLOCK DIAGRAM — M5(LV)-512/XXX

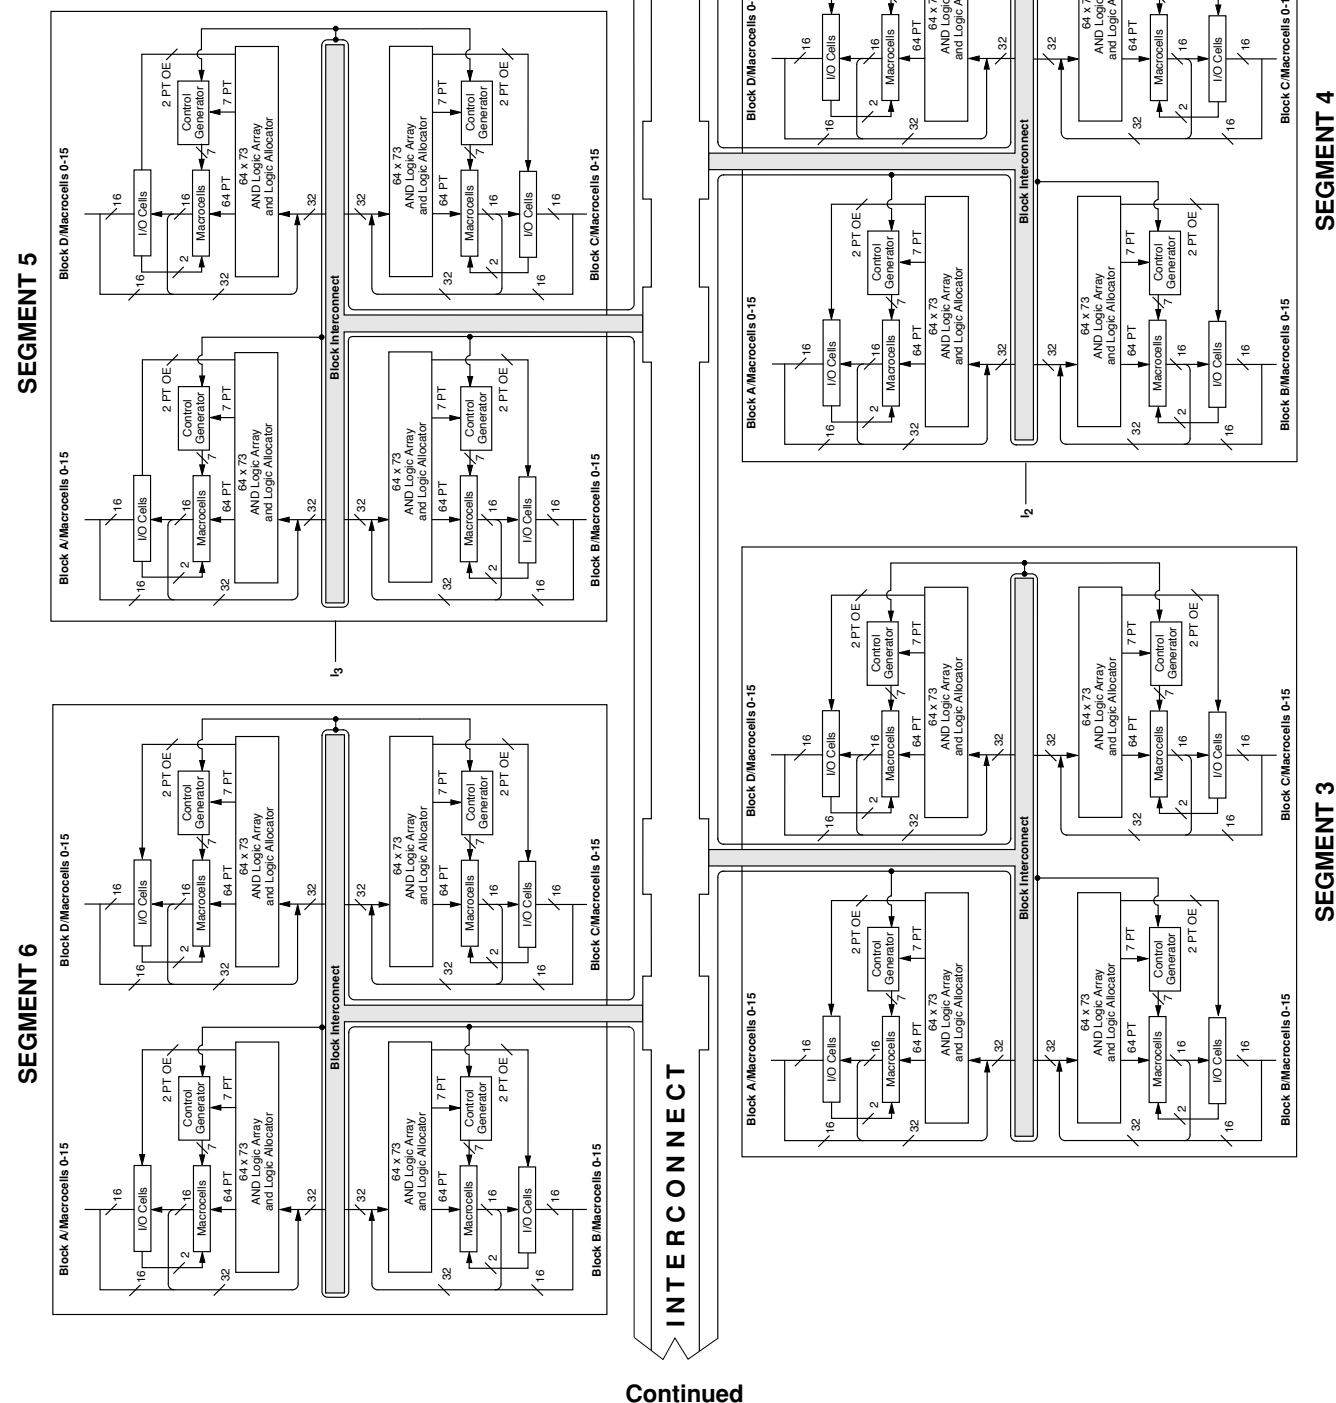

Continued

Select devices have been discontinued.
See Ordering Information section for product status.

ABSOLUTE MAXIMUM RATINGS

M5

Storage Temperature. -65°C to +150°C
 Device Junction
 Temperature (Note 1) +130°C or +150°C
 Supply Voltage
 with Respect to Ground -0.5 V to +7.0 V
 DC Input Voltage -0.5 V to 5.5 V
 Static Discharge Voltage 2000 V
 Latchup Current (-40°C to +85°C) 200 mA

Stresses above those listed under Absolute Maximum Ratings may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to Absolute Maximum Ratings for extended periods may affect device reliability.

OPERATING RANGES

Commercial (C) Devices

Ambient Temperature (T_A)
 Operating in Free Air. 0°C to +70°C
 Supply Voltage (V_{CC})
 with Respect to Ground. +4.75 V to +5.25 V

Industrial (I) Devices

Ambient Temperature (T_A)
 Operating in Free Air. -40°C to +85°C
 Supply Voltage (V_{CC})
 with Respect to Ground. +4.5 V to +5.5 V

Operating ranges define those limits between which the functionality of the device is guaranteed.

Select devices have been discontinued.
See Ordering Information section for product status.

5-V DC CHARACTERISTICS OVER OPERATING RANGES

Parameter Symbol	Parameter Description	Test Description	Min	Typ	Max	Unit
V_{OH}	Output HIGH Voltage (For M5-128/1, M5-192/1, M5-256/1, M5-320, M5-384, M5-512 Devices)	$I_{OH} = -3.2 \text{ mA}$, $V_{CC} = \text{Min}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$	2.4			V
		$I_{OH} = -100 \mu\text{A}$, $V_{CC} = \text{Max}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$		3.3	3.6	V
	Output HIGH Voltage (For M5-128, M5-192, M5-256 Devices)	$I_{OH} = -3.2 \text{ mA}$, $V_{CC} = \text{Min}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$	2.4			V
		$I_{OH} = -2.5 \text{ mA}$, $V_{CC} = 5.25 \text{ V}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$			3.6	V
V_{OL}	Output LOW Voltage (Note 2)	$I_{OL} = +16 \text{ mA}$, $V_{CC} = \text{Min}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$			0.5	V
V_{IH}	Input HIGH Voltage	Guaranteed Input Logical HIGH Voltage for all Inputs (Note 3)	2.0			V
V_{IL}	Input LOW Voltage	Guaranteed Input Logical LOW Voltage for all Inputs (Note 3)			0.8	V
I_{IH}	Input HIGH Leakage Current	$V_{IN} = 5.25$, $V_{CC} = \text{Max}$ (Note 4)			10	μA
I_{IL}	Input LOW Leakage Current	$V_{IN} = 0$, $V_{CC} = \text{Max}$ (Note 4)			-10	μA
I_{OZH}	Off-State Output Leakage Current HIGH	$V_{OUT} = 5.25$, $V_{CC} = \text{Max}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$ (Note 4)			10	μA
I_{OZL}	Off-State Output Leakage Current LOW	$V_{OUT} = 0$, $V_{CC} = \text{Max}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$ (Note 4)			-10	μA
I_{SC}	Output Short-Circuit Current	$V_{OUT} = 0.5 V_{CC} = \text{Max}$, $V_{IN} = V_{IH} \text{ or } V_{IL}$ (Note 5)	-30		-180	mA

Note:

- 150° for M5-128, M5-192 and M5-256 devices. 130° for M5-128/1, M5-192/1, M5-256/1, M5-320, M5-384 and M5-512 devices.
- Total I_{OL} between ground pins should not exceed 64 mA.
- These are absolute values with respect to device ground, and all overshoots due to system and/or tester noise are included.
- I/O pin leakage is the worst case of I_{IL} and I_{OZL} or I_{IH} and I_{OZH} .
- Not more than one output should be shorted at a time. Duration of the short-circuit should not exceed one second.

ABSOLUTE MAXIMUM RATINGS

M5LV

Storage Temperature. -65°C to +150°C
 Device Junction Temperature. +130°C
 Supply Voltage
 with Respect to Ground -0.5 V to +4.5 V
 DC Input Voltage -0.5 V to 5.5 V
 Static Discharge Voltage 2000 V
 Latchup Current (-40°C to +85°C) 200 mA

Stresses above those listed under Absolute Maximum Ratings may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to Absolute Maximum Ratings for extended periods may affect device reliability.

OPERATING RANGES

Commercial (C) Devices

Ambient Temperature (T_A)
 Operating in Free Air. 0°C to +70°C
 Supply Voltage (V_{CC})
 with Respect to Ground. +3.0 V to +3.6 V

Industrial (I) Devices

Ambient Temperature (T_A)
 Operating in Free Air. -40°C to +85°C
 Supply Voltage (V_{CC})
 with Respect to Ground. +3.0 V to +3.6 V
Operating ranges define those limits between which the functionality of the device is guaranteed.

Select devices have been discontinued.
See Ordering Information section for product status.

3.3-V DC CHARACTERISTICS OVER OPERATING RANGES

Parameter Symbol	Parameter Description	Test Description		Min	Max	Unit
V_{OH}	Output HIGH Voltage	$V_{CC} = \text{Min}$	$I_{OH} = -100 \mu A$	$V_{CC} - 0.2$		V
		$V_{IN} = V_{IH} \text{ or } V_{IL}$	$I_{OH} = 3.2 \text{ mA}$	2.4		V
V_{OL}	Output LOW Voltage	$V_{CC} = \text{Min}$	$I_{OL} = 100 \mu A$		0.2	V
		$V_{IN} = V_{IH} \text{ or } V_{IL}$	$I_{OL} = 16 \text{ mA (Note 1)}$		0.5	V
V_{IH}	Input HIGH Voltage	$V_{OUT} \geq V_{OH} \text{ Min or } V_{OUT} \leq V_{OL} \text{ Max (Note 2)}$		2.0	5.5	V
V_{IL}	Input LOW Voltage	$V_{OUT} \geq V_{OH} \text{ Min or } V_{OUT} \leq V_{OL} \text{ Max (Note 2)}$		-0.3	0.8	V
I_{IH}	Input HIGH Leakage Current	$V_{IN} = 3.6, V_{CC} = \text{Max (Note 3)}$			10	μA
I_{IL}	Input LOW Leakage Current	$V_{IN} = 0, V_{CC} = \text{Max (Note 3)}$			-10	μA
I_{OZH}	Off-State Output Leakage Current HIGH	$V_{OUT} = 3.6, V_{CC} = \text{Max}, V_{IN} = V_{IH} \text{ or } V_{IL} \text{ (Note 3)}$			10	μA
I_{OZL}	Off-State Output Leakage Current LOW	$V_{OUT} = 0, V_{CC} = \text{Max}, V_{IN} = V_{IH} \text{ or } V_{IL} \text{ (Note 3)}$			-10	μA
I_{SC}	Output Short-Circuit Current	$V_{OUT} = 0.5 V_{CC} = \text{Max}, V_{IN} = V_{IH} \text{ or } V_{IL} \text{ (Note 4)}$		-15	-160	mA

Notes:

1. Total I_{OL} between ground pins should not exceed 64 mA.
2. These are absolute values with respect to device ground, and all overshoots due to system and/or tester noise are included.
3. I/O pin leakage is the worst case of I_{IL} and I_{OZL} or I_{IH} and I_{OZH} .
4. Not more than one output should be shorted at one time. Duration of the short-circuit should not exceed one second.

M5(LV) TIMING PARAMETERS OVER OPERATING RANGES¹ (CONTINUED)

		-5		-6		-7		-10		-12		-15		-20		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
Power Delays:																
t _{PL1}	Power level 1 delay (Note 2)		4.0 (5.0)		4.0		4.0 (5.0)		4.0 (5.0)		4.0 (5.0)		4.0 (5.0)		4.0 (5.0)	ns
t _{PL2}	Power level 2 delay (Note 2)		6.0 (9.0)		6.0		6.0 (9.0)		6.0 (9.0)		6.0 (9.0)		6.0 (9.0)		6.0 (9.0)	ns
t _{PL3}	Power level 3 delay (Note 2)		9.0 (17.5)		9.0		9.0 (17.5)		9.0 (17.5)		9.0 (17.5)		9.0 (17.5)		9.0 (17.5)	ns
Additional Cluster Delay:																
t _{PT}	Product term cluster delay		0.3		0.3		0.3		0.3		0.3		0.3		0.3	ns
Interconnect Delays:																
t _{BLK}	Block interconnect delay		1.5		1.5		1.5		2.0		2.0		2.0		2.0	ns
t _{SEG}	Segment interconnect delay		4.5		4.5		5.0		6.0		6.0		6.0		6.0	ns
Reset and Preset Delays:																
t _{SRI}	Asynchronous reset or preset to internal register output		6.0		8.0		8.0		10.0		12.0		14.0		16.0	ns
t _{SR}	Asynchronous reset or preset to register output		8.0		10.0		10.0		12.0		14.0		16.0		18.0	ns
t _{SRR}	Reset and set register recovery time	5.5		7.5		7.5		8.0		9.0		10.0		11.0		ns
t _{SRW}	Asynchronous reset or preset width	3.0		4.0		4.0		5.0		6.0		7.0		8.0		ns
Clock Enable Delays:																
t _{CES}	Clock enable setup time	4.0		5.0		5.0		6.0		7.0		7.0		8.0		ns
t _{CEH}	Clock enable hold time	3.0		4.0		4.0		5.0		6.0		6.0		7.0		ns
Width:																
t _{WLS}	Global clock width low (Note 3)	2.5		3.0		3.0		4.0		5.0		6.0		6.0		ns
t _{WHS}	Global clock width high (Note 3)	2.5		3.0		3.0		4.0		5.0		6.0		6.0		ns
t _{WLA}	Product term clock width low	3.0		4.0		4.0		5.0		6.0		7.0		8.0		ns
t _{WHA}	Product term clock width high	3.0		4.0		4.0		5.0		6.0		7.0		8.0		ns
t _{GWA}	Gate width low (for low transparent) or high (for high transparent)	3.0		4.0		4.0		5.0		6.0		7.0		8.0		ns
t _{WIR}	Input register clock width low or high	3.0		4.0		4.0		5.0		6.0		7.0		8.0		ns

Select devices have been discontinued.
See Ordering Information section for product status.

M5(LV) TIMING PARAMETERS OVER OPERATING RANGES¹ (CONTINUED)

		-5		-6		-7		-10		-12		-15		-20		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
Frequency:																
f _{MAX}	External feedback, PAL block level. Min of 1/(t _{WLS} + t _{WHS}) or 1/(t _{SS} + t _{COS})	133		125		100		83.3		71.4		55.6		45.5		MHz
	Internal feedback, PAL block level. Min of 1/(t _{WLS} + t _{WHS}) or 1/(t _{SS} + t _{COSi})	182		167		125		100		83.3		62.5		50.0		MHz
	No feedback PAL block level. Min of 1/(t _{WLS} + t _{WHS}) or 1/(t _{SS} + t _{HS})	200		167		167		125		100		83.3		83.3		MHz
f _{MAXA}	External feedback, PAL block level. Min of 1/(t _{WLA} + t _{WHA}) or 1/(t _{SA} + t _{COA})	91		91		71.4		58.8		47.6		41.7		35.7		MHz
	Internal feedback, PAL block level. Min of 1/(t _{WLA} + t _{WHA}) or 1/(t _{SA} + t _{COAi})	111		111		83.3		66.7		52.6		45.5		38.5		MHz
	No feedback, PAL block level. Min of 1/(t _{WLA} + t _{WHA}) or 1/(t _{SA} + t _{HA})	167		125		125		100		83.3		71.4		62.5		MHz
f _{MAXI}	Maximum input register frequency 1/(t _{SIRS} + t _{HIRS}) or 1/(2 x t _{WICW})	167		125		125		100		83.3		71.4		62.5		MHz

Notes:


- See "MACH Switching Test Circuits" documentation on the Lattice Data Book CD-ROM or Lattice web site.
- Numbers in parentheses are for M5-128, M5-192, M5-256.
- If a signal is used as both a clock and a logic array input, then the maximum input frequency applies ($f_{MAX}/2$).

Select devices have been discontinued.
See Ordering Information section for product status.

100-PIN TQFP CONNECTION DIAGRAM – 68 I/O

Top View

100-Pin TQFP (68 I/O)

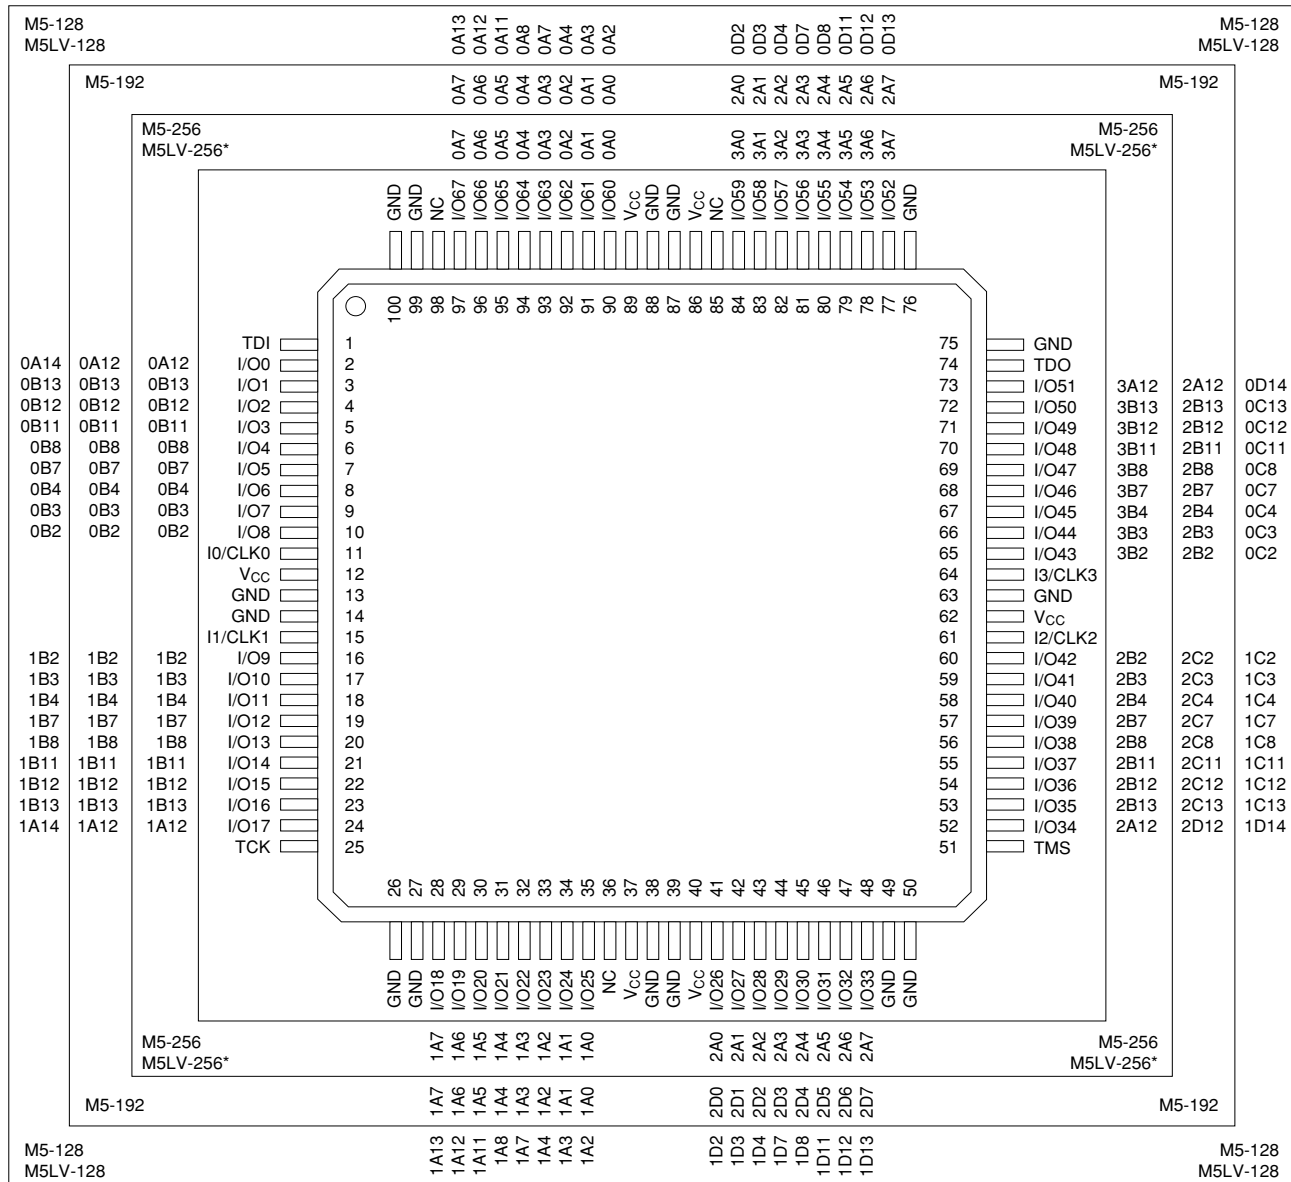

*Package obsolete, contact factory.


Select devices have been discontinued.
See Ordering Information section for product status.

20446G-017

Pin Designations

CLK = Clock
GND = Ground
I = Input
I/O = Input/Output
NC = No Connect


V_{CC} = Supply Voltage
TDI = Test Data In
TCK = Test Clock
TMS = Test Mode Select
TDO = Test Data Out

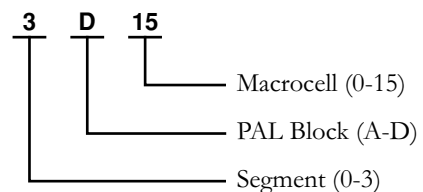

144-PIN PQFP CONNECTION DIAGRAM

Top View

144-Pin PQFP

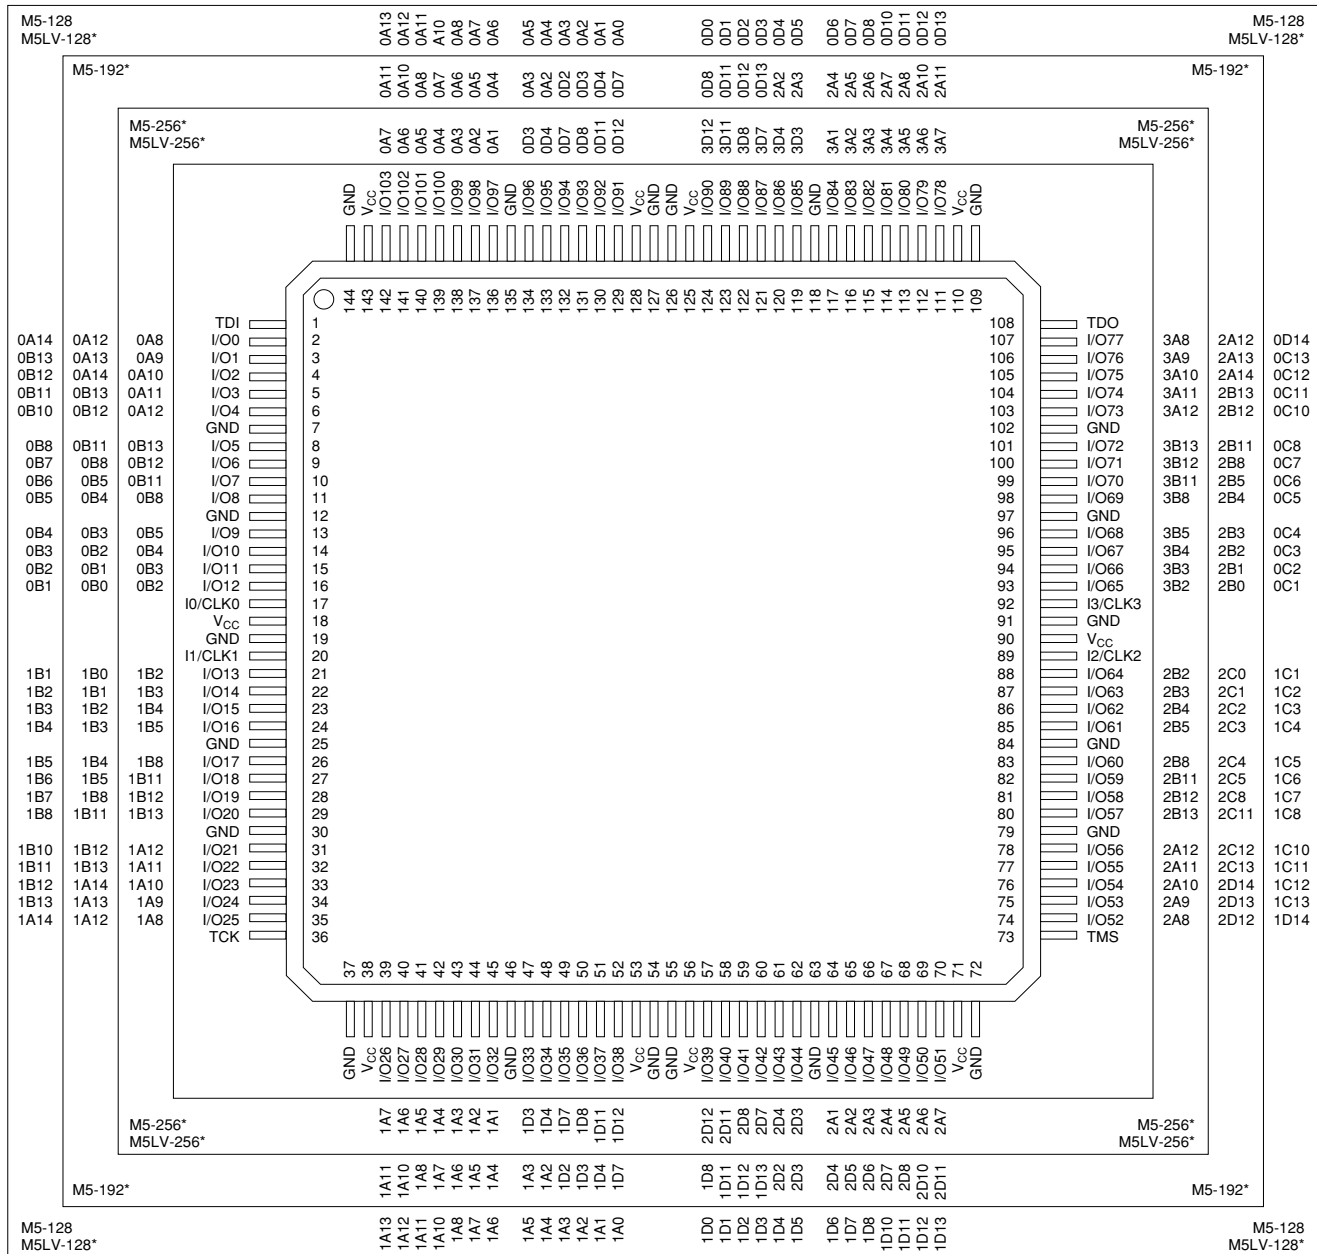

Select devices have been discontinued.
See Ordering Information section for product status.


*Package obsolete, contact factory.

20446G-019

Pin Designations

CLK = Clock
GND = Ground
I = Input
I/O = Input/Output
NC = No Connect


V_{CC} = Supply Voltage
TDI = Test Data In
TCK = Test Clock
TMS = Test Mode Select
TDO = Test Data Out

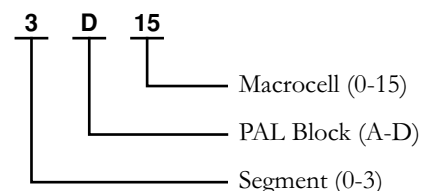

160-PIN PQFP CONNECTION DIAGRAM

Top View

160-Pin PQFP (128, 192, 256 Macrocells)

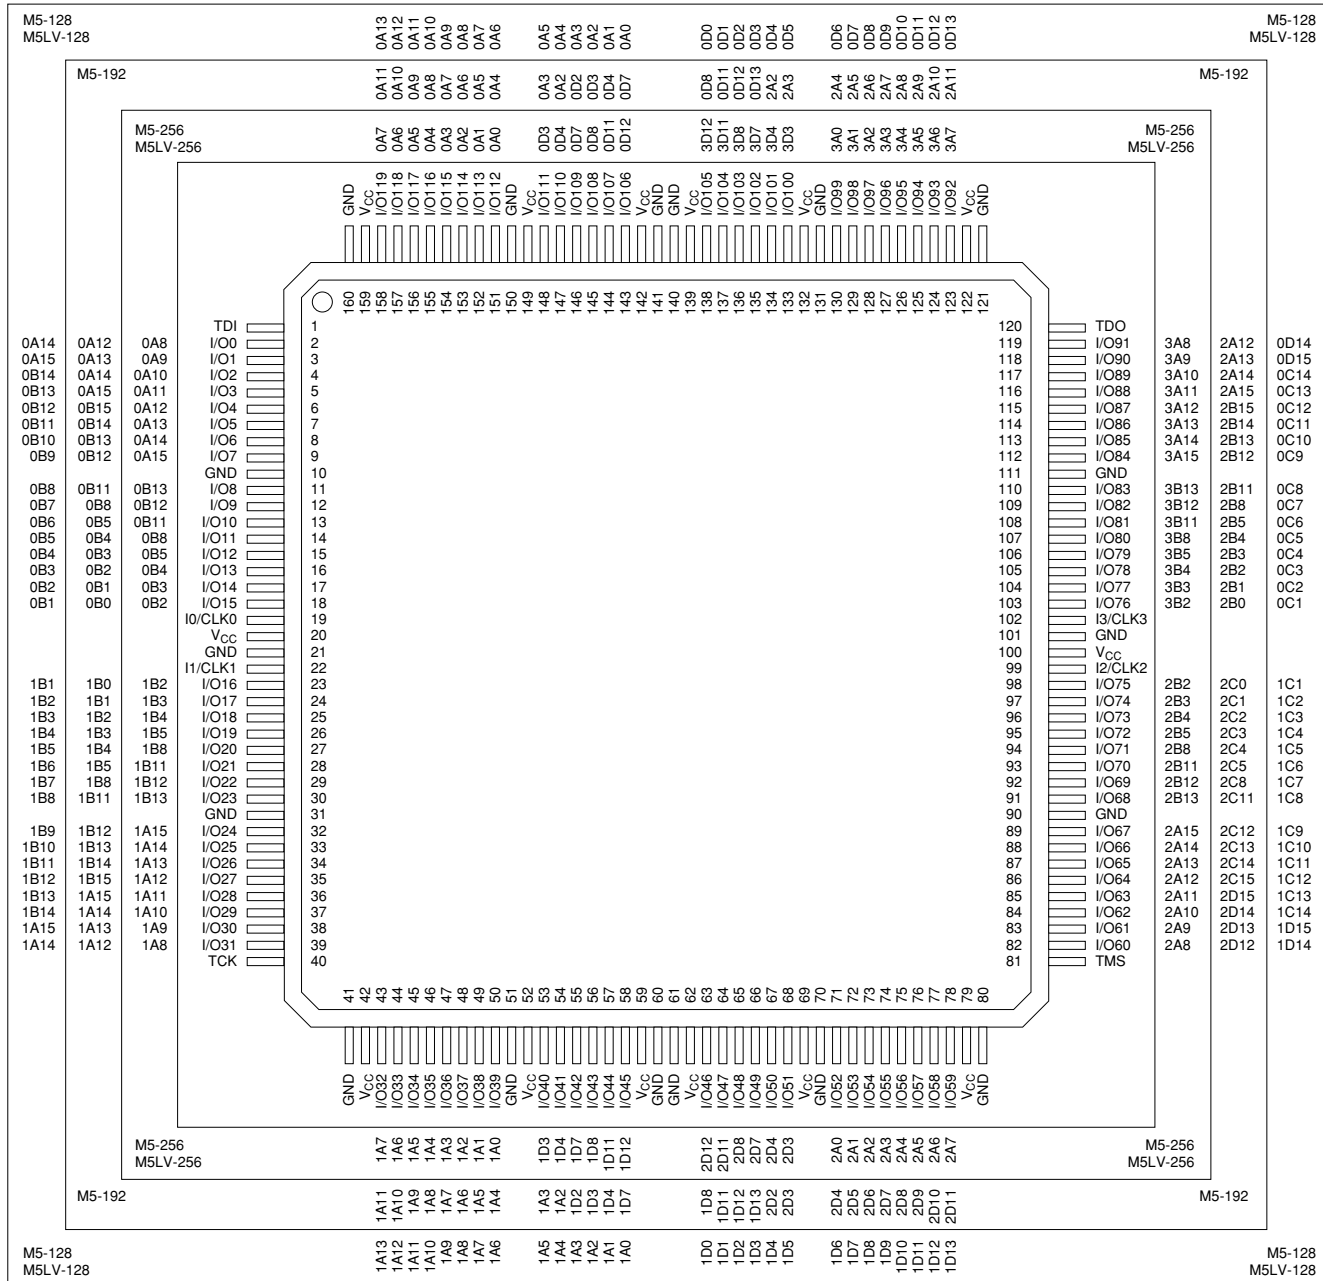


Select devices have been discontinued.
See Ordering Information section for product status.

20446G-021

Pin Designations

CLK = Clock
GND = Ground
I = Input
I/O = Input/Output
NC = No Connect


V_{CC} = Supply Voltage
TDI = Test Data In
TCK = Test Clock
TMS = Test Mode Select
TDO = Test Data Out

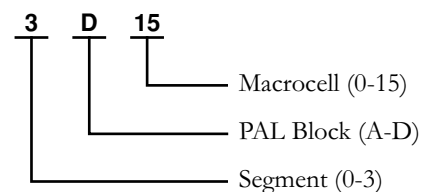

160-PIN PQFP (WITH INTERNAL HEAT SPREADER) CONNECTION DIAGRAM Top View

160-Pin PQFP (320, 384, 512 Macrocells)

Select devices have been discontinued.
See Ordering Information section for product status.

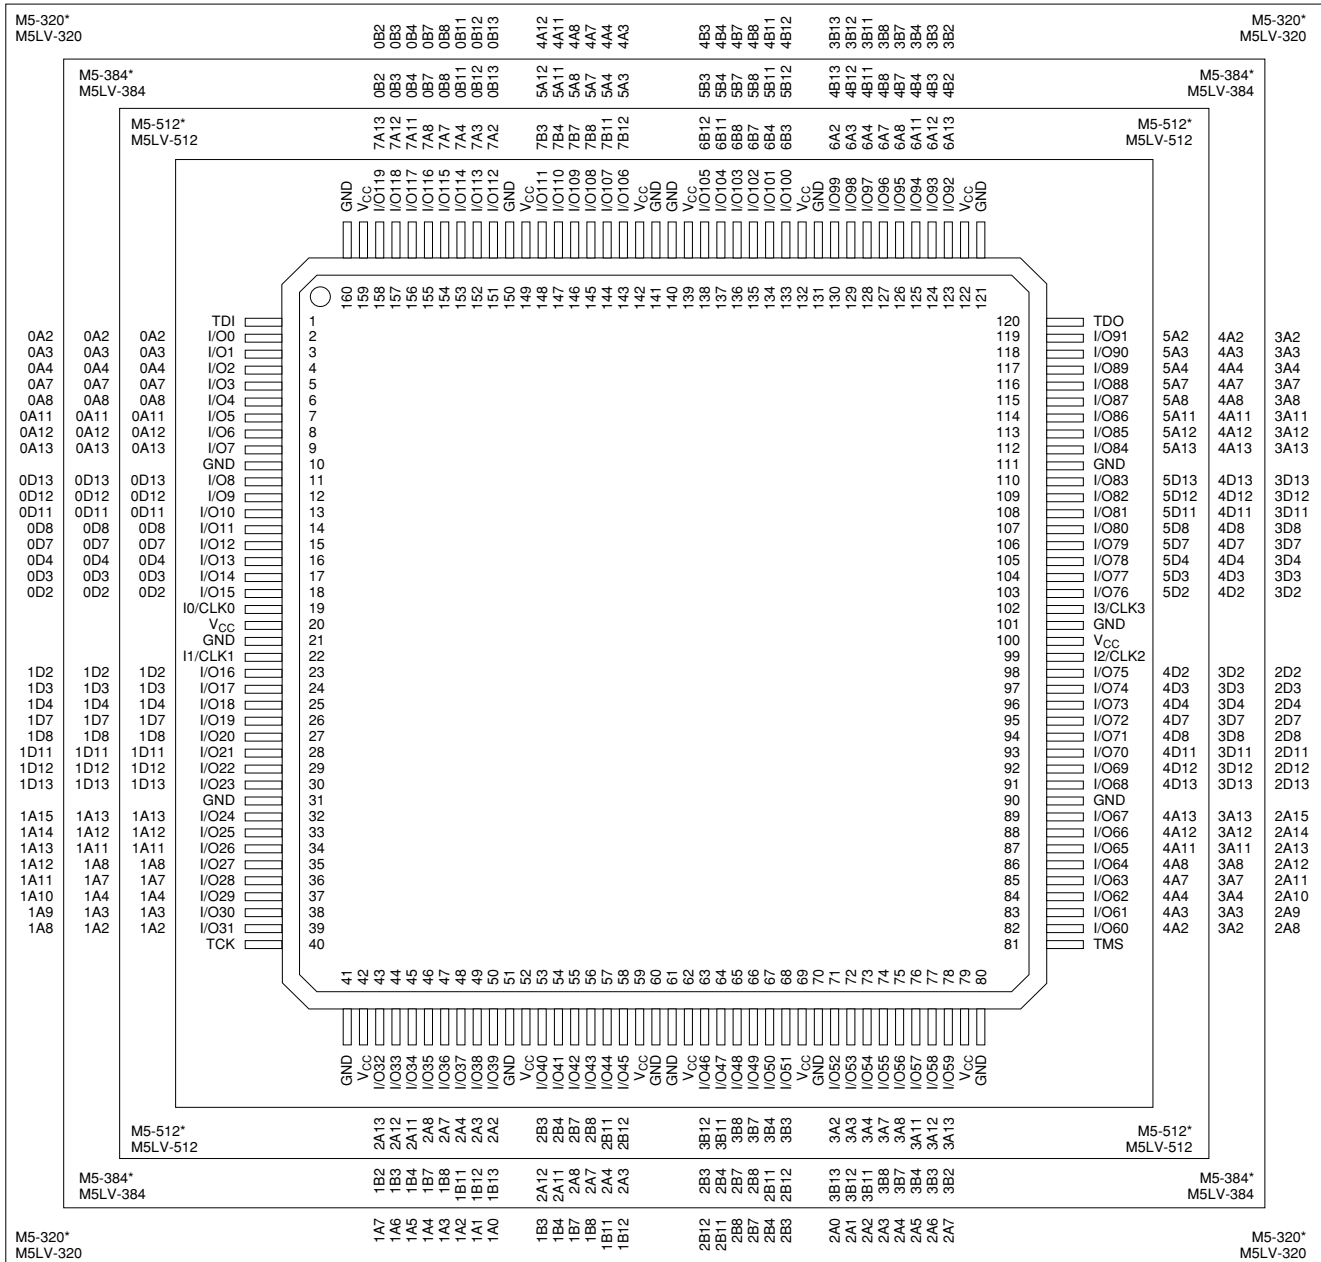


*Package obsolete, contact factory.

20446G-022

Pin Designations


CLK = Clock
GND = Ground
I = Input
I/O = Input/Output
NC = No Connect

V_{CC} = Supply Voltage
TDI = Test Data In
TCK = Test Clock
TMS = Test Mode Select
TDO = Test Data Out

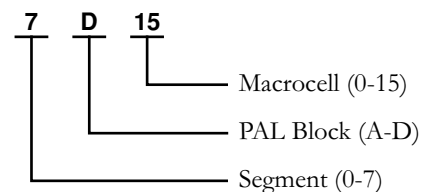

208-PIN PQFP (WITH INTERNAL HEAT SPREADER) CONNECTION DIAGRAM Top View

208-Pin PQFP (320, 384, 512 Macrocells)

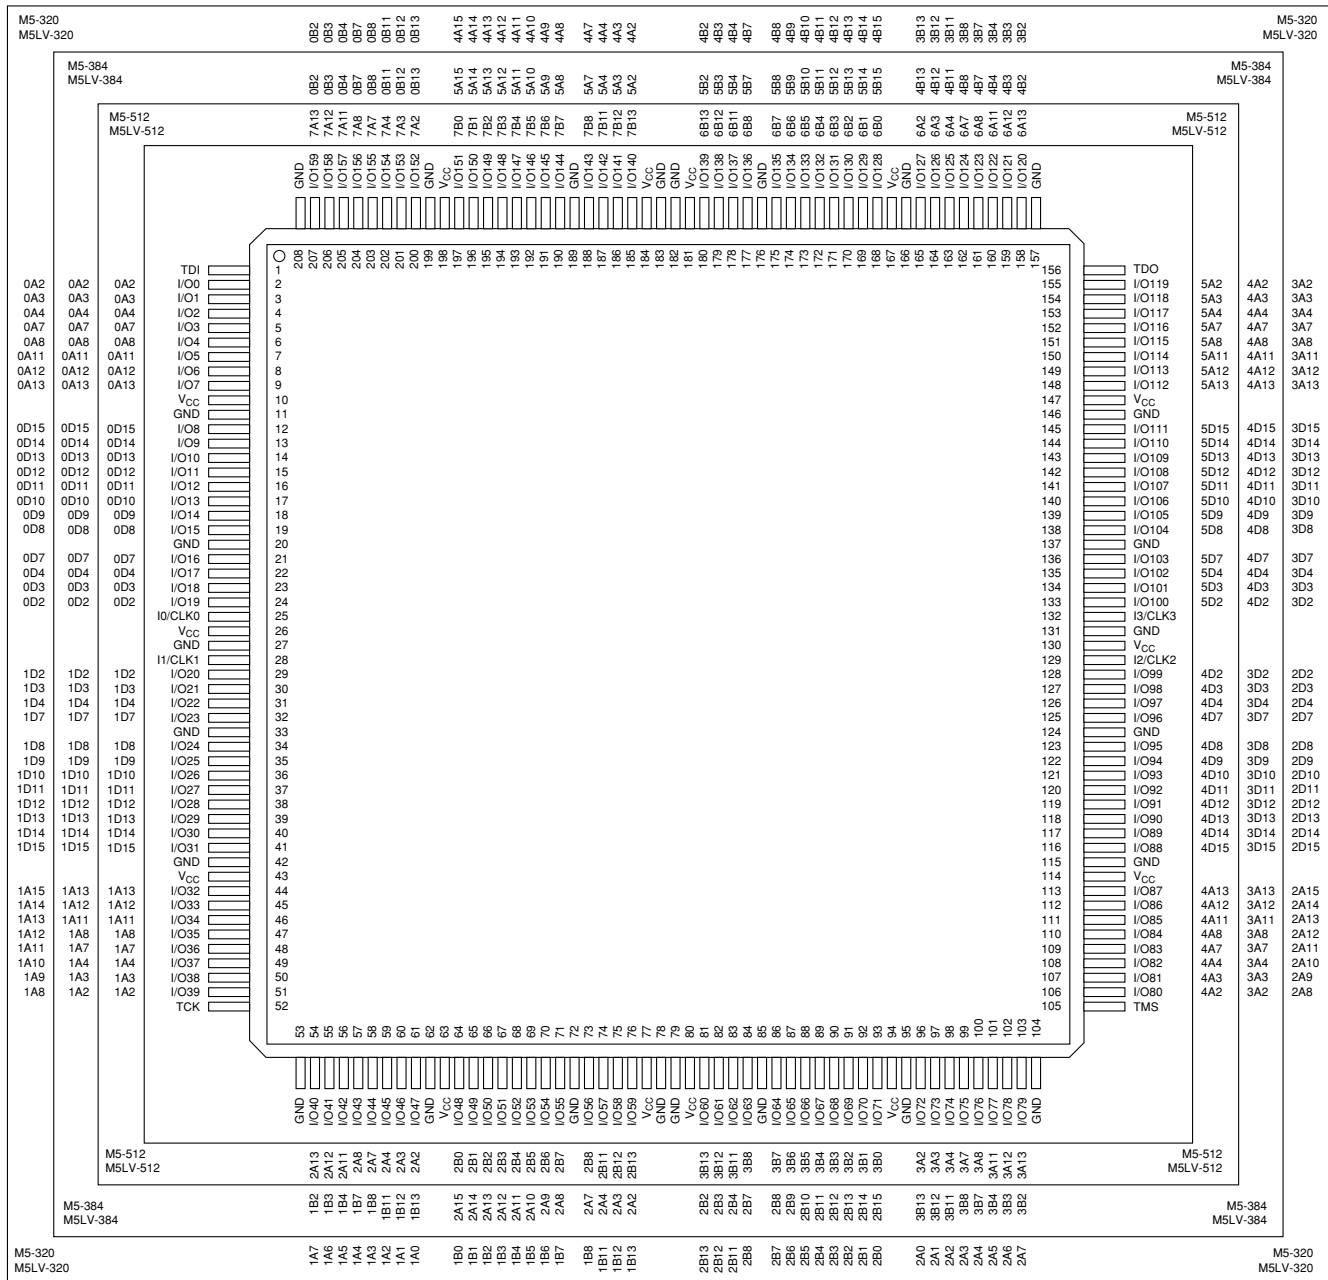

Select devices have been discontinued.
See Ordering Information section for product status.

20446G-024

256-BALL BGA CONNECTION DIAGRAM — M5-320

Bottom View (I/O Pin-outs)

256-Ball BGA

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
A	GND	I/O11	GND	I/O44	I/O58	GND	I/O70	I/O76	GND	GND	GND	GND	I/O108	I/O116	GND	I/O128	I/O134	GND	GND	GND	A
B	GND	I/O12	I/O28	I/O45	I/O59	I/O64	I/O71	I/O77	I/O84	I/O90	I/O96	I/O102	I/O109	I/O117	I/O122	I/O129	I/O135	I/O148	I/O164	GND	B
C	I/O0	I/O13	V _{CC}	I/O46	I/O60	I/O65	I/O72	I/O78	I/O85	I/O91	I/O97	I/O103	I/O110	I/O118	I/O123	I/O130	I/O136	V _{CC}	I/O165	I/O181	C
D	I/O1	I/O14	I/O29	V _{CC}	V _{CC}	I/O66	V _{CC}	I/O79	I/O86	I/O92	I/O98	I/O104	I/O111	V _{CC}	I/O124	V _{CC}	V _{CC}	I/O149	I/O166	I/O182	D
E	I/O2	I/O15	I/O30	TDI													TDI	I/O150	I/O167	I/O183	E
F	GND	I/O16	I/O31	I/O47													I/O137	I/O151	I/O168	GND	F
G	I/O3	I/O17	I/O32	V _{CC}													V _{CC}	I/O152	I/O169	I/O184	G
H	GND	I/O18	I/O33	I/O48													I/O138	I/O153	I/O170	GND	H
J	I/O4	I/O19	I/O34	I/O49													I/O139	I/O154	I/O171	I/O185	J
K	GND	I/O20	I/O35	I/O50													I/O140	I/O155	I/O172	I/O186	K
L	I/O5	I/O21	I/O36	I/O51													I/O141	I/O156	I/O173	GND	L
M	I/O6	I/O22	I/O37	I/O52													I/O142	I/O157	I/O174	I/O187	M
N	GND	I/O23	I/O38	I/O53													I/O143	I/O158	I/O175	GND	N
P	I/O7	I/O24	I/O39	V _{CC}													V _{CC}	I/O159	I/O176	I/O188	P
R	GND	I/O25	I/O40	I/O54													I/O144	I/O160	I/O177	GND	R
T	I/O8	I/O26	I/O41	TCK													TMS	I/O161	I/O178	I/O189	T
U	I/O9	I/O27	I/O42	V _{CC}													V _{CC}	I/O162	I/O179	I/O190	U
V	I/O10	I/O28	V _{CC}	I/O55													I/O145	V _{CC}	I/O180	I/O191	V
W	GND	I/O29	I/O43	I/O56													I/O146	I/O163	I/O181	GND	W
Y	GND	I/O30	GND	I/O57													I/O147	GND	I/O182	I/O192	Y

Pin Designations

CLK	=	Clock
GND	=	Ground
I	=	Input
I/O	=	Input/Output
NC	=	No Connect
V _{CC}	=	Supply Voltage
TDI	=	Test Data In
TCK	=	Test Clock
TMS	=	Test Mode Select
TDO	=	Test Data Out

Select devices have been discontinued.
See Ordering Information section for product status.

20446G-026

256-BALL BGA CONNECTION DIAGRAM — M5-320

Bottom View (Macrocell Association)

256-Ball BGA

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	U	V	W	Y																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	U	V	W	Y																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	GND	GND	GND	3B13	4B14	GND	4B8	4B4	GND	GND	GND	GND	4A4	4A8	GND	4A14	0B13	GND	0B2	GND	A	GND	3B1	3A11	3D15	3D12	GND	3D7	GND	3D3	3D2	GND	2D2	GND	2D7	GND	2A10	2D13	2D15	GND	GND																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
																					B	3B2	3A3	3A2	3A4	3A13	3D14	3D8	3D4	3D0	2D0	2D5	2D9	2D14	2A11	2A15	2A8	2A12	2A9	GND	GND																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
																					C	3B3	V _{CC}	V _{CC}	TDO	3A7	V _{CC}	3D11	3D6	3D1	2D1	2D6	2D11	V _{CC}	2A11	TMS	V _{CC}	2A6	2A2	2A3	GND	GND																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
																					D	4B11	4B12	V _{CC}	4B10	4B9	4B13	4B12	4B10	4B11	4B12	4B13	4B14	4B15	4B16	4B17	4B18	4B19	4B20	4B21	4B22	4B23	4B24	4B25	4B26	4B27	4B28	4B29	4B30	4B31	4B32	4B33	4B34	4B35	4B36	4B37	4B38	4B39	4B40	4B41	4B42	4B43	4B44	4B45	4B46	4B47	4B48	4B49	4B50	4B51	4B52	4B53	4B54	4B55	4B56	4B57	4B58	4B59	4B60	4B61	4B62	4B63	4B64	4B65	4B66	4B67	4B68	4B69	4B70	4B71	4B72	4B73	4B74	4B75	4B76	4B77	4B78	4B79	4B80	4B81	4B82	4B83	4B84	4B85	4B86	4B87	4B88	4B89	4B90	4B91	4B92	4B93	4B94	4B95	4B96	4B97	4B98	4B99	4B100	4B101	4B102	4B103	4B104	4B105	4B106	4B107	4B108	4B109	4B110	4B111	4B112	4B113	4B114	4B115	4B116	4B117	4B118	4B119	4B120	4B121	4B122	4B123	4B124	4B125	4B126	4B127	4B128	4B129	4B130	4B131	4B132	4B133	4B134	4B135	4B136	4B137	4B138	4B139	4B140	4B141	4B142	4B143	4B144	4B145	4B146	4B147	4B148	4B149	4B150	4B151	4B152	4B153	4B154	4B155	4B156	4B157	4B158	4B159	4B160	4B161	4B162	4B163	4B164	4B165	4B166	4B167	4B168	4B169	4B170	4B171	4B172	4B173	4B174	4B175	4B176	4B177	4B178	4B179	4B180	4B181	4B182	4B183	4B184	4B185	4B186	4B187	4B188	4B189	4B190	4B191	4B192	4B193	4B194	4B195	4B196	4B197	4B198	4B199	4B200	4B201	4B202	4B203	4B204	4B205	4B206	4B207	4B208	4B209	4B210	4B211	4B212	4B213	4B214	4B215	4B216	4B217	4B218	4B219	4B220	4B221	4B222	4B223	4B224	4B225	4B226	4B227	4B228	4B229	4B230	4B231	4B232	4B233	4B234	4B235	4B236	4B237	4B238	4B239	4B240	4B241	4B242	4B243	4B244	4B245	4B246	4B247	4B248	4B249	4B250	4B251	4B252	4B253	4B254	4B255	4B256	4B257	4B258	4B259	4B260	4B261	4B262	4B263	4B264	4B265	4B266	4B267	4B268	4B269	4B270	4B271	4B272	4B273	4B274	4B275	4B276	4B277	4B278	4B279	4B280	4B281	4B282	4B283	4B284	4B285	4B286	4B287	4B288	4B289	4B290	4B291	4B292	4B293	4B294	4B295	4B296	4B297	4B298	4B299	4B300	4B301	4B302	4B303	4B304	4B305	4B306	4B307	4B308	4B309	4B310	4B311	4B312	4B313	4B314	4B315	4B316	4B317	4B318	4B319	4B320	4B321	4B322	4B323	4B324	4B325	4B326	4B327	4B328	4B329	4B330	4B331	4B332	4B333	4B334	4B335	4B336	4B337	4B338	4B339	4B340	4B341	4B342	4B343	4B344	4B345	4B346	4B347	4B348	4B349	4B350	4B351	4B352	4B353	4B354	4B355	4B356	4B357	4B358	4B359	4B360	4B361	4B362	4B363	4B364	4B365	4B366	4B367	4B368	4B369	4B370	4B371	4B372	4B373	4B374	4B375	4B376	4B377	4B378	4B379	4B380	4B381	4B382	4B383	4B384	4B385	4B386	4B387	4B388	4B389	4B390	4B391	4B392	4B393	4B394	4B395	4B396	4B397	4B398	4B399	4B400	4B401	4B402	4B403	4B404	4B405	4B406	4B407	4B408	4B409	4B410	4B411	4B412	4B413	4B414	4B415	4B416	4B417	4B418	4B419	4B420	4B421	4B422	4B423	4B424	4B425	4B426	4B427	4B428	4B429	4B430	4B431	4B432	4B433	4B434	4B435	4B436	4B437	4B438	4B439	4B440	4B441	4B442	4B443	4B444	4B445	4B446	4B447	4B448	4B449	4B450	4B451	4B452	4B453	4B454	4B455	4B456	4B457	4B458	4B459	4B460	4B461	4B462	4B463	4B464	4B465	4B466	4B467	4B468	4B469	4B470	4B471	4B472	4B473	4B474	4B475	4B476	4B477	4B478	4B479	4B480	4B481	4B482	4B483	4B484	4B485	4B486	4B487	4B488	4B489	4B490	4B491	4B492	4B493	4B494	4B495	4B496	4B497	4B498	4B499	4B500	4B501	4B502	4B503	4B504	4B505	4B506	4B507	4B508	4B509	4B510	4B511	4B512	4B513	4B514	4B515	4B516	4B517	4B518	4B519	4B520	4B521	4B522	4B523	4B524	4B525	4B526	4B527	4B528	4B529	4B530	4B531	4B532	4B533	4B534	4B535	4B536	4B537	4B538	4B539	4B540	4B541	4B542	4B543	4B544	4B545	4B546	4B547	4B548	4B549	4B550	4B551	4B552	4B553	4B554	4B555	4B556	4B557	4B558	4B559	4B560	4B561	4B562	4B563	4B564	4B565	4B566	4B567	4B568	4B569	4B570	4B571	4B572	4B573	4B574	4B575	4B576	4B577	4B578	4B579	4B580	4B581	4B582	4B583	4B584	4B585	4B586	4B587	4B588	4B589	4B590	4B591	4B592	4B593	4B594	4B595	4B596	4B597	4B598	4B599	4B600	4B601	4B602	4B603	4B604	4B605	4B606	4B607	4B608	4B609	4B610	4B611	4B612	4B613	4B614	4B615	4B616	4B617	4B618	4B619	4B620	4B621	4B622	4B623	4B624	4B625	4B626	4B627	4B628	4B629	4B630	4B631	4B632	4B633	4B634	4B635	4B636	4B637	4B638	4B639	4B640	4B641	4B642	4B643	4B644	4B645	4B646	4B647	4B648	4B649	4B650	4B651	4B652	4B653	4B654	4B655	4B656	4B657	4B658	4B659	4B660	4B661	4B662	4B663	4B664	4B665	4B666	4B667	4B668	4B669	4B670	4B671	4B672	4B673	4B674	4B675	4B676	4B677	4B678	4B679	4B680	4B681	4B682	4B683	4B684	4B685	4B686	4B687	4B688	4B689	4B690	4B691	4B692	4B693	4B694	4B695	4B696	4B697	4B698	4B699	4B700	4B701	4B702	4B703	4B704	4B705	4B706	4B707	4B708	4B709	4B710	4B711	4B712	4B713	4B714	4B715	4B716	4B717	4B718	4B719	4B720	4B721	4B722	4B723	4B724	4B725	4B726	4B727	4B728	4B729	4B730	4B731	4B732	4B733	4B734	4B735	4B736	4B737	4B738	4B739	4B740	4B741	4B742	4B743	4B744	4B745	4B746	4B747	4B748	4B749	4B750	4B751	4B752	4B753	4B754	4B755	4B756	4B757	4B758	4B759	4B760	4B761	4B762	4B763	4B764	4B765	4B766	4B767	4B768	4B769	4B770	4B771	4B772	4B773	4B774	4B775	4B776	4B777	4B778	4B779	4B780	4B781	4B782	4B783	4B784	4B785	4B786	4B787	4B788	4B789	4B790	4B791	4B792	4B793	4B794	4B795	4B796	4B797	4B798	4B799	4B800	4B801	4B802	4B803	4B804	4B805	4B806	4B807	4B808	4B809	4B810	4B811	4B812	4B813	4B814	4B815	4B816	4B817	4B818	4B819	4B820	4B821	4B822	4B823	4B824	4B825	4B826	4B827	4B828	4B829	4B830	4B831	4B832	4B833	4B834	4B835	4B836	4B837	4B838	4B839	4B840	4B841	4B842	4B843	4B844	4B845	4B846	4B847	4B848	4B849	4B850	4B851	4B852	4B853	4B854	4B855	4B856	4B857	4B858	4B859	4B860	4B861	4B862	4B863	4B864	4B865	4B866	4B867	4B868	4B869	4B870	4B871	4B872	4B873	4B874	4B875	4B876	4B877	4B878	4B879	4B880	4B881	4B882	4B883	4B884	4B885	4B886	4B887	4B888	4B889	4B890	4B891	4B892	4B893	4B894	4B895	4B896	4B897	4B898	4B899	4B900	4B901	4B902	4B903	4B904	4B905	4B906	4B907	4B908	4B909	4B910	4B911	4B912	4B913	4B914	4B915	4B916	4B917	4B918	4B919	4B920	4B921	4B922	4B923	4B924	4B925	4B926	4B927	4B928	4B929	4B930	4B931	4B932	4B933	4B934	4B935	4B936	4B937	4B938	4B939	4B940	4B941	4B942	4B943	4B944	4B945	4B946	4B947	4B948	4B949	4B950	4B951	4B952	4B953	4B954	4B955	4B956	4B957	4B958	4B959	4B960	4B961	4B962	4B963	4B964	4B965	4B966	4B967	4B968	4B969	4B970	4B971	4B972	4B973	4B974	4B975	4B976	4B977	4B978	4B979	4B980	4B981	4B982	4B983	4B984	4B985	4B986	4B987	4B988	4B989	4B990	4B991	4B992	4B993	4B994	4B995	4B996	4B997	4B998	4B999	4B1000	4B1001	4B1002	4B1003	4B1004	4B1005	4B1006	4B1007	4B1008	4B1009	4B1010	4B1011	4B1012	4B1013	4B1014	4B1015	4B1016	4B1017	4B1018	4B1019	4B1020	4B1021	4B1022	4B1023	4B1024	4B1025	4B1026	4B1027	4B1028	4B1029	4B1030	4B1031	4B1032	4B1033	4B1034	4B1035	4B1036	4B1037	4B1038	4B1039	4B1040	4B1041	4B1042	4B1043	4B1044	4B1045	4B1046	4B1047	4B1048	4B1049	4B1050	4B1051	4B1052	4B1053	4B1054	4B1055	4B1056	4B1057	4B1058	4B1059	4B1060	4B1061	4B1062	4B1063	4B1064	4B1065	4B1066	4B1067	4B1068	4B1069	4B1070	4B1071	4B1072	4B1073	4B1074	4B1075	4B1076	4B1077	4B1078	4B1079	4B1080	4B1081	4B1082	4B1083	4B1084	4B1085	4

352-BALL BGA CONNECTION DIAGRAM — M5-512, M5LV-512

Bottom View (I/O Pin-outs)

352-Ball BGA

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	U	V	W	Y	AA	AB	AC	AD	AE	AF	
1	NC	NC	NC	GND	NC	I/O189	I/O190	I/O191	V _{CC}	I/O192	V _{CC}	I/O193	I/O194	I/O195	V _{CC}	I/O196	I/O197	I/O198	V _{CC}	I/O199	V _{CC}	I/O200	I/O201	V _{CC}	I/O202	I/O203	I/O204
2	NC	NC	NC	I/O205	I/O206	I/O207	I/O208	I/O209	I/O210	I/O211	I/O212	I/O213	I/O214	I/O215	I/O216	I/O217	I/O218	I/O219	I/O220	I/O221	I/O222	I/O223	I/O224	I/O225	I/O226	I/O227	I/O228
3	GND	GND	NC	TDO	I/O189	I/O190	I/O191	V _{CC}	I/O192	V _{CC}	I/O193	I/O194	I/O195	V _{CC}	I/O196	I/O197	I/O198	V _{CC}	I/O199	V _{CC}	I/O200	I/O201	I/O202	I/O203	I/O204	I/O205	I/O206
4	NC	I/O188	NC	I/O184	I/O185	I/O186	I/O187	I/O188	I/O189	I/O190	I/O191	I/O192	I/O193	I/O194	I/O195	I/O196	I/O197	I/O198	I/O199	I/O200	I/O201	I/O202	I/O203	I/O204	I/O205	I/O206	I/O207
5	GND	I/O176	I/O177	V _{CC}	I/O178	I/O179	I/O180	I/O181	I/O182	I/O183	I/O184	I/O185	I/O186	I/O187	I/O188	I/O189	I/O190	I/O191	I/O192	I/O193	I/O194	I/O195	I/O196	I/O197	I/O198	I/O199	I/O200
6	NC	I/O169	I/O170	I/O171	I/O172	I/O173	I/O174	I/O175	I/O176	I/O177	I/O178	I/O179	I/O180	I/O181	I/O182	I/O183	I/O184	I/O185	I/O186	I/O187	I/O188	I/O189	I/O190	I/O191	I/O192	I/O193	I/O194
7	GND	I/O163	I/O164	I/O165	I/O166	I/O167	I/O168	NC	I/O169	I/O170	I/O171	I/O172	I/O173	I/O174	I/O175	I/O176	I/O177	I/O178	I/O179	I/O180	I/O181	I/O182	I/O183	I/O184	I/O185	I/O186	I/O187
8	I/O156	I/O157	I/O158	I/O159	V _{CC}	I/O160	I/O161	I/O162	I/O163	I/O164	I/O165	I/O166	I/O167	I/O168	I/O169	I/O170	I/O171	I/O172	I/O173	I/O174	I/O175	I/O176	I/O177	I/O178	I/O179	I/O180	I/O181
9	GND	I/O150	I/O151	V _{CC}	I/O152	I/O153	I/O154	I/O155	I/O156	I/O157	I/O158	I/O159	I/O160	I/O161	I/O162	I/O163	I/O164	I/O165	I/O166	I/O167	I/O168	I/O169	I/O170	I/O171	I/O172	I/O173	I/O174
10	I/O142	I/O143	I/O144	I/O145	I/O146	I/O147	I/O148	I/O149	I/O150	I/O151	I/O152	I/O153	I/O154	I/O155	I/O156	I/O157	I/O158	I/O159	I/O160	I/O161	I/O162	I/O163	I/O164	I/O165	I/O166	I/O167	I/O168
11	I/O134	I/O135	I/O136	I/O137	I/O138	I/O139	I/O140	I/O141	I/O142	I/O143	I/O144	I/O145	I/O146	I/O147	I/O148	I/O149	I/O150	I/O151	I/O152	I/O153	I/O154	I/O155	I/O156	I/O157	I/O158	I/O159	I/O160
12	I/O128	I/O129	I/O130	I/O131	I/O132	I/O133	I/O134	I/O135	I/O136	I/O137	I/O138	I/O139	I/O140	I/O141	I/O142	I/O143	I/O144	I/O145	I/O146	I/O147	I/O148	I/O149	I/O150	I/O151	I/O152	I/O153	I/O154
13	I/O122	I/O123	I/O124	V _{CC}	I/O125	I/O126	I/O127	I/O128	I/O129	I/O130	I/O131	I/O132	I/O133	I/O134	I/O135	I/O136	I/O137	I/O138	I/O139	I/O140	I/O141	I/O142	I/O143	I/O144	I/O145	I/O146	I/O147
14	GND	I/O115	I/O116	I/O117	I/O118	I/O119	I/O120	I/O121	I/O122	I/O123	I/O124	I/O125	I/O126	I/O127	I/O128	I/O129	I/O130	I/O131	I/O132	I/O133	I/O134	I/O135	I/O136	I/O137	I/O138	I/O139	I/O140
15	I/O114	I/O115	I/O116	I/O117	I/O118	I/O119	I/O120	I/O121	I/O122	I/O123	I/O124	I/O125	I/O126	I/O127	I/O128	I/O129	I/O130	I/O131	I/O132	I/O133	I/O134	I/O135	I/O136	I/O137	I/O138	I/O139	I/O140
16	NC	I/O107	I/O108	I/O109	I/O110	I/O111	I/O112	I/O113	I/O114	I/O115	I/O116	I/O117	I/O118	I/O119	I/O120	I/O121	I/O122	I/O123	I/O124	I/O125	I/O126	I/O127	I/O128	I/O129	I/O130	I/O131	I/O132
17	I/O101	I/O102	I/O103	I/O104	I/O105	I/O106	I/O107	I/O108	I/O109	I/O110	I/O111	I/O112	I/O113	I/O114	I/O115	I/O116	I/O117	I/O118	I/O119	I/O120	I/O121	I/O122	I/O123	I/O124	I/O125	I/O126	I/O127
18	GND	I/O95	I/O96	V _{CC}	I/O97	I/O98	I/O99	I/O100	I/O101	I/O102	I/O103	I/O104	I/O105	I/O106	I/O107	I/O108	I/O109	I/O110	I/O111	I/O112	I/O113	I/O114	I/O115	I/O116	I/O117	I/O118	I/O119
19	I/O87	I/O88	I/O89	I/O90	I/O91	I/O92	I/O93	I/O94	I/O95	I/O96	I/O97	I/O98	I/O99	I/O100	I/O101	I/O102	I/O103	I/O104	I/O105	I/O106	I/O107	I/O108	I/O109	I/O110	I/O111	I/O112	I/O113
20	I/O80	I/O81	I/O82	I/O83	I/O84	I/O85	I/O86	GND	I/O87	I/O88	I/O89	I/O90	I/O91	I/O92	I/O93	I/O94	I/O95	I/O96	I/O97	I/O98	I/O99	I/O100	I/O101	I/O102	I/O103	I/O104	I/O105
21	I/O73	I/O74	I/O75	I/O76	I/O77	I/O78	I/O79	NC	I/O80	I/O81	I/O82	I/O83	I/O84	I/O85	I/O86	I/O87	I/O88	I/O89	I/O90	I/O91	I/O92	I/O93	I/O94	I/O95	I/O96	I/O97	I/O98
22	GND	I/O68	I/O69	I/O70	V _{CC}	I/O71	I/O72	GND	I/O73	I/O74	I/O75	I/O76	I/O77	I/O78	I/O79	I/O80	I/O81	I/O82	I/O83	I/O84	I/O85	I/O86	I/O87	I/O88	I/O89	I/O90	I/O91
23	I/O51	I/O52	I/O53	V _{CC}	I/O54	I/O55	V _{CC}	I/O56	V _{CC}	I/O57	I/O58	I/O59	V _{CC}	I/O60	I/O61	I/O62	V _{CC}	I/O63	V _{CC}	I/O64	I/O65	I/O66	TCK	NC	NC	NC	NC
24	NC	NC	TDI	I/O32	I/O33	I/O34	I/O35	I/O36	I/O37	I/O38	I/O39	I/O40	I/O41	I/O42	I/O43	I/O44	I/O45	I/O46	I/O47	I/O48	I/O49	I/O50	I/O51	I/O52	I/O53	I/O54	I/O55
25	GND	GND	I/O11	I/O12	I/O13	I/O14	I/O15	I/O16	I/O17	I/O18	I/O19	I/O20	I/O21	I/O22	I/O23	I/O24	I/O25	I/O26	I/O27	I/O28	I/O29	I/O30	I/O31	NC	NC	NC	NC
26	NC	NC	GND	I/O0	NC	GND	I/O1	I/O2	GND	I/O3	I/O4	I/O5	GND	I/O6	I/O7	GND	I/O8	I/O9	GND	I/O10	NC	NC	GND	NC	NC	NC	NC

Pin Designations

CLK = Clock

GND = Ground

I = Input

I/O = Input/Output

NC = No Connect

V_{CC} = Supply Voltage

TDI = Test Data In

TCK = Test Clock

TMS = Test Mode Select

TDO = Test Data Out

20446G-030

Pin Designations

CLK	=	Clock
GND	=	Ground
I	=	Input
I/O	=	Input/Output
NC	=	No Connect
V _{CC}	=	Supply Voltage
TDI	=	Test Data In
TCK	=	Test Clock
TMS	=	Test Mode Select
TDO	=	Test Data Out

20446G-030

Select devices have been discontinued.
See Ordering Information section for product status.

352-BALL BGA CONNECTION DIAGRAM — M5-512, M5LV-512

Bottom View (Macrocell Association)


352-Ball BGA

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	U	V	W	Y	AA	AB	AC	AD	AE	AF					
1	NC	NC	NC	GND	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
2	NC	NC	NC	5A2	5A5	5A9	5A14	5A15	5D13	5D10	5D8	5D4	5D1	4D0	4D2	4D6	4D10	4D13	4A15	4A12	4A9	4A8	4A6	4A3	4A1	GND	NC				
3	GND	GND	NC	5A1	5A4	5A7	5A8	5A10	5A13	5D14	5D9	5D5	5D1	I ₂ /CLK ₂	4D4	4D7	4D11	4D14	4A14	4A10	4A7	4A5	4A2	TMS	NC	NC					
4	NC	6A14	NC	TDO	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
5	GND	6A12	6A13	V _{CC}	Pin Designations CLK = Clock GND = Ground I = Input I/O = Input/Output NC = No Connect V_{CC} = Supply Voltage TDI = Test Data In TCK = Test Clock TMS = Test Mode Select TDO = Test Data Out 7 D 15 Segment (0-7) Macrocell (0-15) PAL Block (A-D)	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12
6	NC	6A9	6A10	6A15		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
7	GND	6A6	6A8	6A11		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
8	6A1	6A4	6A5	6A7		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
9	6B1	6A0	6A2	6A3		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
10	GND	6B2	6B0	V _{CC}		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
11	6B6	6B5	6B4	6B3		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
12	6B10	6B9	6B8	6B7		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
13	6B14	6B13	6B12	6B11		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
14	GND	7B15	7B15	V _{CC}		5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12			
15	7B14	7B13	7B12	7B11	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
16	NC	7B10	7B9	7B8	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
17	7B7	7B6	7B5	7B4	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
18	GND	7B3	7B2	V _{CC}	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
19	7B1	7B0	7A1	7A4	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
20	7A0	7A2	7A3	7A8	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
21	7A5	7A6	7A7	7A12	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
22	GND	7A9	7A11	7A15	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
23	7A10	7A13	7A14	V _{CC}	5A0	5A3	5A6	V _{CC}	5A11	V _{CC}	5D12	5D7	5D2	V _{CC}	4D3	4D8	4D12	V _{CC}	4A11	V _{CC}	4A4	4A0	V _{CC}	3A14	3A15	3A13	3A12				
24	NC	NC	TDI	0A2	0A0	0A7	0A10	0A11	0D14	0D11	0D8	0D3	I ₀ /CLK ₀	1D1	1D5	1D9	1D12	1A13	1A10	1A8	1A7	1A4	1A1	NC	GND	GND					
25	GND	GND	0A1	0A3	0A8	0A9	0A12	0A15	0D13	0D10	0D6	0D2	0D0	1D0	1D4	1D8	1D10	1D13	1A15	1A14	1A9	1A5	1A2	NC	NC	NC					
26	NC	NC	GND	0A6	NC	GND	0A13	0D15	GND	0D9	0D5	0D1	GND	I ₁ /CLK ₁	1D3	1D6	GND	1D11	1D15	GND	1A12	NC	GND	NC	NC	NC					

20446G-031

Pin Designations

- CLK = Clock
- GND = Ground
- I = Input
- I/O = Input/Output
- NC = No Connect
- V_{CC} = Supply Voltage
- TDI = Test Data In
- TCK = Test Clock
- TMS = Test Mode Select
- TDO = Test Data Out

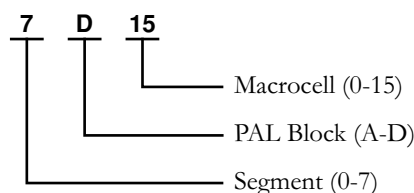


20446G-031

Select devices have been discontinued.
See Ordering Information section for product status.

3.3V M5LV ORDERING INFORMATION¹

Lattice standard products are available in several packages and operating ranges. The order number (Valid Combination) is formed by a combination of the elements below.

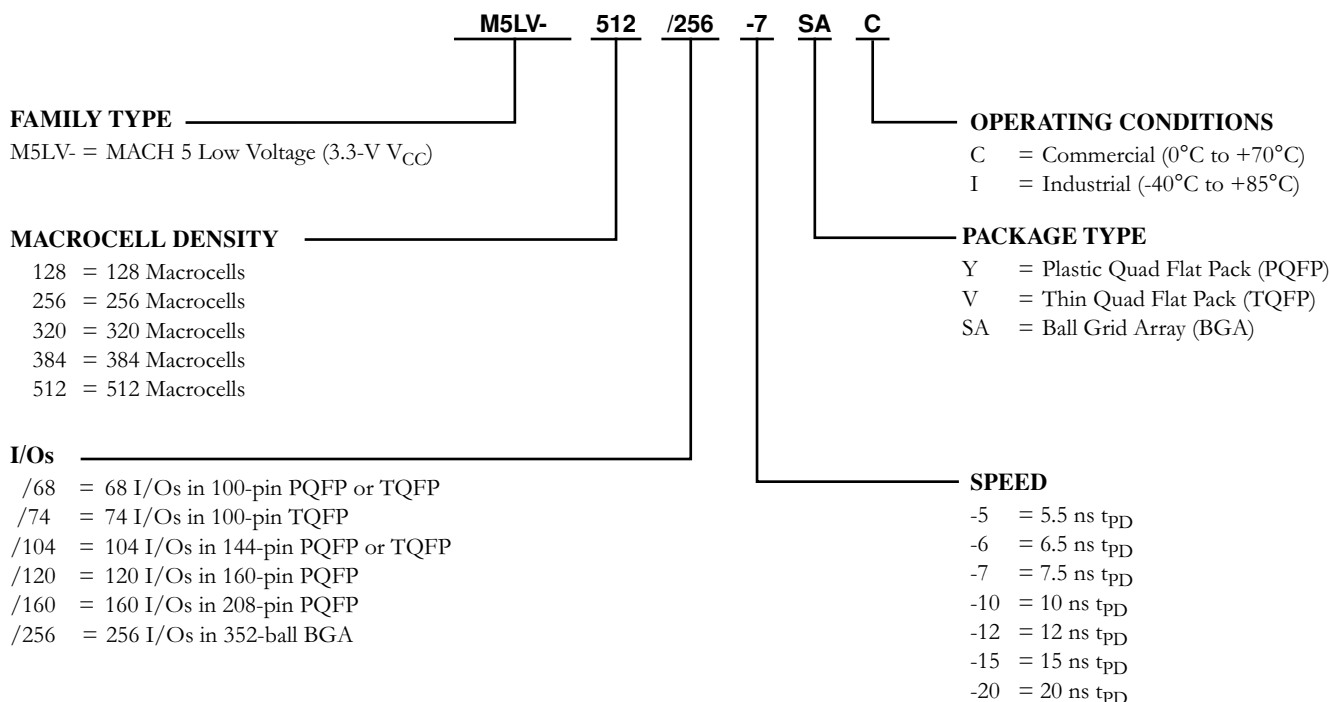

Note:

1. See below for valid device/package combinations.

Valid Combinations		
M5LV-128/68	Commercial: -5, -7, -10, -12	VC, VI
M5LV-128/74		VC, VI
M5LV-128/104		VC, VI
M5LV-128/120		YC, YI
M5LV-256/68	Industrial: -7, -10, -12, -15	YC, YI
M5LV-256/74		VC, VI
M5LV-256/104		VC, VI
M5LV-256/120		YC, YI
M5LV-256/160		YC, YI
M5LV-256/160		YC, YI

Device Marking

Actual device marking differs from the ordering part number (OPN). All MACH devices are dual-marked with both Commercial and Industrial grades. The Industrial grade is slower, i.e., M5LV-512/256-7AC-10AI.

Valid Combinations		
M5LV-320/120	Commercial: -6, -7, -10, -12, -15	YC, YI
M5LV-320/160		YC, YI
M5LV-384/120		YC, YI
M5LV-384/160		YC, YI
M5LV-512/120	Industrial: -10, -12, -15, -20	YC, YI
M5LV-512/160		YC, YI
M5LV-512/256		SAC, SAI

Valid Combinations

Valid Combinations list configurations planned to be supported in volume for this device. Consult the local Lattice sales office to confirm availability of specific valid combinations and to check on newly released combinations.

Select devices have been discontinued.
See Ordering Information section for product status.