



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |   |
|----------------------------|---|
| Product Status             | Obsolete  |
| Core Processor             | Z8  |
| Core Size                  | 8-Bit   |
| Speed                      | 8MHz  |
| Connectivity               | -   |
| Peripherals                | HLVD, POR, WDT  |
| Number of I/O              | 32  |
| Program Memory Size        | 8KB (8K x 8)  |
| Program Memory Type        | OTP   |
| EEPROM Size                | -   |
| RAM Size                   | 237 x 8   |
| Voltage - Supply (Vcc/Vdd) | 2V ~ 3.6V   |
| Data Converters            | -   |
| Oscillator Type            | Internal  |
| Operating Temperature      | -40°C ~ 125°C (TA)  |
| Mounting Type              | Surface Mount   |
| Package / Case             | 48-BSSOP (0.295", 7.50mm Width)   |
| Supplier Device Package    | -   |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/zilog/zgp323lah4808c">https://www.e-xfl.com/product-detail/zilog/zgp323lah4808c</a> |



This publication is subject to replacement by a later edition. To determine whether a later edition exists, or to request copies of publications, contact:

**ZiLOG Worldwide Headquarters**

532 Race Street  
San Jose, CA 95126-3432  
Telephone: 408.558.8500  
Fax: 408.558.8300  
[www.zilog.com](http://www.zilog.com)

ZiLOG is a registered trademark of ZiLOG Inc. in the United States and in other countries. All other products and/or service names mentioned herein may be trademarks of the companies with which they are associated.

**Document Disclaimer**

©2004 by ZiLOG, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZiLOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZiLOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. Devices sold by ZiLOG, Inc. are covered by warranty and limitation of liability provisions appearing in the ZiLOG, Inc. Terms and Conditions of Sale. ZiLOG, Inc. makes no warranty of merchantability or fitness for any purpose. Except with the express written approval of ZiLOG, use of information, devices, or technology as critical components of life support systems is not authorized. No licenses are conveyed, implicitly or otherwise, by this document under any intellectual property rights.



# List of Figures

|  |    |
|--|----|
| Figure 1. Functional Block Diagram .....                         | 3  |
| Figure 2. Counter/Timers Diagram .....                           | 4  |
| Figure 3. 20-Pin PDIP/SOIC/SSOP/CDIP* Pin Configuration .....    | 5  |
| Figure 4. 28-Pin PDIP/SOIC/SSOP/CDIP* Pin Configuration .....    | 6  |
| Figure 5. 40-Pin PDIP/CDIP* Pin Configuration .....              | 7  |
| Figure 6. 48-Pin SSOP Pin Configuration .....                    | 8  |
| Figure 7. Test Load Diagram .....                                | 10 |
| Figure 8. AC Timing Diagram .....                                | 14 |
| Figure 9. Port 0 Configuration .....                             | 17 |
| Figure 10. Port 1 Configuration .....                            | 18 |
| Figure 11. Port 2 Configuration .....                            | 19 |
| Figure 12. Port 3 Configuration .....                            | 20 |
| Figure 13. Port 3 Counter/Timer Output Configuration .....       | 22 |
| Figure 14. Program Memory Map (32K OTP) .....                    | 24 |
| Figure 15. Expanded Register File Architecture .....             | 26 |
| Figure 16. Register Pointer .....                                | 27 |
| Figure 17. Register Pointer—Detail .....                         | 29 |
| Figure 18. Glitch Filter Circuitry .....                         | 38 |
| Figure 19. Transmit Mode Flowchart .....                         | 39 |
| Figure 20. 8-Bit Counter/Timer Circuits .....                    | 40 |
| Figure 21. T8_OUT in Single-Pass Mode .....                      | 41 |
| Figure 22. T8_OUT in Modulo-N Mode .....                         | 41 |
| Figure 23. Demodulation Mode Count Capture Flowchart .....       | 42 |
| Figure 24. Demodulation Mode Flowchart .....                     | 43 |
| Figure 25. 16-Bit Counter/Timer Circuits .....                   | 44 |
| Figure 26. T16_OUT in Single-Pass Mode .....                     | 45 |
| Figure 27. T16_OUT in Modulo-N Mode .....                        | 45 |
| Figure 28. Ping-Pong Mode Diagram .....                          | 47 |
| Figure 29. Output Circuit .....                                  | 47 |
| Figure 30. Interrupt Block Diagram .....                         | 49 |
| Figure 31. Oscillator Configuration .....                        | 51 |
| Figure 32. Port Configuration Register (PCON) (Write Only) ..... | 53 |
| Figure 33. STOP Mode Recovery Register .....                     | 55 |
| Figure 34. SCLK Circuit .....                                    | 56 |




# ***List of Tables***

|           |   |    |
|-----------|---|----|
| Table 1.  | Features .....                                      | 1  |
| Table 2.  | Power Connections .....                             | 3  |
| Table 3.  | 20-Pin PDIP/SOIC/SSOP/CDIP* Pin Identification..... | 5  |
| Table 4.  | 28-Pin PDIP/SOIC/SSOP/CDIP* Pin Identification..... | 6  |
| Table 5.  | 40- and 48-Pin Configuration .....                  | 8  |
| Table 6.  | Absolute Maximum Ratings .....                      | 10 |
| Table 7.  | Capacitance .....                                   | 11 |
| Table 8.  | DC Characteristics .....                            | 11 |
| Table 9.  | EPROM/OTP Characteristics .....                     | 13 |
| Table 10. | AC Characteristics .....                            | 15 |
| Table 11. | Port 3 Pin Function Summary .....                   | 21 |
| Table 12. | CTR0(D)00H Counter/Timer8 Control Register .....    | 31 |
| Table 13. | CTR1(0D)01H T8 and T16 Common Functions.....        | 33 |
| Table 14. | CTR2(D)02H: Counter/Timer16 Control Register.....   | 36 |
| Table 15. | CTR3 (D)03H: T8/T16 Control Register .....          | 37 |
| Table 16. | Interrupt Types, Sources, and Vectors.....          | 50 |
| Table 17. | IRQ Register .....                                  | 50 |
| Table 18. | SMR2(F)0DH:Stop Mode Recovery Register 2* .....     | 56 |
| Table 19. | Stop Mode Recovery Source .....                     | 58 |
| Table 20. | Watch-Dog Timer Time Select .....                   | 61 |
| Table 21. | EPROM Selectable Options .....                      | 62 |

The upper nibble of the register pointer (see Figure 16) selects which working register group, of 16 bytes in the register file, is accessed out of the possible 256. The lower nibble selects the expanded register file bank and, in the case of the Z8 GP family, banks 0, F, and D are implemented. A 0H in the lower nibble allows the normal register file (bank 0) to be addressed. Any other value from 1H to FH exchanges the lower 16 registers to an expanded register bank.

R253 RP

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

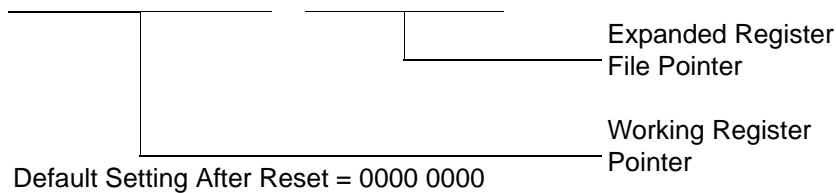

**Figure 16. Register Pointer**

**Example: Z8 GP: (See Figure 15 on page 26)**

R253 RP = 00h

R0 = Port 0

R1 = Port 1

R2 = Port 2

R3 = Port 3

But if:

R253 RP = 0Dh

R0 = CTRL0

R1 = CTRL1

R2 = CTRL2

R3 = Reserved

## Timers

### T8\_Capture\_HI—HI8(D)0BH

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 1.

| Field         | Bit Position | Description                   |
|---------------|--------------|-------------------------------|
| T8_Capture_HI | [7:0]        | R/W Captured Data - No Effect |

### T8\_Capture\_LO—L08(D)0AH

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 0.

| Field         | Bit Position | Description                   |
|---------------|--------------|-------------------------------|
| T8_Capture_LO | [7:0]        | R/W Captured Data - No Effect |

### T16\_Capture\_HI—HI16(D)09H

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the MS-Byte of the data.

| Field          | Bit Position | Description                   |
|----------------|--------------|-------------------------------|
| T16_Capture_HI | [7:0]        | R/W Captured Data - No Effect |

### T16\_Capture\_LO—L016(D)08H

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the LS-Byte of the data.

| Field          | Bit Position | Description                   |
|----------------|--------------|-------------------------------|
| T16_Capture_LO | [7:0]        | R/W Captured Data - No Effect |

### Counter/Timer2 MS-Byte Hold Register—TC16H(D)07H

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_HI | [7:0]        | R/W Data    |

In Demodulation Mode, when set to 0, T16 captures and reloads on detection of all the edges. When set to 1, T16 captures and detects on the first edge but ignores the subsequent edges. For details, see the description of T16 Demodulation Mode on page 45.

#### Time\_Out

This bit is set when T16 times out (terminal count reached). To reset the bit, write a 1 to this location.

#### T16\_Clock

This bit defines the frequency of the input signal to Counter/Timer16.

#### Capture\_INT\_Mask

This bit is set to allow an interrupt when data is captured into LO16 and HI16.

#### Counter\_INT\_Mask

Set this bit to allow an interrupt when T16 times out.

#### P35\_Out

This bit defines whether P35 is used as a normal output pin or T16 output.


#### CTR3 T8/T16 Control Register—CTR3(D)03H

Table 15 lists and briefly describes the fields for this register. This register allows the T<sub>8</sub> and T<sub>16</sub> counters to be synchronized.

**Table 15. CTR3 (D)03H: T8/T16 Control Register**

| Field                  | Bit Position |     | Value | Description       |
|------------------------|--------------|-----|-------|-------------------|
| T <sub>16</sub> Enable | 7-----       | R   | 0*    | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| T <sub>8</sub> Enable  | -6-----      | R   | 0*    | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| Sync Mode              | --5-----     | R/W | 0**   | Disable Sync Mode |
|                        |              |     | 1     | Enable Sync Mode  |

When T8 is enabled, the output T8\_OUT switches to the initial value (CTR1, D1). If the initial value (CTR1, D1) is 0, TC8L is loaded; otherwise, TC8H is loaded into the counter. In SINGLE-PASS Mode (CTR0, D6), T8 counts down to 0 and stops, T8\_OUT toggles, the timeout status bit (CTR0, D5) is set, and a timeout interrupt can be generated if it is enabled (CTR0, D1). In Modulo-N Mode, upon reaching terminal count, T8\_OUT is toggled, but no interrupt is generated. From that point, T8 loads a new count (if the T8\_OUT level now is 0), TC8L is loaded; if it is 1, TC8H is loaded. T8 counts down to 0, toggles T8\_OUT, and sets the timeout status bit (CTR0, D5), thereby generating an interrupt if enabled (CTR0, D1). One cycle is thus completed. T8 then loads from TC8H or TC8L according to the T8\_OUT level and repeats the cycle. See Figure 20.

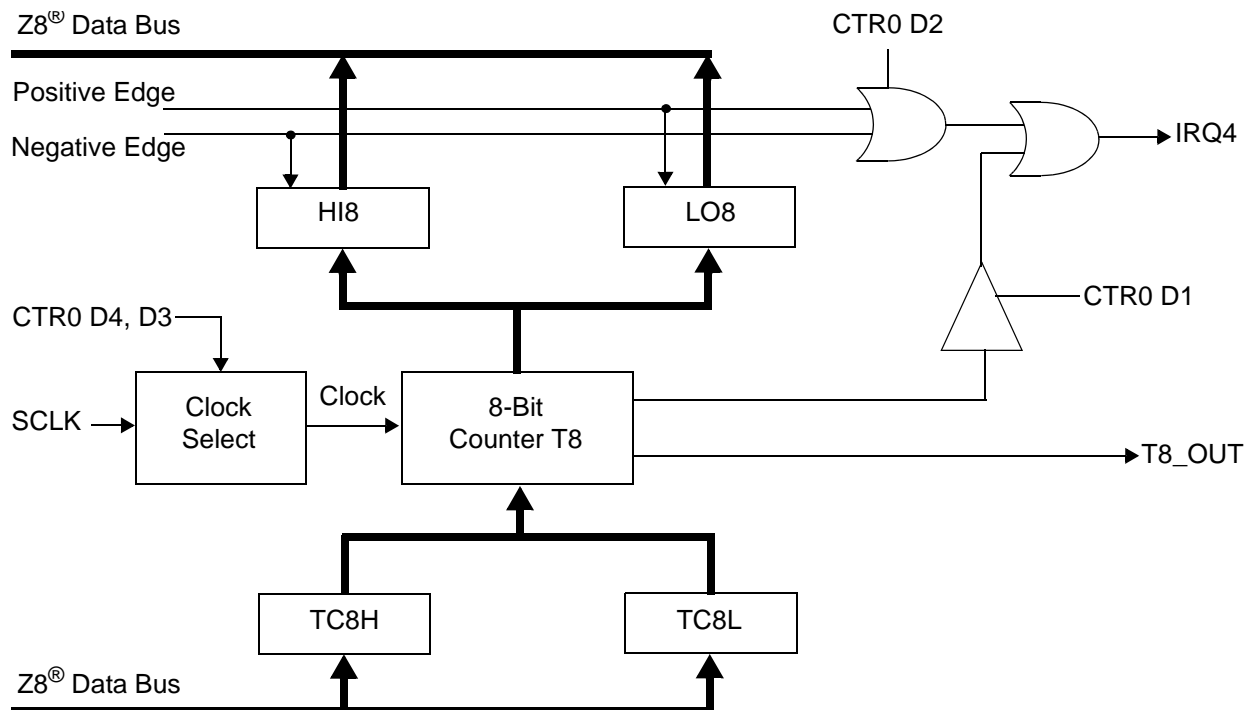

**Figure 20. 8-Bit Counter/Timer Circuits**

You can modify the values in TC8H or TC8L at any time. The new values take effect when they are loaded.



**Caution:** To ensure known operation do not write these registers at the time the values are to be loaded into the counter/timer. An initial count of 1 is not allowed (a non-function occurs). An initial count of 0 causes TC8 to count from 0 to FFH to FEH.

into LO8; if it is a negative edge, data is put into HI8. From that point, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt can be generated if enabled (CTR0, D2). Meanwhile, T8 is loaded with FFh and starts counting again. If T8 reaches 0, the timeout status bit (CTR0, D5) is set, and an interrupt can be generated if enabled (CTR0, D1). T8 then continues counting from FFh (see Figure 23 and Figure 24).


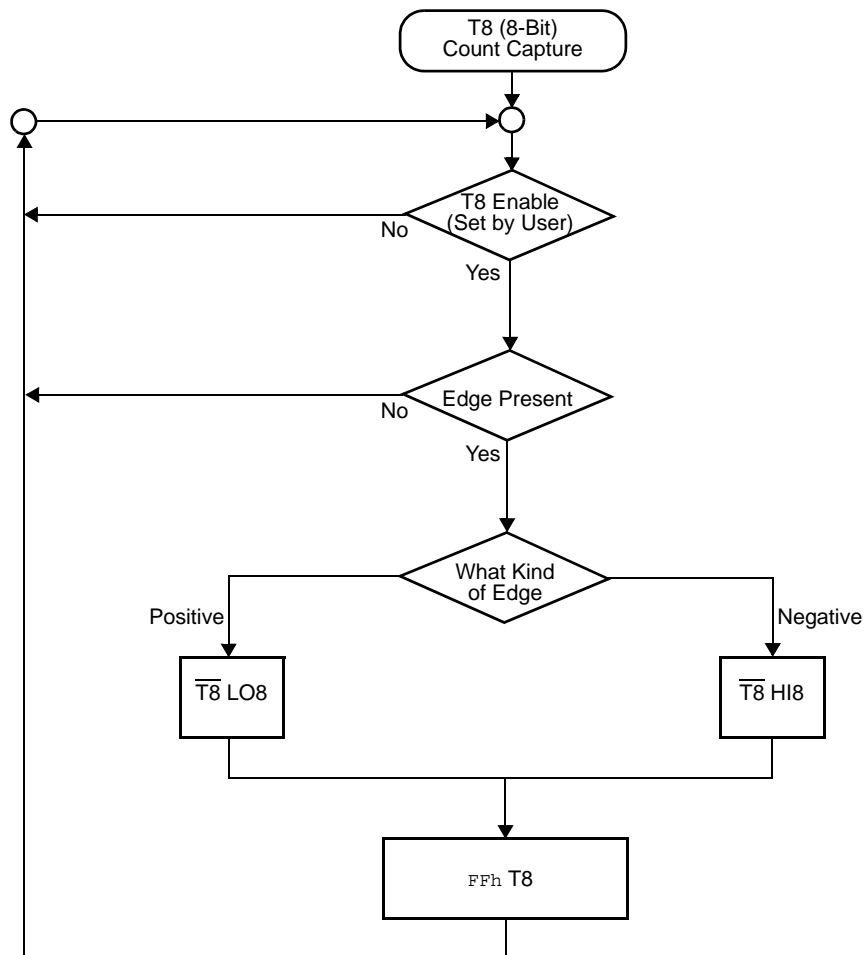



Figure 23. Demodulation Mode Count Capture Flowchart

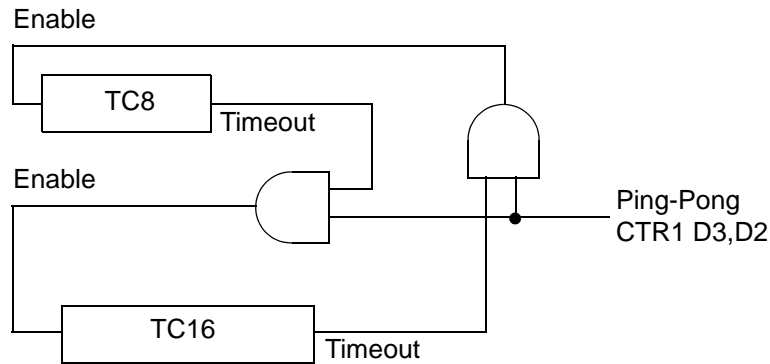

**Figure 28. Ping-Pong Mode Diagram**

### Initiating PING-PONG Mode

First, make sure both counter/timers are not running. Set T8 into Single-Pass mode (CTR0, D6), set T16 into SINGLE-PASS mode (CTR2, D6), and set the Ping-Pong mode (CTR1, D2; D3). These instructions can be in random order. Finally, start PING-PONG mode by enabling either T8 (CTR0, D7) or T16 (CTR2, D7). See Figure 29.

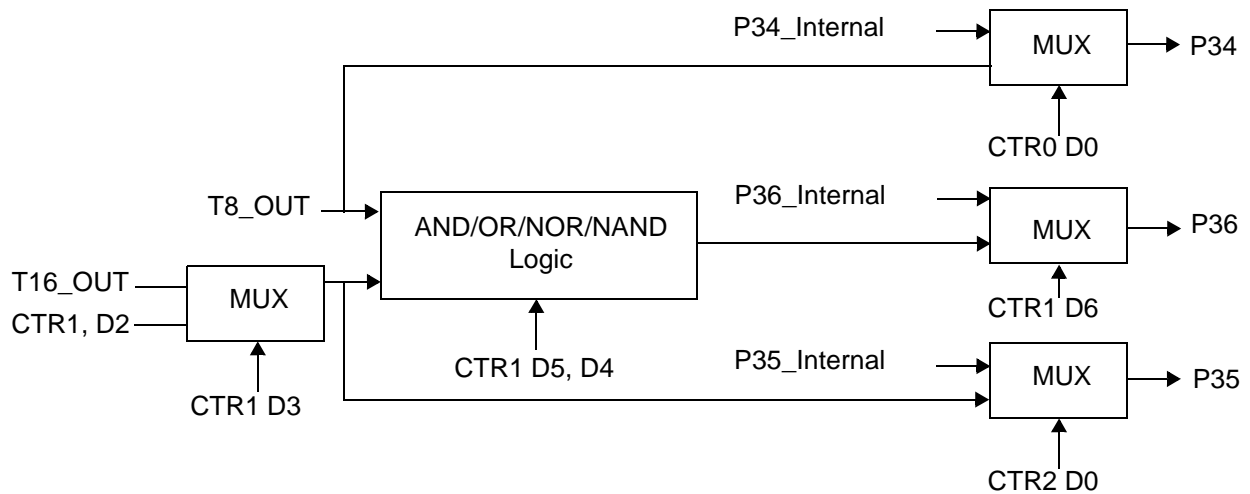

**Figure 29. Output Circuit**

The initial value of T8 or T16 must not be 1. Stopping the timer and restarting the timer reloads the initial value to avoid an unknown previous value.

```
FF      NOP      ; clear the pipeline
6F      Stop     ; enter Stop Mode
```


or

```
FF      NOP      ; clear the pipeline
7F      HALT     ; enter HALT Mode
```

### Port Configuration Register

The Port Configuration (PCON) register (Figure 32) configures the comparator output on Port 3. It is located in the expanded register 2 at Bank F, location 00.

PCON(FH)00H

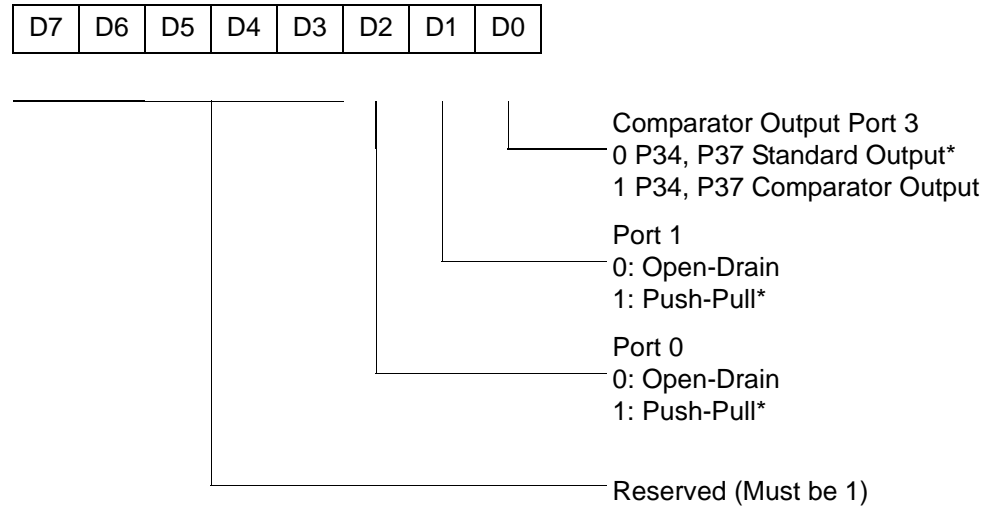

\* Default setting after reset

**Figure 32. Port Configuration Register (PCON) (Write Only)**

#### Comparator Output Port 3 (D0)

Bit 0 controls the comparator used in Port 3. A 1 in this location brings the comparator outputs to P34 and P37, and a 0 releases the Port to its standard I/O configuration.

#### Port 1 Output Mode (D1)

Bit 1 controls the output mode of port 1. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.

### **Port 0 Output Mode (D2)**

Bit 2 controls the output mode of port 0. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.


### **Stop-Mode Recovery Register (SMR)**

This register selects the clock divide value and determines the mode of Stop Mode Recovery (Figure 33). All bits are write only except bit 7, which is read only. Bit 7 is a flag bit that is hardware set on the condition of Stop recovery and reset by a power-on cycle. Bit 6 controls whether a low level or a high level at the XOR-gate input (Figure 35 on page 57) is required from the recovery source. Bit 5 controls the reset delay after recovery. Bits D2, D3, and D4 of the SMR register specify the source of the Stop Mode Recovery signal. Bits D0 determines if SCLK/TCLK are divided by 16 or not. The SMR is located in Bank F of the Expanded Register Group at address 0BH.

### Stop Mode Recovery Register 2 (SMR2)

This register determines the mode of Stop Mode Recovery for SMR2 (Figure 36).

SMR2(0F)DH

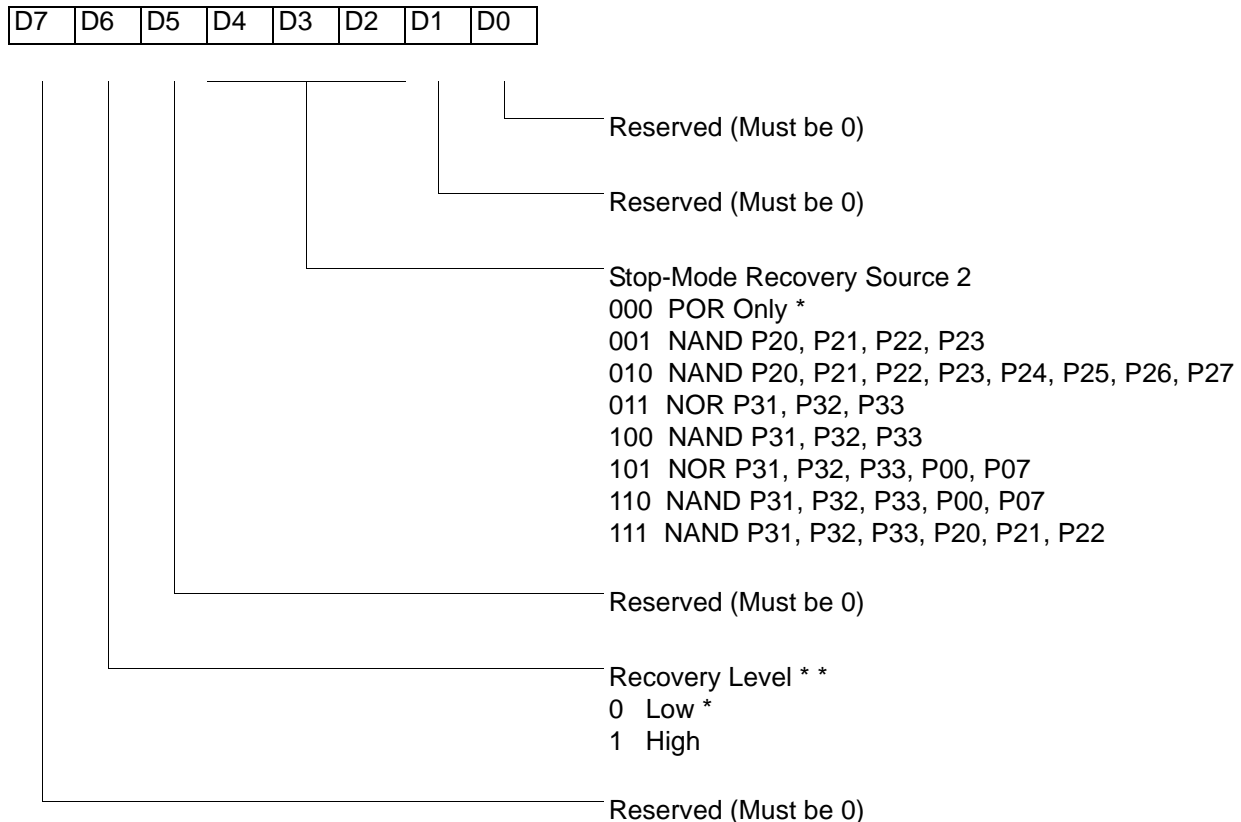

Note: If used in conjunction with SMR, either of the two specified events causes a Stop-Mode Recovery.

\* Default setting after reset

\*\* At the XOR gate input

**Figure 36. Stop Mode Recovery Register 2 ((0F)DH:D2–D4, D6 Write Only)**

If SMR2 is used in conjunction with SMR, either of the specified events causes a Stop Mode Recovery.

► **Note:** Port pins configured as outputs are ignored as an SMR or SMR2 recovery source. For example, if the NAND or P23–P20 is selected as the recovery source and P20 is configured as an output, the remaining SMR pins (P23–P21) form the NAND equation.

### WDTMR During STOP (D3)

This bit determines whether or not the WDT is active during STOP Mode. Because the XTAL clock is stopped during STOP Mode, the on-board RC has to be selected as the clock source to the WDT/POR counter. A 1 indicates active during Stop. The default is 1.

### EPROM Selectable Options

There are seven EPROM Selectable Options to choose from based on ROM code requirements. These options are listed in Table 21.

**Table 21. EPROM Selectable Options**


|                                   |        |
|-----------------------------------|--------|
| Port 00–03 Pull-Ups               | On/Off |
| Port 04–07 Pull-Ups               | On/Off |
| Port 10–13 Pull-Ups               | On/Off |
| Port 14–17 Pull-Ups               | On/Off |
| Port 20–27 Pull-Ups               | On/Off |
| EPROM Protection                  | On/Off |
| Watch-Dog Timer at Power-On Reset | On/Off |

### Voltage Brown-Out/Standby

An on-chip Voltage Comparator checks that the  $V_{DD}$  is at the required level for correct operation of the device. Reset is globally driven when  $V_{DD}$  falls below  $V_{BO}$ . A small drop in  $V_{DD}$  causes the XTAL1 and XTAL2 circuitry to stop the crystal or resonator clock. If the  $V_{DD}$  is allowed to stay above  $V_{RAM}$ , the RAM content is preserved. When the power level is returned to above  $V_{BO}$ , the device performs a POR and functions normally.

CTR2(0D)02H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

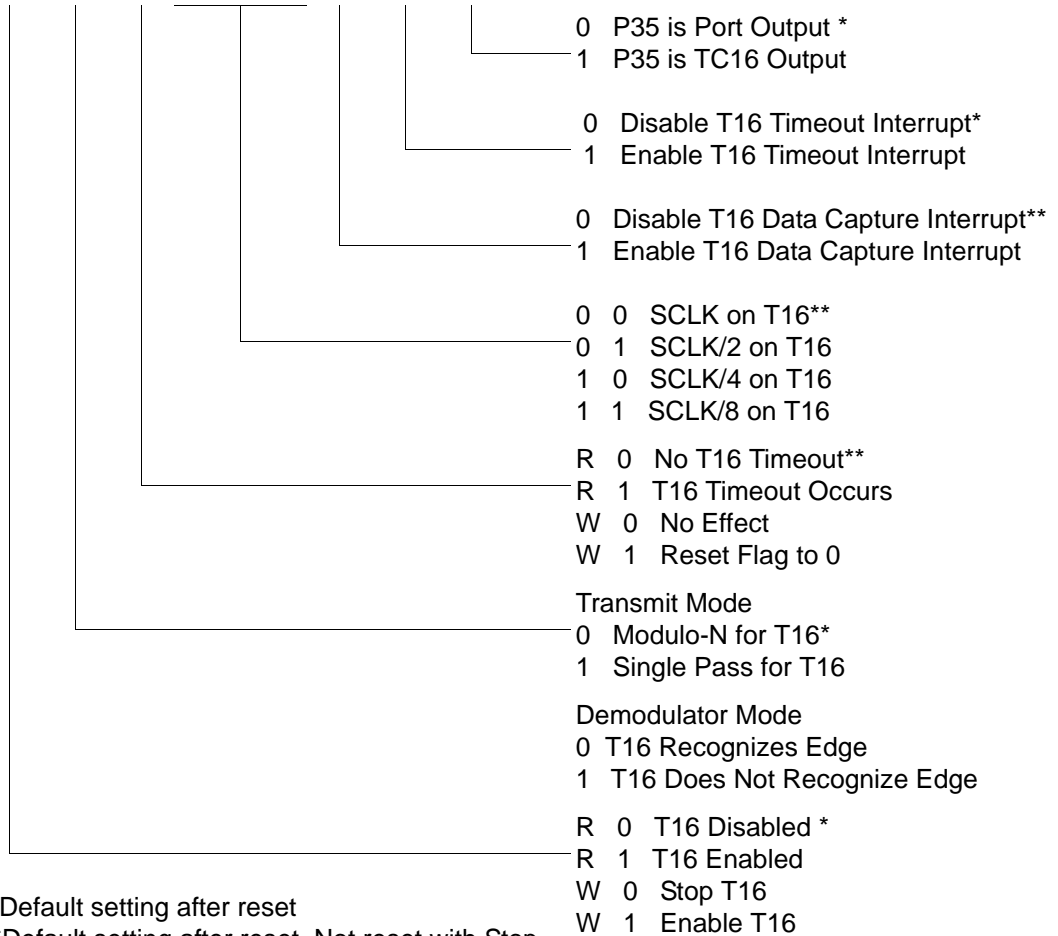


\* Default setting after reset

\*\*Default setting after reset. Not reset with Stop Mode recovery.

**Figure 41. T16 Control Register ((0D) 2H: Read/Write Except Where Noted)**

SMR2(0F)0DH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

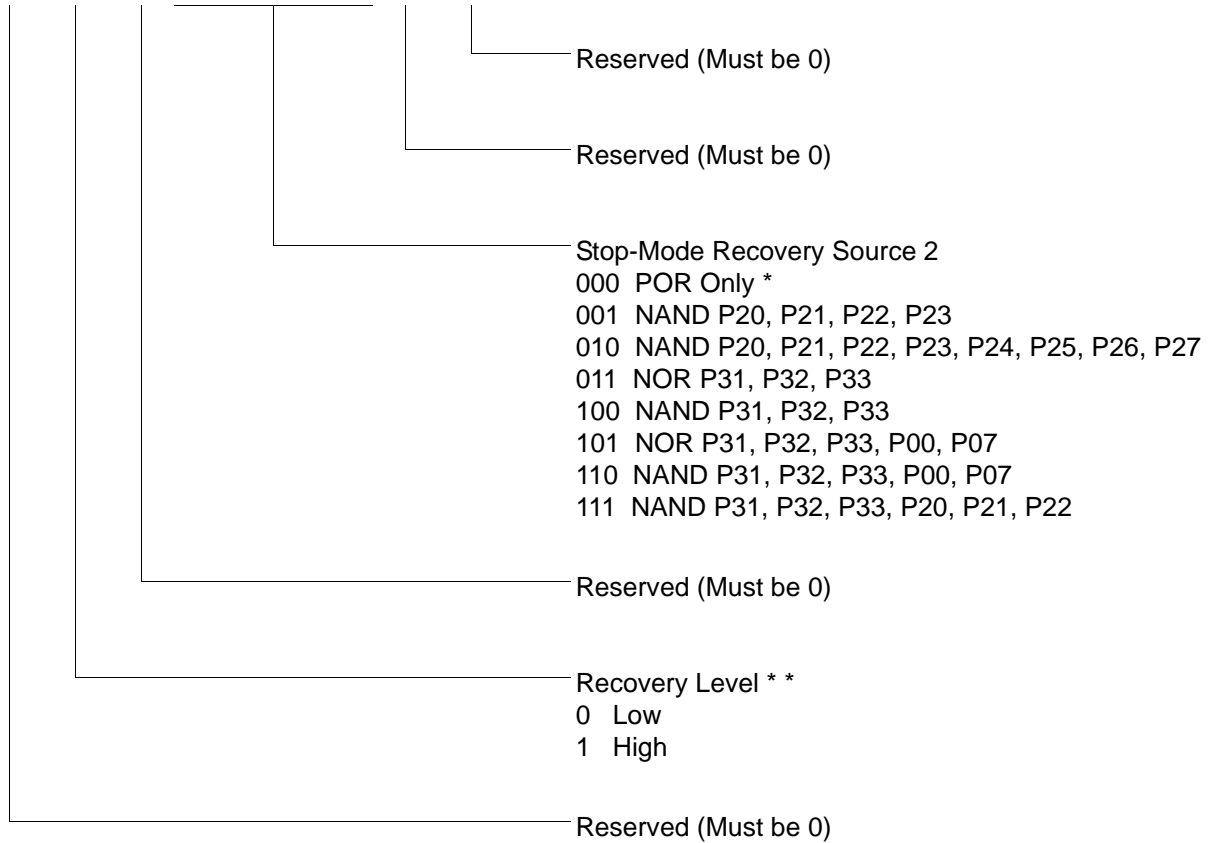

Note: If used in conjunction with SMR, either of the two specified events causes a Stop-Mode Recovery.


\* Default setting after reset

\* \* At the XOR gate input

Figure 46. Stop Mode Recovery Register 2 ((0F)0DH:D2–D4, D6 Write Only)


R248 P01M(F8H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

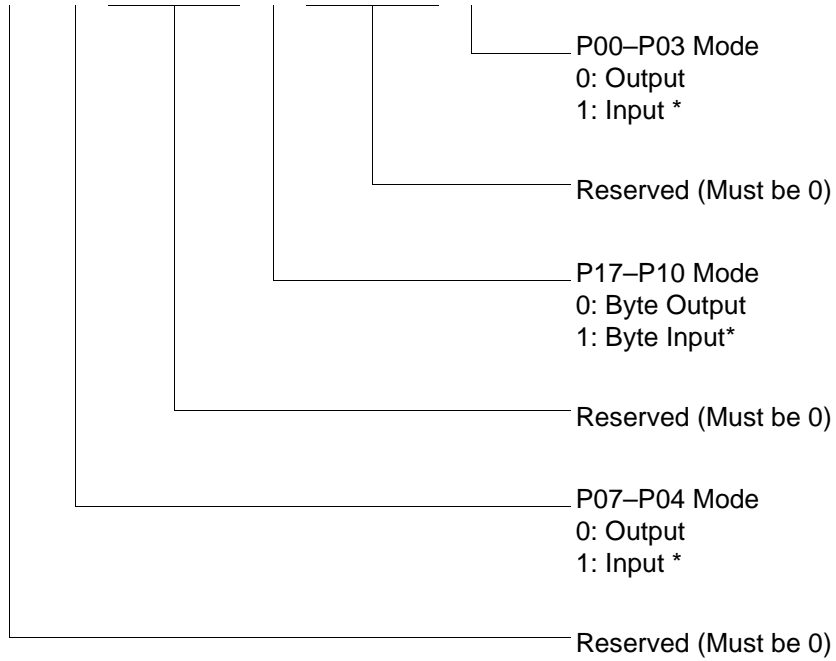

\* Default setting after reset; only P00, P01 and P07 are available in 20-pin configurations.

**Figure 50. Port 0 and 1 Mode Register (F8H: Write Only)**

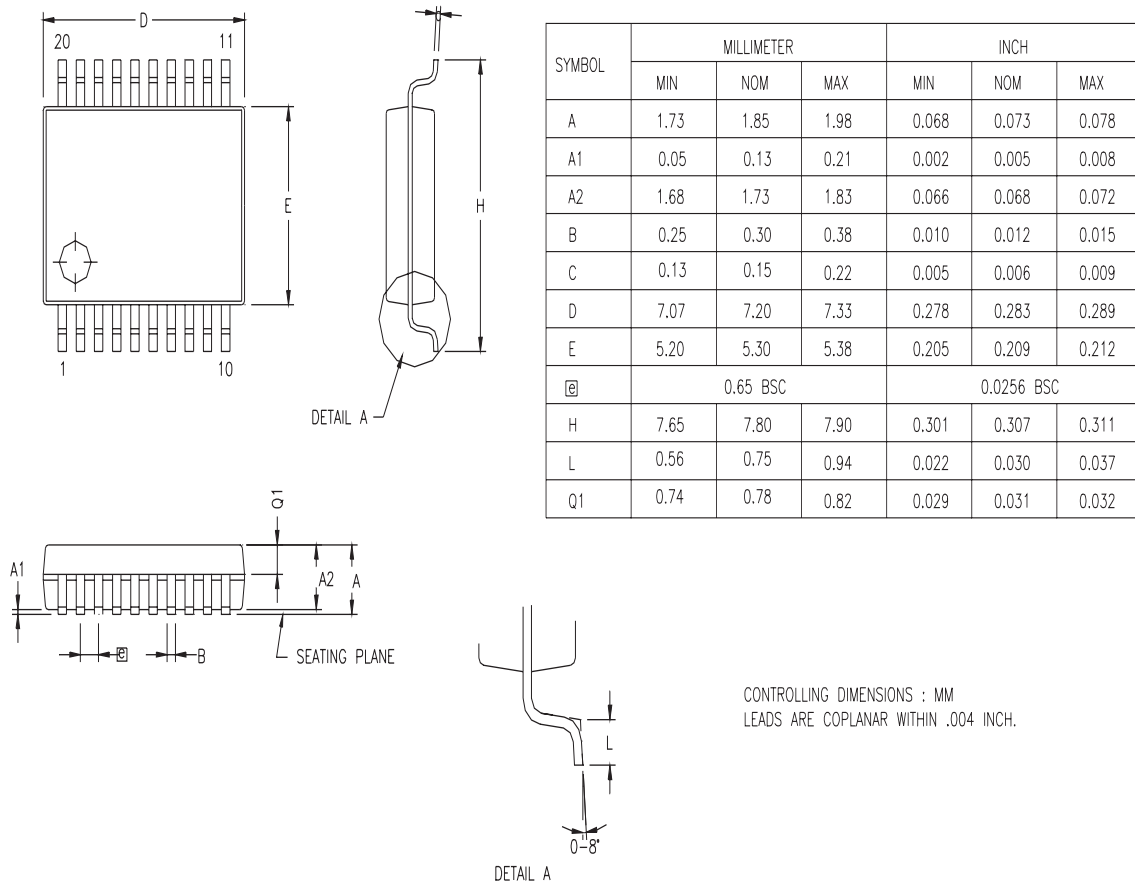

**Figure 61. 20-Pin SSOP Package Diagram**

---



---

**4KB Standard Temperature: 0° to +70°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LSH4804C | 48-pin SSOP 4K OTP | ZGP323LSS2804C | 28-pin SOIC 4K OTP |
| ZGP323LSP4004C | 40-pin PDIP 4K OTP | ZGP323LSH2004C | 20-pin SSOP 4K OTP |
| ZGP323LSH2804C | 28-pin SSOP 4K OTP | ZGP323LSP2004C | 20-pin PDIP 4K OTP |
| ZGP323LSP2804C | 28-pin PDIP 4K OTP | ZGP323LSS2004C | 20-pin SOIC 4K OTP |

---



---

**4KB Extended Temperature: -40° to +105°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LEH4804C | 48-pin SSOP 4K OTP | ZGP323LES2804C | 28-pin SOIC 4K OTP |
| ZGP323LEP4004C | 40-pin PDIP 4K OTP | ZGP323LEH2004C | 20-pin SSOP 4K OTP |
| ZGP323LEH2804C | 28-pin SSOP 4K OTP | ZGP323LEP2004C | 20-pin PDIP 4K OTP |
| ZGP323LEP2804C | 28-pin PDIP 4K OTP | ZGP323LES2004C | 20-pin SOIC 4K OTP |

---



---

**4KB Automotive Temperature: -40° to +125°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LAH4804C | 48-pin SSOP 4K OTP | ZGP323LAS2804C | 28-pin SOIC 4K OTP |
| ZGP323LAP4004C | 40-pin PDIP 4K OTP | ZGP323LAH2004C | 20-pin SSOP 4K OTP |
| ZGP323LAH2804C | 28-pin SSOP 4K OTP | ZGP323LAP2004C | 20-pin PDIP 4K OTP |
| ZGP323LAP2804C | 28-pin PDIP 4K OTP | ZGP323LAS2004C | 20-pin SOIC 4K OTP |

---



---

Note: Replace C with G for Lead-Free Packaging

---



---

**Additional Components**

| Part Number    | Description         | Part Number    | Description        |
|----------------|---------------------|----------------|--------------------|
| ZGP323ICE01ZEM | Emulator/programmer | ZGP32300100ZPR | Programming System |



For fast results, contact your local ZiLOG sales office for assistance in ordering the part desired.

**Codes**

ZG = ZiLOG General Purpose Family

P = OTP

323 = Family Designation

L = Voltage Range

2V to 3.6V

T = Temperature Range:

S = 0 to 70 degrees C (Standard)

E = -40 to +105 degrees C (Extended)

A = -40 to +125 degrees C (Automotive)

P = Package Type:

K = Windowed Cerdip

P = PDIP

H = SSOP

S = SOIC

## = Number of Pins

CC = Memory Size

M = Packaging Options

C = Non Lead-Free

G = Lead-Free

E = CDIP

## **D**

DC characteristics 11  
 demodulation mode  
   count capture flowchart 42  
   flowchart 43  
   T16 45  
   T8 41  
 description  
   functional 23  
   general 2  
   pin 4

## **E**

EPROM  
   selectable options 62  
 expanded register file 24  
 expanded register file architecture 26  
 expanded register file control registers 69  
   flag 78  
   interrupt mask register 77  
   interrupt priority register 76  
   interrupt request register 77  
   port 0 and 1 mode register 75  
   port 2 configuration register 73  
   port 3 mode register 74  
   port configuration register 73  
   register pointer 78  
   stack pointer high register 79  
   stack pointer low register 79  
   stop-mode recovery register 71  
   stop-mode recovery register 2 72  
   T16 control register 67  
   T8 and T16 common control functions register 65  
   T8/T16 control register 68  
   TC8 control register 64  
   watch-dog timer register 73

## **F**

features  
   standby modes 1

## functional description

  counter/timer functional blocks 38  
   CTR(D)01h register 33  
   CTR0(D)00h register 31  
   CTR2(D)02h register 35  
   CTR3(D)03h register 37  
   expanded register file 24  
   expanded register file architecture 26  
   HI16(D)09h register 30  
   HI8(D)0Bh register 30  
   L08(D)0Ah register 30  
   L0I6(D)08h register 30  
   program memory map 24  
   RAM 23  
   register description 63  
   register file 28  
   register pointer 27  
   register pointer detail 29  
   SMR2(F)0D1h register 38  
   stack 29  
   TC16H(D)07h register 30  
   TC16L(D)06h register 31  
   TC8H(D)05h register 31  
   TC8L(D)04h register 31

## **G**

glitch filter circuitry 38

## **H**

halt instruction, counter/timer 52

## **I**

input circuit 38  
 interrupt block diagram, counter/timer 49  
 interrupt types, sources and vectors 50

## **L**

low-voltage detection register 63