



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	25475
Number of Logic Elements/Cells	326080
Total RAM Bits	16404480
Number of I/O	500
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 85°C (TJ)
Package / Case	900-BBGA, FCBGA
Supplier Device Package	900-FCBGA (31x31)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7k325t-2ffg900c

Table 1: Absolute Maximum Ratings ⁽¹⁾ (Cont'd)

Symbol	Description	Min	Max	Units
I_{DCIN}	DC input current for receiver input pins DC coupled $V_{MGTAVTT} = 1.2V$	–	14	mA
I_{DCOUT}	DC output current for transmitter pins DC coupled $V_{MGTAVTT} = 1.2V$	–	14	mA
XADC				
V_{CCADC}	XADC supply relative to GNDADC	–0.5	2.0	V
V_{REFP}	XADC reference input relative to GNDADC	–0.5	2.0	V
Temperature				
T_{STG}	Storage temperature (ambient)	–65	150	°C
T_{SOL}	Maximum soldering temperature for Pb/Sn component bodies ⁽⁶⁾	–	+220	°C
	Maximum soldering temperature for Pb-free component bodies ⁽⁶⁾	–	+260	°C
T_j	Maximum junction temperature ⁽⁶⁾	–	+125	°C

Notes:

- Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.
- The lower absolute voltage specification always applies.
- For I/O operation, refer to [UG471: 7 Series FPGAs SelectIO Resources User Guide](#).
- The maximum limit applied to DC and AC signals.
- For maximum undershoot and overshoot AC specifications, see [Table 4](#) and [Table 5](#).
- For soldering guidelines and thermal considerations, see [UG475: 7 Series FPGA Packaging and Pinout Specification](#).

Table 2: Recommended Operating Conditions ⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
FPGA Logic					
$V_{CCINT}^{(2)}$	Internal supply voltage	0.97	1.00	1.03	V
	For -2L (0.9V) devices: internal supply voltage	0.87	0.90	0.93	V
$V_{CCBRAM}^{(2)}$	Block RAM supply voltage	0.97	1.00	1.03	V
	For -2L (0.9V) devices: block RAM supply voltage	0.87	0.90	1.03	V
V_{CCAUX}	Auxiliary supply voltage	1.71	1.80	1.89	V
$V_{CCO}^{(3)(4)}$	Supply voltage for 3.3V HR I/O banks	1.14	–	3.465	V
	Supply voltage for 1.8V HP I/O banks	1.14	–	1.89	V
V_{CCAUX_IO}	Auxiliary supply voltage when set to 1.8V	1.71	1.80	1.89	V
	Auxiliary supply voltage when set to 2.0V	1.94	2.00	2.06	V
$V_{IN}^{(5)}$	I/O input voltage	–0.20	–	$V_{CCO} + 0.2$	V
	I/O input voltage for V_{REF} and differential I/O standards	–0.20	–	2.625	V
$I_{IN}^{(6)}$	Maximum current through any pin in a powered or unpowered bank when forward biasing the clamp diode.	–	–	10	mA
$V_{CCBATT}^{(7)}$	Battery voltage	1.0	–	1.89	V
GTX Transceiver					
$V_{MGTAVCC}^{(8)}$	Analog supply voltage for the GTX transceiver QPLL frequency range ≤ 10.3125 GHz ⁽⁹⁾⁽¹⁰⁾	0.97	1.0	1.08	V
	Analog supply voltage for the GTX transceiver QPLL frequency range > 10.3125 GHz	1.02	1.05	1.08	V
$V_{MGTAVTT}^{(8)}$	Analog supply voltage for the GTX transmitter and receiver termination circuits	1.17	1.2	1.23	V
$V_{MGTVCCAUX}^{(8)}$	Auxiliary analog QPLL voltage supply for the transceivers	1.75	1.80	1.85	V

AC Switching Characteristics

All values represented in this data sheet are based on the speed specifications in ISE® software 14.3 v1.07 for the -3, -2, -2L(1.0V), -1, and v1.06 for -2L(0.9V) speed grades.

Switching characteristics are specified on a per-speed-grade basis and can be designated as Advance, Preliminary, or Production. Each designation is defined as follows:

Advance Product Specification

These specifications are based on simulations only and are typically available soon after device design specifications are frozen. Although speed grades with this designation are considered relatively stable and conservative, some under-reporting might still occur.

Preliminary Product Specification

These specifications are based on complete ES (engineering sample) silicon characterization. Devices and speed grades with this designation are intended to give a better indication of the expected performance of production silicon. The probability of under-reporting delays is greatly reduced as compared to Advance data.

Product Specification

These specifications are released once enough production silicon of a particular device family member has been characterized to provide full correlation between specifications and devices over numerous production lots. There is no under-reporting of delays, and customers receive formal notification of any subsequent changes. Typically, the slowest speed grades transition to production before faster speed grades.

Testing of AC Switching Characteristics

Internal timing parameters are derived from measuring internal test patterns. All AC switching characteristics are representative of worst-case supply voltage and junction temperature conditions.

For more specific, more precise, and worst-case guaranteed data, use the values reported by the static timing analyzer and back-annotate to the simulation net list. Unless otherwise noted, values apply to all Kintex-7 FPGAs.

Speed Grade Designations

Since individual family members are produced at different times, the migration from one category to another depends completely on the status of the fabrication process for each device. [Table 14](#) correlates the current status of each Kintex-7 device on a per speed grade basis.

Table 14: Kintex-7 Device Speed Grade Designations

Device	Speed Grade Designations		
	Advance	Preliminary	Production
XC7K70T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)
XC7K160T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)
XC7K325T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)
XC7K355T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)
XC7K410T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)
XC7K420T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)
XC7K480T			-3, -2, -2L(1.0V), -1, and -2L (0.9V)

Production Silicon and ISE Software Status

In some cases, a particular family member (and speed grade) is released to production before a speed specification is released with the correct label (Advance, Preliminary, Production). Any labeling discrepancies are corrected in subsequent speed specification releases.

[Table 15](#) lists the production released Kintex-7 device, speed grade, and the minimum corresponding supported speed specification version and ISE software revisions. The ISE software and speed specifications listed are the minimum releases required for production. All subsequent releases of software and speed specifications are valid.

Table 15: Kintex-7 Device Production Software and Speed Specification Release

Device	Speed Grade Designations			
	1.0V			0.9V
	-3	-2/-2L	-1	-2L
XC7K70T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K160T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K325T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K355T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K410T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K420T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K480T	ISE 14.2 v1.06			ISE 14.3 v1.06

Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Kintex-7 devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 11](#). In each table, the I/O bank type is either High Performance (HP) or High Range (HR).

Table 16: Networking Applications Interface Performances

Description	I/O Bank Type	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14)	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s
SDR LVDS receiver (SFI-4.1) ⁽¹⁾	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS receiver (SFI-4.2) ⁽¹⁾	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s

Notes:

1. LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOP1}				T _{IOP0}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVC MOS12_F8	0.64	0.67	0.78	0.95	1.27	1.42	1.55	1.41	1.91	2.18	2.37	2.02	ns
LVDCI_18	0.47	0.50	0.60	0.86	1.99	2.15	2.35	2.44	2.62	2.91	3.17	3.05	ns
LVDCI_15	0.59	0.62	0.73	0.87	1.98	2.23	2.58	2.40	2.62	2.99	3.40	3.01	ns
LVDCI_DV2_18	0.47	0.50	0.60	0.87	1.99	2.15	2.34	1.86	2.62	2.90	3.17	2.48	ns
LVDCI_DV2_15	0.59	0.62	0.73	0.87	1.98	2.23	2.58	1.83	2.62	2.99	3.40	2.44	ns
HSLVDCI_18	0.68	0.72	0.82	0.86	1.99	2.15	2.35	2.43	2.62	2.91	3.17	3.04	ns
HSLVDCI_15	0.68	0.72	0.82	0.84	1.98	2.23	2.58	2.27	2.62	2.99	3.40	2.88	ns
SSTL18_I_S	0.68	0.72	0.82	0.86	1.02	1.15	1.24	1.41	1.66	1.90	2.07	2.02	ns
SSTL18_II_S	0.68	0.72	0.82	0.87	1.17	1.29	1.37	1.55	1.81	2.05	2.19	2.16	ns
SSTL18_I_DCI_S	0.68	0.72	0.82	0.76	0.92	1.06	1.17	1.32	1.56	1.82	1.99	1.93	ns
SSTL18_II_DCI_S	0.68	0.72	0.82	0.78	0.88	0.98	1.08	1.26	1.51	1.74	1.90	1.87	ns
SSTL18_II_T_DCI_S	0.68	0.72	0.82	0.78	0.92	1.06	1.17	1.32	1.56	1.82	1.99	1.93	ns
SSTL15_S	0.68	0.72	0.82	0.81	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
SSTL15_DCI_S	0.68	0.72	0.82	0.78	0.94	1.06	1.15	1.30	1.57	1.82	1.97	1.91	ns
SSTL15_T_DCI_S	0.68	0.72	0.82	0.80	0.94	1.06	1.15	1.30	1.57	1.82	1.97	1.91	ns
SSTL135_S	0.69	0.72	0.82	0.89	0.97	1.10	1.19	1.35	1.60	1.85	2.01	1.96	ns
SSTL135_DCI_S	0.69	0.72	0.82	0.84	0.97	1.09	1.19	1.33	1.60	1.85	2.01	1.94	ns
SSTL135_T_DCI_S	0.69	0.72	0.82	0.84	0.97	1.09	1.19	1.33	1.60	1.85	2.01	1.94	ns
SSTL12_S	0.69	0.72	0.82	0.95	0.96	1.09	1.18	1.33	1.60	1.84	2.00	1.94	ns
SSTL12_DCI_S	0.69	0.72	0.82	0.91	1.03	1.17	1.27	1.33	1.66	1.92	2.09	1.94	ns
SSTL12_T_DCI_S	0.69	0.72	0.82	0.91	1.03	1.17	1.27	1.33	1.66	1.92	2.09	1.94	ns
DIFF_SSTL18_I_S	0.75	0.79	0.92	0.89	1.02	1.15	1.24	1.43	1.66	1.90	2.07	2.04	ns
DIFF_SSTL18_II_S	0.75	0.79	0.92	0.89	1.17	1.29	1.37	1.55	1.81	2.05	2.19	2.16	ns
DIFF_SSTL18_I_DCI_S	0.75	0.79	0.92	0.76	0.92	1.06	1.17	1.40	1.56	1.82	1.99	2.01	ns
DIFF_SSTL18_II_DCI_S	0.75	0.79	0.92	0.75	0.88	0.98	1.08	1.33	1.51	1.74	1.90	1.94	ns
DIFF_SSTL18_II_T_DCI_S	0.75	0.79	0.92	0.76	0.92	1.06	1.17	1.40	1.56	1.82	1.99	2.01	ns
DIFF_SSTL15_S	0.68	0.72	0.82	0.89	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
DIFF_SSTL15_DCI_S	0.68	0.72	0.82	0.75	0.94	1.06	1.15	1.30	1.57	1.82	1.97	1.91	ns
DIFF_SSTL15_T_DCI_S	0.68	0.72	0.82	0.76	0.94	1.06	1.15	1.38	1.57	1.82	1.97	1.99	ns
DIFF_SSTL135_S	0.69	0.72	0.82	0.91	0.97	1.10	1.19	1.35	1.60	1.85	2.01	1.96	ns
DIFF_SSTL135_DCI_S	0.69	0.72	0.82	0.76	0.97	1.09	1.19	1.33	1.60	1.85	2.01	1.94	ns
DIFF_SSTL135_T_DCI_S	0.69	0.72	0.82	0.76	0.97	1.09	1.19	1.43	1.60	1.85	2.01	2.04	ns
DIFF_SSTL12_S	0.69	0.72	0.82	0.91	0.96	1.09	1.18	1.33	1.60	1.84	2.00	1.94	ns
DIFF_SSTL12_DCI_S	0.69	0.72	0.82	0.78	1.03	1.17	1.27	1.33	1.66	1.92	2.09	1.94	ns
DIFF_SSTL12_T_DCI_S	0.69	0.72	0.82	0.80	1.03	1.17	1.27	1.41	1.66	1.92	2.09	2.02	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
SSTL18_I_F	0.68	0.72	0.82	0.86	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
SSTL18_II_F	0.68	0.72	0.82	0.87	0.97	1.09	1.16	1.36	1.61	1.84	1.99	1.98	ns
SSTL18_I_DCI_F	0.68	0.72	0.82	0.76	0.89	1.02	1.10	1.30	1.53	1.77	1.92	1.91	ns
SSTL18_II_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.24	1.53	1.77	1.92	1.85	ns
SSTL18_II_T_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.27	1.53	1.77	1.92	1.88	ns
SSTL15_F	0.68	0.72	0.82	0.81	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
SSTL15_DCI_F	0.68	0.72	0.82	0.78	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL15_T_DCI_F	0.68	0.72	0.82	0.80	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL135_F	0.69	0.72	0.82	0.89	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_T_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL12_F	0.69	0.72	0.82	0.95	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
SSTL12_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
SSTL12_T_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.26	1.54	1.79	1.93	1.87	ns
DIFF_SSTL18_I_F	0.75	0.79	0.92	0.89	0.94	1.06	1.15	1.38	1.58	1.82	1.97	1.99	ns
DIFF_SSTL18_II_F	0.75	0.79	0.92	0.89	0.97	1.09	1.16	1.40	1.61	1.84	1.99	2.01	ns
DIFF_SSTL18_I_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.36	1.53	1.77	1.92	1.98	ns
DIFF_SSTL18_II_DCI_F	0.75	0.79	0.92	0.75	0.89	1.02	1.10	1.32	1.53	1.77	1.92	1.93	ns
DIFF_SSTL18_II_T_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.38	1.53	1.77	1.92	1.99	ns
DIFF_SSTL15_F	0.68	0.72	0.82	0.89	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
DIFF_SSTL15_DCI_F	0.68	0.72	0.82	0.75	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
DIFF_SSTL15_T_DCI_F	0.68	0.72	0.82	0.76	0.89	1.01	1.09	1.35	1.53	1.77	1.91	1.96	ns
DIFF_SSTL135_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_T_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.35	1.52	1.76	1.90	1.96	ns
DIFF_SSTL12_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
DIFF_SSTL12_DCI_F	0.69	0.72	0.82	0.78	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
DIFF_SSTL12_T_DCI_F	0.69	0.72	0.82	0.80	0.91	1.03	1.11	1.33	1.54	1.79	1.93	1.94	ns

Notes:

1. This I/O standard is only available in the 1.8V high-performance (HP) banks.

Input/Output Logic Switching Characteristics

Table 22: ILOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ICE1CK} /T _{ICKCE1}	CE1 pin Setup/Hold with respect to CLK	0.42/0.00	0.48/0.00	0.67/0.00	0.56/−0.16	ns
T _{ISRCK} /T _{ICKSR}	SR pin Setup/Hold with respect to CLK	0.53/0.01	0.61/0.01	0.99/0.01	0.88/−0.30	ns
T _{IDOCKE2} /T _{IOCKDE2}	D pin Setup/Hold with respect to CLK without Delay (HP I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE2} /T _{IOCKDDE2}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HP I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
T _{IDOCKE3} /T _{IOCKDE3}	D pin Setup/Hold with respect to CLK without Delay (HR I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE3} /T _{IOCKDDE3}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HR I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
Combinatorial						
T _{IDIE2}	D pin to O pin propagation delay, no Delay (HP I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE2}	DDLY pin to O pin propagation delay (using IDELAY) (HP I/O banks only)	0.10	0.11	0.13	0.15	ns
T _{IDIE3}	D pin to O pin propagation delay, no Delay (HR I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE3}	DDLY pin to O pin propagation delay (using IDELAY) (HR I/O banks only)	0.10	0.11	0.13	0.15	ns
Sequential Delays						
T _{IDLOE2}	D pin to Q1 pin using flip-flop as a latch without Delay (HP I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE2}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HP I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{IDLOE3}	D pin to Q1 pin using flip-flop as a latch without Delay (HR I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE3}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HR I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{ICKQ}	CLK to Q outputs	0.47	0.50	0.58	0.71	ns
T _{RQ_ILOGICE2}	SR pin to OQ/TQ out (HP I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE2}	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
T _{RQ_ILOGICE3}	SR pin to OQ/TQ out (HR I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE3}	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_ILOGICE2}	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.63	0.63	0.68	ns, Min
T _{RPW_ILOGICE3}	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.63	0.63	0.68	ns, Min

Table 23: OLOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ODCK} /T _{OCKD}	D1/D2 pins Setup/Hold with respect to CLK	0.45/−0.13	0.50/−0.13	0.58/−0.13	0.79/−0.18	ns
T _{OOCECK} /T _{OCKOCE}	OCE pin Setup/Hold with respect to CLK	0.28/0.03	0.29/0.03	0.45/0.03	0.35/−0.10	ns
T _{OSRCK} /T _{OCKSR}	SR pin Setup/Hold with respect to CLK	0.32/0.18	0.38/0.18	0.70/0.18	0.62/−0.04	ns
T _{OTCK} /T _{OCKT}	T1/T2 pins Setup/Hold with respect to CLK	0.49/−0.16	0.56/−0.16	0.68/−0.16	0.67/−0.18	ns
T _{OTCECK} /T _{OCKTCE}	TCE pin Setup/Hold with respect to CLK	0.28/0.01	0.30/0.01	0.45/0.01	0.31/−0.10	ns
Combinatorial						
T _{ODQ}	D1 to OQ out or T1 to TQ out	0.73	0.81	0.97	1.18	ns
Sequential Delays						
T _{OCKQ}	CLK to OQ/TQ out	0.41	0.43	0.49	0.63	ns
T _{RQ_OLOGICE2}	SR pin to OQ/TQ out (HP I/O banks only)	0.63	0.70	0.83	1.12	ns
T _{GSRQ_OLOGICE2}	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
T _{RQ_OLOGICE3}	SR pin to OQ/TQ out (HR I/O banks only)	0.63	0.70	0.83	1.12	ns
T _{GSRQ_OLOGICE3}	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_OLOGICE2}	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.54	0.63	0.68	ns, Min
T _{RPW_OLOGICE3}	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.54	0.63	0.68	ns, Min

Output Serializer/Deserializer Switching Characteristics

Table 25: OSERDES Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{OSDCK_D} /T _{OSCKD_D}	D input Setup/Hold with respect to CLKDIV	0.37/0.02	0.40/0.02	0.55/0.02	0.44/−0.24	ns
T _{OSDCK_T} /T _{OSCKD_T} ⁽¹⁾	T input Setup/Hold with respect to CLK	0.49/−0.15	0.56/−0.15	0.68/−0.15	0.67/−0.25	ns
T _{OSDCK_T2} /T _{OSCKD_T2} ⁽¹⁾	T input Setup/Hold with respect to CLKDIV	0.27/−0.15	0.30/−0.15	0.34/−0.15	0.46/−0.25	ns
T _{OSCCK_OCE} /T _{OSCKC_OCE}	OCE input Setup/Hold with respect to CLK	0.28/0.03	0.29/0.03	0.45/0.03	0.35/−0.15	ns
T _{OSCCK_S}	SR (Reset) input Setup with respect to CLKDIV	0.41	0.46	0.75	0.70	ns
T _{OSCCK_TCE} /T _{OSCKC_TCE}	TCE input Setup/Hold with respect to CLK	0.28/0.01	0.30/0.01	0.45/0.01	0.31/−0.15	ns
Sequential Delays						
T _{OSCKO_OQ}	Clock to out from CLK to OQ	0.35	0.37	0.42	0.54	ns
T _{OSCKO_TQ}	Clock to out from CLK to TQ	0.41	0.43	0.49	0.63	ns
Combinatorial						
T _{OSDO_TTQ}	T input to TQ Out	0.73	0.81	0.97	1.18	ns

Notes:

- T_{OSDCK_T2} and T_{OSCKD_T2} are reported as T_{OSDCK_T}/T_{OSCKD_T} in TRACE report.

Table 27: IO_FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
IO_FIFO Clock to Out Delays						
T _{OFFCKO_DO}	RDCLK to Q outputs	0.51	0.56	0.63	0.81	ns
T _{CKO_FLAGS}	Clock to IO_FIFO Flags	0.59	0.62	0.81	0.77	ns
Setup/Hold						
T _{CCK_D} /T _{CKC_D}	D inputs to WRCLK	0.43/−0.01	0.47/−0.01	0.53/−0.01	0.76/−0.05	ns
T _{IFFCKC_WREN} /T _{IFFCKC_WREN}	WREN to WRCLK	0.39/−0.01	0.43/−0.01	0.50/−0.01	0.70/−0.05	ns
T _{OFFCKC_RDEN} /T _{OFFCKC_RDEN}	RDEN to RDCLK	0.49/0.01	0.53/0.02	0.61/0.02	0.79/−0.02	ns
Minimum Pulse Width						
T _{PWH_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	1.29	ns
T _{PWL_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	1.29	ns
Maximum Frequency						
F _{MAX}	RDCLK and WRCLK	533.05	470.37	400.00	333.33	MHz

Block RAM and FIFO Switching Characteristics

Table 31: Block RAM and FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Block RAM and FIFO Clock-to-Out Delays						
T_{RCKO_DO} and $T_{RCKO_DO_REG}^{(1)}$	Clock CLK to DOUT output (without output register) ⁽²⁾⁽³⁾	1.57	1.80	2.08	2.44	ns, Max
	Clock CLK to DOUT output (with output register) ⁽⁴⁾⁽⁵⁾	0.54	0.63	0.75	0.86	ns, Max
$T_{RCKO_DO_ECC}$ and $T_{RCKO_DO_ECC_REG}$	Clock CLK to DOUT output with ECC (without output register) ⁽²⁾⁽³⁾	2.35	2.58	3.26	4.49	ns, Max
	Clock CLK to DOUT output with ECC (with output register) ⁽⁴⁾⁽⁵⁾	0.62	0.69	0.80	0.94	ns, Max
$T_{RCKO_DO_CASCOU}$ and $T_{RCKO_DO_CASCOU_REG}$	Clock CLK to DOUT output with Cascade (without output register) ⁽²⁾	2.21	2.45	2.80	3.19	ns, Max
	Clock CLK to DOUT output with Cascade (with output register) ⁽⁴⁾	0.98	1.08	1.24	1.32	ns, Max
T_{RCKO_FLAGS}	Clock CLK to FIFO flags outputs ⁽⁶⁾	0.65	0.74	0.89	0.97	ns, Max
$T_{RCKO_POINTERS}$	Clock CLK to FIFO pointers outputs ⁽⁷⁾	0.79	0.87	0.98	1.10	ns, Max
$T_{RCKO_PARITY_ECC}$	Clock CLK to ECCPARITY in ECC encode only mode	0.66	0.72	0.80	0.93	ns, Max
$T_{RCKO_SDBIT_ECC}$ and $T_{RCKO_SDBIT_ECC_REG}$	Clock CLK to BITERR (without output register)	2.17	2.38	3.01	4.15	ns, Max
	Clock CLK to BITERR (with output register)	0.57	0.65	0.76	0.89	ns, Max
$T_{RCKO_RDADDR_ECC}$ and $T_{RCKO_RDADDR_ECC_REG}$	Clock CLK to RDADDR output with ECC (without output register)	0.64	0.74	0.90	0.98	ns, Max
	Clock CLK to RDADDR output with ECC (with output register)	0.71	0.79	0.92	1.10	ns, Max
Setup and Hold Times Before/After Clock CLK						
$T_{RCK_ADDR}/T_{RCKC_ADDR}$	ADDR inputs ⁽⁸⁾	0.38/0.27	0.42/0.28	0.48/0.31	0.65/0.38	ns, Min
$T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$	Data input setup/hold time when block RAM is configured in WRITE_FIRST or NO_CHANGE mode ⁽⁹⁾	0.49/0.51	0.55/0.53	0.63/0.57	0.78/0.64	ns, Min
$T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$	Data input setup/hold time when block RAM is configured in READ_FIRST mode ⁽⁹⁾	0.17/0.25	0.19/0.29	0.21/0.35	0.25/0.32	ns, Min
$T_{RDCK_DI_ECC}/T_{RCKD_DI_ECC}$	DIN inputs with block RAM ECC in standard mode ⁽⁹⁾	0.42/0.37	0.47/0.39	0.53/0.43	0.66/0.46	ns, Min
$T_{RDCK_DI_ECCW}/T_{RCKD_DI_ECCW}$	DIN inputs with block RAM ECC encode only ⁽⁹⁾	0.79/0.37	0.87/0.39	0.99/0.43	1.17/0.41	ns, Min
$T_{RDCK_DI_ECC_FIFO}/T_{RCKD_DI_ECC_FIFO}$	DIN inputs with FIFO ECC in standard mode ⁽⁹⁾	0.89/0.47	0.98/0.50	1.12/0.54	1.32/0.65	ns, Min
$T_{RCK_INJECTBITERR}/T_{RCKC_INJECTBITERR}$	Inject single/double bit error in ECC mode	0.49/0.30	0.55/0.31	0.63/0.34	0.78/0.41	ns, Min
T_{RCK_EN}/T_{RCKC_EN}	Block RAM Enable (EN) input	0.30/0.17	0.33/0.18	0.38/0.20	0.48/0.22	ns, Min
$T_{RCK_REGCE}/T_{RCKC_REGCE}$	CE input of output register	0.21/0.13	0.25/0.13	0.31/0.14	0.34/0.16	ns, Min
$T_{RCK_RSTREG}/T_{RCKC_RSTREG}$	Synchronous RSTREG input	0.25/0.06	0.27/0.06	0.29/0.06	0.35/0.06	ns, Min

Table 32: DSP48E1 Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup and Hold Times of the RST Pins						
$T_{\text{DSPDCK}_{\{\text{RSTA}; \text{RSTB}\}}_{\{\text{AREG}; \text{BREG}\}}/T_{\text{DSPCKD}_{\{\text{RSTA}; \text{RSTB}\}}_{\{\text{AREG}; \text{BREG}\}}}$	{RSTA, RSTB} input to {A, B} register CLK	0.34/ 0.10	0.39/ 0.11	0.47/ 0.13	0.53/ 0.34	ns
$T_{\text{DSPDCK_RSTC_CREG}}/T_{\text{DSPCKD_RSTC_CREG}}$	RSTC input to C register CLK	0.06/ 0.22	0.07/ 0.24	0.08/ 0.26	0.08/ 0.31	ns
$T_{\text{DSPDCK_RSTD_DREG}}/T_{\text{DSPCKD_RSTD_DREG}}$	RSTD input to D register CLK	0.37/ 0.06	0.42/ 0.06	0.50/ 0.07	0.57/ 0.07	ns
$T_{\text{DSPDCK_RSTM_MREG}}/T_{\text{DSPCKD_RSTM_MREG}}$	RSTM input to M register CLK	0.18/ 0.18	0.20/ 0.21	0.23/ 0.24	0.24/ 0.29	ns
$T_{\text{DSPDCK_RSTP_PREG}}/T_{\text{DSPCKD_RSTP_PREG}}$	RSTP input to P register CLK	0.24/ 0.01	0.26/ 0.01	0.30/ 0.01	0.37/ 0.00	ns
Combinatorial Delays from Input Pins to Output Pins						
$T_{\text{DSPDO_A_CARRYOUT_MULT}}$	A input to CARRYOUT output using multiplier	3.21	3.69	4.39	5.60	ns
$T_{\text{DSPDO_D_P_MULT}}$	D input to P output using multiplier	3.15	3.61	4.30	5.44	ns
$T_{\text{DSPDO_A_P}}$	A input to P output not using multiplier	1.30	1.48	1.76	2.10	ns
$T_{\text{DSPDO_C_P}}$	C input to P output	1.13	1.30	1.55	1.84	ns
Combinatorial Delays from Input Pins to Cascading Output Pins						
$T_{\text{DSPDO}_{\{\text{A}; \text{B}\}}_{\{\text{ACOUT}; \text{BCOUT}\}}}$	{A, B} input to {ACOUT, BCOUT} output	0.47	0.53	0.63	0.75	ns
$T_{\text{DSPDO}_{\{\text{A}; \text{B}\}}_{\text{CARRYCASCOUT_MULT}}}$	{A, B} input to CARRYCASCOUT output using multiplier	3.44	3.94	4.69	5.96	ns
$T_{\text{DSPDO_D_CARRYCASCOUT_MULT}}$	D input to CARRYCASCOUT output using multiplier	3.36	3.85	4.58	5.77	ns
$T_{\text{DSPDO}_{\{\text{A}; \text{B}\}}_{\text{CARRYCASCOUT}}}$	{A, B} input to CARRYCASCOUT output not using multiplier	1.50	1.72	2.04	2.44	ns
$T_{\text{DSPDO_C_CARRYCASCOUT}}$	C input to CARRYCASCOUT output	1.34	1.53	1.83	2.18	ns
Combinatorial Delays from Cascading Input Pins to All Output Pins						
$T_{\text{DSPDO_ACIN_P_MULT}}$	ACIN input to P output using multiplier	3.09	3.55	4.24	5.42	ns
$T_{\text{DSPDO_ACIN_P}}$	ACIN input to P output not using multiplier	1.16	1.33	1.59	2.07	ns
$T_{\text{DSPDO_ACIN_ACOUT}}$	ACIN input to ACOUT output	0.32	0.37	0.45	0.53	ns
$T_{\text{DSPDO_ACIN_CARRYCASCOUT_MULT}}$	ACIN input to CARRYCASCOUT output using multiplier	3.30	3.79	4.52	5.76	ns
$T_{\text{DSPDO_ACIN_CARRYCASCOUT}}$	ACIN input to CARRYCASCOUT output not using multiplier	1.37	1.57	1.87	2.40	ns
$T_{\text{DSPDO_PCIN_P}}$	PCIN input to P output	0.94	1.08	1.29	1.54	ns
$T_{\text{DSPDO_PCIN_CARRYCASCOUT}}$	PCIN input to CARRYCASCOUT output	1.15	1.32	1.57	1.88	ns
Clock to Outs from Output Register Clock to Output Pins						
$T_{\text{DSPCKO_P_PREG}}$	CLK PREG to P output	0.33	0.35	0.39	0.45	ns
$T_{\text{DSPCKO_CARRYCASCOUT_PREG}}$	CLK PREG to CARRYCASCOUT output	0.44	0.50	0.59	0.71	ns

MMCM Switching Characteristics

Table 38: MMCM Specification

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
MMCM_F _{INMAX}	Maximum Input Clock Frequency	1066.00	933.00	800.00	800.00	MHz
MMCM_F _{INMIN}	Minimum Input Clock Frequency	10.00	10.00	10.00	10.00	MHz
MMCM_F _{INJITTER}	Maximum Input Clock Period Jitter	< 20% of clock input period or 1 ns Max				
MMCM_F _{INDUTY}	Allowable Input Duty Cycle: 10—49 MHz	25.00	25.00	25.00	25.00	%
	Allowable Input Duty Cycle: 50—199 MHz	30.00	30.00	30.00	30.00	%
	Allowable Input Duty Cycle: 200—399 MHz	35.00	35.00	35.00	35.00	%
	Allowable Input Duty Cycle: 400—499 MHz	40.00	40.00	40.00	40.00	%
	Allowable Input Duty Cycle: >500 MHz	45.00	45.00	45.00	45.00	%
MMCM_F _{MIN_PSCLK}	Minimum Dynamic Phase Shift Clock Frequency	0.01	0.01	0.01	0.01	MHz
MMCM_F _{MAX_PSCLK}	Maximum Dynamic Phase Shift Clock Frequency	550.00	500.00	450.00	450.00	MHz
MMCM_F _{VCOMIN}	Minimum MMCM VCO Frequency	600.00	600.00	600.00	600.00	MHz
MMCM_F _{VCOMAX}	Maximum MMCM VCO Frequency	1600.00	1440.00	1200.00	1200.00	MHz
MMCM_F _{BANDWIDTH}	Low MMCM Bandwidth at Typical ⁽¹⁾	1.00	1.00	1.00	1.00	MHz
	High MMCM Bandwidth at Typical ⁽¹⁾	4.00	4.00	4.00	4.00	MHz
MMCM_T _{STATPHAOFFSET}	Static Phase Offset of the MMCM Outputs ⁽²⁾	0.12	0.12	0.12	0.12	ns
MMCM_T _{OUTJITTER}	MMCM Output Jitter	Note 3				
MMCM_T _{OUTDUTY}	MMCM Output Clock Duty Cycle Precision ⁽⁴⁾	0.20	0.20	0.20	0.25	ns
MMCM_T _{LOCKMAX}	MMCM Maximum Lock Time	100.00	100.00	100.00	100.00	μs
MMCM_F _{OUTMAX}	MMCM Maximum Output Frequency	1066.00	933.00	800.00	800.00	MHz
MMCM_F _{OUTMIN}	MMCM Minimum Output Frequency ⁽⁵⁾⁽⁶⁾	4.69	4.69	4.69	4.69	MHz
MMCM_T _{EXTFDVAR}	External Clock Feedback Variation	< 20% of clock input period or 1 ns Max				
MMCM_RST _{MINPULSE}	Minimum Reset Pulse Width	5.00	5.00	5.00	5.00	ns
MMCM_F _{PFDMAX}	Maximum Frequency at the Phase Frequency Detector with Bandwidth Set to High or Optimized	550.00	500.00	450.00	450.00	MHz
	Maximum Frequency at the Phase Frequency Detector with Bandwidth Set to Low	300.00	300.00	300.00	300.00	MHz
MMCM_F _{PFDMIN}	Minimum Frequency at the Phase Frequency Detector	10.00	10.00	10.00	10.00	MHz
MMCM_T _{FBDELAY}	Maximum Delay in the Feedback Path	3 ns Max or one CLKIN cycle				
MMCM Switching Characteristics Setup and Hold						
T _{MMCMDCK_PSEN} / T _{MMCMCKD_PSEN}	Setup and Hold of Phase Shift Enable	1.04/0.00	1.04/0.00	1.04/0.00	1.04/0.00	ns
T _{MMCMDCK_PSINCDEC} / T _{MMCMCKD_PSINCDEC}	Setup and Hold of Phase Shift Increment/Decrement	1.04/0.00	1.04/0.00	1.04/0.00	1.04/0.00	ns
T _{MMCMCKO_PSDONE}	Phase Shift Clock-to-Out of PSDONE	0.59	0.68	0.81	0.78	ns
Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK						
T _{MMCMDCK_DADDR} / T _{MMCMCKD_DADDR}	DADDR Setup/Hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{MMCMDCK_DI} / T _{MMCMCKD_DI}	DI Setup/Hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min

Table 38: MMCM Specification (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$T_{\text{MMCM DCK_DEN}}/$ $T_{\text{MMCMCKD_DEN}}$	DEN Setup/Hold	1.76/0.00	1.97/0.00	2.29/0.00	2.40/0.00	ns, Min
$T_{\text{MMCM DCK_DWE}}/$ $T_{\text{MMCMCKD_DWE}}$	DWE Setup/Hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
$T_{\text{MMCMCKO_DRDY}}$	CLK to out of DRDY	0.65	0.72	0.99	0.70	ns, Max
F_{DCK}	DCLK frequency	200.00	200.00	200.00	100.00	MHz, Max

Notes:

1. The MMCM does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
2. The static offset is measured between any MMCM outputs with identical phase.
3. Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
4. Includes global clock buffer.
5. Calculated as $F_{\text{VCO}}/128$ assuming output duty cycle is 50%.
6. When $\text{CLKOUT4_CASCADE} = \text{TRUE}$, $\text{MMCM_F}_{\text{OUTMIN}}$ is 0.036 MHz.

PLL Switching Characteristics

Table 39: PLL Specification

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$\text{PLL_F}_{\text{INMAX}}$	Maximum Input Clock Frequency	1066.00	933.00	800.00	800.00	MHz
$\text{PLL_F}_{\text{INMIN}}$	Minimum Input Clock Frequency	19.00	19.00	19.00	19.00	MHz
$\text{PLL_F}_{\text{INJITTER}}$	Maximum Input Clock Period Jitter	< 20% of clock input period or 1 ns Max				
$\text{PLL_F}_{\text{INDUTY}}$	Allowable Input Duty Cycle: 19—49 MHz	25.00	25.00	25.00	25.00	%
	Allowable Input Duty Cycle: 50—199 MHz	30.00	30.00	30.00	30.00	%
	Allowable Input Duty Cycle: 200—399 MHz	35.00	35.00	35.00	35.00	%
	Allowable Input Duty Cycle: 400—499 MHz	40.00	40.00	40.00	40.00	%
	Allowable Input Duty Cycle: >500 MHz	45.00	45.00	45.00	45.00	%
$\text{PLL_F}_{\text{VCOMIN}}$	Minimum PLL VCO Frequency	800.00	800.00	800.00	800.00	MHz
$\text{PLL_F}_{\text{VCOMAX}}$	Maximum PLL VCO Frequency	2133.00	1866.00	1600.00	1600.00	MHz
$\text{PLL_F}_{\text{BANDWIDTH}}$	Low PLL Bandwidth at Typical ⁽¹⁾	1.00	1.00	1.00	1.00	MHz
	High PLL Bandwidth at Typical ⁽¹⁾	4.00	4.00	4.00	4.00	MHz
$\text{PLL_T}_{\text{STATPHAOFFSET}}$	Static Phase Offset of the PLL Outputs ⁽²⁾	0.12	0.12	0.12	0.12	ns
$\text{PLL_T}_{\text{OUTJITTER}}$	PLL Output Jitter	Note 3				
$\text{PLL_T}_{\text{OUTDUTY}}$	PLL Output Clock Duty Cycle Precision ⁽⁴⁾	0.20	0.20	0.20	0.25	ns
$\text{PLL_T}_{\text{LOCKMAX}}$	PLL Maximum Lock Time	100	100	100	100	μs
$\text{PLL_F}_{\text{OUTMAX}}$	PLL Maximum Output Frequency	1066.00	933.00	800.00	800.00	MHz
$\text{PLL_F}_{\text{OUTMIN}}$	PLL Minimum Output Frequency ⁽⁵⁾	6.25	6.25	6.25	6.25	MHz
$\text{PLL_T}_{\text{EXTFDVAR}}$	External Clock Feedback Variation	< 20% of clock input period or 1 ns Max				
$\text{PLL_RST}_{\text{MINPULSE}}$	Minimum Reset Pulse Width	5.00	5.00	5.00	5.00	ns

Device Pin-to-Pin Output Parameter Guidelines

All devices are 100% functionally tested. Values are expressed in nanoseconds unless otherwise noted.

Table 40: Clock-Capable Clock Input to Output Delay Without MMCM/PLL (Near Clock Region)

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>without</i> MMCM/PLL.							
T _{ICKOF}	Clock-capable clock input and OUTFF <i>without</i> MMCM/PLL (near clock region)	XC7K70T	4.98	5.49	6.17	7.04	ns
		XC7K160T	5.23	5.77	6.48	7.38	ns
		XC7K325T	5.72	6.31	7.09	8.07	ns
		XC7K355T	5.34	5.87	6.57	7.51	ns
		XC7K410T	5.84	6.44	7.22	8.21	ns
		XC7K420T	5.50	6.04	6.77	7.73	ns
		XC7K480T	5.50	6.04	6.77	7.73	ns

Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.

Table 41: Clock-Capable Clock Input to Output Delay Without MMCM/PLL (Far Clock Region)

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>without</i> MMCM/PLL.							
T _{ICKOFFAR}	Clock-capable clock input and OUTFF <i>without</i> MMCM/PLL (far clock region)	XC7K70T	5.29	5.83	6.55	7.47	ns
		XC7K160T	5.84	6.45	7.24	8.24	ns
		XC7K325T	6.33	6.99	7.84	8.92	ns
		XC7K355T	5.95	6.55	7.32	8.36	ns
		XC7K410T	6.45	7.12	7.97	9.07	ns
		XC7K420T	6.41	7.06	7.90	9.01	ns
		XC7K480T	6.41	7.06	7.90	9.01	ns

Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.

Table 42: Clock-Capable Clock Input to Output Delay With MMCM

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> MMCM.							
T _{ICKOFMMCMCC}	Clock-capable clock input and OUTFF <i>with</i> MMCM	XC7K70T	0.95	0.95	0.95	1.74	ns
		XC7K160T	0.96	0.96	0.96	1.78	ns
		XC7K325T	1.00	1.00	1.00	1.82	ns
		XC7K355T	1.00	1.00	1.00	1.78	ns
		XC7K410T	1.00	1.00	1.00	1.82	ns
		XC7K420T	1.07	1.07	1.07	1.82	ns
		XC7K480T	1.07	1.07	1.07	1.82	ns

Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. MMCM output jitter is already included in the timing calculation.

Table 43: Clock-Capable Clock Input to Output Delay With PLL

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> PLL.							
T _{ICKOFPLLCC}	Clock-capable clock input and OUTFF <i>with</i> PLL	XC7K70T	0.84	0.84	0.84	1.45	ns
		XC7K160T	0.89	0.89	0.89	1.54	ns
		XC7K325T	0.89	0.89	0.89	1.54	ns
		XC7K355T	0.89	0.89	0.89	1.50	ns
		XC7K410T	0.89	0.89	0.89	1.54	ns
		XC7K420T	0.96	0.96	0.96	1.54	ns
		XC7K480T	0.96	0.96	0.96	1.54	ns

Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. PLL output jitter is already included in the timing calculation.

Table 44: Pin-to-Pin, Clock-to-Out using BUFIO

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> BUFIO.						
T _{ICKOFCS}	Clock-to-Out of I/O clock for HR I/O banks	4.93	5.52	6.20	6.97	ns
	Clock-to-Out of I/O clock for HP I/O banks	4.85	5.44	6.11	6.90	ns

Device Pin-to-Pin Input Parameter Guidelines

All devices are 100% functionally tested. Values are expressed in nanoseconds unless otherwise noted.

Table 45: Global Clock Input Setup and Hold Without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSFD} / T _{PHFD}	Full Delay (Legacy Delay or Default Delay) Global Clock Input and IFF ⁽²⁾ without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks	XC7K70T	2.83/−0.29	2.95/−0.29	3.15/−0.29	4.96/−0.33	ns
		XC7K160T	3.17/−0.35	3.29/−0.35	3.55/−0.35	5.54/−0.49	ns
		XC7K325T	2.83/−0.06	2.94/−0.06	3.15/−0.06	5.18/−0.14	ns
		XC7K355T	3.26/−0.32	3.41/−0.32	3.67/−0.32	5.84/−0.49	ns
		XC7K410T	3.43/−0.34	3.59/−0.34	3.88/−0.34	6.21/−0.54	ns
		XC7K420T	3.37/−0.27	3.48/−0.27	3.76/−0.27	6.00/−0.52	ns
		XC7K480T	3.37/−0.27	3.48/−0.27	3.76/−0.27	6.00/−0.52	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- A Zero "0" Hold Time listing indicates no hold time or a negative hold time.

Table 46: Clock-Capable Clock Input Setup and Hold With MMCM

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSMMCMCC} / T _{PHMMCMCC}	No Delay clock-capable clock input and IFF ⁽²⁾ with MMCM	XC7K70T	2.39/−0.22	2.65/−0.22	2.94/−0.22	2.21/−0.44	ns
		XC7K160T	2.49/−0.20	2.77/−0.20	3.07/−0.20	2.38/−0.47	ns
		XC7K325T	2.55/−0.16	2.85/−0.16	3.14/−0.16	2.60/−0.47	ns
		XC7K355T	2.43/−0.16	2.73/−0.16	3.00/−0.16	2.47/−0.43	ns
		XC7K410T	2.55/−0.16	2.84/−0.16	3.14/−0.16	2.58/−0.47	ns
		XC7K420T	2.47/−0.09	2.73/−0.09	3.02/−0.09	2.40/−0.41	ns
		XC7K480T	2.47/−0.09	2.73/−0.09	3.02/−0.09	2.40/−0.41	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- Use IBIS to determine any duty-cycle distortion incurred using various standards.

GTX Transceiver Specifications

GTX Transceiver DC Input and Output Levels

Table 51 summarizes the DC output specifications of the GTX transceivers in Kintex-7 FPGAs. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 51: GTX Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV_{PPOUT}	Differential peak-to-peak output voltage ⁽¹⁾	Transmitter output swing is set to maximum setting	–	–	1000	mV
$V_{CMOUTDC}$	DC common mode output voltage.	Equation based	$V_{MGTAVTT} - DV_{PPOUT}/4$			mV
R_{OUT}	Differential output resistance		–	100	–	Ω
T_{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew		–	2	12	ps
DV_{PPIN}	Differential peak-to-peak input voltage (external AC coupled)	>10.3125 Gb/s	150	–	1250	mV
		6.6 Gb/s to 10.3125 Gb/s	150	–	1250	mV
		≤ 6.6 Gb/s	150	–	2000	mV
V_{IN}	Absolute input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–200	–	$V_{MGTAVTT}$	mV
V_{CMIN}	Common mode input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–	$2/3 V_{MGTAVTT}$	–	mV
R_{IN}	Differential input resistance		–	100	–	Ω
C_{EXT}	Recommended external AC coupling capacitor ⁽²⁾		–	100	–	nF

Notes:

- The output swing and preemphasis levels are programmable using the attributes discussed in [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) and can result in values lower than reported in this table.
- Other values can be used as appropriate to conform to specific protocols and standards.

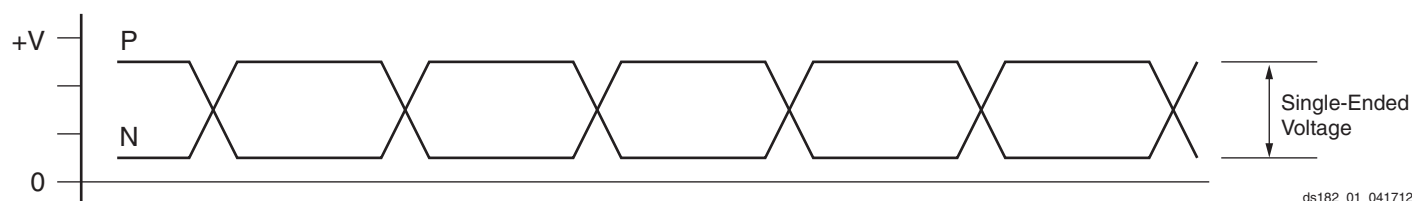


Figure 1: Single-Ended Peak-to-Peak Voltage

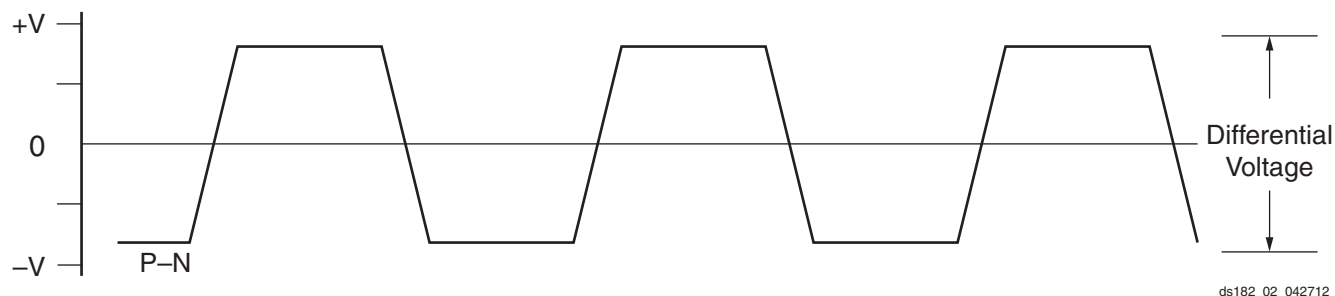


Figure 2: Differential Peak-to-Peak Voltage

Table 68: Configuration Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Master/Slave Serial Mode Programming Switching						
T _{DCC} /T _{CCKD}	DIN Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{CCO}	DOUT clock to out	8.00	8.00	8.00	9.00	ns, Max
SelectMAP Mode Programming Switching						
T _{SMDCC} /T _{SMCCKD}	D[31:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
T _{SMCSCCK} /T _{SMCCKCS}	CSI_B Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{SMWCC} /T _{SMCCKW}	RDWR_B Setup/Hold	10.00/0.00	10.00/0.00	10.00/0.00	12.00/0.00	ns, Min
T _{SMCKCSO}	CSO_B clock to out (330 Ω pull-up resistor required)	7.00	7.00	7.00	8.00	ns, Max
T _{SMCO}	D[31:00] clock to out in readback	8.00	8.00	8.00	10.00	ns, Max
F _{RBCK}	Readback frequency	100.00	100.00	100.00	70.00	MHz, Max
Boundary-Scan Port Timing Specifications						
T _{TAPTCK} /T _{TCKTAP}	TMS and TDI Setup/Hold	3.00/2.00	3.00/2.00	3.00/2.00	3.00/2.00	ns, Min
T _{TCKTDO}	TCK falling edge to TDO output	7.00	7.00	7.00	8.50	ns, Max
F _{TCK}	TCK frequency	66.00	66.00	66.00	50.00	MHz, Max
BPI Master Flash Mode Programming Switching						
T _{BPICCO} ⁽²⁾	A[28:00], RS[1:0], FCS_B, FOE_B, FWE_B, ADV_B clock to out	8.50	8.50	8.50	10.00	ns, Max
T _{BPIDCC} /T _{BPICCD}	D[15:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
SPI Master Flash Mode Programming Switching						
T _{SPIDCC} /T _{SPICCD}	D[03:00] Setup/Hold	3.00/0.00	3.00/0.00	3.00/0.00	3.00/0.00	ns, Min
T _{SPICCM}	MOSI clock to out	8.00	8.00	8.00	9.00	ns, Max
T _{SPICCF}	FCS_B clock to out	8.00	8.00	8.00	9.00	ns, Max

Notes:

1. To support longer delays in configuration, use the design solutions described in [UG470: 7 Series FPGA Configuration User Guide](#).
2. Only during configuration, the last edge is determined by a weak pull-up/pull-down resistor in the I/O.

eFUSE Programming Conditions

Table 69 lists the programming conditions specifically for eFUSE. For more information, see [UG470: 7 Series FPGA Configuration User Guide](#).

Table 69: eFUSE Programming Conditions⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
I_{FS}	V_{CCAUX} supply current	—	—	115	mA
t_j	Temperature range	15	—	125	$^{\circ}\text{C}$

Notes:

1. The FPGA must not be configured during eFUSE programming.

Revision History

The following table shows the revision history for this document:

Date	Version	Description
03/01/11	1.0	Initial Xilinx release.
04/01/11	1.1	Added the XC7K355T, XC7K420T, and XC7K480T devices throughout data sheet. Added the extended temperature range discussion to page 1 . Updated V_{CCAUX_IO} in Table 2 . Edits to clarify Power-On/Off Power Supply Sequencing power sequencing discussion. Added I_{CCAUX_IO} and I_{CCBRAM} to Table 6 and Table 7 . Updated $MMCM_F_{INDUTY}$ and added $F_{INJITTER}$, $T_{OUTJITTER}$, $T_{EXTFVAR}$, and Note 3 to Table 38 . Removed the SBG324 package from Table 50 . Updated the Notice of Disclaimer .
10/04/11	1.2	Replaced -1L with -2L throughout this data sheet. Updated Min/Max values and removed Note 5 from Table 2 . Clarified Power-On/Off Power Supply Sequencing power sequencing discussion including adding $T_{VCCO2VCCAUX}$ to Table 8 . Updated V_{ICM} in Table 12 and Table 13 . Added Note 1 to Table 12 . Updated Table 69 including adding Note 1 . Added <i>Absolute Maximum Ratings for GTX Transceivers</i> . Revised the reference clock maximum frequency (F_{GCLK}) in Table 55 . Added Table 57 . Added LVTTTL and removed SSTL135_II and SSTL15_II specifications from Table 19 . Removed HSTL_III from Table 20 . Removed the <i>I/O Standard Adjustment Measurement Methodology</i> section. Use IBIS for more accurate information and measurements. Updated $T_{DELAYPAT_JIT}$ in Table 26 . Added T_{AS}/T_{AH} to Table 28 . Added $T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$ and $T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$ to Table 31 . Completely updated Table 68 . Updated the AC Switching Characteristics in Table 19 , Table 20 , Table 21 , Table 22 , Table 23 , Table 24 , Table 26 through Table 38 , Table 40 through Table 37 , and Table 67 .
11/03/11	1.3	Revised the V_{OCM} specification in Table 12 . Updated the AC Switching Characteristics based upon the ISE 13.3 v1.02 speed specification throughout document including Table 19 and Table 20 . Added $MMCM_T_{FBDELAY}$ while adding $MMCM_$ to the symbol names of a few specifications in Table 38 and PLL to the symbol names in Table 39 . In Table 40 through Table 47 , updated the pin-to-pin descriptions with the SSTL15 standard. Updated units in Table 49 .
02/13/12	1.4	Updated summary description on page 1 . In Table 2 , revised V_{CCO} for the 3.3V HR I/O banks and updated T_j . Added typical values to Table 3 . Updated the notes in Table 6 . Added MGTAVCC, MGTAVTT, and MGTVCCAUX power supply ramp times to Table 8 . Rearranged Table 9 , added Mobile_DDR, HSTL_I_18, HSTL_II_18, HSUL_12, SSTL135_R, SSTL15_R, and SSTL12 and removed DIFF_SSTL135, DIFF_SSTL18_I, DIFF_SSTL18_II, DIFF_HSTL_I, and DIFF_HSTL_II. Added Table 10 and Table 11 . Revised the specifications in Table 12 and Table 13 . Updated the eFUSE Programming Conditions section and removed the endurance table. Added the IO_FIFO Switching Characteristics table. Revised I_{CCADC} and updated Note 1 in Table 67 . Revised DDR LVDS transmitter data width in Table 16 . Updated the AC Switching Characteristics based upon the ISE 13.4 v1.03 speed specification throughout document. Removed notes from Table 28 as they are no longer applicable. Updated specifications in Table 68 . Updated Note 1 in Table 37 . In the GTX Transceiver DC Input and Output Levels section: Revised V_{IN} , and added I_{DCIN} and I_{DCOUT} to Table 51 . Added Note 4 to Table 53 . In Table 55 , revised F_{GCLK} , removed T_{PHASE} , and added T_{DLOCK} . Revised specifications and added Note 2 to Table 57 . Added Table 58 and Table 59 along with GTX Transceiver Protocol Jitter Characteristics in Table 60 through Table 65 .
05/23/12	1.5	Reorganized entire data sheet including adding Table 44 and Table 48 . Updated T_{SOL} in Table 1 . Updated I_{BATT} and added R_{IN_TERM} to Table 3 . Added values to Table 6 and Table 7 . Updated Power-On/Off Power Supply Sequencing , page 6 with regards to GTX transceivers. Updated many parameters in Table 9 including SSTL135 and SSTL135_R. Removed V_{OX} column and added DIFF_HSUL_12 to Table 11 . Updated V_{OL} in Table 12 . Updated Table 16 and removed notes 2 and 3. Updated Table 17 . Updated the AC Switching Characteristics based upon the ISE 14.1 v1.04 for the -3, -2, -2L (1.0V), -1, and -2L (0.9V) speed specifications throughout the document. In Table 31 , updated Reset Delays section including Note 10 and Note 11 . Added data for T_{LOCK} and T_{DLOCK} in Table 55 . Updated many of the XADC specifications in Table 67 and added Note 2 . Updated and moved <i>Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK</i> section from Table 68 to Table 38 and Table 39 .

Date	Version	Description
07/25/12	1.6	Updated the descriptions, changed V_{IN} and Note 2 and added Note 4 in Table 1. In Table 2, changed descriptions and notes, removed Note 7, changed GTX transceiver parameters and values and added Note 9. Updated parameters in Table 3. Added Table 4 and Table 5. Changed the typical values for many of the devices in Table 7. Updated LVCMOS12 and the SSTLs in Table 9. Updated many of the specifications in Table 10 and Table 11. Updated speed specification to v1.06 (-3, -2, -2L(1.0V), -1) and v1.05 (-2L(0.9V)) with appropriate changes to Table 14 and Table 15 including production release of the XC7K325T and the XC7K410T in the -2, -2L(1.0V), and -1 speed designations. Added notes and specifications to Table 17 and Table 18. Updated the IOB Pad Input/Output/3-State discussion and changed Table 21 by adding $T_{IOIBUFDISABLE}$. Removed many of the combinatorial delay specifications and T_{CINCK}/T_{CKCIN} from Table 28. Rearranged Table 51 including moving some parameters to Table 1. Added Table 56. Updated Table 57. In Table 59, updated SJ Jitter Tolerance with Stressed Eye section, page 51 and Note 8. Added Note 1, Note 2, and Note 3 to Table 62. Added Note 1 and Note 2 to Table 63, and line rate ranges. Updated Table 64 including adding Note 1. Updated Table 65 including adding Note 1. In Table 67 updated Note 1 and added Note 4. In Table 68, updated T_{POR} and F_{EMCCK}.
09/04/12	1.7	Updated Table 14 and Table 15 for production release of the XC7K160T in the -2, -2L(1.0V), and -1 speed designations.
09/26/12	1.8	In Table 2 , revised V_{CCINT} and V_{CCBRAM} and added Note 2 . Updated Table 14 and Table 15 for production release of the XC7K480T in the -2, -2L(1.0V), and -1 speed designations and the XC7K325T and XC7K410T in the -3 speed designation.
10/10/12	1.9	Updated the $I_{CCINTMIN}$ value for the XC7K355T in Table 7 . Updated Table 14 and Table 15 for production release of the XC7K420T in the -2, -2L(1.0V), and -1 speed designations.
10/25/12	2.0	Updated the AC Switching Characteristics based upon ISE 14.3 v1.07 for the -3, -2, -2L (1.0V), -1 speed specifications, and ISE 14.3 v1.06 for the -2L (0.9V) speed specifications throughout the document. Updated Table 14 and Table 15 for production release of the XC7K355T in the -2, -2L(1.0V), and -1 speed designations. Also updated Table 14 and Table 15 for production release of the XC7K325T and XC7K410T in the -2L (0.9V). Added values for Table 16 -2L (0.9V). Added package skew values to Table 50. In Table 53, increased -1 speed grade (FF package) F_{GTMAX} value from 6.6 Gb/s to 8.0 Gb/s.
10/31/12	2.1	Updated Table 14 and Table 15 for production release of the XC7K70T in the -2, -2L(1.0V), and -1 speed designations.
11/26/12	2.2	Updated Table 14 and Table 15 for production release of -3 speed designation for XC7K70T, XC7K160T, XC7K355T, XC7K420T, and XC7K480T. Removed Note 4 from Table 67 .
12/05/12	2.3	Updated Table 14 and Table 15 for production release of the -2L (0.9V) speed designation for XC7K160T, XC7K420T, and XC7K480T. Updated Note 1 in Table 50 .
12/12/12	2.4	Updated Table 14 and Table 15 for production release of the -2L (0.9V) speed designation for XC7K70T and XC7K355T. Added Internal Configuration Access Port section to Table 68 .