



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	31775
Number of Logic Elements/Cells	406720
Total RAM Bits	29306880
Number of I/O	350
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	900-BBGA, FCBGA
Supplier Device Package	900-FCBGA (31x31)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7k410t-2fb900i

Table 2: Recommended Operating Conditions ⁽¹⁾ (Cont'd)

Symbol	Description	Min	Typ	Max	Units
$V_{MGTAVTTRCAL}$ ⁽⁸⁾	Analog supply voltage for the resistor calibration circuit of the GTX transceiver column	1.17	1.2	1.23	V
XADC					
V_{CCADC}	XADC supply relative to GNDADC	1.71	1.80	1.89	V
V_{REFP}	Externally supplied reference voltage	1.20	1.25	1.30	V
Temperature					
T_j	Junction temperature operating range for commercial (C) temperature devices	0	–	85	°C
	Junction temperature operating range for extended (E) temperature devices	0	–	100	°C
	Junction temperature operating range for industrial (I) temperature devices	–40	–	100	°C

Notes:

- All voltages are relative to ground.
- V_{CCINT} and V_{CCBRAM} should be connected to the same supply.
- Configuration data is retained even if V_{CCO} drops to 0V.
- Includes V_{CCO} of 1.2V, 1.5V, 1.8V, 2.5V, and 3.3V.
- The lower absolute voltage specification always applies.
- A total of 200 mA per bank should not be exceeded.
- V_{CCBATT} is required only when using bitstream encryption. If battery is not used, connect V_{CCBATT} to either ground or V_{CCAUX} .
- Each voltage listed requires the filter circuit described in [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#).
- For data rates ≤ 10.3125 Gb/s, $V_{MGTAVCC}$ should be 1.0V $\pm 3\%$ for lower power consumption.
- For lower power consumption, $V_{MGTAVCC}$ should be 1.0V $\pm 3\%$ over the entire CPLL frequency range.

Table 3: DC Characteristics Over Recommended Operating Conditions

Symbol	Description	Min	Typ ⁽¹⁾	Max	Units
V_{DRINT}	Data retention V_{CCINT} voltage (below which configuration data might be lost)	0.75	–	–	V
V_{DRI}	Data retention V_{CCAUX} voltage (below which configuration data might be lost)	1.5	–	–	V
I_{REF}	V_{REF} leakage current per pin	–	–	15	μ A
I_L	Input or output leakage current per pin (sample-tested)	–	–	15	μ A
C_{IN} ⁽²⁾	Die input capacitance at the pad	–	–	8	pF
I_{RPU}	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 3.3V$	90	–	330	μ A
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 2.5V$	68	–	250	μ A
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 1.8V$	34	–	220	μ A
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 1.5V$	23	–	150	μ A
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 1.2V$	12	–	120	μ A
I_{RPD}	Pad pull-down (when selected) @ $V_{IN} = 3.3V$	68	–	330	μ A
	Pad pull-down (when selected) @ $V_{IN} = 1.8V$	45	–	180	μ A
I_{CCADC}	Analog supply current, analog circuits in powered up state	–	–	25	mA
I_{BATT} ⁽³⁾	Battery supply current	–	–	150	nA

Table 5: Maximum Allowed AC Voltage Overshoot and Undershoot for 1.8V HP I/O Banks⁽¹⁾⁽²⁾ (Cont'd)

AC Voltage Overshoot	% of UI @-40°C to 100°C	AC Voltage Undershoot	% of UI @-40°C to 100°C
$V_{CCO} + 0.80$	9.71	-0.80	50.0
$V_{CCO} + 0.85$	4.51	-0.85	28.4
$V_{CCO} + 0.90$	2.12	-0.90	12.7
$V_{CCO} + 0.95$	1.01	-0.95	5.79

Notes:

1. A total of 200 mA per bank should not be exceeded.
2. For UI smaller than 20 μ s.

Table 6: Typical Quiescent Supply Current

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC7K70T	241	241	241	187	mA
		XC7K160T	474	474	474	368	mA
		XC7K325T	810	810	810	629	mA
		XC7K355T	993	993	993	771	mA
		XC7K410T	1080	1080	1080	838	mA
		XC7K420T	1313	1313	1313	1019	mA
		XC7K480T	1313	1313	1313	1019	mA
I_{CCOQ}	Quiescent V_{CCO} supply current	XC7K70T	1	1	1	1	mA
		XC7K160T	1	1	1	1	mA
		XC7K325T	1	1	1	1	mA
		XC7K355T	1	1	1	1	mA
		XC7K410T	1	1	1	1	mA
		XC7K420T	1	1	1	1	mA
		XC7K480T	1	1	1	1	mA
I_{CCAUXQ}	Quiescent V_{CCAUX} supply current	XC7K70T	21	21	21	21	mA
		XC7K160T	40	40	40	40	mA
		XC7K325T	68	68	68	68	mA
		XC7K355T	75	75	75	75	mA
		XC7K410T	85	85	85	85	mA
		XC7K420T	99	99	99	99	mA
		XC7K480T	99	99	99	99	mA
$I_{CCAUX_{IO}Q}$	Quiescent $V_{CCAUX_{IO}}$ supply current	XC7K70T	N/A	N/A	N/A	N/A	mA
		XC7K160T	2	2	2	2	mA
		XC7K325T	2	2	2	2	mA
		XC7K355T	N/A	N/A	N/A	N/A	mA
		XC7K410T	2	2	2	2	mA
		XC7K420T	N/A	N/A	N/A	N/A	mA
		XC7K480T	N/A	N/A	N/A	N/A	mA

Table 7 shows the minimum current, in addition to I_{CCQ} , that are required by Kintex-7 devices for proper power-on and configuration. If the current minimums shown in Table 6 and Table 7 are met, the device powers on after all five supplies have passed through their power-on reset threshold voltages. The FPGA must not be configured until after V_{CCINT} is applied.

Once initialized and configured, use the XPower tools to estimate current drain on these supplies.

Table 7: Power-On Current for Kintex-7 Devices

Device	$I_{CCINTMIN}$ Typ ⁽¹⁾	$I_{CCAUXMIN}$ Typ ⁽¹⁾	I_{CCOMIN} Typ ⁽¹⁾	I_{CCAUX_IOMIN} Typ ⁽¹⁾	$I_{CCBRAMMIN}$ Typ ⁽¹⁾	Units
XC7K70T	$I_{CCINTQ} + 450$	$I_{CCAUXQ} + 40$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 40$	mA
XC7K160T	$I_{CCINTQ} + 550$	$I_{CCAUXQ} + 50$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 40$	mA
XC7K325T	$I_{CCINTQ} + 600$	$I_{CCAUXQ} + 80$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 40$	mA
XC7K355T	$I_{CCINTQ} + 1450$	$I_{CCAUXQ} + 109$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 81$	mA
XC7K410T	$I_{CCINTQ} + 1500$	$I_{CCAUXQ} + 125$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 90$	mA
XC7K420T	$I_{CCINTQ} + 2200$	$I_{CCAUXQ} + 180$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 108$	mA
XC7K480T	$I_{CCINTQ} + 2200$	$I_{CCAUXQ} + 180$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 108$	mA

Notes:

- Typical values are specified at nominal voltage, 25°C.
- Use the XPower Estimator (XPE) spreadsheet tool (download at <http://www.xilinx.com/power>) to calculate maximum power-on currents.

Table 8: Power Supply Ramp Time

Symbol	Description	Conditions	Min	Max	Units
T_{VCCINT}	Ramp time from GND to 90% of V_{CCINT}		0.2	50	ms
T_{VCCO}	Ramp time from GND to 90% of V_{CCO}		0.2	50	ms
T_{VCCAUX}	Ramp time from GND to 90% of V_{CCAUX}		0.2	50	ms
T_{VCCAUX_IO}	Ramp time from GND to 90% of V_{CCAUX_IO}		0.2	50	ms
$T_{VCCBRAM}$	Ramp time from GND to 90% of V_{CCBRAM}		0.2	50	ms
$T_{VCCO2VCCAUX}$	Allowed time per power cycle for $V_{CCO} - V_{CCAUX} > 2.625V$	$T_J = 100^{\circ}C^{(1)}$	–	500	ms
		$T_J = 85^{\circ}C^{(1)}$	–	800	
$T_{MGTAVCC}$	Ramp time from GND to 90% of $V_{MGTAVCC}$		0.2	50	ms
$T_{MGTAVTT}$	Ramp time from GND to 90% of $V_{MGTAVTT}$		0.2	50	ms
$T_{MGTVCCAUX}$	Ramp time from GND to 90% of $V_{MGTVCCAUX}$		0.2	50	ms

Notes:

- Based on 240,000 power cycles with nominal V_{CCO} of 3.3V or 36,500 power cycles with a worst case V_{CCO} of 3.465V.

LVDS DC Specifications (LVDS_25)

The LVDS_25 standard is available in the HR I/O banks. See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information.

Table 12: LVDS_25 DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		2.375	2.500	2.625	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	0.700	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High		100	350	600	mV
V_{ICM}	Input Common-Mode Voltage		0.300	1.200	1.425	V

LVDS DC Specifications (LVDS)

The LVDS standard is available in the HP I/O banks. See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information.

Table 13: LVDS DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		1.710	1.800	1.890	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	0.825	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	Common-mode input voltage = 1.25V	100	350	600	mV
V_{ICM}	Input Common-Mode Voltage	Differential input voltage = ± 350 mV	0.300	1.200	1.425	V

Production Silicon and ISE Software Status

In some cases, a particular family member (and speed grade) is released to production before a speed specification is released with the correct label (Advance, Preliminary, Production). Any labeling discrepancies are corrected in subsequent speed specification releases.

[Table 15](#) lists the production released Kintex-7 device, speed grade, and the minimum corresponding supported speed specification version and ISE software revisions. The ISE software and speed specifications listed are the minimum releases required for production. All subsequent releases of software and speed specifications are valid.

Table 15: Kintex-7 Device Production Software and Speed Specification Release

Device	Speed Grade Designations			
	1.0V			0.9V
	-3	-2/-2L	-1	-2L
XC7K70T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K160T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K325T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K355T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K410T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K420T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K480T	ISE 14.2 v1.06			ISE 14.3 v1.06

Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Kintex-7 devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 11](#). In each table, the I/O bank type is either High Performance (HP) or High Range (HR).

Table 16: Networking Applications Interface Performances

Description	I/O Bank Type	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14)	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s
SDR LVDS receiver (SFI-4.1) ⁽¹⁾	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS receiver (SFI-4.2) ⁽¹⁾	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s

Notes:

1. LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 19: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
HSTL_I_F	0.61	0.64	0.73	0.79	1.10	1.19	1.23	1.41	1.86	2.05	2.22	1.92	ns
HSTL_II_F	0.61	0.64	0.73	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
HSTL_I_18_F	0.64	0.67	0.76	0.79	1.05	1.18	1.28	1.44	1.81	2.04	2.27	1.95	ns
HSTL_II_18_F	0.64	0.67	0.76	0.79	1.03	1.14	1.23	1.42	1.79	2.00	2.22	1.94	ns
DIFF_HSTL_I_F	0.63	0.67	0.77	0.78	1.09	1.18	1.22	1.48	1.85	2.04	2.21	2.00	ns
DIFF_HSTL_II_F	0.63	0.67	0.77	0.79	1.02	1.11	1.14	1.48	1.78	1.97	2.13	2.00	ns
DIFF_HSTL_I_18_F	0.65	0.69	0.78	0.79	1.08	1.17	1.21	1.48	1.84	2.03	2.20	2.00	ns
DIFF_HSTL_II_18_F	0.65	0.69	0.78	0.81	1.01	1.10	1.13	1.48	1.77	1.96	2.12	2.00	ns
LVC MOS33_S4	1.31	1.40	1.60	1.54	5.23	5.61	6.09	4.13	5.99	6.47	7.08	4.64	ns
LVC MOS33_S8	1.31	1.40	1.60	1.54	4.46	4.85	5.33	3.84	5.22	5.71	6.32	4.36	ns
LVC MOS33_S12	1.31	1.40	1.60	1.54	3.46	3.89	4.42	3.41	4.22	4.75	5.41	3.92	ns
LVC MOS33_S16	1.31	1.40	1.60	1.54	3.06	3.43	3.88	3.72	3.82	4.29	4.87	4.23	ns
LVC MOS33_F4	1.31	1.40	1.60	1.54	4.70	5.01	5.36	3.58	5.46	5.87	6.35	4.09	ns
LVC MOS33_F8	1.31	1.40	1.60	1.54	3.62	4.04	4.56	3.06	4.38	4.90	5.55	3.58	ns
LVC MOS33_F12	1.31	1.40	1.60	1.54	2.57	2.85	3.15	2.88	3.33	3.71	4.14	3.39	ns
LVC MOS33_F16	1.31	1.40	1.60	1.54	2.44	2.69	2.96	2.88	3.20	3.55	3.95	3.39	ns
LVC MOS25_S4	1.08	1.16	1.32	1.36	4.49	4.80	5.16	3.44	5.25	5.66	6.15	3.95	ns
LVC MOS25_S8	1.08	1.16	1.32	1.36	3.66	4.04	4.49	3.20	4.42	4.90	5.48	3.72	ns
LVC MOS25_S12	1.08	1.16	1.32	1.36	2.77	3.10	3.49	2.80	3.53	3.96	4.48	3.31	ns
LVC MOS25_S16	1.08	1.16	1.32	1.36	3.24	3.62	4.09	3.14	4.00	4.48	5.08	3.66	ns
LVC MOS25_F4	1.08	1.16	1.32	1.36	3.96	4.31	4.72	3.06	4.72	5.17	5.71	3.58	ns
LVC MOS25_F8	1.08	1.16	1.32	1.36	2.43	2.87	3.42	2.50	3.19	3.73	4.41	3.02	ns
LVC MOS25_F12	1.08	1.16	1.32	1.36	2.23	2.63	3.13	2.48	2.99	3.49	4.12	3.00	ns
LVC MOS25_F16	1.08	1.16	1.32	1.36	1.92	2.17	2.45	2.33	2.68	3.03	3.44	2.84	ns
LVC MOS18_S4	0.64	0.66	0.74	0.87	3.24	3.45	3.66	1.91	4.00	4.31	4.65	2.42	ns
LVC MOS18_S8	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S12	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S16	0.64	0.66	0.74	0.87	1.82	2.03	2.24	1.84	2.58	2.89	3.23	2.36	ns
LVC MOS18_S24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.74	1.92	2.08	1.92	2.50	2.78	3.07	2.44	ns
LVC MOS18_F4	0.64	0.66	0.74	0.87	3.12	3.31	3.49	1.77	3.88	4.17	4.48	2.28	ns
LVC MOS18_F8	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F12	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F16	0.64	0.66	0.74	0.87	1.52	1.68	1.81	1.72	2.28	2.54	2.80	2.23	ns
LVC MOS18_F24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.34	1.46	1.55	1.66	2.10	2.32	2.54	2.17	ns
LVC MOS15_S4	0.66	0.69	0.81	0.90	3.48	3.74	4.03	2.22	4.24	4.60	5.02	2.73	ns
LVC MOS15_S8	0.66	0.69	0.81	0.90	2.37	2.67	3.01	2.41	3.13	3.53	4.00	2.92	ns
LVC MOS15_S12	0.66	0.69	0.81	0.90	1.83	2.03	2.23	1.91	2.59	2.89	3.22	2.42	ns

Input/Output Logic Switching Characteristics

Table 22: ILOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ICE1CK} /T _{ICKCE1}	CE1 pin Setup/Hold with respect to CLK	0.42/0.00	0.48/0.00	0.67/0.00	0.56/−0.16	ns
T _{ISRCK} /T _{ICKSR}	SR pin Setup/Hold with respect to CLK	0.53/0.01	0.61/0.01	0.99/0.01	0.88/−0.30	ns
T _{IDOCKE2} /T _{IOCKDE2}	D pin Setup/Hold with respect to CLK without Delay (HP I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE2} /T _{IOCKDDE2}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HP I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
T _{IDOCKE3} /T _{IOCKDE3}	D pin Setup/Hold with respect to CLK without Delay (HR I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE3} /T _{IOCKDDE3}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HR I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
Combinatorial						
T _{IDIE2}	D pin to O pin propagation delay, no Delay (HP I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE2}	DDLY pin to O pin propagation delay (using IDELAY) (HP I/O banks only)	0.10	0.11	0.13	0.15	ns
T _{IDIE3}	D pin to O pin propagation delay, no Delay (HR I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE3}	DDLY pin to O pin propagation delay (using IDELAY) (HR I/O banks only)	0.10	0.11	0.13	0.15	ns
Sequential Delays						
T _{IDLOE2}	D pin to Q1 pin using flip-flop as a latch without Delay (HP I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE2}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HP I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{IDLOE3}	D pin to Q1 pin using flip-flop as a latch without Delay (HR I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE3}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HR I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{ICKQ}	CLK to Q outputs	0.47	0.50	0.58	0.71	ns
T _{RQ_ILOGICE2}	SR pin to OQ/TQ out (HP I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE2}	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
T _{RQ_ILOGICE3}	SR pin to OQ/TQ out (HR I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE3}	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_ILOGICE2}	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.63	0.63	0.68	ns, Min
T _{RPW_ILOGICE3}	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.63	0.63	0.68	ns, Min

CLB Distributed RAM Switching Characteristics (SLICEM Only)

Table 29: CLB Distributed RAM Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Sequential Delays						
T _{SHCKO}	Clock to A – B outputs	0.68	0.70	0.85	1.08	ns, Max
T _{SHCKO_1}	Clock to AMUX – BMUX outputs	0.91	0.95	1.15	1.44	ns, Max
Setup and Hold Times Before/After Clock CLK						
T _{DS_LRAM} /T _{DH_LRAM}	A – D inputs to CLK	0.45/0.23	0.45/0.24	0.54/0.27	0.69/0.33	ns, Min
T _{AS_LRAM} /T _{AH_LRAM}	Address An inputs to clock	0.13/0.50	0.14/0.50	0.17/0.58	0.21/0.63	ns, Min
	Address An inputs through MUXs and/or carry logic to clock	0.40/0.16	0.42/0.17	0.52/0.23	0.63/0.23	ns, Min
T _{WS_LRAM} /T _{WH_LRAM}	WE input to clock	0.29/0.09	0.30/0.09	0.36/0.09	0.46/0.10	ns, Min
T _{CECK_LRAM} / T _{CKCE_LRAM}	CE input to CLK	0.29/0.09	0.30/0.09	0.37/0.09	0.47/0.10	ns, Min
Clock CLK						
T _{MPW}	Minimum pulse width	0.68	0.77	0.91	1.11	ns, Min
T _{MCP}	Minimum clock period	1.35	1.54	1.82	2.22	ns, Min

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time.
2. T_{SHCKO} also represents the CLK to XMUX output. Refer to TRACE report for the CLK to XMUX path.

CLB Shift Register Switching Characteristics (SLICEM Only)

Table 30: CLB Shift Register Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Sequential Delays						
T _{REG}	Clock to A – D outputs	0.96	0.98	1.20	1.35	ns, Max
T _{REG_MUX}	Clock to AMUX – DMUX output	1.19	1.23	1.50	1.72	ns, Max
T _{REG_M31}	Clock to DMUX output via M31 output	0.89	0.91	1.10	1.25	ns, Max
Setup and Hold Times Before/After Clock CLK						
T _{WS_SHFREG} / T _{WH_SHFREG}	WE input	0.26/0.09	0.27/0.09	0.33/0.09	0.41/0.10	ns, Min
T _{CECK_SHFREG} / T _{CKCE_SHFREG}	CE input to CLK	0.27/0.09	0.28/0.09	0.33/0.09	0.42/0.10	ns, Min
T _{DS_SHFREG} / T _{DH_SHFREG}	A – D inputs to CLK	0.28/0.26	0.28/0.26	0.33/0.30	0.41/0.36	ns, Min
Clock CLK						
T _{MPW_SHFREG}	Minimum pulse width	0.55	0.65	0.78	0.91	ns, Min

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time.

Block RAM and FIFO Switching Characteristics

Table 31: Block RAM and FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Block RAM and FIFO Clock-to-Out Delays						
T_{RCKO_DO} and $T_{RCKO_DO_REG}^{(1)}$	Clock CLK to DOUT output (without output register) ⁽²⁾⁽³⁾	1.57	1.80	2.08	2.44	ns, Max
	Clock CLK to DOUT output (with output register) ⁽⁴⁾⁽⁵⁾	0.54	0.63	0.75	0.86	ns, Max
$T_{RCKO_DO_ECC}$ and $T_{RCKO_DO_ECC_REG}$	Clock CLK to DOUT output with ECC (without output register) ⁽²⁾⁽³⁾	2.35	2.58	3.26	4.49	ns, Max
	Clock CLK to DOUT output with ECC (with output register) ⁽⁴⁾⁽⁵⁾	0.62	0.69	0.80	0.94	ns, Max
$T_{RCKO_DO_CASCOU}$ and $T_{RCKO_DO_CASCOU_REG}$	Clock CLK to DOUT output with Cascade (without output register) ⁽²⁾	2.21	2.45	2.80	3.19	ns, Max
	Clock CLK to DOUT output with Cascade (with output register) ⁽⁴⁾	0.98	1.08	1.24	1.32	ns, Max
T_{RCKO_FLAGS}	Clock CLK to FIFO flags outputs ⁽⁶⁾	0.65	0.74	0.89	0.97	ns, Max
$T_{RCKO_POINTERS}$	Clock CLK to FIFO pointers outputs ⁽⁷⁾	0.79	0.87	0.98	1.10	ns, Max
$T_{RCKO_PARITY_ECC}$	Clock CLK to ECCPARITY in ECC encode only mode	0.66	0.72	0.80	0.93	ns, Max
$T_{RCKO_SDBIT_ECC}$ and $T_{RCKO_SDBIT_ECC_REG}$	Clock CLK to BITERR (without output register)	2.17	2.38	3.01	4.15	ns, Max
	Clock CLK to BITERR (with output register)	0.57	0.65	0.76	0.89	ns, Max
$T_{RCKO_RDADDR_ECC}$ and $T_{RCKO_RDADDR_ECC_REG}$	Clock CLK to RDADDR output with ECC (without output register)	0.64	0.74	0.90	0.98	ns, Max
	Clock CLK to RDADDR output with ECC (with output register)	0.71	0.79	0.92	1.10	ns, Max
Setup and Hold Times Before/After Clock CLK						
$T_{RCK_ADDR}/T_{RCKC_ADDR}$	ADDR inputs ⁽⁸⁾	0.38/0.27	0.42/0.28	0.48/0.31	0.65/0.38	ns, Min
$T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$	Data input setup/hold time when block RAM is configured in WRITE_FIRST or NO_CHANGE mode ⁽⁹⁾	0.49/0.51	0.55/0.53	0.63/0.57	0.78/0.64	ns, Min
$T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$	Data input setup/hold time when block RAM is configured in READ_FIRST mode ⁽⁹⁾	0.17/0.25	0.19/0.29	0.21/0.35	0.25/0.32	ns, Min
$T_{RDCK_DI_ECC}/T_{RCKD_DI_ECC}$	DIN inputs with block RAM ECC in standard mode ⁽⁹⁾	0.42/0.37	0.47/0.39	0.53/0.43	0.66/0.46	ns, Min
$T_{RDCK_DI_ECCW}/T_{RCKD_DI_ECCW}$	DIN inputs with block RAM ECC encode only ⁽⁹⁾	0.79/0.37	0.87/0.39	0.99/0.43	1.17/0.41	ns, Min
$T_{RDCK_DI_ECC_FIFO}/T_{RCKD_DI_ECC_FIFO}$	DIN inputs with FIFO ECC in standard mode ⁽⁹⁾	0.89/0.47	0.98/0.50	1.12/0.54	1.32/0.65	ns, Min
$T_{RCK_INJECTBITERR}/T_{RCKC_INJECTBITERR}$	Inject single/double bit error in ECC mode	0.49/0.30	0.55/0.31	0.63/0.34	0.78/0.41	ns, Min
T_{RCK_EN}/T_{RCKC_EN}	Block RAM Enable (EN) input	0.30/0.17	0.33/0.18	0.38/0.20	0.48/0.22	ns, Min
$T_{RCK_REGCE}/T_{RCKC_REGCE}$	CE input of output register	0.21/0.13	0.25/0.13	0.31/0.14	0.34/0.16	ns, Min
$T_{RCK_RSTREG}/T_{RCKC_RSTREG}$	Synchronous RSTREG input	0.25/0.06	0.27/0.06	0.29/0.06	0.35/0.06	ns, Min

Clock Buffers and Networks

Table 33: Global Clock Switching Characteristics (Including BUFGCTRL)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$T_{BCCCK_CE}/T_{BCCCK_CE}^{(1)}$	CE pins Setup/Hold	0.12/0.30	0.14/0.38	0.26/0.38	0.23/0.40	ns
$T_{BCCCK_S}/T_{BCCCK_S}^{(1)}$	S pins Setup/Hold	0.12/0.30	0.14/0.38	0.26/0.38	0.23/0.40	ns
$T_{BCKO_O}^{(2)}$	BUFGCTRL delay from I0/I1 to O	0.08	0.10	0.12	0.10	ns
Maximum Frequency						
F_{MAX_BUFG}	Global clock tree (BUFG)	741.00	710.00	625.00	560.00	MHz

Notes:

- T_{BCCCK_CE} and T_{BCCCK_S} must be satisfied to assure glitch-free operation of the global clock when switching between clocks. These parameters do not apply to the BUFGMUX primitive that assures glitch-free operation. The other global clock setup and hold times are optional; only needing to be satisfied if device operation requires simulation matches on a cycle-for-cycle basis when switching between clocks.
- T_{BCKO_O} (BUFG delay from I0 to O) values are the same as T_{BCKO_O} values.

Table 34: Input/Output Clock Switching Characteristics (BUFIO)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{BIOCKO_O}	Clock to out delay from I to O	1.04	1.14	1.32	1.48	ns
Maximum Frequency						
F_{MAX_BUFIO}	I/O clock tree (BUFIO)	800.00	800.00	710.00	710.00	MHz

Table 35: Regional Clock Buffer Switching Characteristics (BUFR)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{BRCKO_O}	Clock to out delay from I to O	0.60	0.65	0.77	1.06	ns
$T_{BRCKO_O_BYP}$	Clock to out delay from I to O with Divide Bypass attribute set	0.30	0.32	0.38	0.57	ns
T_{BRDO_O}	Propagation delay from CLR to O	0.71	0.75	0.96	0.93	ns
Maximum Frequency						
$F_{MAX_BUFR}^{(1)}$	Regional clock tree (BUFR)	600.00	540.00	450.00	450.00	MHz

Notes:

- The maximum input frequency to the BUFR is the BUFIO F_{MAX} frequency.

Table 42: Clock-Capable Clock Input to Output Delay With MMCM

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> MMCM.							
T _{ICKOFMMCMCC}	Clock-capable clock input and OUTFF <i>with</i> MMCM	XC7K70T	0.95	0.95	0.95	1.74	ns
		XC7K160T	0.96	0.96	0.96	1.78	ns
		XC7K325T	1.00	1.00	1.00	1.82	ns
		XC7K355T	1.00	1.00	1.00	1.78	ns
		XC7K410T	1.00	1.00	1.00	1.82	ns
		XC7K420T	1.07	1.07	1.07	1.82	ns
		XC7K480T	1.07	1.07	1.07	1.82	ns

Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. MMCM output jitter is already included in the timing calculation.

Table 43: Clock-Capable Clock Input to Output Delay With PLL

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> PLL.							
T _{ICKOFPLLCC}	Clock-capable clock input and OUTFF <i>with</i> PLL	XC7K70T	0.84	0.84	0.84	1.45	ns
		XC7K160T	0.89	0.89	0.89	1.54	ns
		XC7K325T	0.89	0.89	0.89	1.54	ns
		XC7K355T	0.89	0.89	0.89	1.50	ns
		XC7K410T	0.89	0.89	0.89	1.54	ns
		XC7K420T	0.96	0.96	0.96	1.54	ns
		XC7K480T	0.96	0.96	0.96	1.54	ns

Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. PLL output jitter is already included in the timing calculation.

Table 44: Pin-to-Pin, Clock-to-Out using BUFIO

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> BUFIO.						
T _{ICKOFCS}	Clock-to-Out of I/O clock for HR I/O banks	4.93	5.52	6.20	6.97	ns
	Clock-to-Out of I/O clock for HP I/O banks	4.85	5.44	6.11	6.90	ns

Additional Package Parameter Guidelines

The parameters in this section provide the necessary values for calculating timing budgets for Kintex-7 FPGA clock transmitter and receiver data-valid windows.

Table 50: Package Skew

Symbol	Description	Device	Package	Value	Units
T _{PKGSKEW}	Package Skew ⁽¹⁾	XC7K70T	FBG484	108	ps
			FBG676	135	ps
		XC7K160T	FBG484	118	ps
			FBG676	136	ps
			FFG676	161	ps
		XC7K325T	FBG676	146	ps
			FFG676	154	ps
			FBG900	163	ps
			FFG900	161	ps
		XC7K355T	FFG901	149	ps
		XC7K410T	FBG676	165	ps
			FFG676	168	ps
			FBG900	151	ps
			FFG900	146	ps
		XC7K420T	FFG901	149	ps
			FFG1156	145	ps
		XC7K480T	FFG901	149	ps
			FFG1156	145	ps

Notes:

- These values represent the worst-case skew between any two SelectIO resources in the package: shortest delay to longest delay from die pad to ball.
- Package delay information is available for these device/package combinations. This information can be used to deskew the package.

Table 52 summarizes the DC specifications of the clock input of the GTX transceiver. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 52: GTX Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V _{IDIFF}	Differential peak-to-peak input voltage	250	–	2000	mV
R _{IN}	Differential input resistance	–	100	–	Ω
C _{EXT}	Required external AC coupling capacitor	–	100	–	nF

GTX Transceiver Switching Characteristics

Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further information.

Table 53: GTX Transceiver Performance

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3		-2/-2L		-1 ⁽¹⁾		-2L ⁽²⁾		
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
F _{GTXMAX} ⁽³⁾	Maximum GTX transceiver data rate		12.5	6.6	10.3125	6.6	8.0	6.6	6.6	6.6	Gb/s
F _{GTXMIN} ⁽³⁾	Minimum GTX transceiver data rate		0.500	0.500	0.500	0.500	0.500	0.500	0.500	0.500	Gb/s
F _{GTXCRANGE}	CPLL line rate range	1	3.2–6.6								Gb/s
		2	1.6–3.3								Gb/s
		4	0.8–1.65								Gb/s
		8	0.5–0.825								Gb/s
		16	N/A								Gb/s
F _{GTXQRANGE1}	QPLL line rate range 1	1	5.93– 8.0	5.93– 6.6	5.93– 8.0	5.93– 6.6	5.93– 8.0	5.93– 6.6	5.93–6.6		Gb/s
		2	2.965–4.0		2.965–4.0		2.965–4.0		2.965–3.3		Gb/s
		4	1.4825–2.0		1.4825–2.0		1.4825–2.0		1.4825–1.65		Gb/s
		8	0.74125–1.0		0.74125–1.0		0.74125–1.0		0.74125–0.825		Gb/s
		16	N/A		N/A		N/A		N/A		Gb/s
F _{GTXQRANGE2}	QPLL line rate range 2 ⁽⁴⁾	1	9.8– 12.5	N/A	9.8– 10.3125	N/A	N/A		N/A		Gb/s
		2	4.9–6.25		4.9–5.15625		N/A		N/A		Gb/s
		4	2.45–3.125		2.45–2.578125		N/A		N/A		Gb/s
		8	1.225–1.5625		1.225–1.2890625		N/A		N/A		Gb/s
		16	0.6125–0.78125		0.6125– 0.64453125		N/A		N/A		Gb/s
F _{GCPLLRANGE}	GTX transceiver CPLL frequency range		1.6–3.3		1.6–3.3		1.6–3.3		1.6–3.3		GHz
F _{GQPLLRange1}	GTX transceiver QPLL frequency range 1		5.93–8.0		5.93–8.0		5.93–8.0		5.93–6.6		GHz

Table 53: GTX Transceiver Performance (Cont'd)

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3	-2/-2L		-1 ⁽¹⁾		-2L ⁽²⁾			
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
F _{GQPLL} RANGE2	GTX transceiver QPLL frequency range 2		9.8–12.5		9.8–10.3125		N/A		N/A		GHz

Notes:

1. The -1 speed grade requires a 4-byte internal data width for operation above 5.0 Gb/s.
2. The -2L (0.9V) speed grade requires a 4-byte internal data width for operation above 3.8 Gb/s.
3. Data rates between 8.0 Gb/s and 9.8 Gb/s are not available.
4. For QPLL line rate range 2, the maximum line rate with the divider N set to 66 is 10.3125Gb/s.

Table 54: GTX Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
F _{GTXDRPCLK}	GTXDRPCLK maximum frequency	175.01	175.01	156.25	125.00	MHz

Table 55: GTX Transceiver Reference Clock Switching Characteristics

Symbol	Description	Conditions	All Speed Grades			Units
			Min	Typ	Max	
F _{GCLK}	Reference clock frequency range	-3 speed grade	60	–	700	MHz
		All other speed grades	60	–	670	MHz
T _{RCLK}	Reference clock rise time	20% – 80%	–	200	–	ps
T _{FCLK}	Reference clock fall time	80% – 20%	–	200	–	ps
T _{DCREF}	Reference clock duty cycle	Transceiver PLL only	40	50	60	%

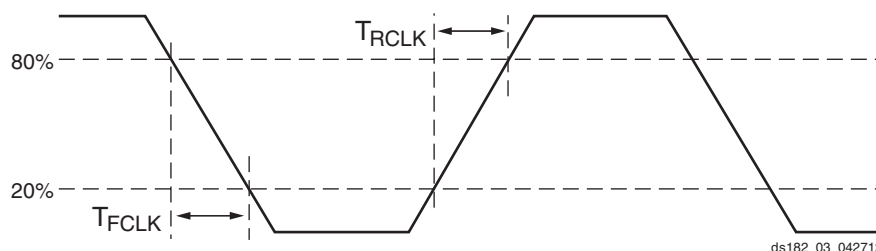


Figure 3: Reference Clock Timing Parameters

Table 56: GTX Transceiver PLL /Lock Time Adaptation

Symbol	Description	Conditions	All Speed Grades			Units
			Min	Typ	Max	
T _{LOCK}	Initial PLL lock		–	–	1	ms
T _{DLOCK}	Clock recovery phase acquisition and adaptation time for decision feedback equalizer (DFE).	After the PLL is locked to the reference clock, this is the time it takes to lock the clock data recovery (CDR) to the data present at the input.	–	50,000	37 x10 ⁶	UI
	Clock recovery phase acquisition and adaptation time for low-power mode (LPM) when the DFE is disabled.		–	50,000	2.3 x10 ⁶	UI

Table 57: GTX Transceiver User Clock Switching Characteristics⁽¹⁾⁽²⁾

Symbol	Description	Conditions	Speed Grade				Units
			1.0V			0.9V	
			-3 ⁽³⁾	-2/-2L ⁽³⁾	-1 ⁽⁴⁾	-2L ⁽⁵⁾	
F _{TXOUT}	TXOUTCLK maximum frequency		412.54	412.54	312.50	237.53	MHz
F _{RXOUT}	RXOUTCLK maximum frequency		412.54	412.54	312.50	237.53	MHz
F _{TXIN}	TXUSRCLK maximum frequency	16-bit data path	412.54	412.54	312.50	237.53	MHz
		32-bit data path	391.08	322.37	250.00	206.27	MHz
F _{RXIN}	RXUSRCLK maximum frequency	16-bit data path	412.54	412.54	312.50	237.53	MHz
		32-bit data path	391.08	322.37	250.00	206.27	MHz
F _{TXIN2}	TXUSRCLK2 maximum frequency	16-bit data path	412.54	412.54	312.50	237.53	MHz
		32-bit data path	391.08	322.37	250.00	206.27	MHz
		64-bit data path	195.54	161.19	125.00	103.14	MHz
F _{RXIN2}	RXUSRCLK2 maximum frequency	16-bit data path	412.54	412.54	312.50	237.53	MHz
		32-bit data path	391.08	322.37	250.00	206.27	MHz
		64-bit data path	195.54	161.19	125.00	103.14	MHz

Notes:

1. Clocking must be implemented as described in [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#).
2. These frequencies are not supported for all possible transceiver configurations.
3. For speed grades -3, -2, -2L (1.0V), a 16-bit data path can only be used for speeds less than 6.6 Gb/s.
4. For speed grade -1, a 16-bit data path can only be used for speeds less than 5.0 Gb/s.
5. For speed grade -2L (0.9V), a 16-bit data path can only be used for speeds less than 3.8 Gb/s.

Table 58: GTX Transceiver Transmitter Switching Characteristics

Symbol	Description	Condition	Min	Typ	Max	Units
F _{GTXTX}	Serial data rate range		0.500	–	F _{GTXMAX}	Gb/s
T _{RTX}	TX Rise time	20%–80%	–	40	–	ps
T _{FTX}	TX Fall time	80%–20%	–	40	–	ps
T _{LLSKEW}	TX lane-to-lane skew ⁽¹⁾		–	–	500	ps
V _{TXOOBVDPP}	Electrical idle amplitude		–	–	15	mV
T _{TXOOBTRANSITION}	Electrical idle transition time		–	–	140	ns
TJ _{12.5}	Total Jitter ⁽²⁾⁽⁴⁾	12.5 Gb/s	–	–	0.28	UI
DJ _{12.5}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.17	UI
TJ _{11.18}	Total Jitter ⁽²⁾⁽⁴⁾	11.18 Gb/s	–	–	0.28	UI
DJ _{11.18}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.17	UI

Table 59: GTX Transceiver Receiver Switching Characteristics

Symbol	Description		Min	Typ	Max	Units
F _{GTXRX}	Serial data rate	RX oversampler not enabled	0.500	–	F _{GTXMAX}	Gb/s
T _{RXELECIDLE}	Time for RXELECIDLE to respond to loss or restoration of data		–	10	–	ns
RX _{OOBVDPP}	OOB detect threshold peak-to-peak		60	–	150	mV
RX _{SST}	Receiver spread-spectrum tracking ⁽¹⁾	Modulated @ 33 KHz	–5000	–	0	ppm
RX _{RL}	Run length (CID)		–	–	512	UI
RX _{PPMTOL}	Data/REFCLK PPM offset tolerance	Bit rates ≤ 6.6 Gb/s	–1250	–	1250	ppm
		Bit rates > 6.6 Gb/s and ≤ 8.0 Gb/s	–700	–	700	ppm
		Bit rates > 8.0 Gb/s	–200	–	200	ppm
SJ Jitter Tolerance ⁽²⁾						
JT_SJ _{12.5}	Sinusoidal Jitter (QPLL) ⁽³⁾	12.5 Gb/s	0.3	–	–	UI
JT_SJ _{11.18}	Sinusoidal Jitter (QPLL) ⁽³⁾	11.18 Gb/s	0.3	–	–	UI
JT_SJ _{10.32}	Sinusoidal Jitter (QPLL) ⁽³⁾	10.32 Gb/s	0.3	–	–	UI
JT_SJ _{9.95}	Sinusoidal Jitter (QPLL) ⁽³⁾	9.95 Gb/s	0.3	–	–	UI
JT_SJ _{9.8}	Sinusoidal Jitter (QPLL) ⁽³⁾	9.8 Gb/s	0.3	–	–	UI
JT_SJ _{8.0}	Sinusoidal Jitter (QPLL) ⁽³⁾	8.0 Gb/s	0.44	–	–	UI
JT_SJ _{6.6_QPLL}	Sinusoidal Jitter (QPLL) ⁽³⁾	6.6 Gb/s	0.48	–	–	UI
JT_SJ _{6.6_CPLL}	Sinusoidal Jitter (CPLL) ⁽³⁾	6.6 Gb/s	0.44	–	–	UI
JT_SJ _{5.0}	Sinusoidal Jitter (CPLL) ⁽³⁾	5.0 Gb/s	0.44	–	–	UI
JT_SJ _{4.25}	Sinusoidal Jitter (CPLL) ⁽³⁾	4.25 Gb/s	0.44	–	–	UI
JT_SJ _{3.75}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.75 Gb/s	0.44	–	–	UI
JT_SJ _{3.2}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁴⁾	0.45	–	–	UI
JT_SJ _{3.2L}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁵⁾	0.45	–	–	UI
JT_SJ _{2.5}	Sinusoidal Jitter (CPLL) ⁽³⁾	2.5 Gb/s ⁽⁶⁾	0.5	–	–	UI
JT_SJ _{1.25}	Sinusoidal Jitter (CPLL) ⁽³⁾	1.25 Gb/s ⁽⁷⁾	0.5	–	–	UI
JT_SJ ₅₀₀	Sinusoidal Jitter (CPLL) ⁽³⁾	500 Mb/s	0.4	–	–	UI
SJ Jitter Tolerance with Stressed Eye ⁽²⁾						
JT_TJSE _{3.2}	Total Jitter with Stressed Eye ⁽⁸⁾	3.2 Gb/s	0.70	–	–	UI
JT_TJSE _{6.6}		6.6 Gb/s	0.70	–	–	UI
JT_SJSE _{3.2}	Sinusoidal Jitter with Stressed Eye ⁽⁸⁾	3.2 Gb/s	0.1	–	–	UI
JT_SJSE _{6.6}		6.6 Gb/s	0.1	–	–	UI

Notes:

- Using RXOUT_DIV = 1, 2, and 4.
- All jitter values are based on a bit error ratio of $1e^{-12}$.
- The frequency of the injected sinusoidal jitter is 10 MHz.
- CPLL frequency at 3.2 GHz and RXOUT_DIV = 2.
- CPLL frequency at 1.6 GHz and RXOUT_DIV = 1.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 2.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 4.
- Composite jitter with RX and LPM or DFE mode.

Table 65: CPRI Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
CPRI Transmitter Jitter Generation				
Total transmitter jitter	614.4	–	0.35	UI
	1228.8	–	0.35	UI
	2457.6	–	0.35	UI
	3072.0	–	0.35	UI
	4915.2	–	0.3	UI
	6144.0	–	0.3	UI
	9830.4	–	Note 1	UI
CPRI Receiver Frequency Jitter Tolerance				
Total receiver jitter tolerance	614.4	0.65	–	UI
	1228.8	0.65	–	UI
	2457.6	0.65	–	UI
	3072.0	0.65	–	UI
	4915.2	0.95	–	UI
	6144.0	0.95	–	UI
	9830.4	Note 1	–	UI

Notes:

1. Tested per SFP+ specification, see Table 64.

Integrated Interface Block for PCI Express Designs Switching Characteristics

More information and documentation on solutions for PCI Express designs can be found at:

<http://www.xilinx.com/technology/protocols/pciexpress.htm>

Table 66: Maximum Performance for PCI Express Designs

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
F _{PIPECLK}	Pipe clock maximum frequency	250.00	250.00	250.00	250.00	MHz
F _{USERCLK}	User clock maximum frequency	500.00	500.00	250.00	250.00	MHz
F _{USERCLK2}	User clock 2 maximum frequency	250.00	250.00	250.00	250.00	MHz
F _{DRPCLK}	DRP clock maximum frequency	250.00	250.00	250.00	250.00	MHz

Table 68: Configuration Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Master/Slave Serial Mode Programming Switching						
T _{DCC} /T _{CCKD}	DIN Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{CCO}	DOUT clock to out	8.00	8.00	8.00	9.00	ns, Max
SelectMAP Mode Programming Switching						
T _{SMDCC} /T _{SMCCKD}	D[31:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
T _{SMCSCCK} /T _{SMCCKCS}	CSI_B Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{SMWCCK} /T _{SMCCKW}	RDWR_B Setup/Hold	10.00/0.00	10.00/0.00	10.00/0.00	12.00/0.00	ns, Min
T _{SMCKCSO}	CSO_B clock to out (330 Ω pull-up resistor required)	7.00	7.00	7.00	8.00	ns, Max
T _{SMCO}	D[31:00] clock to out in readback	8.00	8.00	8.00	10.00	ns, Max
F _{RBCK}	Readback frequency	100.00	100.00	100.00	70.00	MHz, Max
Boundary-Scan Port Timing Specifications						
T _{TAPTCK} /T _{TCKTAP}	TMS and TDI Setup/Hold	3.00/2.00	3.00/2.00	3.00/2.00	3.00/2.00	ns, Min
T _{TCKTDO}	TCK falling edge to TDO output	7.00	7.00	7.00	8.50	ns, Max
F _{TCK}	TCK frequency	66.00	66.00	66.00	50.00	MHz, Max
BPI Master Flash Mode Programming Switching						
T _{BPICCO} ⁽²⁾	A[28:00], RS[1:0], FCS_B, FOE_B, FWE_B, ADV_B clock to out	8.50	8.50	8.50	10.00	ns, Max
T _{BPIDCC} /T _{BPICCD}	D[15:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
SPI Master Flash Mode Programming Switching						
T _{SPIDCC} /T _{SPICCD}	D[03:00] Setup/Hold	3.00/0.00	3.00/0.00	3.00/0.00	3.00/0.00	ns, Min
T _{SPICCM}	MOSI clock to out	8.00	8.00	8.00	9.00	ns, Max
T _{SPICCF}	FCS_B clock to out	8.00	8.00	8.00	9.00	ns, Max

Notes:

- To support longer delays in configuration, use the design solutions described in [UG470: 7 Series FPGA Configuration User Guide](#).
- Only during configuration, the last edge is determined by a weak pull-up/pull-down resistor in the I/O.

eFUSE Programming Conditions

Table 69 lists the programming conditions specifically for eFUSE. For more information, see [UG470: 7 Series FPGA Configuration User Guide](#).

Table 69: eFUSE Programming Conditions⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
I_{FS}	V_{CCAUX} supply current	—	—	115	mA
t_j	Temperature range	15	—	125	°C

Notes:

- The FPGA must not be configured during eFUSE programming.

Revision History

The following table shows the revision history for this document:

Date	Version	Description
03/01/11	1.0	Initial Xilinx release.
04/01/11	1.1	Added the XC7K355T, XC7K420T, and XC7K480T devices throughout data sheet. Added the extended temperature range discussion to page 1 . Updated V_{CCAUX_IO} in Table 2 . Edits to clarify Power-On/Off Power Supply Sequencing power sequencing discussion. Added I_{CCAUX_IO} and I_{CCBRAM} to Table 6 and Table 7 . Updated $MMCM_F_{INDUTY}$ and added $F_{INJITTER}$, $T_{OUTJITTER}$, $T_{EXTFVAR}$, and Note 3 to Table 38 . Removed the SBG324 package from Table 50 . Updated the Notice of Disclaimer .
10/04/11	1.2	Replaced -1L with -2L throughout this data sheet. Updated Min/Max values and removed Note 5 from Table 2 . Clarified Power-On/Off Power Supply Sequencing power sequencing discussion including adding $T_{VCCO2VCCAUX}$ to Table 8 . Updated V_{ICM} in Table 12 and Table 13 . Added Note 1 to Table 12 . Updated Table 69 including adding Note 1 . Added <i>Absolute Maximum Ratings for GTX Transceivers</i> . Revised the reference clock maximum frequency (F_{GCLK}) in Table 55 . Added Table 57 . Added LVTTTL and removed SSTL135_II and SSTL15_II specifications from Table 19 . Removed HSTL_III from Table 20 . Removed the <i>I/O Standard Adjustment Measurement Methodology</i> section. Use IBIS for more accurate information and measurements. Updated $T_{DELAYPAT_JIT}$ in Table 26 . Added T_{AS}/T_{AH} to Table 28 . Added $T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$ and $T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$ to Table 31 . Completely updated Table 68 . Updated the AC Switching Characteristics in Table 19 , Table 20 , Table 21 , Table 22 , Table 23 , Table 24 , Table 26 through Table 38 , Table 40 through Table 37 , and Table 67 .
11/03/11	1.3	Revised the V_{OCM} specification in Table 12 . Updated the AC Switching Characteristics based upon the ISE 13.3 v1.02 speed specification throughout document including Table 19 and Table 20 . Added $MMCM_T_{FBDELAY}$ while adding $MMCM_$ to the symbol names of a few specifications in Table 38 and PLL to the symbol names in Table 39 . In Table 40 through Table 47 , updated the pin-to-pin descriptions with the SSTL15 standard. Updated units in Table 49 .
02/13/12	1.4	Updated summary description on page 1 . In Table 2 , revised V_{CCO} for the 3.3V HR I/O banks and updated T_j . Added typical values to Table 3 . Updated the notes in Table 6 . Added MGTAVCC, MGTAVTT, and MGTVCCAUX power supply ramp times to Table 8 . Rearranged Table 9 , added Mobile_DDR, HSTL_I_18, HSTL_II_18, HSUL_12, SSTL135_R, SSTL15_R, and SSTL12 and removed DIFF_SSTL135, DIFF_SSTL18_I, DIFF_SSTL18_II, DIFF_HSTL_I, and DIFF_HSTL_II. Added Table 10 and Table 11 . Revised the specifications in Table 12 and Table 13 . Updated the eFUSE Programming Conditions section and removed the endurance table. Added the IO_FIFO Switching Characteristics table. Revised I_{CCADC} and updated Note 1 in Table 67 . Revised DDR LVDS transmitter data width in Table 16 . Updated the AC Switching Characteristics based upon the ISE 13.4 v1.03 speed specification throughout document. Removed notes from Table 28 as they are no longer applicable. Updated specifications in Table 68 . Updated Note 1 in Table 37 . In the GTX Transceiver DC Input and Output Levels section: Revised V_{IN} , and added I_{DCIN} and I_{DCOUT} to Table 51 . Added Note 4 to Table 53 . In Table 55 , revised F_{GCLK} , removed T_{PHASE} , and added T_{DLOCK} . Revised specifications and added Note 2 to Table 57 . Added Table 58 and Table 59 along with GTX Transceiver Protocol Jitter Characteristics in Table 60 through Table 65 .
05/23/12	1.5	Reorganized entire data sheet including adding Table 44 and Table 48 . Updated T_{SOL} in Table 1 . Updated I_{BATT} and added R_{IN_TERM} to Table 3 . Added values to Table 6 and Table 7 . Updated Power-On/Off Power Supply Sequencing , page 6 with regards to GTX transceivers. Updated many parameters in Table 9 including SSTL135 and SSTL135_R. Removed V_{OX} column and added DIFF_HSUL_12 to Table 11 . Updated V_{OL} in Table 12 . Updated Table 16 and removed notes 2 and 3. Updated Table 17 . Updated the AC Switching Characteristics based upon the ISE 14.1 v1.04 for the -3, -2, -2L (1.0V), -1, and -2L (0.9V) speed specifications throughout the document. In Table 31 , updated Reset Delays section including Note 10 and Note 11 . Added data for T_{LOCK} and T_{DLOCK} in Table 55 . Updated many of the XADC specifications in Table 67 and added Note 2 . Updated and moved <i>Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK</i> section from Table 68 to Table 38 and Table 39 .

Date	Version	Description
07/25/12	1.6	Updated the descriptions, changed V_{IN} and Note 2 and added Note 4 in Table 1. In Table 2, changed descriptions and notes, removed Note 7, changed GTX transceiver parameters and values and added Note 9. Updated parameters in Table 3. Added Table 4 and Table 5. Changed the typical values for many of the devices in Table 7. Updated LVCMOS12 and the SSTLs in Table 9. Updated many of the specifications in Table 10 and Table 11. Updated speed specification to v1.06 (-3, -2, -2L(1.0V), -1) and v1.05 (-2L(0.9V)) with appropriate changes to Table 14 and Table 15 including production release of the XC7K325T and the XC7K410T in the -2, -2L(1.0V), and -1 speed designations. Added notes and specifications to Table 17 and Table 18. Updated the IOB Pad Input/Output/3-State discussion and changed Table 21 by adding $T_{IOIBUFDISABLE}$. Removed many of the combinatorial delay specifications and T_{CINCK}/T_{CKCIN} from Table 28. Rearranged Table 51 including moving some parameters to Table 1. Added Table 56. Updated Table 57. In Table 59, updated SJ Jitter Tolerance with Stressed Eye section, page 51 and Note 8. Added Note 1, Note 2, and Note 3 to Table 62. Added Note 1 and Note 2 to Table 63, and line rate ranges. Updated Table 64 including adding Note 1. Updated Table 65 including adding Note 1. In Table 67 updated Note 1 and added Note 4. In Table 68, updated T_{POR} and F_{EMCCK}.
09/04/12	1.7	Updated Table 14 and Table 15 for production release of the XC7K160T in the -2, -2L(1.0V), and -1 speed designations.
09/26/12	1.8	In Table 2 , revised V_{CCINT} and V_{CCBRAM} and added Note 2 . Updated Table 14 and Table 15 for production release of the XC7K480T in the -2, -2L(1.0V), and -1 speed designations and the XC7K325T and XC7K410T in the -3 speed designation.
10/10/12	1.9	Updated the $I_{CCINTMIN}$ value for the XC7K355T in Table 7 . Updated Table 14 and Table 15 for production release of the XC7K420T in the -2, -2L(1.0V), and -1 speed designations.
10/25/12	2.0	Updated the AC Switching Characteristics based upon ISE 14.3 v1.07 for the -3, -2, -2L (1.0V), -1 speed specifications, and ISE 14.3 v1.06 for the -2L (0.9V) speed specifications throughout the document. Updated Table 14 and Table 15 for production release of the XC7K355T in the -2, -2L(1.0V), and -1 speed designations. Also updated Table 14 and Table 15 for production release of the XC7K325T and XC7K410T in the -2L (0.9V). Added values for Table 16 -2L (0.9V). Added package skew values to Table 50. In Table 53, increased -1 speed grade (FF package) F_{GTMAX} value from 6.6 Gb/s to 8.0 Gb/s.
10/31/12	2.1	Updated Table 14 and Table 15 for production release of the XC7K70T in the -2, -2L(1.0V), and -1 speed designations.
11/26/12	2.2	Updated Table 14 and Table 15 for production release of -3 speed designation for XC7K70T, XC7K160T, XC7K355T, XC7K420T, and XC7K480T. Removed Note 4 from Table 67 .
12/05/12	2.3	Updated Table 14 and Table 15 for production release of the -2L (0.9V) speed designation for XC7K160T, XC7K420T, and XC7K480T. Updated Note 1 in Table 50 .
12/12/12	2.4	Updated Table 14 and Table 15 for production release of the -2L (0.9V) speed designation for XC7K70T and XC7K355T. Added Internal Configuration Access Port section to Table 68 .