



Welcome to E-XFL.COM

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	37325
Number of Logic Elements/Cells	477760
Total RAM Bits	35205120
Number of I/O	400
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	1156-BBGA, FCBGA
Supplier Device Package	1156-FCBGA (35x35)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7k480t-1ffg1156i

Table 6: Typical Quiescent Supply Current (Cont'd)

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
I _{CCBRAMQ}	Quiescent V _{CCBRAM} supply current	XC7K70T	6	6	6	6	mA
		XC7K160T	14	14	14	14	mA
		XC7K325T	19	19	19	19	mA
		XC7K355T	31	31	31	31	mA
		XC7K410T	34	34	34	34	mA
		XC7K420T	41	41	41	41	mA
		XC7K480T	41	41	41	41	mA

Notes:

- Typical values are specified at nominal voltage, 85°C junction temperatures (T_j) with single-ended SelectIO resources.
- Typical values are for blank configured devices with no output current loads, no active input pull-up resistors, all I/O pins are 3-state and floating.
- Use the XPower™ Estimator (XPE) spreadsheet tool (download at <http://www.xilinx.com/power>) to calculate static power consumption for conditions other than those specified.

Power-On/Off Power Supply Sequencing

The recommended power-on sequence is V_{CCINT}, V_{CCBRAM}, V_{CCAUX}, V_{CCAUX_IO}, and V_{CCO} to achieve minimum current draw and ensure that the I/Os are 3-stated at power-on. The recommended power-off sequence is the reverse of the power-on sequence. If V_{CCINT} and V_{CCBRAM} have the same recommended voltage levels then both can be powered by the same supply and ramped simultaneously. If V_{CCAUX}, V_{CCAUX_IO}, and V_{CCO} have the same recommended voltage levels then they can be powered by the same supply and ramped simultaneously.

For V_{CCO} voltages of 3.3V in HR I/O banks and configuration bank 0:

- The voltage difference between V_{CCO} and V_{CCAUX} must not exceed 2.625V for longer than T_{VCCO2VCCAUX} for each power-on/off cycle to maintain device reliability levels.
- The T_{VCCO2VCCAUX} time can be allocated in any percentage between the power-on and power-off ramps.

The recommended power-on sequence to achieve minimum current draw for the GTX transceivers is V_{CCINT}, V_{MGTAVCC}, V_{MGTAVTT} OR V_{MGTAVCC}, V_{CCINT}, V_{MGTAVTT}. There is no recommended sequencing for V_{MGTVCCAUX}. Both V_{MGTAVCC} and V_{CCINT} can be ramped simultaneously. The recommended power-off sequence is the reverse of the power-on sequence to achieve minimum current draw.

If these recommended sequences are not met, current drawn from V_{MGTAVTT} can be higher than specifications during power-up and power-down.

- When V_{MGTAVTT} is powered before V_{MGTAVCC} and V_{MGTAVTT} - V_{MGTAVCC} > 150 mV and V_{MGTAVCC} < 0.7V, the V_{MGTAVTT} current draw can increase by 460 mA per transceiver during V_{MGTAVCC} ramp up. The duration of the current draw can be up to 0.3 x T_{MGTAVCC} (ramp time from GND to 90% of V_{MGTAVCC}). The reverse is true for power-down.
- When V_{MGTAVTT} is powered before V_{CCINT} and V_{MGTAVTT} - V_{CCINT} > 150 mV and V_{CCINT} < 0.7V, the V_{MGTAVTT} current draw can increase by 50 mA per transceiver during V_{CCINT} ramp up. The duration of the current draw can be up to 0.3 x T_{VCCINT} (ramp time from GND to 90% of V_{CCINT}). The reverse is true for power-down.

Table 19: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOP1}				T _{IOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
HSTL_I_F	0.61	0.64	0.73	0.79	1.10	1.19	1.23	1.41	1.86	2.05	2.22	1.92	ns
HSTL_II_F	0.61	0.64	0.73	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
HSTL_I_18_F	0.64	0.67	0.76	0.79	1.05	1.18	1.28	1.44	1.81	2.04	2.27	1.95	ns
HSTL_II_18_F	0.64	0.67	0.76	0.79	1.03	1.14	1.23	1.42	1.79	2.00	2.22	1.94	ns
DIFF_HSTL_I_F	0.63	0.67	0.77	0.78	1.09	1.18	1.22	1.48	1.85	2.04	2.21	2.00	ns
DIFF_HSTL_II_F	0.63	0.67	0.77	0.79	1.02	1.11	1.14	1.48	1.78	1.97	2.13	2.00	ns
DIFF_HSTL_I_18_F	0.65	0.69	0.78	0.79	1.08	1.17	1.21	1.48	1.84	2.03	2.20	2.00	ns
DIFF_HSTL_II_18_F	0.65	0.69	0.78	0.81	1.01	1.10	1.13	1.48	1.77	1.96	2.12	2.00	ns
LVC MOS33_S4	1.31	1.40	1.60	1.54	5.23	5.61	6.09	4.13	5.99	6.47	7.08	4.64	ns
LVC MOS33_S8	1.31	1.40	1.60	1.54	4.46	4.85	5.33	3.84	5.22	5.71	6.32	4.36	ns
LVC MOS33_S12	1.31	1.40	1.60	1.54	3.46	3.89	4.42	3.41	4.22	4.75	5.41	3.92	ns
LVC MOS33_S16	1.31	1.40	1.60	1.54	3.06	3.43	3.88	3.72	3.82	4.29	4.87	4.23	ns
LVC MOS33_F4	1.31	1.40	1.60	1.54	4.70	5.01	5.36	3.58	5.46	5.87	6.35	4.09	ns
LVC MOS33_F8	1.31	1.40	1.60	1.54	3.62	4.04	4.56	3.06	4.38	4.90	5.55	3.58	ns
LVC MOS33_F12	1.31	1.40	1.60	1.54	2.57	2.85	3.15	2.88	3.33	3.71	4.14	3.39	ns
LVC MOS33_F16	1.31	1.40	1.60	1.54	2.44	2.69	2.96	2.88	3.20	3.55	3.95	3.39	ns
LVC MOS25_S4	1.08	1.16	1.32	1.36	4.49	4.80	5.16	3.44	5.25	5.66	6.15	3.95	ns
LVC MOS25_S8	1.08	1.16	1.32	1.36	3.66	4.04	4.49	3.20	4.42	4.90	5.48	3.72	ns
LVC MOS25_S12	1.08	1.16	1.32	1.36	2.77	3.10	3.49	2.80	3.53	3.96	4.48	3.31	ns
LVC MOS25_S16	1.08	1.16	1.32	1.36	3.24	3.62	4.09	3.14	4.00	4.48	5.08	3.66	ns
LVC MOS25_F4	1.08	1.16	1.32	1.36	3.96	4.31	4.72	3.06	4.72	5.17	5.71	3.58	ns
LVC MOS25_F8	1.08	1.16	1.32	1.36	2.43	2.87	3.42	2.50	3.19	3.73	4.41	3.02	ns
LVC MOS25_F12	1.08	1.16	1.32	1.36	2.23	2.63	3.13	2.48	2.99	3.49	4.12	3.00	ns
LVC MOS25_F16	1.08	1.16	1.32	1.36	1.92	2.17	2.45	2.33	2.68	3.03	3.44	2.84	ns
LVC MOS18_S4	0.64	0.66	0.74	0.87	3.24	3.45	3.66	1.91	4.00	4.31	4.65	2.42	ns
LVC MOS18_S8	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S12	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S16	0.64	0.66	0.74	0.87	1.82	2.03	2.24	1.84	2.58	2.89	3.23	2.36	ns
LVC MOS18_S24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.74	1.92	2.08	1.92	2.50	2.78	3.07	2.44	ns
LVC MOS18_F4	0.64	0.66	0.74	0.87	3.12	3.31	3.49	1.77	3.88	4.17	4.48	2.28	ns
LVC MOS18_F8	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F12	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F16	0.64	0.66	0.74	0.87	1.52	1.68	1.81	1.72	2.28	2.54	2.80	2.23	ns
LVC MOS18_F24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.34	1.46	1.55	1.66	2.10	2.32	2.54	2.17	ns
LVC MOS15_S4	0.66	0.69	0.81	0.90	3.48	3.74	4.03	2.22	4.24	4.60	5.02	2.73	ns
LVC MOS15_S8	0.66	0.69	0.81	0.90	2.37	2.67	3.01	2.41	3.13	3.53	4.00	2.92	ns
LVC MOS15_S12	0.66	0.69	0.81	0.90	1.83	2.03	2.23	1.91	2.59	2.89	3.22	2.42	ns

Table 19: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPi}				T _{IOPp}				T _{IOTp}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVC MOS15_S16	0.66	0.69	0.81	0.90	1.76	1.95	2.13	1.91	2.52	2.81	3.12	2.42	ns
LVC MOS15_F4	0.66	0.69	0.81	0.90	3.39	3.60	3.80	1.98	4.15	4.46	4.79	2.50	ns
LVC MOS15_F8	0.66	0.69	0.81	0.90	1.79	1.99	2.18	1.92	2.55	2.85	3.17	2.44	ns
LVC MOS15_F12	0.66	0.69	0.81	0.90	1.40	1.54	1.65	1.67	2.16	2.40	2.64	2.19	ns
LVC MOS15_F16	0.66	0.69	0.81	0.90	1.37	1.51	1.61	1.66	2.13	2.37	2.60	2.17	ns
LVC MOS12_S4	0.88	0.91	1.00	1.01	3.85	4.22	4.69	2.89	4.61	5.08	5.68	3.41	ns
LVC MOS12_S8	0.88	0.91	1.00	1.01	2.52	2.96	3.52	2.41	3.28	3.82	4.51	2.92	ns
LVC MOS12_S12 ⁽¹⁾	0.88	0.91	1.00	1.01	2.06	2.31	2.59	2.11	2.82	3.17	3.58	2.63	ns
LVC MOS12_F4	0.88	0.91	1.00	1.01	3.44	3.73	4.06	2.30	4.20	4.59	5.05	2.81	ns
LVC MOS12_F8	0.88	0.91	1.00	1.01	1.72	2.04	2.40	1.86	2.48	2.90	3.39	2.38	ns
LVC MOS12_F12 ⁽¹⁾	0.88	0.91	1.00	1.01	1.54	1.71	1.87	1.69	2.30	2.57	2.86	2.20	ns
SSTL135_S	0.61	0.64	0.73	0.79	1.27	1.40	1.50	1.64	2.03	2.26	2.49	2.16	ns
SSTL15_S	0.61	0.64	0.73	0.73	1.24	1.37	1.47	1.59	2.00	2.23	2.46	2.11	ns
SSTL18_I_S	0.64	0.67	0.76	0.79	1.59	1.74	1.85	1.95	2.35	2.60	2.84	2.47	ns
SSTL18_II_S	0.64	0.67	0.76	0.78	1.27	1.40	1.50	1.63	2.03	2.26	2.49	2.14	ns
DIFF_SSTL135_S	0.59	0.61	0.73	0.79	1.27	1.40	1.50	1.64	2.03	2.26	2.49	2.16	ns
DIFF_SSTL15_S	0.63	0.67	0.77	0.79	1.24	1.37	1.47	1.59	2.00	2.23	2.46	2.11	ns
DIFF_SSTL18_I_S	0.65	0.69	0.78	0.79	1.50	1.63	1.72	1.95	2.26	2.49	2.71	2.47	ns
DIFF_SSTL18_II_S	0.65	0.69	0.78	0.79	1.13	1.22	1.25	1.66	1.89	2.08	2.24	2.17	ns
SSTL135_F	0.61	0.64	0.73	0.79	1.04	1.17	1.26	1.42	1.80	2.03	2.25	1.94	ns
SSTL15_F	0.61	0.64	0.73	0.73	1.04	1.17	1.26	1.39	1.80	2.03	2.25	1.91	ns
SSTL18_I_F	0.64	0.67	0.76	0.79	1.12	1.22	1.26	1.44	1.88	2.08	2.25	1.95	ns
SSTL18_II_F	0.64	0.67	0.76	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
DIFF_SSTL135_F	0.59	0.61	0.73	0.79	1.04	1.17	1.26	1.42	1.80	2.03	2.25	1.94	ns
DIFF_SSTL15_F	0.63	0.67	0.77	0.79	1.04	1.17	1.26	1.39	1.80	2.03	2.25	1.91	ns
DIFF_SSTL18_I_F	0.65	0.69	0.78	0.79	1.10	1.19	1.23	1.52	1.86	2.05	2.22	2.03	ns
DIFF_SSTL18_II_F	0.65	0.69	0.78	0.79	1.02	1.10	1.14	1.50	1.78	1.96	2.13	2.02	ns

Notes:

1. This I/O standard is only available in the 3.3V high-range (HR) banks.

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
DIFF_HSTL_II_DCI_F	0.75	0.79	0.92	0.76	0.97	1.08	1.15	1.30	1.61	1.84	1.97	1.91	ns
DIFF_HSTL_I_18_F	0.75	0.79	0.92	0.89	1.04	1.16	1.24	1.38	1.68	1.91	2.06	1.99	ns
DIFF_HSTL_II_18_F	0.75	0.79	0.92	0.89	0.98	1.09	1.16	1.40	1.62	1.85	1.98	2.01	ns
DIFF_HSTL_I_DCI_18_F	0.75	0.79	0.92	0.75	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
DIFF_HSTL_II_DCI_18_F	0.75	0.79	0.92	0.75	0.98	1.09	1.16	1.33	1.61	1.85	1.98	1.94	ns
DIFF_HSTL_II_T_DCI_18_F	0.75	0.79	0.92	0.76	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
LVC MOS18_S2	0.47	0.50	0.60	0.87	3.95	4.28	4.85	3.40	4.59	5.04	5.67	4.01	ns
LVC MOS18_S4	0.47	0.50	0.60	0.87	2.67	2.98	3.43	2.69	3.31	3.73	4.26	3.30	ns
LVC MOS18_S6	0.47	0.50	0.60	0.87	2.14	2.38	2.72	2.18	2.77	3.14	3.54	2.79	ns
LVC MOS18_S8	0.47	0.50	0.60	0.87	1.98	2.21	2.52	2.02	2.61	2.97	3.35	2.63	ns
LVC MOS18_S12	0.47	0.50	0.60	0.87	1.70	1.91	2.17	1.85	2.34	2.67	2.99	2.46	ns
LVC MOS18_S16	0.47	0.50	0.60	0.87	1.57	1.75	1.97	1.76	2.20	2.51	2.79	2.37	ns
LVC MOS18_F2	0.47	0.50	0.60	0.87	3.50	3.87	4.48	2.85	4.14	4.63	5.30	3.46	ns
LVC MOS18_F4	0.47	0.50	0.60	0.87	2.23	2.50	2.87	2.26	2.87	3.25	3.69	2.87	ns
LVC MOS18_F6	0.47	0.50	0.60	0.87	1.80	2.00	2.26	1.52	2.43	2.76	3.08	2.13	ns
LVC MOS18_F8	0.47	0.50	0.60	0.87	1.46	1.72	2.04	1.51	2.10	2.47	2.86	2.12	ns
LVC MOS18_F12	0.47	0.50	0.60	0.87	1.26	1.40	1.53	1.46	1.89	2.16	2.35	2.07	ns
LVC MOS18_F16	0.47	0.50	0.60	0.87	1.19	1.33	1.44	1.46	1.83	2.08	2.26	2.07	ns
LVC MOS15_S2	0.59	0.62	0.73	0.86	3.55	3.89	4.45	3.11	4.19	4.65	5.27	3.73	ns
LVC MOS15_S4	0.59	0.62	0.73	0.86	2.45	2.70	3.06	2.46	3.08	3.45	3.89	3.07	ns
LVC MOS15_S6	0.59	0.62	0.73	0.86	2.24	2.51	2.88	2.33	2.88	3.26	3.71	2.94	ns
LVC MOS15_S8	0.59	0.62	0.73	0.86	1.91	2.16	2.49	2.05	2.55	2.91	3.31	2.66	ns
LVC MOS15_S12	0.59	0.62	0.73	0.86	1.77	1.98	2.23	1.97	2.41	2.73	3.05	2.58	ns
LVC MOS15_S16	0.59	0.62	0.73	0.86	1.62	1.81	2.02	1.85	2.26	2.56	2.84	2.46	ns
LVC MOS15_F2	0.59	0.62	0.73	0.86	3.38	3.69	4.18	2.74	4.02	4.44	5.00	3.35	ns
LVC MOS15_F4	0.59	0.62	0.73	0.86	2.04	2.21	2.44	1.72	2.68	2.97	3.26	2.33	ns
LVC MOS15_F6	0.59	0.62	0.73	0.86	1.47	1.74	2.09	1.49	2.10	2.50	2.91	2.10	ns
LVC MOS15_F8	0.59	0.62	0.73	0.86	1.31	1.46	1.61	1.47	1.95	2.22	2.43	2.08	ns
LVC MOS15_F12	0.59	0.62	0.73	0.86	1.21	1.34	1.45	1.44	1.84	2.10	2.27	2.05	ns
LVC MOS15_F16	0.59	0.62	0.73	0.86	1.18	1.31	1.41	1.41	1.82	2.07	2.23	2.02	ns
LVC MOS12_S2	0.64	0.67	0.78	0.95	3.38	3.80	4.48	3.27	4.02	4.55	5.30	3.88	ns
LVC MOS12_S4	0.64	0.67	0.78	0.95	2.62	2.94	3.43	2.76	3.26	3.70	4.25	3.37	ns
LVC MOS12_S6	0.64	0.67	0.78	0.95	2.05	2.33	2.72	2.24	2.69	3.08	3.54	2.85	ns
LVC MOS12_S8	0.64	0.67	0.78	0.95	1.94	2.18	2.51	2.16	2.58	2.94	3.33	2.77	ns
LVC MOS12_F2	0.64	0.67	0.78	0.95	2.84	3.15	3.62	2.47	3.48	3.90	4.44	3.08	ns
LVC MOS12_F4	0.64	0.67	0.78	0.95	1.97	2.18	2.44	1.69	2.61	2.93	3.26	2.30	ns
LVC MOS12_F6	0.64	0.67	0.78	0.95	1.33	1.51	1.70	1.43	1.96	2.26	2.52	2.04	ns

Input/Output Logic Switching Characteristics

Table 22: ILOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ICE1CK} /T _{ICKCE1}	CE1 pin Setup/Hold with respect to CLK	0.42/0.00	0.48/0.00	0.67/0.00	0.56/−0.16	ns
T _{ISRCK} /T _{ICKSR}	SR pin Setup/Hold with respect to CLK	0.53/0.01	0.61/0.01	0.99/0.01	0.88/−0.30	ns
T _{IDOCKE2} /T _{IOCKDE2}	D pin Setup/Hold with respect to CLK without Delay (HP I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE2} /T _{IOCKDDE2}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HP I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
T _{IDOCKE3} /T _{IOCKDE3}	D pin Setup/Hold with respect to CLK without Delay (HR I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE3} /T _{IOCKDDE3}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HR I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
Combinatorial						
T _{IDIE2}	D pin to O pin propagation delay, no Delay (HP I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE2}	DDLY pin to O pin propagation delay (using IDELAY) (HP I/O banks only)	0.10	0.11	0.13	0.15	ns
T _{IDIE3}	D pin to O pin propagation delay, no Delay (HR I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE3}	DDLY pin to O pin propagation delay (using IDELAY) (HR I/O banks only)	0.10	0.11	0.13	0.15	ns
Sequential Delays						
T _{IDLOE2}	D pin to Q1 pin using flip-flop as a latch without Delay (HP I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE2}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HP I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{IDLOE3}	D pin to Q1 pin using flip-flop as a latch without Delay (HR I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE3}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HR I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{ICKQ}	CLK to Q outputs	0.47	0.50	0.58	0.71	ns
T _{RQ_ILOGICE2}	SR pin to OQ/TQ out (HP I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE2}	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
T _{RQ_ILOGICE3}	SR pin to OQ/TQ out (HR I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE3}	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_ILOGICE2}	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.63	0.63	0.68	ns, Min
T _{RPW_ILOGICE3}	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.63	0.63	0.68	ns, Min

Input Serializer/Deserializer Switching Characteristics

Table 24: ISERDES Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold for Control Lines						
T _{ISCK_BITSLIP} / T _{ISCKC_BITSLIP}	BITSLIP pin Setup/Hold with respect to CLKDIV	0.01/0.12	0.02/0.13	0.02/0.15	0.02/0.21	ns
T _{ISCK_C} / T _{ISCKC_C} ⁽²⁾	CE pin Setup/Hold with respect to CLK (for CE1)	0.39/−0.02	0.44/−0.02	0.63/−0.02	0.51/−0.22	ns
T _{ISCK_C} / T _{ISCKC_C} ⁽²⁾	CE pin Setup/Hold with respect to CLKDIV (for CE2)	−0.12/0.29	−0.12/0.31	−0.12/0.35	−0.17/0.40	ns
Setup/Hold for Data Lines						
T _{ISDCK_D} /T _{ISCKD_D}	D pin Setup/Hold with respect to CLK	−0.02/0.11	−0.02/0.12	−0.02/0.15	−0.04/0.19	ns
T _{ISDCK_DDL} / T _{ISCKD_DDL}	DDL pin Setup/Hold with respect to CLK (using IDELAY) ⁽¹⁾	−0.02/0.11	−0.02/0.12	−0.02/0.15	−0.03/0.19	ns
T _{ISDCK_D_DDR} / T _{ISCKD_D_DDR}	D pin Setup/Hold with respect to CLK at DDR mode	−0.02/0.11	−0.02/0.12	−0.02/0.15	−0.04/0.19	ns
T _{ISDCK_DDL_DDR} / T _{ISCKD_DDL_DDR}	D pin Setup/Hold with respect to CLK at DDR mode (using IDELAY) ⁽¹⁾	0.11/0.11	0.12/0.12	0.15/0.15	0.19/0.19	ns
Sequential Delays						
T _{ISCKO_Q}	CLKDIV to out at Q pin	0.46	0.47	0.58	0.67	ns
Propagation Delays						
T _{ISDO_DO}	D input to DO output pin	0.09	0.10	0.12	0.14	ns

Notes:

1. Recorded at 0 tap value.
2. T_{ISCK_CE2} and T_{ISCK_CE2} are reported as T_{ISCK_CE}/T_{ISCK_CE} in TRACE report.

Table 27: IO_FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
IO_FIFO Clock to Out Delays						
T _{OFFCKO_DO}	RDCLK to Q outputs	0.51	0.56	0.63	0.81	ns
T _{CKO_FLAGS}	Clock to IO_FIFO Flags	0.59	0.62	0.81	0.77	ns
Setup/Hold						
T _{CCK_D} /T _{CKC_D}	D inputs to WRCLK	0.43/−0.01	0.47/−0.01	0.53/−0.01	0.76/−0.05	ns
T _{IFFCKC_WREN} /T _{IFFCKC_WREN}	WREN to WRCLK	0.39/−0.01	0.43/−0.01	0.50/−0.01	0.70/−0.05	ns
T _{OFFCKC_RDEN} /T _{OFFCKC_RDEN}	RDEN to RDCLK	0.49/0.01	0.53/0.02	0.61/0.02	0.79/−0.02	ns
Minimum Pulse Width						
T _{PWH_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	1.29	ns
T _{PWL_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	1.29	ns
Maximum Frequency						
F _{MAX}	RDCLK and WRCLK	533.05	470.37	400.00	333.33	MHz

CLB Switching Characteristics

Table 28: CLB Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Combinatorial Delays						
T _{ILO}	An – Dn LUT address to A	0.05	0.05	0.06	0.07	ns, Max
T _{ILO_2}	An – Dn LUT address to AMUX/CMUX	0.15	0.16	0.19	0.22	ns, Max
T _{ILO_3}	An – Dn LUT address to BMUX_A	0.24	0.25	0.30	0.37	ns, Max
T _{ITO}	An – Dn inputs to A – D Q outputs	0.58	0.61	0.74	0.91	ns, Max
T _{AXA}	AX inputs to AMUX output	0.38	0.40	0.49	0.62	ns, Max
T _{AXB}	AX inputs to BMUX output	0.40	0.42	0.52	0.66	ns, Max
T _{AXC}	AX inputs to CMUX output	0.39	0.41	0.50	0.62	ns, Max
T _{AXD}	AX inputs to DMUX output	0.43	0.44	0.52	0.67	ns, Max
T _{BXB}	BX inputs to BMUX output	0.31	0.33	0.40	0.51	ns, Max
T _{BXD}	BX inputs to DMUX output	0.38	0.39	0.47	0.62	ns, Max
T _{CXC}	CX inputs to CMUX output	0.27	0.28	0.34	0.43	ns, Max
T _{CXD}	CX inputs to DMUX output	0.33	0.34	0.41	0.54	ns, Max
T _{DXD}	DX inputs to DMUX output	0.32	0.33	0.40	0.52	ns, Max
Sequential Delays						
T _{CKO}	Clock to AQ – DQ outputs	0.26	0.27	0.32	0.40	ns, Max
T _{SHCKO}	Clock to AMUX – DMUX outputs	0.32	0.32	0.39	0.46	ns, Max
Setup and Hold Times of CLB Flip-Flops Before/After Clock CLK						
T _{AS} /T _{AH}	A _N – D _N input to CLK on A – D Flip Flops	0.01/0.12	0.02/0.13	0.03/0.18	0.02/0.18	ns, Min
T _{DICK} /T _{CKDI}	A _X – D _X input to CLK on A – D Flip Flops	0.04/0.14	0.04/0.14	0.05/0.20	0.05/0.21	ns, Min
	A _X – D _X input through MUXs and/or carry logic to CLK on A – D Flip Flops	0.36/0.10	0.37/0.11	0.46/0.16	0.56/0.15	ns, Min
T _{CECK_CLB} /T _{CKCE_CLB}	CE input to CLK on A – D Flip Flops	0.19/0.05	0.20/0.05	0.25/0.05	0.24/0.04	ns, Min
T _{SRCK} /T _{CKSR}	SR input to CLK on A – D Flip Flops	0.30/0.05	0.31/0.07	0.37/0.09	0.48/0.05	ns, Min
Set/Reset						
T _{SRMIN}	SR input minimum pulse width	0.52	0.78	1.04	0.95	ns, Min
T _{RQ}	Delay from SR input to AQ – DQ flip-flops	0.38	0.38	0.46	0.59	ns, Max
T _{CEO}	Delay from CE input to AQ – DQ flip-flops	0.34	0.35	0.43	0.54	ns, Max
F _{TOG}	Toggle frequency (for export control)	1818	1818	1818	1286	MHz

CLB Distributed RAM Switching Characteristics (SLICEM Only)

Table 29: CLB Distributed RAM Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Sequential Delays						
T _{SHCKO}	Clock to A – B outputs	0.68	0.70	0.85	1.08	ns, Max
T _{SHCKO_1}	Clock to AMUX – BMUX outputs	0.91	0.95	1.15	1.44	ns, Max
Setup and Hold Times Before/After Clock CLK						
T _{DS_LRAM} /T _{DH_LRAM}	A – D inputs to CLK	0.45/0.23	0.45/0.24	0.54/0.27	0.69/0.33	ns, Min
T _{AS_LRAM} /T _{AH_LRAM}	Address An inputs to clock	0.13/0.50	0.14/0.50	0.17/0.58	0.21/0.63	ns, Min
	Address An inputs through MUXs and/or carry logic to clock	0.40/0.16	0.42/0.17	0.52/0.23	0.63/0.23	ns, Min
T _{WS_LRAM} /T _{WH_LRAM}	WE input to clock	0.29/0.09	0.30/0.09	0.36/0.09	0.46/0.10	ns, Min
T _{CECK_LRAM} / T _{CKCE_LRAM}	CE input to CLK	0.29/0.09	0.30/0.09	0.37/0.09	0.47/0.10	ns, Min
Clock CLK						
T _{MPW}	Minimum pulse width	0.68	0.77	0.91	1.11	ns, Min
T _{MCP}	Minimum clock period	1.35	1.54	1.82	2.22	ns, Min

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time.
2. T_{SHCKO} also represents the CLK to XMUX output. Refer to TRACE report for the CLK to XMUX path.

CLB Shift Register Switching Characteristics (SLICEM Only)

Table 30: CLB Shift Register Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Sequential Delays						
T _{REG}	Clock to A – D outputs	0.96	0.98	1.20	1.35	ns, Max
T _{REG_MUX}	Clock to AMUX – DMUX output	1.19	1.23	1.50	1.72	ns, Max
T _{REG_M31}	Clock to DMUX output via M31 output	0.89	0.91	1.10	1.25	ns, Max
Setup and Hold Times Before/After Clock CLK						
T _{WS_SHFREG} / T _{WH_SHFREG}	WE input	0.26/0.09	0.27/0.09	0.33/0.09	0.41/0.10	ns, Min
T _{CECK_SHFREG} / T _{CKCE_SHFREG}	CE input to CLK	0.27/0.09	0.28/0.09	0.33/0.09	0.42/0.10	ns, Min
T _{DS_SHFREG} / T _{DH_SHFREG}	A – D inputs to CLK	0.28/0.26	0.28/0.26	0.33/0.30	0.41/0.36	ns, Min
Clock CLK						
T _{MPW_SHFREG}	Minimum pulse width	0.55	0.65	0.78	0.91	ns, Min

Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time.

Block RAM and FIFO Switching Characteristics

Table 31: Block RAM and FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Block RAM and FIFO Clock-to-Out Delays						
T_{RCKO_DO} and $T_{RCKO_DO_REG}^{(1)}$	Clock CLK to DOUT output (without output register) ⁽²⁾⁽³⁾	1.57	1.80	2.08	2.44	ns, Max
	Clock CLK to DOUT output (with output register) ⁽⁴⁾⁽⁵⁾	0.54	0.63	0.75	0.86	ns, Max
$T_{RCKO_DO_ECC}$ and $T_{RCKO_DO_ECC_REG}$	Clock CLK to DOUT output with ECC (without output register) ⁽²⁾⁽³⁾	2.35	2.58	3.26	4.49	ns, Max
	Clock CLK to DOUT output with ECC (with output register) ⁽⁴⁾⁽⁵⁾	0.62	0.69	0.80	0.94	ns, Max
$T_{RCKO_DO_CASCOUT}$ and $T_{RCKO_DO_CASCOUT_REG}$	Clock CLK to DOUT output with Cascade (without output register) ⁽²⁾	2.21	2.45	2.80	3.19	ns, Max
	Clock CLK to DOUT output with Cascade (with output register) ⁽⁴⁾	0.98	1.08	1.24	1.32	ns, Max
T_{RCKO_FLAGS}	Clock CLK to FIFO flags outputs ⁽⁶⁾	0.65	0.74	0.89	0.97	ns, Max
$T_{RCKO_POINTERS}$	Clock CLK to FIFO pointers outputs ⁽⁷⁾	0.79	0.87	0.98	1.10	ns, Max
$T_{RCKO_PARITY_ECC}$	Clock CLK to ECCPARITY in ECC encode only mode	0.66	0.72	0.80	0.93	ns, Max
$T_{RCKO_SDBIT_ECC}$ and $T_{RCKO_SDBIT_ECC_REG}$	Clock CLK to BITERR (without output register)	2.17	2.38	3.01	4.15	ns, Max
	Clock CLK to BITERR (with output register)	0.57	0.65	0.76	0.89	ns, Max
$T_{RCKO_RDADDR_ECC}$ and $T_{RCKO_RDADDR_ECC_REG}$	Clock CLK to RDADDR output with ECC (without output register)	0.64	0.74	0.90	0.98	ns, Max
	Clock CLK to RDADDR output with ECC (with output register)	0.71	0.79	0.92	1.10	ns, Max
Setup and Hold Times Before/After Clock CLK						
$T_{RCKCK_ADDRA}/T_{RCKKC_ADDRA}$	ADDR inputs ⁽⁸⁾	0.38/0.27	0.42/0.28	0.48/0.31	0.65/0.38	ns, Min
$T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$	Data input setup/hold time when block RAM is configured in WRITE_FIRST or NO_CHANGE mode ⁽⁹⁾	0.49/0.51	0.55/0.53	0.63/0.57	0.78/0.64	ns, Min
$T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$	Data input setup/hold time when block RAM is configured in READ_FIRST mode ⁽⁹⁾	0.17/0.25	0.19/0.29	0.21/0.35	0.25/0.32	ns, Min
$T_{RDCK_DI_ECC}/T_{RCKD_DI_ECC}$	DIN inputs with block RAM ECC in standard mode ⁽⁹⁾	0.42/0.37	0.47/0.39	0.53/0.43	0.66/0.46	ns, Min
$T_{RDCK_DI_ECCW}/T_{RCKD_DI_ECCW}$	DIN inputs with block RAM ECC encode only ⁽⁹⁾	0.79/0.37	0.87/0.39	0.99/0.43	1.17/0.41	ns, Min
$T_{RDCK_DI_ECC_FIFO}/T_{RCKD_DI_ECC_FIFO}$	DIN inputs with FIFO ECC in standard mode ⁽⁹⁾	0.89/0.47	0.98/0.50	1.12/0.54	1.32/0.65	ns, Min
$T_{RCKCK_INJECTBITERR}/T_{RCKKC_INJECTBITERR}$	Inject single/double bit error in ECC mode	0.49/0.30	0.55/0.31	0.63/0.34	0.78/0.41	ns, Min
$T_{RCKCK_EN}/T_{RCKKC_EN}$	Block RAM Enable (EN) input	0.30/0.17	0.33/0.18	0.38/0.20	0.48/0.22	ns, Min
$T_{RCKCK_REGCE}/T_{RCKKC_REGCE}$	CE input of output register	0.21/0.13	0.25/0.13	0.31/0.14	0.34/0.16	ns, Min
$T_{RCKCK_RSTREG}/T_{RCKKC_RSTREG}$	Synchronous RSTREG input	0.25/0.06	0.27/0.06	0.29/0.06	0.35/0.06	ns, Min

Table 32: DSP48E1 Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Clock to Outs from Pipeline Register Clock to Output Pins						
T _{DSPCKO_P_MREG}	CLK MREG to P output	1.42	1.64	1.96	2.31	ns
T _{DSPCKO_CARRYCASCOUT_MREG}	CLK MREG to CARRYCASCOUT output	1.63	1.87	2.24	2.65	ns
T _{DSPCKO_P_ADREG_MULT}	CLK ADREG to P output using multiplier	2.30	2.63	3.13	3.90	ns
T _{DSPCKO_CARRYCASCOUT_ADREG_MULT}	CLK ADREG to CARRYCASCOUT output using multiplier	2.51	2.87	3.41	4.23	ns
Clock to Outs from Input Register Clock to Output Pins						
T _{DSPCKO_P_AREG_MULT}	CLK AREG to P output using multiplier	3.34	3.83	4.55	5.80	ns
T _{DSPCKO_P_BREG}	CLK BREG to P output not using multiplier	1.39	1.59	1.88	2.24	ns
T _{DSPCKO_P_CREG}	CLK CREG to P output not using multiplier	1.43	1.64	1.95	2.32	ns
T _{DSPCKO_P_DREG_MULT}	CLK DREG to P output using multiplier	3.32	3.80	4.51	5.74	ns
Clock to Outs from Input Register Clock to Cascading Output Pins						
T _{DSPCKO_{ACOUT; BCOUT}_{AREG; BREG}}	CLK (ACOUT, BCOUT) to {A,B} register output	0.55	0.62	0.74	0.87	ns
T _{DSPCKO_CARRYCASCOUT_{AREG, BREG}_MULT}	CLK (AREG, BREG) to CARRYCASCOUT output using multiplier	3.55	4.06	4.84	6.13	ns
T _{DSPCKO_CARRYCASCOUT_BREG}	CLK BREG to CARRYCASCOUT output not using multiplier	1.60	1.82	2.16	2.58	ns
T _{DSPCKO_CARRYCASCOUT_DREG_MULT}	CLK DREG to CARRYCASCOUT output using multiplier	3.52	4.03	4.79	6.07	ns
T _{DSPCKO_CARRYCASCOUT_CREG}	CLK CREG to CARRYCASCOUT output	1.64	1.88	2.23	2.65	ns
Maximum Frequency						
F _{MAX}	With all registers used	741.84	650.20	547.95	429.37	MHz
F _{MAX_PATDET}	With pattern detector	627.35	549.75	463.61	365.90	MHz
F _{MAX_MULT_NOMREG}	Two register multiply without MREG	412.20	360.75	303.77	248.32	MHz
F _{MAX_MULT_NOMREG_PATDET}	Two register multiply without MREG with pattern detect	374.25	327.65	276.01	225.73	MHz
F _{MAX_PREADD_MULT_NOADREG}	Without ADREG	468.82	408.66	342.70	263.44	MHz
F _{MAX_PREADD_MULT_NOADREG_PATDET}	Without ADREG with pattern detect	468.82	408.66	342.70	263.44	MHz
F _{MAX_NOPIPELINEREG}	Without pipeline registers (MREG, ADREG)	306.84	267.81	225.02	177.15	MHz
F _{MAX_NOPIPELINEREG_PATDET}	Without pipeline registers (MREG, ADREG) with pattern detect	285.23	249.13	209.38	165.32	MHz

Clock Buffers and Networks

Table 33: Global Clock Switching Characteristics (Including BUFGCTRL)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$T_{BCCCK_CE}/T_{BCKKC_CE}^{(1)}$	CE pins Setup/Hold	0.12/0.30	0.14/0.38	0.26/0.38	0.23/0.40	ns
$T_{BCCCK_S}/T_{BCKKC_S}^{(1)}$	S pins Setup/Hold	0.12/0.30	0.14/0.38	0.26/0.38	0.23/0.40	ns
$T_{BCKKO_O}^{(2)}$	BUFGCTRL delay from I0/I1 to O	0.08	0.10	0.12	0.10	ns
Maximum Frequency						
F_{MAX_BUFG}	Global clock tree (BUFG)	741.00	710.00	625.00	560.00	MHz

Notes:

- T_{BCCCK_CE} and T_{BCKKC_CE} must be satisfied to assure glitch-free operation of the global clock when switching between clocks. These parameters do not apply to the BUFGMUX primitive that assures glitch-free operation. The other global clock setup and hold times are optional; only needing to be satisfied if device operation requires simulation matches on a cycle-for-cycle basis when switching between clocks.
- T_{BCKKO_O} (BUFG delay from I0 to O) values are the same as T_{BCKKO_O} values.

Table 34: Input/Output Clock Switching Characteristics (BUFIO)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{BIOCKO_O}	Clock to out delay from I to O	1.04	1.14	1.32	1.48	ns
Maximum Frequency						
F_{MAX_BUFIO}	I/O clock tree (BUFIO)	800.00	800.00	710.00	710.00	MHz

Table 35: Regional Clock Buffer Switching Characteristics (BUFR)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{BRCKO_O}	Clock to out delay from I to O	0.60	0.65	0.77	1.06	ns
$T_{BRCKO_O_BYP}$	Clock to out delay from I to O with Divide Bypass attribute set	0.30	0.32	0.38	0.57	ns
T_{BRDO_O}	Propagation delay from CLR to O	0.71	0.75	0.96	0.93	ns
Maximum Frequency						
$F_{MAX_BUFR}^{(1)}$	Regional clock tree (BUFR)	600.00	540.00	450.00	450.00	MHz

Notes:

- The maximum input frequency to the BUFR is the BUFIO F_{MAX} frequency.

Table 36: Horizontal Clock Buffer Switching Characteristics (BUFH)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{BHCKO_O}	BUFH delay from I to O	0.10	0.11	0.13	0.12	ns
T_{BHCK_CE}/T_{BHCKC_CE}	CE pin Setup and Hold	0.20/0.16	0.23/0.20	0.38/0.21	0.28/0.09	ns
Maximum Frequency						
F_{MAX_BUFH}	Horizontal clock buffer (BUFH)	741.00	710.00	625.00	560.00	MHz

Table 37: Duty Cycle Distortion and Clock-Tree Skew

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
T_{DCD_CLK}	Global Clock Tree Duty Cycle Distortion ⁽¹⁾	All	0.20	0.20	0.20	0.25	ns
T_{CKSKEW}	Global Clock Tree Skew ⁽²⁾	XC7K70T	0.29	0.40	0.40	0.47	ns
		XC7K160T	0.42	0.53	0.57	0.59	ns
		XC7K325T	0.59	0.74	0.79	0.91	ns
		XC7K355T	0.45	0.57	0.59	0.69	ns
		XC7K410T	0.60	0.74	0.79	0.91	ns
		XC7K420T	0.60	0.74	0.79	0.91	ns
		XC7K480T	0.60	0.74	0.79	0.91	ns
T_{DCD_BUFIO}	I/O clock tree duty cycle distortion	All	0.12	0.12	0.12	0.12	ns
T_{BUFIO_SKEW}	I/O clock tree skew across one clock region	All	0.02	0.02	0.02	0.03	ns
T_{DCD_BUFR}	Regional clock tree duty cycle distortion	All	0.15	0.15	0.15	0.15	ns

Notes:

- These parameters represent the worst-case duty cycle distortion observable at the I/O flip flops. For all I/O standards, IBIS can be used to calculate any additional duty cycle distortion that might be caused by asymmetrical rise/fall times.
- The T_{CKSKEW} value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx Timing Analyzer tools to evaluate clock skew specific to your application.

Device Pin-to-Pin Input Parameter Guidelines

All devices are 100% functionally tested. Values are expressed in nanoseconds unless otherwise noted.

Table 45: Global Clock Input Setup and Hold Without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSFD} / T _{PHFD}	Full Delay (Legacy Delay or Default Delay) Global Clock Input and IFF ⁽²⁾ without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks	XC7K70T	2.83/−0.29	2.95/−0.29	3.15/−0.29	4.96/−0.33	ns
		XC7K160T	3.17/−0.35	3.29/−0.35	3.55/−0.35	5.54/−0.49	ns
		XC7K325T	2.83/−0.06	2.94/−0.06	3.15/−0.06	5.18/−0.14	ns
		XC7K355T	3.26/−0.32	3.41/−0.32	3.67/−0.32	5.84/−0.49	ns
		XC7K410T	3.43/−0.34	3.59/−0.34	3.88/−0.34	6.21/−0.54	ns
		XC7K420T	3.37/−0.27	3.48/−0.27	3.76/−0.27	6.00/−0.52	ns
		XC7K480T	3.37/−0.27	3.48/−0.27	3.76/−0.27	6.00/−0.52	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- A Zero "0" Hold Time listing indicates no hold time or a negative hold time.

Table 46: Clock-Capable Clock Input Setup and Hold With MMCM

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSMMCMCC} / T _{PHMMCMCC}	No Delay clock-capable clock input and IFF ⁽²⁾ with MMCM	XC7K70T	2.39/−0.22	2.65/−0.22	2.94/−0.22	2.21/−0.44	ns
		XC7K160T	2.49/−0.20	2.77/−0.20	3.07/−0.20	2.38/−0.47	ns
		XC7K325T	2.55/−0.16	2.85/−0.16	3.14/−0.16	2.60/−0.47	ns
		XC7K355T	2.43/−0.16	2.73/−0.16	3.00/−0.16	2.47/−0.43	ns
		XC7K410T	2.55/−0.16	2.84/−0.16	3.14/−0.16	2.58/−0.47	ns
		XC7K420T	2.47/−0.09	2.73/−0.09	3.02/−0.09	2.40/−0.41	ns
		XC7K480T	2.47/−0.09	2.73/−0.09	3.02/−0.09	2.40/−0.41	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- Use IBIS to determine any duty-cycle distortion incurred using various standards.

Table 47: Clock-Capable Clock Input Setup and Hold With PLL

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Clock-Capable Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSPLLCC} / T _{PHPLLCC}	No Delay clock-capable clock input and IFF ⁽²⁾ with PLL	XC7K70T	2.75/−0.32	3.04/−0.32	3.33/−0.32	2.42/−0.54	ns
		XC7K160T	2.85/−0.31	3.16/−0.31	3.46/−0.31	2.59/−0.56	ns
		XC7K325T	2.91/−0.27	3.24/−0.27	3.54/−0.27	2.80/−0.56	ns
		XC7K355T	2.79/−0.27	3.12/−0.27	3.40/−0.27	2.67/−0.52	ns
		XC7K410T	2.91/−0.27	3.24/−0.27	3.53/−0.27	2.78/−0.56	ns
		XC7K420T	2.83/−0.20	3.12/−0.20	3.41/−0.20	2.61/−0.50	ns
		XC7K480T	2.83/−0.20	3.12/−0.20	3.41/−0.20	2.61/−0.50	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- Use IBIS to determine any duty-cycle distortion incurred using various standards.

Table 48: Data Input Setup and Hold Times Relative to a Forwarded Clock Input Pin Using BUFIO

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to a Forwarded Clock Input Pin Using BUFIO for SSTL15 Standard.						
T _{PSCS} /T _{PHCS}	Setup/Hold of I/O clock for HR I/O banks	−0.36/1.36	−0.36/1.50	−0.36/1.70	−0.44/1.87	ns
	Setup/Hold of I/O clock for HP I/O banks	−0.34/1.39	−0.34/1.53	−0.34/1.73	−0.44/1.87	ns

Table 49: Sample Window

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T _{SAMP}	Sampling Error at Receiver Pins ⁽¹⁾	0.51	0.56	0.61	0.56	ns
T _{SAMP_BUFIO}	Sampling Error at Receiver Pins using BUFIO ⁽²⁾	0.30	0.35	0.40	0.35	ns

Notes:

- This parameter indicates the total sampling error of the Kintex-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the MMCM to capture the DDR input registers' edges of operation. These measurements include:
 - CLK0 MMCM jitter
 - MMCM accuracy (phase offset)
 - MMCM phase shift resolution
These measurements do not include package or clock tree skew.
- This parameter indicates the total sampling error of the Kintex-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the BUFIO clock network and IDELAY to capture the DDR input registers' edges of operation. These measurements do not include package or clock tree skew.

Additional Package Parameter Guidelines

The parameters in this section provide the necessary values for calculating timing budgets for Kintex-7 FPGA clock transmitter and receiver data-valid windows.

Table 50: Package Skew

Symbol	Description	Device	Package	Value	Units
T _{PKGSKEW}	Package Skew ⁽¹⁾	XC7K70T	FBG484	108	ps
			FBG676	135	ps
		XC7K160T	FBG484	118	ps
			FBG676	136	ps
			FFG676	161	ps
		XC7K325T	FBG676	146	ps
			FFG676	154	ps
			FBG900	163	ps
			FFG900	161	ps
		XC7K355T	FFG901	149	ps
		XC7K410T	FBG676	165	ps
			FFG676	168	ps
			FBG900	151	ps
			FFG900	146	ps
		XC7K420T	FFG901	149	ps
			FFG1156	145	ps
		XC7K480T	FFG901	149	ps
			FFG1156	145	ps

Notes:

- These values represent the worst-case skew between any two SelectIO resources in the package: shortest delay to longest delay from die pad to ball.
- Package delay information is available for these device/package combinations. This information can be used to deskew the package.

GTX Transceiver Specifications

GTX Transceiver DC Input and Output Levels

Table 51 summarizes the DC output specifications of the GTX transceivers in Kintex-7 FPGAs. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 51: GTX Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV_{PPOUT}	Differential peak-to-peak output voltage ⁽¹⁾	Transmitter output swing is set to maximum setting	–	–	1000	mV
$V_{CMOUTDC}$	DC common mode output voltage.	Equation based	$V_{MGTAVTT} - DV_{PPOUT}/4$			mV
R_{OUT}	Differential output resistance		–	100	–	Ω
T_{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew		–	2	12	ps
DV_{PPIN}	Differential peak-to-peak input voltage (external AC coupled)	>10.3125 Gb/s	150	–	1250	mV
		6.6 Gb/s to 10.3125 Gb/s	150	–	1250	mV
		≤ 6.6 Gb/s	150	–	2000	mV
V_{IN}	Absolute input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–200	–	$V_{MGTAVTT}$	mV
V_{CMIN}	Common mode input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–	$2/3 V_{MGTAVTT}$	–	mV
R_{IN}	Differential input resistance		–	100	–	Ω
C_{EXT}	Recommended external AC coupling capacitor ⁽²⁾		–	100	–	nF

Notes:

- The output swing and preemphasis levels are programmable using the attributes discussed in [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) and can result in values lower than reported in this table.
- Other values can be used as appropriate to conform to specific protocols and standards.

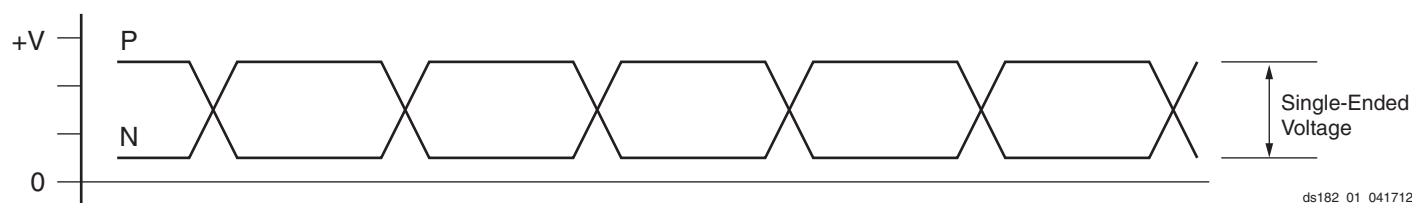


Figure 1: Single-Ended Peak-to-Peak Voltage

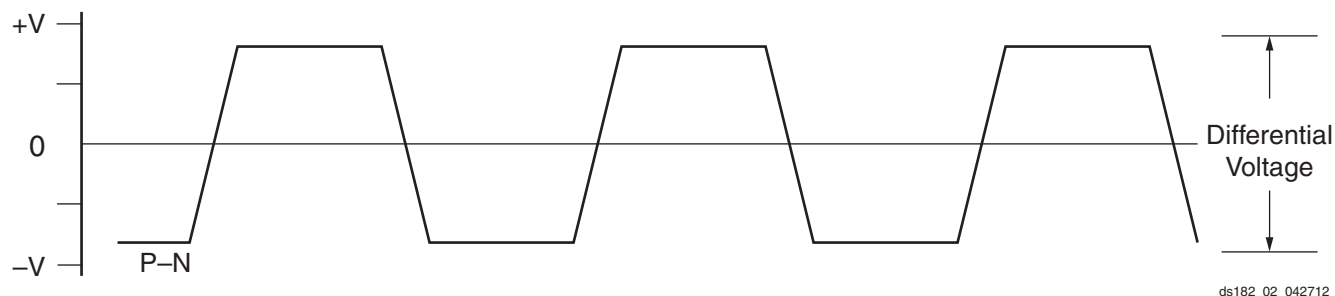


Figure 2: Differential Peak-to-Peak Voltage

Table 52 summarizes the DC specifications of the clock input of the GTX transceiver. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 52: GTX Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V _{IDIFF}	Differential peak-to-peak input voltage	250	–	2000	mV
R _{IN}	Differential input resistance	–	100	–	Ω
C _{EXT}	Required external AC coupling capacitor	–	100	–	nF

GTX Transceiver Switching Characteristics

Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further information.

Table 53: GTX Transceiver Performance

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3		-2/-2L		-1 ⁽¹⁾		-2L ⁽²⁾		
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
F _{GTXMAX} ⁽³⁾	Maximum GTX transceiver data rate		12.5	6.6	10.3125	6.6	8.0	6.6	6.6	6.6	Gb/s
F _{GTXMIN} ⁽³⁾	Minimum GTX transceiver data rate		0.500	0.500	0.500	0.500	0.500	0.500	0.500	0.500	Gb/s
F _{GTXCRANGE}	CPLL line rate range	1	3.2–6.6								Gb/s
		2	1.6–3.3								Gb/s
		4	0.8–1.65								Gb/s
		8	0.5–0.825								Gb/s
		16	N/A								Gb/s
F _{GTXQRANGE1}	QPLL line rate range 1	1	5.93– 8.0	5.93– 6.6	5.93– 8.0	5.93– 6.6	5.93– 8.0	5.93– 6.6	5.93–6.6		Gb/s
		2	2.965–4.0		2.965–4.0		2.965–4.0		2.965–3.3		Gb/s
		4	1.4825–2.0		1.4825–2.0		1.4825–2.0		1.4825–1.65		Gb/s
		8	0.74125–1.0		0.74125–1.0		0.74125–1.0		0.74125–0.825		Gb/s
		16	N/A		N/A		N/A		N/A		Gb/s
F _{GTXQRANGE2}	QPLL line rate range 2 ⁽⁴⁾	1	9.8– 12.5	N/A	9.8– 10.3125	N/A	N/A		N/A		Gb/s
		2	4.9–6.25		4.9–5.15625		N/A		N/A		Gb/s
		4	2.45–3.125		2.45–2.578125		N/A		N/A		Gb/s
		8	1.225–1.5625		1.225–1.2890625		N/A		N/A		Gb/s
		16	0.6125–0.78125		0.6125– 0.64453125		N/A		N/A		Gb/s
F _{GCPLLRANGE}	GTX transceiver CPLL frequency range		1.6–3.3		1.6–3.3		1.6–3.3		1.6–3.3		GHz
F _{GQPLLRange1}	GTX transceiver QPLL frequency range 1		5.93–8.0		5.93–8.0		5.93–8.0		5.93–6.6		GHz

GTX Transceiver Protocol Jitter Characteristics

For Table 60 through Table 65, the [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) contains recommended settings for optimal usage of protocol specific characteristics.

Table 60: Gigabit Ethernet Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
Gigabit Ethernet Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	1250	–	0.24	UI
Gigabit Ethernet Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	1250	0.749	–	UI

Table 61: XAUI Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
XAUI Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	3125	–	0.35	UI
XAUI Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	3125	0.65	–	UI

Table 62: PCI Express Protocol Characteristics⁽¹⁾

Standard	Description		Line Rate (Mb/s)	Min	Max	Units
PCI Express Transmitter Jitter Generation						
PCI Express Gen 1	Total transmitter jitter		2500	–	0.25	UI
PCI Express Gen 2	Total transmitter jitter		5000	–	0.25	UI
PCI Express Gen 3 ⁽²⁾	Total transmitter jitter uncorrelated		8000	–	31.25	ps
	Deterministic transmitter jitter uncorrelated			–	12	ps
PCI Express Receiver High Frequency Jitter Tolerance						
PCI Express Gen 1	Total receiver jitter tolerance		2500	0.65	–	UI
PCI Express Gen 2 ⁽³⁾	Receiver inherent timing error		5000	0.40	–	UI
	Receiver inherent deterministic timing error			0.30	–	UI
PCI Express Gen 3 ⁽²⁾	Receiver sinusoidal jitter tolerance	0.03 MHz–1.0 MHz	8000	1.00	–	UI
		1.0 MHz–10 MHz		Note 4	–	UI
		10 MHz–100 MHz		0.10	–	UI

Notes:

1. Tested per card electromechanical (CEM) methodology.
2. PCI-SIG 3.0 certification and compliance test boards are currently not available.
3. Using common REFCLK.
4. Between 1 MHz and 10 MHz the minimum sinusoidal jitter roll-off with a slope of 20dB/decade.

Table 68: Configuration Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Master/Slave Serial Mode Programming Switching						
T _{DCC} /T _{CCKD}	DIN Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{CCO}	DOUT clock to out	8.00	8.00	8.00	9.00	ns, Max
SelectMAP Mode Programming Switching						
T _{SMDCC} /T _{SMCCKD}	D[31:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
T _{SMCSCCK} /T _{SMCCKCS}	CSI_B Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{SMWCC} /T _{SMCCKW}	RDWR_B Setup/Hold	10.00/0.00	10.00/0.00	10.00/0.00	12.00/0.00	ns, Min
T _{SMCKCSO}	CSO_B clock to out (330 Ω pull-up resistor required)	7.00	7.00	7.00	8.00	ns, Max
T _{SMCO}	D[31:00] clock to out in readback	8.00	8.00	8.00	10.00	ns, Max
F _{RBCK}	Readback frequency	100.00	100.00	100.00	70.00	MHz, Max
Boundary-Scan Port Timing Specifications						
T _{TAPTCK} /T _{TCKTAP}	TMS and TDI Setup/Hold	3.00/2.00	3.00/2.00	3.00/2.00	3.00/2.00	ns, Min
T _{TCKTDO}	TCK falling edge to TDO output	7.00	7.00	7.00	8.50	ns, Max
F _{TCK}	TCK frequency	66.00	66.00	66.00	50.00	MHz, Max
BPI Master Flash Mode Programming Switching						
T _{BPICCO} ⁽²⁾	A[28:00], RS[1:0], FCS_B, FOE_B, FWE_B, ADV_B clock to out	8.50	8.50	8.50	10.00	ns, Max
T _{BPIDCC} /T _{BPICCD}	D[15:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
SPI Master Flash Mode Programming Switching						
T _{SPIDCC} /T _{SPICCD}	D[03:00] Setup/Hold	3.00/0.00	3.00/0.00	3.00/0.00	3.00/0.00	ns, Min
T _{SPICCM}	MOSI clock to out	8.00	8.00	8.00	9.00	ns, Max
T _{SPICCF}	FCS_B clock to out	8.00	8.00	8.00	9.00	ns, Max

Notes:

1. To support longer delays in configuration, use the design solutions described in [UG470: 7 Series FPGA Configuration User Guide](#).
2. Only during configuration, the last edge is determined by a weak pull-up/pull-down resistor in the I/O.

eFUSE Programming Conditions

Table 69 lists the programming conditions specifically for eFUSE. For more information, see [UG470: 7 Series FPGA Configuration User Guide](#).

Table 69: eFUSE Programming Conditions⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
I_{FS}	V_{CCAUX} supply current	–	–	115	mA
t_j	Temperature range	15	–	125	°C

Notes:

1. The FPGA must not be configured during eFUSE programming.