



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	37325
Number of Logic Elements/Cells	477760
Total RAM Bits	35205120
Number of I/O	380
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 85°C (TJ)
Package / Case	900-BBGA, FCBGA
Supplier Device Package	901-FCBGA (31x31)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7k480t-2ffg901c

Production Silicon and ISE Software Status

In some cases, a particular family member (and speed grade) is released to production before a speed specification is released with the correct label (Advance, Preliminary, Production). Any labeling discrepancies are corrected in subsequent speed specification releases.

[Table 15](#) lists the production released Kintex-7 device, speed grade, and the minimum corresponding supported speed specification version and ISE software revisions. The ISE software and speed specifications listed are the minimum releases required for production. All subsequent releases of software and speed specifications are valid.

Table 15: Kintex-7 Device Production Software and Speed Specification Release

Device	Speed Grade Designations			
	1.0V			0.9V
	-3	-2/-2L	-1	-2L
XC7K70T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K160T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K325T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K355T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K410T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K420T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K480T	ISE 14.2 v1.06			ISE 14.3 v1.06

Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Kintex-7 devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 11](#). In each table, the I/O bank type is either High Performance (HP) or High Range (HR).

Table 16: Networking Applications Interface Performances

Description	I/O Bank Type	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14)	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s
SDR LVDS receiver (SFI-4.1) ⁽¹⁾	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS receiver (SFI-4.2) ⁽¹⁾	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s

Notes:

1. LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 17: Maximum Physical Interface (PHY) Rate for Memory Interfaces (FFG Packages)⁽¹⁾⁽²⁾

Memory Standard	I/O Bank Type	V _{CCAUX_IO}	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
4:1 Memory Controllers							
DDR3	HP	2.0V	1866	1866	1600	1333	Mb/s
	HP	1.8V	1600	1333	1066	1066	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1600	1600	1333	1066	Mb/s
	HP	1.8V	1333	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	800	800	800	Mb/s
RLDRAM III ⁽³⁾	HP	2.0V	800	667	667	533	MHz
	HP	1.8V	550	500	450	450	MHz
	HR	N/A	N/A				
2:1 Memory Controllers							
DDR3	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V					
	HR	N/A					
QDR II+ ⁽⁴⁾	HP	2.0V	550	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
RLDRAM II	HP	2.0V	533	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
LPDDR2 ⁽³⁾	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	667	667	667	Mb/s

Notes:

1. V_{REF} tracking is required. For more information, see [UG586](#), 7 Series FPGAs Memory Interface Solutions User Guide.
2. When using the internal V_{REF} the maximum data rate is 800 Mb/s (400 MHz).
3. RLDRAM III (BL = 4, BL = 8) and LPDDR2 specifications have not been validated with memory IP.
4. The maximum QDRII+ performance specifications are for burst-length 4 (BL = 4) implementations. Burst length 2 (BL = 2) implementations are limited to 333 MHz for all speed grades and I/O bank types.

Table 19: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPi}				T _{IOPp}				T _{IOTp}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVC MOS15_S16	0.66	0.69	0.81	0.90	1.76	1.95	2.13	1.91	2.52	2.81	3.12	2.42	ns
LVC MOS15_F4	0.66	0.69	0.81	0.90	3.39	3.60	3.80	1.98	4.15	4.46	4.79	2.50	ns
LVC MOS15_F8	0.66	0.69	0.81	0.90	1.79	1.99	2.18	1.92	2.55	2.85	3.17	2.44	ns
LVC MOS15_F12	0.66	0.69	0.81	0.90	1.40	1.54	1.65	1.67	2.16	2.40	2.64	2.19	ns
LVC MOS15_F16	0.66	0.69	0.81	0.90	1.37	1.51	1.61	1.66	2.13	2.37	2.60	2.17	ns
LVC MOS12_S4	0.88	0.91	1.00	1.01	3.85	4.22	4.69	2.89	4.61	5.08	5.68	3.41	ns
LVC MOS12_S8	0.88	0.91	1.00	1.01	2.52	2.96	3.52	2.41	3.28	3.82	4.51	2.92	ns
LVC MOS12_S12 ⁽¹⁾	0.88	0.91	1.00	1.01	2.06	2.31	2.59	2.11	2.82	3.17	3.58	2.63	ns
LVC MOS12_F4	0.88	0.91	1.00	1.01	3.44	3.73	4.06	2.30	4.20	4.59	5.05	2.81	ns
LVC MOS12_F8	0.88	0.91	1.00	1.01	1.72	2.04	2.40	1.86	2.48	2.90	3.39	2.38	ns
LVC MOS12_F12 ⁽¹⁾	0.88	0.91	1.00	1.01	1.54	1.71	1.87	1.69	2.30	2.57	2.86	2.20	ns
SSTL135_S	0.61	0.64	0.73	0.79	1.27	1.40	1.50	1.64	2.03	2.26	2.49	2.16	ns
SSTL15_S	0.61	0.64	0.73	0.73	1.24	1.37	1.47	1.59	2.00	2.23	2.46	2.11	ns
SSTL18_I_S	0.64	0.67	0.76	0.79	1.59	1.74	1.85	1.95	2.35	2.60	2.84	2.47	ns
SSTL18_II_S	0.64	0.67	0.76	0.78	1.27	1.40	1.50	1.63	2.03	2.26	2.49	2.14	ns
DIFF_SSTL135_S	0.59	0.61	0.73	0.79	1.27	1.40	1.50	1.64	2.03	2.26	2.49	2.16	ns
DIFF_SSTL15_S	0.63	0.67	0.77	0.79	1.24	1.37	1.47	1.59	2.00	2.23	2.46	2.11	ns
DIFF_SSTL18_I_S	0.65	0.69	0.78	0.79	1.50	1.63	1.72	1.95	2.26	2.49	2.71	2.47	ns
DIFF_SSTL18_II_S	0.65	0.69	0.78	0.79	1.13	1.22	1.25	1.66	1.89	2.08	2.24	2.17	ns
SSTL135_F	0.61	0.64	0.73	0.79	1.04	1.17	1.26	1.42	1.80	2.03	2.25	1.94	ns
SSTL15_F	0.61	0.64	0.73	0.73	1.04	1.17	1.26	1.39	1.80	2.03	2.25	1.91	ns
SSTL18_I_F	0.64	0.67	0.76	0.79	1.12	1.22	1.26	1.44	1.88	2.08	2.25	1.95	ns
SSTL18_II_F	0.64	0.67	0.76	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
DIFF_SSTL135_F	0.59	0.61	0.73	0.79	1.04	1.17	1.26	1.42	1.80	2.03	2.25	1.94	ns
DIFF_SSTL15_F	0.63	0.67	0.77	0.79	1.04	1.17	1.26	1.39	1.80	2.03	2.25	1.91	ns
DIFF_SSTL18_I_F	0.65	0.69	0.78	0.79	1.10	1.19	1.23	1.52	1.86	2.05	2.22	2.03	ns
DIFF_SSTL18_II_F	0.65	0.69	0.78	0.79	1.02	1.10	1.14	1.50	1.78	1.96	2.13	2.02	ns

Notes:

1. This I/O standard is only available in the 3.3V high-range (HR) banks.

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
DIFF_HSTL_II_DCI_F	0.75	0.79	0.92	0.76	0.97	1.08	1.15	1.30	1.61	1.84	1.97	1.91	ns
DIFF_HSTL_I_18_F	0.75	0.79	0.92	0.89	1.04	1.16	1.24	1.38	1.68	1.91	2.06	1.99	ns
DIFF_HSTL_II_18_F	0.75	0.79	0.92	0.89	0.98	1.09	1.16	1.40	1.62	1.85	1.98	2.01	ns
DIFF_HSTL_I_DCI_18_F	0.75	0.79	0.92	0.75	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
DIFF_HSTL_II_DCI_18_F	0.75	0.79	0.92	0.75	0.98	1.09	1.16	1.33	1.61	1.85	1.98	1.94	ns
DIFF_HSTL_II_T_DCI_18_F	0.75	0.79	0.92	0.76	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
LVC MOS18_S2	0.47	0.50	0.60	0.87	3.95	4.28	4.85	3.40	4.59	5.04	5.67	4.01	ns
LVC MOS18_S4	0.47	0.50	0.60	0.87	2.67	2.98	3.43	2.69	3.31	3.73	4.26	3.30	ns
LVC MOS18_S6	0.47	0.50	0.60	0.87	2.14	2.38	2.72	2.18	2.77	3.14	3.54	2.79	ns
LVC MOS18_S8	0.47	0.50	0.60	0.87	1.98	2.21	2.52	2.02	2.61	2.97	3.35	2.63	ns
LVC MOS18_S12	0.47	0.50	0.60	0.87	1.70	1.91	2.17	1.85	2.34	2.67	2.99	2.46	ns
LVC MOS18_S16	0.47	0.50	0.60	0.87	1.57	1.75	1.97	1.76	2.20	2.51	2.79	2.37	ns
LVC MOS18_F2	0.47	0.50	0.60	0.87	3.50	3.87	4.48	2.85	4.14	4.63	5.30	3.46	ns
LVC MOS18_F4	0.47	0.50	0.60	0.87	2.23	2.50	2.87	2.26	2.87	3.25	3.69	2.87	ns
LVC MOS18_F6	0.47	0.50	0.60	0.87	1.80	2.00	2.26	1.52	2.43	2.76	3.08	2.13	ns
LVC MOS18_F8	0.47	0.50	0.60	0.87	1.46	1.72	2.04	1.51	2.10	2.47	2.86	2.12	ns
LVC MOS18_F12	0.47	0.50	0.60	0.87	1.26	1.40	1.53	1.46	1.89	2.16	2.35	2.07	ns
LVC MOS18_F16	0.47	0.50	0.60	0.87	1.19	1.33	1.44	1.46	1.83	2.08	2.26	2.07	ns
LVC MOS15_S2	0.59	0.62	0.73	0.86	3.55	3.89	4.45	3.11	4.19	4.65	5.27	3.73	ns
LVC MOS15_S4	0.59	0.62	0.73	0.86	2.45	2.70	3.06	2.46	3.08	3.45	3.89	3.07	ns
LVC MOS15_S6	0.59	0.62	0.73	0.86	2.24	2.51	2.88	2.33	2.88	3.26	3.71	2.94	ns
LVC MOS15_S8	0.59	0.62	0.73	0.86	1.91	2.16	2.49	2.05	2.55	2.91	3.31	2.66	ns
LVC MOS15_S12	0.59	0.62	0.73	0.86	1.77	1.98	2.23	1.97	2.41	2.73	3.05	2.58	ns
LVC MOS15_S16	0.59	0.62	0.73	0.86	1.62	1.81	2.02	1.85	2.26	2.56	2.84	2.46	ns
LVC MOS15_F2	0.59	0.62	0.73	0.86	3.38	3.69	4.18	2.74	4.02	4.44	5.00	3.35	ns
LVC MOS15_F4	0.59	0.62	0.73	0.86	2.04	2.21	2.44	1.72	2.68	2.97	3.26	2.33	ns
LVC MOS15_F6	0.59	0.62	0.73	0.86	1.47	1.74	2.09	1.49	2.10	2.50	2.91	2.10	ns
LVC MOS15_F8	0.59	0.62	0.73	0.86	1.31	1.46	1.61	1.47	1.95	2.22	2.43	2.08	ns
LVC MOS15_F12	0.59	0.62	0.73	0.86	1.21	1.34	1.45	1.44	1.84	2.10	2.27	2.05	ns
LVC MOS15_F16	0.59	0.62	0.73	0.86	1.18	1.31	1.41	1.41	1.82	2.07	2.23	2.02	ns
LVC MOS12_S2	0.64	0.67	0.78	0.95	3.38	3.80	4.48	3.27	4.02	4.55	5.30	3.88	ns
LVC MOS12_S4	0.64	0.67	0.78	0.95	2.62	2.94	3.43	2.76	3.26	3.70	4.25	3.37	ns
LVC MOS12_S6	0.64	0.67	0.78	0.95	2.05	2.33	2.72	2.24	2.69	3.08	3.54	2.85	ns
LVC MOS12_S8	0.64	0.67	0.78	0.95	1.94	2.18	2.51	2.16	2.58	2.94	3.33	2.77	ns
LVC MOS12_F2	0.64	0.67	0.78	0.95	2.84	3.15	3.62	2.47	3.48	3.90	4.44	3.08	ns
LVC MOS12_F4	0.64	0.67	0.78	0.95	1.97	2.18	2.44	1.69	2.61	2.93	3.26	2.30	ns
LVC MOS12_F6	0.64	0.67	0.78	0.95	1.33	1.51	1.70	1.43	1.96	2.26	2.52	2.04	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOP1}				T _{IOP0}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVC MOS12_F8	0.64	0.67	0.78	0.95	1.27	1.42	1.55	1.41	1.91	2.18	2.37	2.02	ns
LVDCI_18	0.47	0.50	0.60	0.86	1.99	2.15	2.35	2.44	2.62	2.91	3.17	3.05	ns
LVDCI_15	0.59	0.62	0.73	0.87	1.98	2.23	2.58	2.40	2.62	2.99	3.40	3.01	ns
LVDCI_DV2_18	0.47	0.50	0.60	0.87	1.99	2.15	2.34	1.86	2.62	2.90	3.17	2.48	ns
LVDCI_DV2_15	0.59	0.62	0.73	0.87	1.98	2.23	2.58	1.83	2.62	2.99	3.40	2.44	ns
HSLVDCI_18	0.68	0.72	0.82	0.86	1.99	2.15	2.35	2.43	2.62	2.91	3.17	3.04	ns
HSLVDCI_15	0.68	0.72	0.82	0.84	1.98	2.23	2.58	2.27	2.62	2.99	3.40	2.88	ns
SSTL18_I_S	0.68	0.72	0.82	0.86	1.02	1.15	1.24	1.41	1.66	1.90	2.07	2.02	ns
SSTL18_II_S	0.68	0.72	0.82	0.87	1.17	1.29	1.37	1.55	1.81	2.05	2.19	2.16	ns
SSTL18_I_DCI_S	0.68	0.72	0.82	0.76	0.92	1.06	1.17	1.32	1.56	1.82	1.99	1.93	ns
SSTL18_II_DCI_S	0.68	0.72	0.82	0.78	0.88	0.98	1.08	1.26	1.51	1.74	1.90	1.87	ns
SSTL18_II_T_DCI_S	0.68	0.72	0.82	0.78	0.92	1.06	1.17	1.32	1.56	1.82	1.99	1.93	ns
SSTL15_S	0.68	0.72	0.82	0.81	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
SSTL15_DCI_S	0.68	0.72	0.82	0.78	0.94	1.06	1.15	1.30	1.57	1.82	1.97	1.91	ns
SSTL15_T_DCI_S	0.68	0.72	0.82	0.80	0.94	1.06	1.15	1.30	1.57	1.82	1.97	1.91	ns
SSTL135_S	0.69	0.72	0.82	0.89	0.97	1.10	1.19	1.35	1.60	1.85	2.01	1.96	ns
SSTL135_DCI_S	0.69	0.72	0.82	0.84	0.97	1.09	1.19	1.33	1.60	1.85	2.01	1.94	ns
SSTL135_T_DCI_S	0.69	0.72	0.82	0.84	0.97	1.09	1.19	1.33	1.60	1.85	2.01	1.94	ns
SSTL12_S	0.69	0.72	0.82	0.95	0.96	1.09	1.18	1.33	1.60	1.84	2.00	1.94	ns
SSTL12_DCI_S	0.69	0.72	0.82	0.91	1.03	1.17	1.27	1.33	1.66	1.92	2.09	1.94	ns
SSTL12_T_DCI_S	0.69	0.72	0.82	0.91	1.03	1.17	1.27	1.33	1.66	1.92	2.09	1.94	ns
DIFF_SSTL18_I_S	0.75	0.79	0.92	0.89	1.02	1.15	1.24	1.43	1.66	1.90	2.07	2.04	ns
DIFF_SSTL18_II_S	0.75	0.79	0.92	0.89	1.17	1.29	1.37	1.55	1.81	2.05	2.19	2.16	ns
DIFF_SSTL18_I_DCI_S	0.75	0.79	0.92	0.76	0.92	1.06	1.17	1.40	1.56	1.82	1.99	2.01	ns
DIFF_SSTL18_II_DCI_S	0.75	0.79	0.92	0.75	0.88	0.98	1.08	1.33	1.51	1.74	1.90	1.94	ns
DIFF_SSTL18_II_T_DCI_S	0.75	0.79	0.92	0.76	0.92	1.06	1.17	1.40	1.56	1.82	1.99	2.01	ns
DIFF_SSTL15_S	0.68	0.72	0.82	0.89	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
DIFF_SSTL15_DCI_S	0.68	0.72	0.82	0.75	0.94	1.06	1.15	1.30	1.57	1.82	1.97	1.91	ns
DIFF_SSTL15_T_DCI_S	0.68	0.72	0.82	0.76	0.94	1.06	1.15	1.38	1.57	1.82	1.97	1.99	ns
DIFF_SSTL135_S	0.69	0.72	0.82	0.91	0.97	1.10	1.19	1.35	1.60	1.85	2.01	1.96	ns
DIFF_SSTL135_DCI_S	0.69	0.72	0.82	0.76	0.97	1.09	1.19	1.33	1.60	1.85	2.01	1.94	ns
DIFF_SSTL135_T_DCI_S	0.69	0.72	0.82	0.76	0.97	1.09	1.19	1.43	1.60	1.85	2.01	2.04	ns
DIFF_SSTL12_S	0.69	0.72	0.82	0.91	0.96	1.09	1.18	1.33	1.60	1.84	2.00	1.94	ns
DIFF_SSTL12_DCI_S	0.69	0.72	0.82	0.78	1.03	1.17	1.27	1.33	1.66	1.92	2.09	1.94	ns
DIFF_SSTL12_T_DCI_S	0.69	0.72	0.82	0.80	1.03	1.17	1.27	1.41	1.66	1.92	2.09	2.02	ns

Table 21 specifies the values of T_{IOTPHZ} and $T_{IOIBUFDISABLE}$. T_{IOTPHZ} is described as the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is enabled (i.e., a high impedance state). $T_{IOIBUFDISABLE}$ is described as the IOB delay from IBUFDISABLE to O output. In HP I/O banks, the internal DCI termination turn-off time is always faster than T_{IOTPHZ} when the DCITERMDISABLE pin is used. In HR I/O banks, the internal IN_TERM termination turn-off time is always faster than T_{IOTPHZ} when the INTERMDISABLE pin is used.

Table 21: IOB 3-state Output Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{IOTPHZ}	T input to pad high-impedance	0.76	0.86	0.99	0.62	ns
$T_{IOIBUFDISABLE_HR}$	IBUF turn-on time from IBUFDISABLE to O output for HR I/O banks	1.72	1.89	2.14	2.17	ns
$T_{IOIBUFDISABLE_HP}$	IBUF turn-on time from IBUFDISABLE to O output for HP I/O banks	1.31	1.46	1.76	1.86	ns

Input Serializer/Deserializer Switching Characteristics

Table 24: ISERDES Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold for Control Lines						
T _{ISCK_BITSLIP} / T _{ISCKC_BITSLIP}	BITSLIP pin Setup/Hold with respect to CLKDIV	0.01/0.12	0.02/0.13	0.02/0.15	0.02/0.21	ns
T _{ISCK_CE} / T _{ISCKC_CE} ⁽²⁾	CE pin Setup/Hold with respect to CLK (for CE1)	0.39/−0.02	0.44/−0.02	0.63/−0.02	0.51/−0.22	ns
T _{ISCK_CE2} / T _{ISCKC_CE2} ⁽²⁾	CE pin Setup/Hold with respect to CLKDIV (for CE2)	−0.12/0.29	−0.12/0.31	−0.12/0.35	−0.17/0.40	ns
Setup/Hold for Data Lines						
T _{ISDCK_D} /T _{ISCKD_D}	D pin Setup/Hold with respect to CLK	−0.02/0.11	−0.02/0.12	−0.02/0.15	−0.04/0.19	ns
T _{ISDCK_DDLY} / T _{ISCKD_DDLY}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) ⁽¹⁾	−0.02/0.11	−0.02/0.12	−0.02/0.15	−0.03/0.19	ns
T _{ISDCK_D_DDR} / T _{ISCKD_D_DDR}	D pin Setup/Hold with respect to CLK at DDR mode	−0.02/0.11	−0.02/0.12	−0.02/0.15	−0.04/0.19	ns
T _{ISDCK_DDLY_DDR} / T _{ISCKD_DDLY_DDR}	D pin Setup/Hold with respect to CLK at DDR mode (using IDELAY) ⁽¹⁾	0.11/0.11	0.12/0.12	0.15/0.15	0.19/0.19	ns
Sequential Delays						
T _{ISCKO_Q}	CLKDIV to out at Q pin	0.46	0.47	0.58	0.67	ns
Propagation Delays						
T _{ISDO_DO}	D input to DO output pin	0.09	0.10	0.12	0.14	ns

Notes:

1. Recorded at 0 tap value.
2. T_{ISCK_CE2} and T_{ISCK_CE2} are reported as T_{ISCK_CE}/T_{ISCK_CE} in TRACE report.

Output Serializer/Deserializer Switching Characteristics

Table 25: OSERDES Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{OSDCK_D} /T _{OSCKD_D}	D input Setup/Hold with respect to CLKDIV	0.37/0.02	0.40/0.02	0.55/0.02	0.44/−0.24	ns
T _{OSDCK_T} /T _{OSCKD_T} ⁽¹⁾	T input Setup/Hold with respect to CLK	0.49/−0.15	0.56/−0.15	0.68/−0.15	0.67/−0.25	ns
T _{OSDCK_T2} /T _{OSCKD_T2} ⁽¹⁾	T input Setup/Hold with respect to CLKDIV	0.27/−0.15	0.30/−0.15	0.34/−0.15	0.46/−0.25	ns
T _{OSCCK_OCE} /T _{OSCKC_OCE}	OCE input Setup/Hold with respect to CLK	0.28/0.03	0.29/0.03	0.45/0.03	0.35/−0.15	ns
T _{OSCCK_S}	SR (Reset) input Setup with respect to CLKDIV	0.41	0.46	0.75	0.70	ns
T _{OSCCK_TCE} /T _{OSCKC_TCE}	TCE input Setup/Hold with respect to CLK	0.28/0.01	0.30/0.01	0.45/0.01	0.31/−0.15	ns
Sequential Delays						
T _{OSCKO_OQ}	Clock to out from CLK to OQ	0.35	0.37	0.42	0.54	ns
T _{OSCKO_TQ}	Clock to out from CLK to TQ	0.41	0.43	0.49	0.63	ns
Combinatorial						
T _{OSDO_TTQ}	T input to TQ Out	0.73	0.81	0.97	1.18	ns

Notes:

- T_{OSDCK_T2} and T_{OSCKD_T2} are reported as T_{OSDCK_T}/T_{OSCKD_T} in TRACE report.

Table 27: IO_FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
IO_FIFO Clock to Out Delays						
T _{OFFCKO_DO}	RDCLK to Q outputs	0.51	0.56	0.63	0.81	ns
T _{CKO_FLAGS}	Clock to IO_FIFO Flags	0.59	0.62	0.81	0.77	ns
Setup/Hold						
T _{CCK_D} /T _{CKC_D}	D inputs to WRCLK	0.43/−0.01	0.47/−0.01	0.53/−0.01	0.76/−0.05	ns
T _{IFFCKC_WREN} /T _{IFFCKC_WREN}	WREN to WRCLK	0.39/−0.01	0.43/−0.01	0.50/−0.01	0.70/−0.05	ns
T _{OFFCKC_RDEN} /T _{OFFCKC_RDEN}	RDEN to RDCLK	0.49/0.01	0.53/0.02	0.61/0.02	0.79/−0.02	ns
Minimum Pulse Width						
T _{PWH_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	1.29	ns
T _{PWL_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	1.29	ns
Maximum Frequency						
F _{MAX}	RDCLK and WRCLK	533.05	470.37	400.00	333.33	MHz

Block RAM and FIFO Switching Characteristics

Table 31: Block RAM and FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Block RAM and FIFO Clock-to-Out Delays						
T _{RCKO_DO} and T _{RCKO_DO_REG} ⁽¹⁾	Clock CLK to DOUT output (without output register) ⁽²⁾⁽³⁾	1.57	1.80	2.08	2.44	ns, Max
	Clock CLK to DOUT output (with output register) ⁽⁴⁾⁽⁵⁾	0.54	0.63	0.75	0.86	ns, Max
T _{RCKO_DO_ECC} and T _{RCKO_DO_ECC_REG}	Clock CLK to DOUT output with ECC (without output register) ⁽²⁾⁽³⁾	2.35	2.58	3.26	4.49	ns, Max
	Clock CLK to DOUT output with ECC (with output register) ⁽⁴⁾⁽⁵⁾	0.62	0.69	0.80	0.94	ns, Max
T _{RCKO_DO_CASCOU} and T _{RCKO_DO_CASCOU_REG}	Clock CLK to DOUT output with Cascade (without output register) ⁽²⁾	2.21	2.45	2.80	3.19	ns, Max
	Clock CLK to DOUT output with Cascade (with output register) ⁽⁴⁾	0.98	1.08	1.24	1.32	ns, Max
T _{RCKO_FLAGS}	Clock CLK to FIFO flags outputs ⁽⁶⁾	0.65	0.74	0.89	0.97	ns, Max
T _{RCKO_POINTERS}	Clock CLK to FIFO pointers outputs ⁽⁷⁾	0.79	0.87	0.98	1.10	ns, Max
T _{RCKO_PARITY_ECC}	Clock CLK to ECCPARITY in ECC encode only mode	0.66	0.72	0.80	0.93	ns, Max
T _{RCKO_SDBIT_ECC} and T _{RCKO_SDBIT_ECC_REG}	Clock CLK to BITERR (without output register)	2.17	2.38	3.01	4.15	ns, Max
	Clock CLK to BITERR (with output register)	0.57	0.65	0.76	0.89	ns, Max
T _{RCKO_RDADDR_ECC} and T _{RCKO_RDADDR_ECC_REG}	Clock CLK to RDADDR output with ECC (without output register)	0.64	0.74	0.90	0.98	ns, Max
	Clock CLK to RDADDR output with ECC (with output register)	0.71	0.79	0.92	1.10	ns, Max
Setup and Hold Times Before/After Clock CLK						
T _{RCKC_ADDRA} /T _{RCKC_ADDRA}	ADDR inputs ⁽⁸⁾	0.38/0.27	0.42/0.28	0.48/0.31	0.65/0.38	ns, Min
T _{RDCK_DI_WF_NC} / T _{RCKD_DI_WF_NC}	Data input setup/hold time when block RAM is configured in WRITE_FIRST or NO_CHANGE mode ⁽⁹⁾	0.49/0.51	0.55/0.53	0.63/0.57	0.78/0.64	ns, Min
T _{RDCK_DI_RF} /T _{RCKD_DI_RF}	Data input setup/hold time when block RAM is configured in READ_FIRST mode ⁽⁹⁾	0.17/0.25	0.19/0.29	0.21/0.35	0.25/0.32	ns, Min
T _{RDCK_DI_ECC} / T _{RCKD_DI_ECC}	DIN inputs with block RAM ECC in standard mode ⁽⁹⁾	0.42/0.37	0.47/0.39	0.53/0.43	0.66/0.46	ns, Min
T _{RDCK_DI_ECCW} / T _{RCKD_DI_ECCW}	DIN inputs with block RAM ECC encode only ⁽⁹⁾	0.79/0.37	0.87/0.39	0.99/0.43	1.17/0.41	ns, Min
T _{RDCK_DI_ECC_FIFO} / T _{RCKD_DI_ECC_FIFO}	DIN inputs with FIFO ECC in standard mode ⁽⁹⁾	0.89/0.47	0.98/0.50	1.12/0.54	1.32/0.65	ns, Min
T _{RCKC_INJECTBITERR} / T _{RCKC_INJECTBITERR}	Inject single/double bit error in ECC mode	0.49/0.30	0.55/0.31	0.63/0.34	0.78/0.41	ns, Min
T _{RCKC_EN} /T _{RCKC_EN}	Block RAM Enable (EN) input	0.30/0.17	0.33/0.18	0.38/0.20	0.48/0.22	ns, Min
T _{RCKC_REGCE} /T _{RCKC_REGCE}	CE input of output register	0.21/0.13	0.25/0.13	0.31/0.14	0.34/0.16	ns, Min
T _{RCKC_RSTREG} /T _{RCKC_RSTREG}	Synchronous RSTREG input	0.25/0.06	0.27/0.06	0.29/0.06	0.35/0.06	ns, Min

Table 31: Block RAM and FIFO Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$T_{RCKK_RSTRAM}/T_{RCKC_RSTRAM}$	Synchronous RSTRAM input	0.27/0.35	0.29/0.37	0.31/0.39	0.34/0.40	ns, Min
$T_{RCKK_WEA}/T_{RCKC_WEA}$	Write Enable (WE) input (Block RAM only)	0.38/0.15	0.41/0.16	0.46/0.17	0.54/0.19	ns, Min
$T_{RCKK_WREN}/T_{RCKC_WREN}$	WREN FIFO inputs	0.39/0.25	0.39/0.30	0.40/0.37	0.65/0.37	ns, Min
$T_{RCKK_RDEN}/T_{RCKC_RDEN}$	RDEN FIFO inputs	0.36/0.26	0.36/0.30	0.37/0.37	0.60/0.38	ns, Min
Reset Delays						
T_{RCO_FLAGS}	Reset RST to FIFO flags/pointers ⁽¹⁰⁾	0.76	0.83	0.93	1.06	ns, Max
$T_{RREC_RST}/T_{RREM_RST}$	FIFO reset recovery and removal timing ⁽¹¹⁾	1.59/–0.68	1.76/–0.68	2.01/–0.68	2.07/–0.60	ns, Max
Maximum Frequency						
$F_{MAX_BRAM_WF_NC}$	Block RAM (Write first and No change modes) When not in SDP RF mode	601.32	543.77	458.09	372.44	MHz
$F_{MAX_BRAM_RF_PERFORMANCE}$	Block RAM (Read first, Performance mode) When in SDP RF mode but no address overlap between port A and port B	601.32	543.77	458.09	372.44	MHz
$F_{MAX_BRAM_RF_DELAYED_WRITE}$	Block RAM (Read first, Delayed_write mode) When in SDP RF mode and there is possibility of overlap between port A and port B addresses	528.26	477.33	400.80	317.36	MHz
$F_{MAX_CAS_WF_NC}$	Block RAM Cascade (Write first, No change mode) When cascade but not in RF mode	551.27	493.83	408.00	322.48	MHz
$F_{MAX_CAS_RF_PERFORMANCE}$	Block RAM Cascade (Read first, Performance mode) When in cascade with RF mode and no possibility of address overlap/one port is disabled	551.27	493.83	408.00	322.48	MHz
$F_{MAX_CAS_RF_DELAYED_WRITE}$	When in cascade RF mode and there is a possibility of address overlap between port A and port B	478.27	427.35	350.88	267.38	MHz
F_{MAX_FIFO}	FIFO in all modes without ECC	601.32	543.77	458.09	372.44	MHz
F_{MAX_ECC}	Block RAM and FIFO in ECC configuration	484.26	430.85	351.12	254.13	MHz

Notes:

- TRACE will report all of these parameters as T_{RCKO_DO} .
- T_{RCKO_DOR} includes T_{RCKO_DOW} , T_{RCKO_DOPR} , and T_{RCKO_DOPW} as well as the B port equivalent timing parameters.
- These parameters also apply to synchronous FIFO with $DO_REG = 0$.
- T_{RCKO_DO} includes T_{RCKO_DOP} as well as the B port equivalent timing parameters.
- These parameters also apply to multirate (asynchronous) and synchronous FIFO with $DO_REG = 1$.
- T_{RCKO_FLAGS} includes the following parameters: T_{RCKO_AEMPTY} , T_{RCKO_AFULL} , T_{RCKO_EMPTY} , T_{RCKO_FULL} , T_{RCKO_RDERR} , T_{RCKO_WRERR} .
- $T_{RCKO_POINTERS}$ includes both $T_{RCKO_RDCOUNT}$ and $T_{RCKO_WRCOUNT}$.
- The ADDR setup and hold must be met when EN is asserted (even when WE is deasserted). Otherwise, block RAM data corruption is possible.
- These parameters include both A and B inputs as well as the parity inputs of A and B.
- T_{RCO_FLAGS} includes the following flags: AEMPTY, AFULL, EMPTY, FULL, RDERR, WRERR, RDCOUNT, and WRCOUNT.
- RDEN and WREN must be held Low prior to and during reset. The FIFO reset must be asserted for at least five positive clock edges of the slowest clock (WRCLK or RDCLK).

Table 32: DSP48E1 Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Clock to Outs from Pipeline Register Clock to Output Pins						
T _{DSPCKO_P_MREG}	CLK MREG to P output	1.42	1.64	1.96	2.31	ns
T _{DSPCKO_CARRYCASCOUT_MREG}	CLK MREG to CARRYCASCOUT output	1.63	1.87	2.24	2.65	ns
T _{DSPCKO_P_ADREG_MULT}	CLK ADREG to P output using multiplier	2.30	2.63	3.13	3.90	ns
T _{DSPCKO_CARRYCASCOUT_ADREG_MULT}	CLK ADREG to CARRYCASCOUT output using multiplier	2.51	2.87	3.41	4.23	ns
Clock to Outs from Input Register Clock to Output Pins						
T _{DSPCKO_P_AREG_MULT}	CLK AREG to P output using multiplier	3.34	3.83	4.55	5.80	ns
T _{DSPCKO_P_BREG}	CLK BREG to P output not using multiplier	1.39	1.59	1.88	2.24	ns
T _{DSPCKO_P_CREG}	CLK CREG to P output not using multiplier	1.43	1.64	1.95	2.32	ns
T _{DSPCKO_P_DREG_MULT}	CLK DREG to P output using multiplier	3.32	3.80	4.51	5.74	ns
Clock to Outs from Input Register Clock to Cascading Output Pins						
T _{DSPCKO_{ACOUT; BCOUT}_{AREG; BREG}}	CLK (ACOUT, BCOUT) to {A,B} register output	0.55	0.62	0.74	0.87	ns
T _{DSPCKO_CARRYCASCOUT_{AREG, BREG}_MULT}	CLK (AREG, BREG) to CARRYCASCOUT output using multiplier	3.55	4.06	4.84	6.13	ns
T _{DSPCKO_CARRYCASCOUT_BREG}	CLK BREG to CARRYCASCOUT output not using multiplier	1.60	1.82	2.16	2.58	ns
T _{DSPCKO_CARRYCASCOUT_DREG_MULT}	CLK DREG to CARRYCASCOUT output using multiplier	3.52	4.03	4.79	6.07	ns
T _{DSPCKO_CARRYCASCOUT_CREG}	CLK CREG to CARRYCASCOUT output	1.64	1.88	2.23	2.65	ns
Maximum Frequency						
F _{MAX}	With all registers used	741.84	650.20	547.95	429.37	MHz
F _{MAX_PATDET}	With pattern detector	627.35	549.75	463.61	365.90	MHz
F _{MAX_MULT_NOMREG}	Two register multiply without MREG	412.20	360.75	303.77	248.32	MHz
F _{MAX_MULT_NOMREG_PATDET}	Two register multiply without MREG with pattern detect	374.25	327.65	276.01	225.73	MHz
F _{MAX_PREADD_MULT_NOADREG}	Without ADREG	468.82	408.66	342.70	263.44	MHz
F _{MAX_PREADD_MULT_NOADREG_PATDET}	Without ADREG with pattern detect	468.82	408.66	342.70	263.44	MHz
F _{MAX_NOPIPELINEREG}	Without pipeline registers (MREG, ADREG)	306.84	267.81	225.02	177.15	MHz
F _{MAX_NOPIPELINEREG_PATDET}	Without pipeline registers (MREG, ADREG) with pattern detect	285.23	249.13	209.38	165.32	MHz

Table 36: Horizontal Clock Buffer Switching Characteristics (BUFH)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{BHCKO_O}	BUFH delay from I to O	0.10	0.11	0.13	0.12	ns
T_{BHCK_CE}/T_{BHCKC_CE}	CE pin Setup and Hold	0.20/0.16	0.23/0.20	0.38/0.21	0.28/0.09	ns
Maximum Frequency						
F_{MAX_BUFH}	Horizontal clock buffer (BUFH)	741.00	710.00	625.00	560.00	MHz

Table 37: Duty Cycle Distortion and Clock-Tree Skew

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
T_{DCD_CLK}	Global Clock Tree Duty Cycle Distortion ⁽¹⁾	All	0.20	0.20	0.20	0.25	ns
T_{CKSKEW}	Global Clock Tree Skew ⁽²⁾	XC7K70T	0.29	0.40	0.40	0.47	ns
		XC7K160T	0.42	0.53	0.57	0.59	ns
		XC7K325T	0.59	0.74	0.79	0.91	ns
		XC7K355T	0.45	0.57	0.59	0.69	ns
		XC7K410T	0.60	0.74	0.79	0.91	ns
		XC7K420T	0.60	0.74	0.79	0.91	ns
		XC7K480T	0.60	0.74	0.79	0.91	ns
T_{DCD_BUFIO}	I/O clock tree duty cycle distortion	All	0.12	0.12	0.12	0.12	ns
T_{BUFIO_SKEW}	I/O clock tree skew across one clock region	All	0.02	0.02	0.02	0.03	ns
T_{DCD_BUFR}	Regional clock tree duty cycle distortion	All	0.15	0.15	0.15	0.15	ns

Notes:

- These parameters represent the worst-case duty cycle distortion observable at the I/O flip flops. For all I/O standards, IBIS can be used to calculate any additional duty cycle distortion that might be caused by asymmetrical rise/fall times.
- The T_{CKSKEW} value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx Timing Analyzer tools to evaluate clock skew specific to your application.

MMCM Switching Characteristics

Table 38: MMCM Specification

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
MMCM_F _{INMAX}	Maximum Input Clock Frequency	1066.00	933.00	800.00	800.00	MHz
MMCM_F _{INMIN}	Minimum Input Clock Frequency	10.00	10.00	10.00	10.00	MHz
MMCM_F _{INJITTER}	Maximum Input Clock Period Jitter	< 20% of clock input period or 1 ns Max				
MMCM_F _{INDUTY}	Allowable Input Duty Cycle: 10—49 MHz	25.00	25.00	25.00	25.00	%
	Allowable Input Duty Cycle: 50—199 MHz	30.00	30.00	30.00	30.00	%
	Allowable Input Duty Cycle: 200—399 MHz	35.00	35.00	35.00	35.00	%
	Allowable Input Duty Cycle: 400—499 MHz	40.00	40.00	40.00	40.00	%
	Allowable Input Duty Cycle: >500 MHz	45.00	45.00	45.00	45.00	%
MMCM_F _{MIN_PSCLK}	Minimum Dynamic Phase Shift Clock Frequency	0.01	0.01	0.01	0.01	MHz
MMCM_F _{MAX_PSCLK}	Maximum Dynamic Phase Shift Clock Frequency	550.00	500.00	450.00	450.00	MHz
MMCM_F _{VCOMIN}	Minimum MMCM VCO Frequency	600.00	600.00	600.00	600.00	MHz
MMCM_F _{VCOMAX}	Maximum MMCM VCO Frequency	1600.00	1440.00	1200.00	1200.00	MHz
MMCM_F _{BANDWIDTH}	Low MMCM Bandwidth at Typical ⁽¹⁾	1.00	1.00	1.00	1.00	MHz
	High MMCM Bandwidth at Typical ⁽¹⁾	4.00	4.00	4.00	4.00	MHz
MMCM_T _{STATPHAOFFSET}	Static Phase Offset of the MMCM Outputs ⁽²⁾	0.12	0.12	0.12	0.12	ns
MMCM_T _{OUTJITTER}	MMCM Output Jitter	Note 3				
MMCM_T _{OUTDUTY}	MMCM Output Clock Duty Cycle Precision ⁽⁴⁾	0.20	0.20	0.20	0.25	ns
MMCM_T _{LOCKMAX}	MMCM Maximum Lock Time	100.00	100.00	100.00	100.00	μs
MMCM_F _{OUTMAX}	MMCM Maximum Output Frequency	1066.00	933.00	800.00	800.00	MHz
MMCM_F _{OUTMIN}	MMCM Minimum Output Frequency ⁽⁵⁾⁽⁶⁾	4.69	4.69	4.69	4.69	MHz
MMCM_T _{EXTFDVAR}	External Clock Feedback Variation	< 20% of clock input period or 1 ns Max				
MMCM_RST _{MINPULSE}	Minimum Reset Pulse Width	5.00	5.00	5.00	5.00	ns
MMCM_F _{PFDMAX}	Maximum Frequency at the Phase Frequency Detector with Bandwidth Set to High or Optimized	550.00	500.00	450.00	450.00	MHz
	Maximum Frequency at the Phase Frequency Detector with Bandwidth Set to Low	300.00	300.00	300.00	300.00	MHz
MMCM_F _{PFDMIN}	Minimum Frequency at the Phase Frequency Detector	10.00	10.00	10.00	10.00	MHz
MMCM_T _{FBDELAY}	Maximum Delay in the Feedback Path	3 ns Max or one CLKIN cycle				
MMCM Switching Characteristics Setup and Hold						
T _{MMCMDCK_PSEN} / T _{MMCMCKD_PSEN}	Setup and Hold of Phase Shift Enable	1.04/0.00	1.04/0.00	1.04/0.00	1.04/0.00	ns
T _{MMCMDCK_PSINCDEC} / T _{MMCMCKD_PSINCDEC}	Setup and Hold of Phase Shift Increment/Decrement	1.04/0.00	1.04/0.00	1.04/0.00	1.04/0.00	ns
T _{MMCMCKO_PSDONE}	Phase Shift Clock-to-Out of PSDONE	0.59	0.68	0.81	0.78	ns
Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK						
T _{MMCMDCK_DADDR} / T _{MMCMCKD_DADDR}	DADDR Setup/Hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{MMCMDCK_DI} / T _{MMCMCKD_DI}	DI Setup/Hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min

Table 39: PLL Specification (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
PLL_F _{PFDMAX}	Maximum Frequency at the Phase Frequency Detector with Bandwidth Set to High or Optimized	550.00	500.00	450.00	450.00	MHz
	Maximum Frequency at the Phase Frequency Detector with Bandwidth Set to Low	300.00	300.00	300.00	300.00	MHz
PLL_F _{PFDMIN}	Minimum Frequency at the Phase Frequency Detector	19.00	19.00	19.00	19.00	MHz
PLL_T _{FBDELAY}	Maximum Delay in the Feedback Path	3 ns Max or one CLKIN cycle				
Dynamic Reconfiguration Port (DRP) for PLL Before and After DCLK						
T _{PLLCKC_DADDR} / T _{PLLCKC_DADDR}	Setup and hold of D address	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{PLLCKC_DI} / T _{PLLCKC_DI}	Setup and hold of D input	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{PLLCKC_DEN} / T _{PLLCKC_DEN}	Setup and hold of D enable	1.76/0.00	1.97/0.00	2.29/0.00	2.40/0.00	ns, Min
T _{PLLCKC_DWE} / T _{PLLCKC_DWE}	Setup and hold of D write enable	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{PLLCKO_DRDY}	CLK to out of DRDY	0.65	0.72	0.99	0.70	ns, Max
F _{DCK}	DCLK frequency	200.00	200.00	200.00	100.00	MHz, Max

Notes:

1. The PLL does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
2. The static offset is measured between any PLL outputs with identical phase.
3. Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
4. Includes global clock buffer.
5. Calculated as $F_{VCO}/128$ assuming output duty cycle is 50%.

GTX Transceiver Specifications

GTX Transceiver DC Input and Output Levels

Table 51 summarizes the DC output specifications of the GTX transceivers in Kintex-7 FPGAs. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 51: GTX Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV_{PPOUT}	Differential peak-to-peak output voltage ⁽¹⁾	Transmitter output swing is set to maximum setting	–	–	1000	mV
$V_{CMOUTDC}$	DC common mode output voltage.	Equation based	$V_{MGTAVTT} - DV_{PPOUT}/4$			mV
R_{OUT}	Differential output resistance		–	100	–	Ω
T_{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew		–	2	12	ps
DV_{PPIN}	Differential peak-to-peak input voltage (external AC coupled)	>10.3125 Gb/s	150	–	1250	mV
		6.6 Gb/s to 10.3125 Gb/s	150	–	1250	mV
		≤ 6.6 Gb/s	150	–	2000	mV
V_{IN}	Absolute input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–200	–	$V_{MGTAVTT}$	mV
V_{CMIN}	Common mode input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–	$2/3 V_{MGTAVTT}$	–	mV
R_{IN}	Differential input resistance		–	100	–	Ω
C_{EXT}	Recommended external AC coupling capacitor ⁽²⁾		–	100	–	nF

Notes:

1. The output swing and preemphasis levels are programmable using the attributes discussed in [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) and can result in values lower than reported in this table.
2. Other values can be used as appropriate to conform to specific protocols and standards.

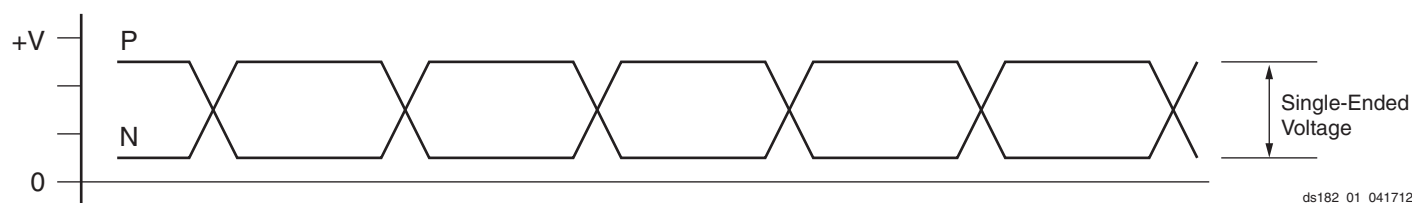


Figure 1: Single-Ended Peak-to-Peak Voltage

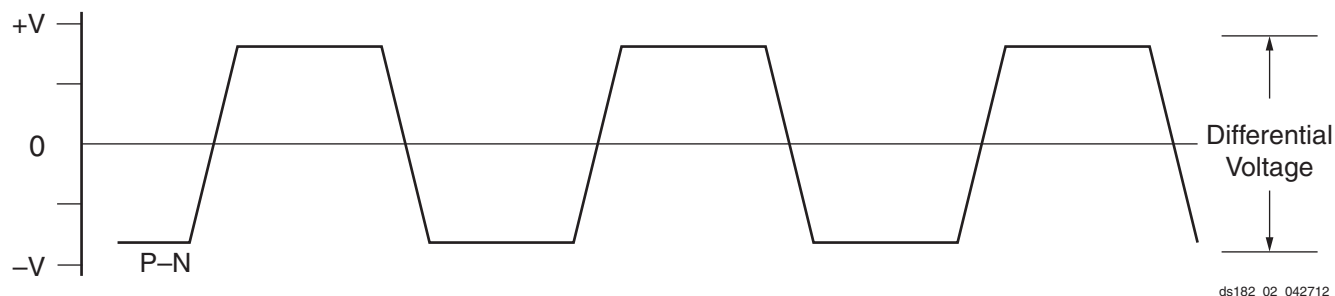


Figure 2: Differential Peak-to-Peak Voltage

Table 52 summarizes the DC specifications of the clock input of the GTX transceiver. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 52: GTX Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V _{IDIFF}	Differential peak-to-peak input voltage	250	–	2000	mV
R _{IN}	Differential input resistance	–	100	–	Ω
C _{EXT}	Required external AC coupling capacitor	–	100	–	nF

GTX Transceiver Switching Characteristics

Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further information.

Table 53: GTX Transceiver Performance

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3		-2/-2L		-1 ⁽¹⁾		-2L ⁽²⁾		
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
F _{GTXMAX} ⁽³⁾	Maximum GTX transceiver data rate		12.5	6.6	10.3125	6.6	8.0	6.6	6.6	6.6	Gb/s
F _{GTXMIN} ⁽³⁾	Minimum GTX transceiver data rate		0.500	0.500	0.500	0.500	0.500	0.500	0.500	0.500	Gb/s
F _{GTXCRANGE}	CPLL line rate range	1	3.2–6.6								Gb/s
		2	1.6–3.3								Gb/s
		4	0.8–1.65								Gb/s
		8	0.5–0.825								Gb/s
		16	N/A								Gb/s
F _{GTXQRANGE1}	QPLL line rate range 1	1	5.93–8.0	5.93–6.6	5.93–8.0	5.93–6.6	5.93–8.0	5.93–6.6	5.93–6.6		Gb/s
		2	2.965–4.0		2.965–4.0		2.965–4.0		2.965–3.3		Gb/s
		4	1.4825–2.0		1.4825–2.0		1.4825–2.0		1.4825–1.65		Gb/s
		8	0.74125–1.0		0.74125–1.0		0.74125–1.0		0.74125–0.825		Gb/s
		16	N/A		N/A		N/A		N/A		Gb/s
F _{GTXQRANGE2}	QPLL line rate range 2 ⁽⁴⁾	1	9.8–12.5	N/A	9.8–10.3125	N/A	N/A		N/A		Gb/s
		2	4.9–6.25		4.9–5.15625		N/A		N/A		Gb/s
		4	2.45–3.125		2.45–2.578125		N/A		N/A		Gb/s
		8	1.225–1.5625		1.225–1.2890625		N/A		N/A		Gb/s
		16	0.6125–0.78125		0.6125–0.64453125		N/A		N/A		Gb/s
F _{GCPLLRANGE}	GTX transceiver CPLL frequency range		1.6–3.3		1.6–3.3		1.6–3.3		1.6–3.3		GHz
F _{GQPLLRange1}	GTX transceiver QPLL frequency range 1		5.93–8.0		5.93–8.0		5.93–8.0		5.93–6.6		GHz

GTX Transceiver Protocol Jitter Characteristics

For Table 60 through Table 65, the [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) contains recommended settings for optimal usage of protocol specific characteristics.

Table 60: Gigabit Ethernet Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
Gigabit Ethernet Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	1250	–	0.24	UI
Gigabit Ethernet Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	1250	0.749	–	UI

Table 61: XAUI Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
XAUI Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	3125	–	0.35	UI
XAUI Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	3125	0.65	–	UI

Table 62: PCI Express Protocol Characteristics⁽¹⁾

Standard	Description		Line Rate (Mb/s)	Min	Max	Units
PCI Express Transmitter Jitter Generation						
PCI Express Gen 1	Total transmitter jitter		2500	–	0.25	UI
PCI Express Gen 2	Total transmitter jitter		5000	–	0.25	UI
PCI Express Gen 3 ⁽²⁾	Total transmitter jitter uncorrelated		8000	–	31.25	ps
	Deterministic transmitter jitter uncorrelated			–	12	ps
PCI Express Receiver High Frequency Jitter Tolerance						
PCI Express Gen 1	Total receiver jitter tolerance		2500	0.65	–	UI
PCI Express Gen 2 ⁽³⁾	Receiver inherent timing error		5000	0.40	–	UI
	Receiver inherent deterministic timing error			0.30	–	UI
PCI Express Gen 3 ⁽²⁾	Receiver sinusoidal jitter tolerance	0.03 MHz–1.0 MHz	8000	1.00	–	UI
		1.0 MHz–10 MHz		Note 4	–	UI
		10 MHz–100 MHz		0.10	–	UI

Notes:

1. Tested per card electromechanical (CEM) methodology.
2. PCI-SIG 3.0 certification and compliance test boards are currently not available.
3. Using common REFCLK.
4. Between 1 MHz and 10 MHz the minimum sinusoidal jitter roll-off with a slope of 20dB/decade.

Table 63: CEI-6G and CEI-11G Protocol Characteristics

Description	Line Rate (Mb/s)	Interface	Min	Max	Units
CEI-6G Transmitter Jitter Generation					
Total transmitter jitter ⁽¹⁾	4976–6375	CEI-6G-SR	–	0.3	UI
		CEI-6G-LR	–	0.3	UI
CEI-6G Receiver High Frequency Jitter Tolerance					
Total receiver jitter tolerance ⁽¹⁾	4976–6375	CEI-6G-SR	0.6	–	UI
		CEI-6G-LR	0.95	–	UI
CEI-11G Transmitter Jitter Generation					
Total transmitter jitter ⁽²⁾	9950–11100	CEI-11G-SR	–	0.3	UI
		CEI-11G-LR/MR	–	0.3	UI
CEI-11G Receiver High Frequency Jitter Tolerance					
Total receiver jitter tolerance ⁽²⁾	9950–11100	CEI-11G-SR	0.65	–	UI
		CEI-11G-MR	0.65	–	UI
		CEI-11G-LR	0.825	–	UI

Notes:

1. Tested at most commonly used line rate of 6250 Mb/s using 390.625 MHz reference clock.
2. Tested at line rate of 9950 Mb/s using 155.46875 MHz reference clock and 11100 Mb/s using 173.4375 MHz reference clock.

Table 64: SFP+ Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
SFP+ Transmitter Jitter Generation				
Total transmitter jitter	9830.40 ⁽¹⁾	–	0.28	UI
	9953.00			
	10312.50			
	10518.75			
	11100.00			
SFP+ Receiver Frequency Jitter Tolerance				
Total receiver jitter tolerance	9830.40 ⁽¹⁾	0.7	–	UI
	9953.00			
	10312.50			
	10518.75			
	11100.00			

Notes:

1. Line rated used for CPRI over SFP+ applications.

Revision History

The following table shows the revision history for this document:

Date	Version	Description
03/01/11	1.0	Initial Xilinx release.
04/01/11	1.1	Added the XC7K355T, XC7K420T, and XC7K480T devices throughout data sheet. Added the extended temperature range discussion to page 1 . Updated V_{CCAUX_IO} in Table 2 . Edits to clarify Power-On/Off Power Supply Sequencing power sequencing discussion. Added I_{CCAUX_IO} and I_{CCBRAM} to Table 6 and Table 7 . Updated $MMCM_F_{INDUTY}$ and added $F_{INJITTER}$, $T_{OUTJITTER}$, $T_{EXTFVAR}$, and Note 3 to Table 38 . Removed the SBG324 package from Table 50 . Updated the Notice of Disclaimer .
10/04/11	1.2	Replaced -1L with -2L throughout this data sheet. Updated Min/Max values and removed Note 5 from Table 2 . Clarified Power-On/Off Power Supply Sequencing power sequencing discussion including adding $T_{VCCO2VCCAUX}$ to Table 8 . Updated V_{ICM} in Table 12 and Table 13 . Added Note 1 to Table 12 . Updated Table 69 including adding Note 1 . Added <i>Absolute Maximum Ratings for GTX Transceivers</i> . Revised the reference clock maximum frequency (F_{GCLK}) in Table 55 . Added Table 57 . Added LVTTTL and removed SSTL135_II and SSTL15_II specifications from Table 19 . Removed HSTL_III from Table 20 . Removed the <i>I/O Standard Adjustment Measurement Methodology</i> section. Use IBIS for more accurate information and measurements. Updated $T_{DELAYPAT_JIT}$ in Table 26 . Added T_{AS}/T_{AH} to Table 28 . Added $T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$ and $T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$ to Table 31 . Completely updated Table 68 . Updated the AC Switching Characteristics in Table 19 , Table 20 , Table 21 , Table 22 , Table 23 , Table 24 , Table 26 through Table 38 , Table 40 through Table 37 , and Table 67 .
11/03/11	1.3	Revised the V_{OCM} specification in Table 12 . Updated the AC Switching Characteristics based upon the ISE 13.3 v1.02 speed specification throughout document including Table 19 and Table 20 . Added $MMCM_T_{FBDELAY}$ while adding $MMCM_$ to the symbol names of a few specifications in Table 38 and PLL to the symbol names in Table 39 . In Table 40 through Table 47 , updated the pin-to-pin descriptions with the SSTL15 standard. Updated units in Table 49 .
02/13/12	1.4	Updated summary description on page 1 . In Table 2 , revised V_{CCO} for the 3.3V HR I/O banks and updated T_j . Added typical values to Table 3 . Updated the notes in Table 6 . Added MGTAVCC, MGTAVTT, and MGTVCCAUX power supply ramp times to Table 8 . Rearranged Table 9 , added Mobile_DDR, HSTL_I_18, HSTL_II_18, HSUL_12, SSTL135_R, SSTL15_R, and SSTL12 and removed DIFF_SSTL135, DIFF_SSTL18_I, DIFF_SSTL18_II, DIFF_HSTL_I, and DIFF_HSTL_II. Added Table 10 and Table 11 . Revised the specifications in Table 12 and Table 13 . Updated the eFUSE Programming Conditions section and removed the endurance table. Added the IO_FIFO Switching Characteristics table. Revised I_{CCADC} and updated Note 1 in Table 67 . Revised DDR LVDS transmitter data width in Table 16 . Updated the AC Switching Characteristics based upon the ISE 13.4 v1.03 speed specification throughout document. Removed notes from Table 28 as they are no longer applicable. Updated specifications in Table 68 . Updated Note 1 in Table 37 . In the GTX Transceiver DC Input and Output Levels section: Revised V_{IN} , and added I_{DCIN} and I_{DCOUT} to Table 51 . Added Note 4 to Table 53 . In Table 55 , revised F_{GCLK} , removed T_{PHASE} , and added T_{DLOCK} . Revised specifications and added Note 2 to Table 57 . Added Table 58 and Table 59 along with GTX Transceiver Protocol Jitter Characteristics in Table 60 through Table 65 .
05/23/12	1.5	Reorganized entire data sheet including adding Table 44 and Table 48 . Updated T_{SOL} in Table 1 . Updated I_{BATT} and added R_{IN_TERM} to Table 3 . Added values to Table 6 and Table 7 . Updated Power-On/Off Power Supply Sequencing , page 6 with regards to GTX transceivers. Updated many parameters in Table 9 including SSTL135 and SSTL135_R. Removed V_{OX} column and added DIFF_HSUL_12 to Table 11 . Updated V_{OL} in Table 12 . Updated Table 16 and removed notes 2 and 3. Updated Table 17 . Updated the AC Switching Characteristics based upon the ISE 14.1 v1.04 for the -3, -2, -2L (1.0V), -1, and -2L (0.9V) speed specifications throughout the document. In Table 31 , updated Reset Delays section including Note 10 and Note 11 . Added data for T_{LOCK} and T_{DLOCK} in Table 55 . Updated many of the XADC specifications in Table 67 and added Note 2 . Updated and moved <i>Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK</i> section from Table 68 to Table 38 and Table 39 .