Table 1: **Absolute Maximum Ratings (1) *(Cont'd)***

Symbol	Description	Min	Max	Units
I_{DCIN}	DC input current for receiver input pins DC coupled $V_{MGTAVTT}$ = 1.2V	–	14	mA
I_{DCOUT}	DC output current for transmitter pins DC coupled $V_{MGTAVTT}$ = 1.2V	–	14	mA
XADC				
V_{CCADC}	XADC supply relative to GNDADC	–0.5	2.0	V
V_{REFP}	XADC reference input relative to GNDADC	–0.5	2.0	V
Temperature				
T_{STG}	Storage temperature (ambient)	–65	150	°C
T_{SOL}	Maximum soldering temperature for Pb/Sn component bodies (6)	–	+220	°C
	Maximum soldering temperature for Pb-free component bodies (6)	–	+260	°C
T_j	Maximum junction temperature(6)	–	+125	°C

Notes:

1. Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.
2. The lower absolute voltage specification always applies.
3. For I/O operation, refer to UG471: *7 Series FPGAs SelectIO Resources User Guide*.
4. The maximum limit applied to DC and AC signals.
5. For maximum undershoot and overshoot AC specifications, see Table 4 and Table 5.
6. For soldering guidelines and thermal considerations, see UG475: *7 Series FPGA Packaging and Pinout Specification*.

Table 2: **Recommended Operating Conditions (1)**

Symbol	Description	Min	Typ	Max	Units
FPGA Logic					
V_{CCINT}(2)	Internal supply voltage	0.97	1.00	1.03	V
	For -2L (0.9V) devices: internal supply voltage	0.87	0.90	0.93	V
V_{CCBRAM}(2)	Block RAM supply voltage	0.97	1.00	1.03	V
	For -2L (0.9V) devices: block RAM supply voltage	0.87	0.90	1.03	V
V_{CCAUX}	Auxiliary supply voltage	1.71	1.80	1.89	V
V_{CCO}(3)(4)	Supply voltage for 3.3V HR I/O banks	1.14	–	3.465	V
	Supply voltage for 1.8V HP I/O banks	1.14	–	1.89	V
V_{CCAUX_IO}	Auxiliary supply voltage when set to 1.8V	1.71	1.80	1.89	V
	Auxiliary supply voltage when set to 2.0V	1.94	2.00	2.06	V
V_{IN}(5)	I/O input voltage	–0.20	–	V_{CCO} + 0.2	V
	I/O input voltage for V_{REF} and differential I/O standards	–0.20	–	2.625	V
I_{IN}(6)	Maximum current through any pin in a powered or unpowered bank when forward biasing the clamp diode.	–	–	10	mA
V_{CCBATT}(7)	Battery voltage	1.0	–	1.89	V
GTX Transceiver					
$V_{MGTAVCC}$(8)	Analog supply voltage for the GTX transceiver QPLL frequency range ≤ 10.3125 GHz(9)(10)	0.97	1.0	1.08	V
	Analog supply voltage for the GTX transceiver QPLL frequency range > 10.3125 GHz	1.02	1.05	1.08	V
$V_{MGTAVTT}$(8)	Analog supply voltage for the GTX transmitter and receiver termination circuits	1.17	1.2	1.23	V
$V_{MGTVCCAUX}$(8)	Auxiliary analog QPLL voltage supply for the transceivers	1.75	1.80	1.85	V

Table 2: **Recommended Operating Conditions (1) *(Cont'd)***

Symbol	Description	Min	Typ	Max	Units
$V_{MGTAVTTRCAL}$ (8)	Analog supply voltage for the resistor calibration circuit of the GTX transceiver column	1.17	1.2	1.23	V
XADC					
V_{CCADC}	XADC supply relative to GNDADC	1.71	1.80	1.89	V
V_{REFP}	Externally supplied reference voltage	1.20	1.25	1.30	V
Temperature					
T_j	Junction temperature operating range for commercial (C) temperature devices	0	–	85	°C
	Junction temperature operating range for extended (E) temperature devices	0	–	100	°C
	Junction temperature operating range for industrial (I) temperature devices	–40	–	100	°C

Notes:

1. All voltages are relative to ground.
2. V_{CCINT} and V_{CCBRAM} should be connected to the same supply.
3. Configuration data is retained even if V_{CCO} drops to 0V.
4. Includes V_{CCO} of 1.2V, 1.5V, 1.8V, 2.5V, and 3.3V.
5. The lower absolute voltage specification always applies.
6. A total of 200 mA per bank should not be exceeded.
7. V_{CCBATT} is required only when using bitstream encryption. If battery is not used, connect V_{CCBATT} to either ground or V_{CCAUX}.
8. Each voltage listed requires the filter circuit described in UG476: *7 Series FPGAs GTX/GTH Transceiver User Guide*.
9. For data rates ≤ 10.3125 Gb/s, $V_{MGTAVCC}$ should be 1.0V ±3% for lower power consumption.
10. For lower power consumption, $V_{MGTAVCC}$ should be 1.0V ±3% over the entire CPLL frequency range.

Table 3: **DC Characteristics Over Recommended Operating Conditions**

Symbol	Description	Min	Typ(1)	Max	Units
V_{DRINT}	Data retention V_{CCINT} voltage (below which configuration data might be lost)	0.75	–	–	V
V_{DRI}	Data retention V_{CCAUX} voltage (below which configuration data might be lost)	1.5	–	–	V
I_{REF}	V_{REF} leakage current per pin	–	–	15	µA
I_L	Input or output leakage current per pin (sample-tested)	–	–	15	µA
C_{IN} (2)	Die input capacitance at the pad	–	–	8	pF
I_{RPU}	Pad pull-up (when selected) @ V_{IN} = 0V, V_{CCO} = 3.3V	90	–	330	µA
	Pad pull-up (when selected) @ V_{IN} = 0V, V_{CCO} = 2.5V	68	–	250	µA
	Pad pull-up (when selected) @ V_{IN} = 0V, V_{CCO} = 1.8V	34	–	220	µA
	Pad pull-up (when selected) @ V_{IN} = 0V, V_{CCO} = 1.5V	23	–	150	µA
	Pad pull-up (when selected) @ V_{IN} = 0V, V_{CCO} = 1.2V	12	–	120	µA
I_{RPD}	Pad pull-down (when selected) @ V_{IN} = 3.3V	68	–	330	µA
	Pad pull-down (when selected) @ V_{IN} = 1.8V	45	–	180	µA
I_{CCADC}	Analog supply current, analog circuits in powered up state	–	–	25	mA
I_{BATT} (3)	Battery supply current	–	–	150	nA

Table 5: **Maximum Allowed AC Voltage Overshoot and Undershoot for 1.8V HP I/O Banks(1)(2) *(Cont'd)***

AC Voltage Overshoot	% of UI @–40°C to 100°C	AC Voltage Undershoot	% of UI @–40°C to 100°C
V_{CCO} + 0.80	9.71	–0.80	50.0
V_{CCO} + 0.85	4.51	–0.85	28.4
V_{CCO} + 0.90	2.12	–0.90	12.7
V_{CCO} + 0.95	1.01	–0.95	5.79

Notes:

1. A total of 200 mA per bank should not be exceeded.
2. For UI smaller than 20 µs.

Table 6: **Typical Quiescent Supply Current**

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC7K70T	241	241	241	187	mA
		XC7K160T	474	474	474	368	mA
		XC7K325T	810	810	810	629	mA
		XC7K355T	993	993	993	771	mA
		XC7K410T	1080	1080	1080	838	mA
		XC7K420T	1313	1313	1313	1019	mA
		XC7K480T	1313	1313	1313	1019	mA
I_{CCOQ}	Quiescent V_{CCO} supply current	XC7K70T	1	1	1	1	mA
		XC7K160T	1	1	1	1	mA
		XC7K325T	1	1	1	1	mA
		XC7K355T	1	1	1	1	mA
		XC7K410T	1	1	1	1	mA
		XC7K420T	1	1	1	1	mA
		XC7K480T	1	1	1	1	mA
I_{CCAUXQ}	Quiescent V_{CCAUX} supply current	XC7K70T	21	21	21	21	mA
		XC7K160T	40	40	40	40	mA
		XC7K325T	68	68	68	68	mA
		XC7K355T	75	75	75	75	mA
		XC7K410T	85	85	85	85	mA
		XC7K420T	99	99	99	99	mA
		XC7K480T	99	99	99	99	mA
I_{CCAUX_IOQ}	Quiescent V_{CCAUX_IO} supply current	XC7K70T	N/A	N/A	N/A	N/A	mA
		XC7K160T	2	2	2	2	mA
		XC7K325T	2	2	2	2	mA
		XC7K355T	N/A	N/A	N/A	N/A	mA
		XC7K410T	2	2	2	2	mA
		XC7K420T	N/A	N/A	N/A	N/A	mA
		XC7K480T	N/A	N/A	N/A	N/A	mA

LVDS DC Specifications (LVDS_25)

The LVDS_25 standard is available in the HR I/O banks. See UG471: *7 Series FPGAs SelectIO Resources User Guide* for more information.

Table 12: **LVDS_25 DC Specifications**

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		2.375	2.500	2.625	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	R_T = 100 Ω across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	R_T = 100 Ω across Q and $\overline{Q}$ signals	0.700	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	R_T = 100 Ω across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	R_T = 100 Ω across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High		100	350	600	mV
V_{ICM}	Input Common-Mode Voltage		0.300	1.200	1.425	V

LVDS DC Specifications (LVDS)

The LVDS standard is available in the HP I/O banks. See UG471: *7 Series FPGAs SelectIO Resources User Guide* for more information.

Table 13: **LVDS DC Specifications**

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		1.710	1.800	1.890	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	R_T = 100 Ω across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	R_T = 100 Ω across Q and $\overline{Q}$ signals	0.825	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	R_T = 100 Ω across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	R_T = 100 Ω across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	Common-mode input voltage = 1.25V	100	350	600	mV
V_{ICM}	Input Common-Mode Voltage	Differential input voltage = ±350 mV	0.300	1.200	1.425	V

Table 17: **Maximum Physical Interface (PHY) Rate for Memory Interfaces (FFG Packages)(1)(2)**

Memory Standard	I/O Bank Type	V_{CCAUX_IO}	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
4:1 Memory Controllers							
DDR3	HP	2.0V	1866	1866	1600	1333	Mb/s
	HP	1.8V	1600	1333	1066	1066	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1600	1600	1333	1066	Mb/s
	HP	1.8V	1333	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	800	800	800	Mb/s
RLDRAM III(3)	HP	2.0V	800	667	667	533	MHz
	HP	1.8V	550	500	450	450	MHz
	HR	N/A	N/A				
2:1 Memory Controllers							
DDR3	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V					
	HR	N/A					
QDR II+(4)	HP	2.0V	550	500	450	450	MHz
	HP	1.8V					
	HR	N/A	500	450	400	400	MHz
RLDRAM II	HP	2.0V	533	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
LPDDR2(3)	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	667	667	667	Mb/s

Notes:

1. V_{REF} tracking is required. For more information, see UG586, *7 Series FPGAs Memory Interface Solutions User Guide*.
2. When using the internal V_{REF}, the maximum data rate is 800 Mb/s (400 MHz).
3. RLDRAM III (BL = 4, BL = 8) and LPDDR2 specifications have not been validated with memory IP.
4. The maximum QDRII+ performance specifications are for burst-length 4 (BL = 4) implementations. Burst length 2 (BL = 2) implementations are limited to 333 MHz for all speed grades and I/O bank types.

IOB Pad Input/Output/3-State

Table 19 (3.3V high-range IOB (HR)) and Table 20 (1.8V high-performance IOB (HP)) summarizes the values of standard-specific data input delay adjustments, output delays terminating at pads (based on standard) and 3-state delays.

- T_{IOPI} is described as the delay from IOB pad through the input buffer to the I-pin of an IOB pad. The delay varies depending on the capability of the SelectIO input buffer.
- T_{IOOP} is described as the delay from the O pin to the IOB pad through the output buffer of an IOB pad. The delay varies depending on the capability of the SelectIO output buffer.
- T_{IOTP} is described as the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is disabled. The delay varies depending on the SelectIO capability of the output buffer. In HP I/O banks, the internal DCI termination turn-on time is always faster than T_{IOTP} when the DCITERMDISABLE pin is used. In HR I/O banks, the IN_TERM termination turn-on time is always faster than T_{IOTP} when the INTERMDISABLE pin is used.

Table 19: **3.3V IOB High Range (HR) Switching Characteristics**

I/O Standard	T_{IOPI}				T_{IOOP}				T_{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVTTL_S4	1.31	1.42	1.64	1.51	5.27	5.63	6.05	4.13	6.03	6.49	7.04	4.64	ns
LVTTL_S8	1.31	1.42	1.64	1.51	4.45	4.83	5.30	3.86	5.21	5.69	6.29	4.38	ns
LVTTL_S12	1.31	1.42	1.64	1.51	4.45	4.83	5.29	3.84	5.21	5.69	6.28	4.36	ns
LVTTL_S16	1.31	1.42	1.64	1.51	3.47	3.88	4.40	3.39	4.23	4.74	5.39	3.91	ns
LVTTL_S24	1.31	1.42	1.64	1.51	3.58	3.99	4.51	3.61	4.34	4.85	5.50	4.13	ns
LVTTL_F4	1.31	1.42	1.64	1.51	4.70	4.98	5.29	3.58	5.46	5.84	6.28	4.09	ns
LVTTL_F8	1.31	1.42	1.64	1.51	3.66	4.06	4.56	3.06	4.42	4.92	5.55	3.58	ns
LVTTL_F12	1.31	1.42	1.64	1.51	3.66	4.06	4.56	3.05	4.42	4.92	5.55	3.56	ns
LVTTL_F16	1.31	1.42	1.64	1.51	2.57	2.85	3.15	2.88	3.33	3.71	4.14	3.39	ns
LVTTL_F24	1.31	1.42	1.64	1.51	2.41	2.64	2.89	2.94	3.17	3.50	3.88	3.45	ns
LVDS_25(1)	0.64	0.68	0.80	0.83	1.36	1.47	1.55	1.58	2.12	2.33	2.54	2.09	ns
MINI_LVDS_25	0.68	0.70	0.79	0.83	1.36	1.47	1.55	1.59	2.12	2.33	2.54	2.11	ns
BLVDS_25(1)	0.65	0.69	0.80	0.83	1.83	2.02	2.20	2.16	2.59	2.88	3.19	2.67	ns
RSDS_25 (point to point)(1)	0.63	0.68	0.79	0.83	1.36	1.48	1.55	1.59	2.12	2.34	2.54	2.11	ns
PPDS_25(1)	0.65	0.69	0.80	0.83	1.36	1.49	1.58	1.59	2.12	2.35	2.57	2.11	ns
TMDS_33(1)	0.72	0.76	0.86	0.83	1.43	1.54	1.60	1.70	2.19	2.40	2.59	2.22	ns
PCI33_3(1)	1.28	1.41	1.65	1.50	2.71	3.08	3.52	3.42	3.47	3.94	4.51	3.94	ns
HSUL_12	0.63	0.64	0.71	0.79	2.06	2.31	2.59	2.13	2.82	3.17	3.58	2.64	ns
DIFF_HSUL_12	0.58	0.61	0.70	0.81	1.83	2.04	2.26	1.92	2.59	2.90	3.25	2.44	ns
HSTL_I_S	0.61	0.64	0.73	0.79	1.55	1.69	1.80	1.91	2.31	2.55	2.79	2.42	ns
HSTL_II_S	0.61	0.64	0.73	0.78	1.21	1.34	1.43	1.70	1.97	2.20	2.42	2.22	ns
HSTL_I_18_S	0.64	0.67	0.76	0.79	1.28	1.39	1.45	1.58	2.04	2.25	2.44	2.09	ns
HSTL_II_18_S	0.64	0.67	0.76	0.79	1.18	1.31	1.40	1.69	1.94	2.17	2.39	2.20	ns
DIFF_HSTL_I_S	0.63	0.67	0.77	0.78	1.42	1.54	1.61	1.84	2.18	2.40	2.60	2.36	ns
DIFF_HSTL_II_S	0.63	0.67	0.77	0.79	1.15	1.24	1.27	1.78	1.91	2.10	2.26	2.30	ns
DIFF_HSTL_I_18_S	0.65	0.69	0.78	0.79	1.27	1.38	1.43	1.67	2.03	2.24	2.42	2.19	ns
DIFF_HSTL_II_18_S	0.65	0.69	0.78	0.81	1.14	1.23	1.26	1.72	1.90	2.09	2.25	2.23	ns

Table 19: **3.3V IOB High Range (HR) Switching Characteristics *(Cont'd)***

I/O Standard	T_{IOPI}				T_{IOOP}				T_{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVCMOS15_S16	0.66	0.69	0.81	0.90	1.76	1.95	2.13	1.91	2.52	2.81	3.12	2.42	ns
LVCMOS15_F4	0.66	0.69	0.81	0.90	3.39	3.60	3.80	1.98	4.15	4.46	4.79	2.50	ns
LVCMOS15_F8	0.66	0.69	0.81	0.90	1.79	1.99	2.18	1.92	2.55	2.85	3.17	2.44	ns
LVCMOS15_F12	0.66	0.69	0.81	0.90	1.40	1.54	1.65	1.67	2.16	2.40	2.64	2.19	ns
LVCMOS15_F16	0.66	0.69	0.81	0.90	1.37	1.51	1.61	1.66	2.13	2.37	2.60	2.17	ns
LVCMOS12_S4	0.88	0.91	1.00	1.01	3.85	4.22	4.69	2.89	4.61	5.08	5.68	3.41	ns
LVCMOS12_S8	0.88	0.91	1.00	1.01	2.52	2.96	3.52	2.41	3.28	3.82	4.51	2.92	ns
LVCMOS12_S12(1)	0.88	0.91	1.00	1.01	2.06	2.31	2.59	2.11	2.82	3.17	3.58	2.63	ns
LVCMOS12_F4	0.88	0.91	1.00	1.01	3.44	3.73	4.06	2.30	4.20	4.59	5.05	2.81	ns
LVCMOS12_F8	0.88	0.91	1.00	1.01	1.72	2.04	2.40	1.86	2.48	2.90	3.39	2.38	ns
LVCMOS12_F12(1)	0.88	0.91	1.00	1.01	1.54	1.71	1.87	1.69	2.30	2.57	2.86	2.20	ns
SSTL135_S	0.61	0.64	0.73	0.79	1.27	1.40	1.50	1.64	2.03	2.26	2.49	2.16	ns
SSTL15_S	0.61	0.64	0.73	0.73	1.24	1.37	1.47	1.59	2.00	2.23	2.46	2.11	ns
SSTL18_I_S	0.64	0.67	0.76	0.79	1.59	1.74	1.85	1.95	2.35	2.60	2.84	2.47	ns
SSTL18_II_S	0.64	0.67	0.76	0.78	1.27	1.40	1.50	1.63	2.03	2.26	2.49	2.14	ns
DIFF_SSTL135_S	0.59	0.61	0.73	0.79	1.27	1.40	1.50	1.64	2.03	2.26	2.49	2.16	ns
DIFF_SSTL15_S	0.63	0.67	0.77	0.79	1.24	1.37	1.47	1.59	2.00	2.23	2.46	2.11	ns
DIFF_SSTL18_I_S	0.65	0.69	0.78	0.79	1.50	1.63	1.72	1.95	2.26	2.49	2.71	2.47	ns
DIFF_SSTL18_II_S	0.65	0.69	0.78	0.79	1.13	1.22	1.25	1.66	1.89	2.08	2.24	2.17	ns
SSTL135_F	0.61	0.64	0.73	0.79	1.04	1.17	1.26	1.42	1.80	2.03	2.25	1.94	ns
SSTL15_F	0.61	0.64	0.73	0.73	1.04	1.17	1.26	1.39	1.80	2.03	2.25	1.91	ns
SSTL18_I_F	0.64	0.67	0.76	0.79	1.12	1.22	1.26	1.44	1.88	2.08	2.25	1.95	ns
SSTL18_II_F	0.64	0.67	0.76	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
DIFF_SSTL135_F	0.59	0.61	0.73	0.79	1.04	1.17	1.26	1.42	1.80	2.03	2.25	1.94	ns
DIFF_SSTL15_F	0.63	0.67	0.77	0.79	1.04	1.17	1.26	1.39	1.80	2.03	2.25	1.91	ns
DIFF_SSTL18_I_F	0.65	0.69	0.78	0.79	1.10	1.19	1.23	1.52	1.86	2.05	2.22	2.03	ns
DIFF_SSTL18_II_F	0.65	0.69	0.78	0.79	1.02	1.10	1.14	1.50	1.78	1.96	2.13	2.02	ns

Notes:

1. This I/O standard is only available in the 3.3V high-range (HR) banks.

Table 20: **1.8V IOB High Performance (HP) Switching Characteristics *(Cont'd)***

I/O Standard	T_{IOPI}				T_{IOOP}				T_{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
DIFF_HSTL_II_DCI_F	0.75	0.79	0.92	0.76	0.97	1.08	1.15	1.30	1.61	1.84	1.97	1.91	ns
DIFF_HSTL_I_18_F	0.75	0.79	0.92	0.89	1.04	1.16	1.24	1.38	1.68	1.91	2.06	1.99	ns
DIFF_HSTL_II_18_F	0.75	0.79	0.92	0.89	0.98	1.09	1.16	1.40	1.62	1.85	1.98	2.01	ns
DIFF_HSTL_I_DCI_18_F	0.75	0.79	0.92	0.75	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
DIFF_HSTL_II_DCI_18_F	0.75	0.79	0.92	0.75	0.98	1.09	1.16	1.33	1.61	1.85	1.98	1.94	ns
DIFF_HSTL_II _T_DCI_18_F	0.75	0.79	0.92	0.76	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
LVCMOS18_S2	0.47	0.50	0.60	0.87	3.95	4.28	4.85	3.40	4.59	5.04	5.67	4.01	ns
LVCMOS18_S4	0.47	0.50	0.60	0.87	2.67	2.98	3.43	2.69	3.31	3.73	4.26	3.30	ns
LVCMOS18_S6	0.47	0.50	0.60	0.87	2.14	2.38	2.72	2.18	2.77	3.14	3.54	2.79	ns
LVCMOS18_S8	0.47	0.50	0.60	0.87	1.98	2.21	2.52	2.02	2.61	2.97	3.35	2.63	ns
LVCMOS18_S12	0.47	0.50	0.60	0.87	1.70	1.91	2.17	1.85	2.34	2.67	2.99	2.46	ns
LVCMOS18_S16	0.47	0.50	0.60	0.87	1.57	1.75	1.97	1.76	2.20	2.51	2.79	2.37	ns
LVCMOS18_F2	0.47	0.50	0.60	0.87	3.50	3.87	4.48	2.85	4.14	4.63	5.30	3.46	ns
LVCMOS18_F4	0.47	0.50	0.60	0.87	2.23	2.50	2.87	2.26	2.87	3.25	3.69	2.87	ns
LVCMOS18_F6	0.47	0.50	0.60	0.87	1.80	2.00	2.26	1.52	2.43	2.76	3.08	2.13	ns
LVCMOS18_F8	0.47	0.50	0.60	0.87	1.46	1.72	2.04	1.51	2.10	2.47	2.86	2.12	ns
LVCMOS18_F12	0.47	0.50	0.60	0.87	1.26	1.40	1.53	1.46	1.89	2.16	2.35	2.07	ns
LVCMOS18_F16	0.47	0.50	0.60	0.87	1.19	1.33	1.44	1.46	1.83	2.08	2.26	2.07	ns
LVCMOS15_S2	0.59	0.62	0.73	0.86	3.55	3.89	4.45	3.11	4.19	4.65	5.27	3.73	ns
LVCMOS15_S4	0.59	0.62	0.73	0.86	2.45	2.70	3.06	2.46	3.08	3.45	3.89	3.07	ns
LVCMOS15_S6	0.59	0.62	0.73	0.86	2.24	2.51	2.88	2.33	2.88	3.26	3.71	2.94	ns
LVCMOS15_S8	0.59	0.62	0.73	0.86	1.91	2.16	2.49	2.05	2.55	2.91	3.31	2.66	ns
LVCMOS15_S12	0.59	0.62	0.73	0.86	1.77	1.98	2.23	1.97	2.41	2.73	3.05	2.58	ns
LVCMOS15_S16	0.59	0.62	0.73	0.86	1.62	1.81	2.02	1.85	2.26	2.56	2.84	2.46	ns
LVCMOS15_F2	0.59	0.62	0.73	0.86	3.38	3.69	4.18	2.74	4.02	4.44	5.00	3.35	ns
LVCMOS15_F4	0.59	0.62	0.73	0.86	2.04	2.21	2.44	1.72	2.68	2.97	3.26	2.33	ns
LVCMOS15_F6	0.59	0.62	0.73	0.86	1.47	1.74	2.09	1.49	2.10	2.50	2.91	2.10	ns
LVCMOS15_F8	0.59	0.62	0.73	0.86	1.31	1.46	1.61	1.47	1.95	2.22	2.43	2.08	ns
LVCMOS15_F12	0.59	0.62	0.73	0.86	1.21	1.34	1.45	1.44	1.84	2.10	2.27	2.05	ns
LVCMOS15_F16	0.59	0.62	0.73	0.86	1.18	1.31	1.41	1.41	1.82	2.07	2.23	2.02	ns
LVCMOS12_S2	0.64	0.67	0.78	0.95	3.38	3.80	4.48	3.27	4.02	4.55	5.30	3.88	ns
LVCMOS12_S4	0.64	0.67	0.78	0.95	2.62	2.94	3.43	2.76	3.26	3.70	4.25	3.37	ns
LVCMOS12_S6	0.64	0.67	0.78	0.95	2.05	2.33	2.72	2.24	2.69	3.08	3.54	2.85	ns
LVCMOS12_S8	0.64	0.67	0.78	0.95	1.94	2.18	2.51	2.16	2.58	2.94	3.33	2.77	ns
LVCMOS12_F2	0.64	0.67	0.78	0.95	2.84	3.15	3.62	2.47	3.48	3.90	4.44	3.08	ns
LVCMOS12_F4	0.64	0.67	0.78	0.95	1.97	2.18	2.44	1.69	2.61	2.93	3.26	2.30	ns
LVCMOS12_F6	0.64	0.67	0.78	0.95	1.33	1.51	1.70	1.43	1.96	2.26	2.52	2.04	ns

Table 20: **1.8V IOB High Performance (HP) Switching Characteristics *(Cont'd)***

I/O Standard	T_{IOPI}				T_{IOOP}				T_{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
SSTL18_I_F	0.68	0.72	0.82	0.86	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
SSTL18_II_F	0.68	0.72	0.82	0.87	0.97	1.09	1.16	1.36	1.61	1.84	1.99	1.98	ns
SSTL18_I_DCI_F	0.68	0.72	0.82	0.76	0.89	1.02	1.10	1.30	1.53	1.77	1.92	1.91	ns
SSTL18_II_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.24	1.53	1.77	1.92	1.85	ns
SSTL18_II_T_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.27	1.53	1.77	1.92	1.88	ns
SSTL15_F	0.68	0.72	0.82	0.81	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
SSTL15_DCI_F	0.68	0.72	0.82	0.78	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL15_T_DCI_F	0.68	0.72	0.82	0.80	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL135_F	0.69	0.72	0.82	0.89	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_T_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL12_F	0.69	0.72	0.82	0.95	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
SSTL12_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
SSTL12_T_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.26	1.54	1.79	1.93	1.87	ns
DIFF_SSTL18_I_F	0.75	0.79	0.92	0.89	0.94	1.06	1.15	1.38	1.58	1.82	1.97	1.99	ns
DIFF_SSTL18_II_F	0.75	0.79	0.92	0.89	0.97	1.09	1.16	1.40	1.61	1.84	1.99	2.01	ns
DIFF_SSTL18_I_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.36	1.53	1.77	1.92	1.98	ns
DIFF_SSTL18_II_DCI_F	0.75	0.79	0.92	0.75	0.89	1.02	1.10	1.32	1.53	1.77	1.92	1.93	ns
DIFF_SSTL18_II_T_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.38	1.53	1.77	1.92	1.99	ns
DIFF_SSTL15_F	0.68	0.72	0.82	0.89	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
DIFF_SSTL15_DCI_F	0.68	0.72	0.82	0.75	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
DIFF_SSTL15_T_DCI_F	0.68	0.72	0.82	0.76	0.89	1.01	1.09	1.35	1.53	1.77	1.91	1.96	ns
DIFF_SSTL135_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_T_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.35	1.52	1.76	1.90	1.96	ns
DIFF_SSTL12_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
DIFF_SSTL12_DCI_F	0.69	0.72	0.82	0.78	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
DIFF_SSTL12_T_DCI_F	0.69	0.72	0.82	0.80	0.91	1.03	1.11	1.33	1.54	1.79	1.93	1.94	ns

Notes:

1. This I/O standard is only available in the 1.8V high-performance (HP) banks.

Input/Output Logic Switching Characteristics

Table 22: **ILOGIC Switching Characteristics**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T_{ICE1CK}/T_{ICKCE1}	CE1 pin Setup/Hold with respect to CLK	0.42/0.00	0.48/0.00	0.67/0.00	0.56/–0.16	ns
T_{ISRCK}/T_{ICKSR}	SR pin Setup/Hold with respect to CLK	0.53/0.01	0.61/0.01	0.99/0.01	0.88/–0.30	ns
$T_{IDOCKE2}/T_{IOCKDE2}$	D pin Setup/Hold with respect to CLK without Delay (HP I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
$T_{IDOCKDE2}/T_{IOCKDDE2}$	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HP I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
$T_{IDOCKE3}/T_{IOCKDE3}$	D pin Setup/Hold with respect to CLK without Delay (HR I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
$T_{IDOCKDE3}/T_{IOCKDDE3}$	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HR I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
Combinatorial						
T_{IDIE2}	D pin to O pin propagation delay, no Delay (HP I/O banks only)	0.09	0.10	0.12	0.14	ns
T_{IDIDE2}	DDLY pin to O pin propagation delay (using IDELAY) (HP I/O banks only)	0.10	0.11	0.13	0.15	ns
T_{IDIE3}	D pin to O pin propagation delay, no Delay (HR I/O banks only)	0.09	0.10	0.12	0.14	ns
T_{IDIDE3}	DDLY pin to O pin propagation delay (using IDELAY) (HR I/O banks only)	0.10	0.11	0.13	0.15	ns
Sequential Delays						
T_{IDLOE2}	D pin to Q1 pin using flip-flop as a latch without Delay (HP I/O banks only)	0.36	0.39	0.45	0.54	ns
$T_{IDLODE2}$	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HP I/O banks only)	0.36	0.39	0.45	0.55	ns
T_{IDLOE3}	D pin to Q1 pin using flip-flop as a latch without Delay (HR I/O banks only)	0.36	0.39	0.45	0.54	ns
$T_{IDLODE3}$	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HR I/O banks only)	0.36	0.39	0.45	0.55	ns
T_{ICKQ}	CLK to Q outputs	0.47	0.50	0.58	0.71	ns
$T_{RQ_ILOGICE2}$	SR pin to OQ/TQ out (HP I/O banks only)	0.84	0.94	1.16	1.32	ns
$T_{GSRQ_ILOGICE2}$	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
$T_{RQ_ILOGICE3}$	SR pin to OQ/TQ out (HR I/O banks only)	0.84	0.94	1.16	1.32	ns
$T_{GSRQ_ILOGICE3}$	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
$T_{RPW_ILOGICE2}$	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.63	0.63	0.68	ns, Min
$T_{RPW_ILOGICE3}$	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.63	0.63	0.68	ns, Min

Table 23: **OLOGIC Switching Characteristics**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T_{ODCK}/T_{OCKD}	D1/D2 pins Setup/Hold with respect to CLK	0.45/–0.13	0.50/–0.13	0.58/–0.13	0.79/–0.18	ns
T_{OOCECK}/T_{OCKOCE}	OCE pin Setup/Hold with respect to CLK	0.28/0.03	0.29/0.03	0.45/0.03	0.35/–0.10	ns
T_{OSRCK}/T_{OCKSR}	SR pin Setup/Hold with respect to CLK	0.32/0.18	0.38/0.18	0.70/0.18	0.62/–0.04	ns
T_{OTCK}/T_{OCKT}	T1/T2 pins Setup/Hold with respect to CLK	0.49/–0.16	0.56/–0.16	0.68/–0.16	0.67/–0.18	ns
T_{OTCECK}/T_{OCKTCE}	TCE pin Setup/Hold with respect to CLK	0.28/0.01	0.30/0.01	0.45/0.01	0.31/–0.10	ns
Combinatorial						
T_{ODQ}	D1 to OQ out or T1 to TQ out	0.73	0.81	0.97	1.18	ns
Sequential Delays						
T_{OCKQ}	CLK to OQ/TQ out	0.41	0.43	0.49	0.63	ns
$T_{RQ_OLOGICE2}$	SR pin to OQ/TQ out (HP I/O banks only)	0.63	0.70	0.83	1.12	ns
$T_{GSRQ_OLOGICE2}$	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
$T_{RQ_OLOGICE3}$	SR pin to OQ/TQ out (HR I/O banks only)	0.63	0.70	0.83	1.12	ns
$T_{GSRQ_OLOGICE3}$	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
$T_{RPW_OLOGICE2}$	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.54	0.63	0.68	ns, Min
$T_{RPW_OLOGICE3}$	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.54	0.63	0.68	ns, Min

Input Serializer/Deserializer Switching Characteristics

Table 24: **ISERDES Switching Characteristics**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold for Control Lines						
$T_{ISCCK_BITSLIP}$/ $T_{ISCKC_BITSLIP}$	BITSLIP pin Setup/Hold with respect to CLKDIV	0.01/0.12	0.02/0.13	0.02/0.15	0.02/0.21	ns
T_{ISCCK_CE}/ T_{ISCKC_CE}(2)	CE pin Setup/Hold with respect to CLK (for CE1)	0.39/–0.02	0.44/–0.02	0.63/–0.02	0.51/–0.22	ns
T_{ISCCK_CE2}/ T_{ISCKC_CE2}(2)	CE pin Setup/Hold with respect to CLKDIV (for CE2)	–0.12/0.29	–0.12/0.31	–0.12/0.35	–0.17/0.40	ns
Setup/Hold for Data Lines						
T_{ISDCK_D}/T_{ISCKD_D}	D pin Setup/Hold with respect to CLK	–0.02/0.11	–0.02/0.12	–0.02/0.15	–0.04/0.19	ns
T_{ISDCK_DDLY}/ T_{ISCKD_DDLY}	DDLY pin Setup/Hold with respect to CLK (using IDELAY)(1)	–0.02/0.11	–0.02/0.12	–0.02/0.15	–0.03/0.19	ns
$T_{ISDCK_D_DDR}$/ $T_{ISCKD_D_DDR}$	D pin Setup/Hold with respect to CLK at DDR mode	–0.02/0.11	–0.02/0.12	–0.02/0.15	–0.04/0.19	ns
$T_{ISDCK_DDLY_DDR}$/ $T_{ISCKD_DDLY_DDR}$	D pin Setup/Hold with respect to CLK at DDR mode (using IDELAY)(1)	0.11/0.11	0.12/0.12	0.15/0.15	0.19/0.19	ns
Sequential Delays						
T_{ISCKO_Q}	CLKDIV to out at Q pin	0.46	0.47	0.58	0.67	ns
Propagation Delays						
T_{ISDO_DO}	D input to DO output pin	0.09	0.10	0.12	0.14	ns

Notes:

1. Recorded at 0 tap value.
2. T_{ISCCK_CE2} and T_{ISCKC_CE2} are reported as T_{ISCCK_CE}/T_{ISCKC_CE} in TRACE report.

Output Serializer/Deserializer Switching Characteristics

Table 25: **OSERDES Switching Characteristics**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T_{OSDCK_D}/T_{OSCKD_D}	D input Setup/Hold with respect to CLKDIV	0.37/0.02	0.40/0.02	0.55/0.02	0.44/–0.24	ns
T_{OSDCK_T}/T_{OSCKD_T}(1)	T input Setup/Hold with respect to CLK	0.49/–0.15	0.56/–0.15	0.68/–0.15	0.67/–0.25	ns
$T_{OSDCK_T2}/T_{OSCKD_T2}$(1)	T input Setup/Hold with respect to CLKDIV	0.27/–0.15	0.30/–0.15	0.34/–0.15	0.46/–0.25	ns
$T_{OSCCK_OCE}/T_{OSCKC_OCE}$	OCE input Setup/Hold with respect to CLK	0.28/0.03	0.29/0.03	0.45/0.03	0.35/–0.15	ns
T_{OSCCK_S}	SR (Reset) input Setup with respect to CLKDIV	0.41	0.46	0.75	0.70	ns
$T_{OSCCK_TCE}/T_{OSCKC_TCE}$	TCE input Setup/Hold with respect to CLK	0.28/0.01	0.30/0.01	0.45/0.01	0.31/–0.15	ns
Sequential Delays						
T_{OSCKO_OQ}	Clock to out from CLK to OQ	0.35	0.37	0.42	0.54	ns
T_{OSCKO_TQ}	Clock to out from CLK to TQ	0.41	0.43	0.49	0.63	ns
Combinatorial						
T_{OSDO_TTQ}	T input to TQ Out	0.73	0.81	0.97	1.18	ns

Notes:

1. T_{OSDCK_T2} and T_{OSCKD_T2} are reported as T_{OSDCK_T}/T_{OSCKD_T} in TRACE report.

Input/Output Delay Switching Characteristics

Table 26: **Input/Output Delay Switching Characteristics**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
IDELAYCTRL						
T_{DLYCCO_RDY}	Reset to Ready for IDELAYCTRL	3.22	3.22	3.22	3.22	µs
$F_{IDELAYCTRL_REF}$	Attribute REFCLK frequency = 200.00(1)	200.00	200.00	200.00	200.00	MHz
	Attribute REFCLK frequency = 300.00(1)	300.00	300.00	N/A	N/A	MHz
IDELAYCTRL_REF_PRECISION	REFCLK precision	±10	±10	±10	±10	MHz
$T_{IDELAYCTRL_RPW}$	Minimum Reset pulse width	52.00	52.00	52.00	52.00	ns
IDELAY/ODELAY						
$T_{IDELAYRESOLUTION}$	IDELAY/ODELAY chain delay resolution	1/(32 x 2 x F_{REF})				ps
$T_{IDELAYPAT_JIT}$ and $T_{ODELAYPAT_JIT}$	Pattern dependent period jitter in delay chain for clock pattern.(2)	0	0	0	0	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23)(3)	±5	±5	±5	±5	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23)(4)	±9	±9	±9	±9	ps per tap
$T_{IDELAY_CLK_MAX}$/ $T_{ODELAY_CLK_MAX}$	Maximum frequency of CLK input to IDELAY/ODELAY	800.00	800.00	710.00	710.00	MHz
T_{IDCCK_CE} / T_{IDCKC_CE}	CE pin Setup/Hold with respect to C for IDELAY	0.11/0.10	0.14/0.12	0.18/0.14	0.14/0.16	ns
T_{ODCCK_CE} / T_{ODCKC_CE}	CE pin Setup/Hold with respect to C for ODELAY	0.14/0.03	0.16/0.04	0.19/0.05	0.28/0.06	ns
T_{IDCCK_INC}/ T_{IDCKC_INC}	INC pin Setup/Hold with respect to C for IDELAY	0.10/0.14	0.12/0.16	0.14/0.20	0.10/0.23	ns
T_{ODCCK_INC}/ T_{ODCKC_INC}	INC pin Setup/Hold with respect to C for ODELAY	0.10/0.07	0.12/0.08	0.13/0.09	0.19/0.16	ns
T_{IDCCK_RST}/ T_{IDCKC_RST}	RST pin Setup/Hold with respect to C for IDELAY	0.13/0.08	0.14/0.10	0.16/0.12	0.22/0.19	ns
T_{ODCCK_RST}/ T_{ODCKC_RST}	RST pin Setup/Hold with respect to C for ODELAY	0.16/0.04	0.19/0.06	0.24/0.08	0.32/0.11	ns
$T_{IDDO_IDATAIN}$	Propagation delay through IDELAY	Note 5	Note 5	Note 5	Note 5	ps
$T_{ODDO_ODATAIN}$	Propagation delay through ODELAY	Note 5	Note 5	Note 5	Note 5	ps

Notes:

1. Average Tap Delay at 200 MHz = 78 ps, at 300 MHz = 52 ps.
2. When HIGH_PERFORMANCE mode is set to TRUE or FALSE.
3. When HIGH_PERFORMANCE mode is set to TRUE.
4. When HIGH_PERFORMANCE mode is set to FALSE.
5. Delay depends on IDELAY/ODELAY tap setting. See TRACE report for actual values.

DSP48E1 Switching Characteristics

Table 32: **DSP48E1 Switching Characteristics**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup and Hold Times of Data/Control Pins to the Input Register Clock						
$T_{DSPDCK_A_AREG}$/ $T_{DSPCKD_A_AREG}$	A input to A register CLK	0.24/ 0.12	0.27/ 0.14	0.31/ 0.16	0.38/ 0.12	ns
$T_{DSPDCK_B_BREG}$/$T_{DSPCKD_B_BREG}$	B input to B register CLK	0.28/ 0.13	0.32/ 0.14	0.39/ 0.15	0.51/ 0.16	ns
$T_{DSPDCK_C_CREG}$/$T_{DSPCKD_C_CREG}$	C input to C register CLK	0.15/ 0.15	0.17/ 0.17	0.20/ 0.20	0.31/ 0.21	ns
$T_{DSPDCK_D_DREG}$/$T_{DSPCKD_D_DREG}$	D input to D register CLK	0.21/ 0.19	0.27/ 0.22	0.35/ 0.26	0.46/ 0.20	ns
$T_{DSPDCK_ACIN_AREG}$/$T_{DSPCKD_ACIN_AREG}$	ACIN input to A register CLK	0.21/ 0.12	0.24/ 0.14	0.27/ 0.16	0.31/ 0.12	ns
$T_{DSPDCK_BCIN_BREG}$/$T_{DSPCKD_BCIN_BREG}$	BCIN input to B register CLK	0.22/ 0.13	0.25/ 0.14	0.30/ 0.15	0.34/ 0.16	ns
Setup and Hold Times of Data Pins to the Pipeline Register Clock						
$T_{DSPDCK_\{A, B\}_MREG_MULT}$/ $T_{DSPCKD_B_MREG_MULT}$	{A, B,} input to M register CLK using multiplier	2.04/ –0.01	2.34/ –0.01	2.79/ –0.01	3.66/ –0.06	ns
$T_{DSPDCK_\{A, B\}_ADREG}$/ $T_{DSPCKD_ D_ADREG}$	{A, D} input to AD register CLK	1.09/ –0.02	1.25/ –0.02	1.49/ –0.02	1.94/ –0.23	ns
Setup and Hold Times of Data/Control Pins to the Output Register Clock						
$T_{DSPDCK_\{A, B\}_PREG_MULT}$/ $T_{DSPCKD_\{A, B\} _PREG_MULT}$	{A, B,} input to P register CLK using multiplier	3.41/ –0.24	3.90/ –0.24	4.64/ –0.24	5.89/ –0.41	ns
$T_{DSPDCK_D_PREG_MULT}$/ $T_{DSPCKD_D_PREG_MULT}$	D input to P register CLK using multiplier	3.33/ –0.62	3.81/ –0.62	4.53/ –0.62	5.70/ –1.42	ns
$T_{DSPDCK_\{A, B\} _PREG}$/ $T_{DSPCKD_\{A, B\} _PREG}$	A or B input to P register CLK not using multiplier	1.47/ –0.24	1.68/ –0.24	2.00/ –0.24	2.37/ –0.41	ns
$T_{DSPDCK_C_PREG}$/ $T_{DSPCKD_C_PREG}$	C input to P register CLK not using multiplier	1.30/ –0.22	1.49/ –0.22	1.78/ –0.22	2.11/ –0.36	ns
$T_{DSPDCK_PCIN_PREG}$/ $T_{DSPCKD_PCIN_PREG}$	PCIN input to P register CLK	1.12/ –0.13	1.28/ –0.13	1.52/ –0.13	1.81/ –0.21	ns
Setup and Hold Times of the CE Pins						
$T_{DSPDCK_\{CEA;CEB\}_\{AREG;BREG\}}$/ $T_{DSPCKD_\{CEA;CEB\}_\{AREG;BREG\}}$	{CEA; CEB} input to {A; B} register CLK	0.30/ 0.05	0.36/ 0.06	0.44/ 0.09	0.55/ 0.09	ns
$T_{DSPDCK_CEC_CREG}$/ $T_{DSPCKD_CEC_CREG}$	CEC input to C register CLK	0.24/ 0.08	0.29/ 0.09	0.36/ 0.11	0.43/ 0.11	ns
$T_{DSPDCK_CED_DREG}$/ $T_{DSPCKD_CED_DREG}$	CED input to D register CLK	0.31/ –0.02	0.36/ –0.02	0.44/ –0.02	0.58/ 0.12	ns
$T_{DSPDCK_CEM_MREG}$/ $T_{DSPCKD_CEM_MREG}$	CEM input to M register CLK	0.26/ 0.15	0.29/ 0.17	0.33/ 0.20	0.39/ 0.25	ns
$T_{DSPDCK_CEP_PREG}$/ $T_{DSPCKD_CEP_PREG}$	CEP input to P register CLK	0.31/ 0.01	0.36/ 0.01	0.45/ 0.01	0.54/ 0.00	ns

Table 47: **Clock-Capable Clock Input Setup and Hold With PLL**

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Clock-Capable Clock Input Signal for SSTL15 Standard.(1)							
$T_{PSPLLCC}$/ $T_{PHPLLCC}$	No Delay clock-capable clock input and IFF(2) with PLL	XC7K70T	2.75/–0.32	3.04/–0.32	3.33/–0.32	2.42/–0.54	ns
		XC7K160T	2.85/–0.31	3.16/–0.31	3.46/–0.31	2.59/–0.56	ns
		XC7K325T	2.91/–0.27	3.24/–0.27	3.54/–0.27	2.80/–0.56	ns
		XC7K355T	2.79/–0.27	3.12/–0.27	3.40/–0.27	2.67/–0.52	ns
		XC7K410T	2.91/–0.27	3.24/–0.27	3.53/–0.27	2.78/–0.56	ns
		XC7K420T	2.83/–0.20	3.12/–0.20	3.41/–0.20	2.61/–0.50	ns
		XC7K480T	2.83/–0.20	3.12/–0.20	3.41/–0.20	2.61/–0.50	ns

Notes:

1. Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
2. IFF = Input Flip-Flop or Latch
3. Use IBIS to determine any duty-cycle distortion incurred using various standards.

Table 48: **Data Input Setup and Hold Times Relative to a Forwarded Clock Input Pin Using BUFIO**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to a Forwarded Clock Input Pin Using BUFIO for SSTL15 Standard.						
T_{PSCS}/T_{PHCS}	Setup/Hold of I/O clock for HR I/O banks	–0.36/1.36	–0.36/1.50	–0.36/1.70	–0.44/1.87	ns
	Setup/Hold of I/O clock for HP I/O banks	–0.34/1.39	–0.34/1.53	–0.34/1.73	–0.44/1.87	ns

Table 49: **Sample Window**

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{SAMP}	Sampling Error at Receiver Pins(1)	0.51	0.56	0.61	0.56	ns
T_{SAMP_BUFIO}	Sampling Error at Receiver Pins using BUFIO(2)	0.30	0.35	0.40	0.35	ns

Notes:

1. This parameter indicates the total sampling error of the Kintex-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the MMCM to capture the DDR input registers' edges of operation. These measurements include:
   - CLK0 MMCM jitter
   - MMCM accuracy (phase offset)
   - MMCM phase shift resolution

   These measurements do not include package or clock tree skew.
2. This parameter indicates the total sampling error of the Kintex-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the BUFIO clock network and IDELAY to capture the DDR input registers' edges of operation. These measurements do not include package or clock tree skew.

Table 53: GTX Transceiver Performance (Cont d)

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3		-2/-2L		-1[1]		-2L[2]		
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
$F_{GQPLLRANGE2}$	GTX transceiver QPLL frequency range 2		9.8 12.5		9.8 10.3125		N/A		N/A		GHz

Notes:

1. The -1 speed grade requires a 4-byte internal data width for operation above 5.0 Gb/s.
2. The -2L (0.9V) speed grade requires a 4-byte internal data width for operation above 3.8 Gb/s.
3. Data rates between 8.0 Gb/s and 9.8 Gb/s are not available.
4. For QPLL line rate range 2, the maximum line rate with the divider N set to 66 is 10.3125Gb/s.

Table 54: GTX Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$F_{GTXDRPCLK}$	GTXDRPCLK maximum frequency	175.01	175.01	156.25	125.00	MHz

Table 55: GTX Transceiver Reference Clock Switching Characteristics

Symbol	Description	Conditions	All Speed Grades			Units
			Min	Typ	Max	
F_{GCLK}	Reference clock frequency range	-3 speed grade	60		700	MHz
		All other speed grades	60		670	MHz
T_{RCLK}	Reference clock rise time	20% 80%		200		ps
T_{FCLK}	Reference clock fall time	80% 20%		200		ps
T_{DCREF}	Reference clock duty cycle	Transceiver PLL only	40	50	60	%

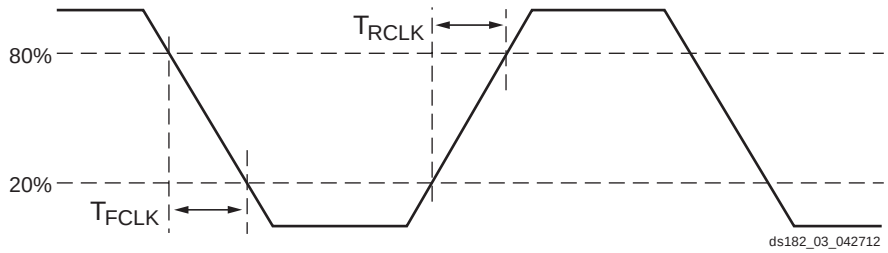

Figure 3: Reference Clock Timing Parameters