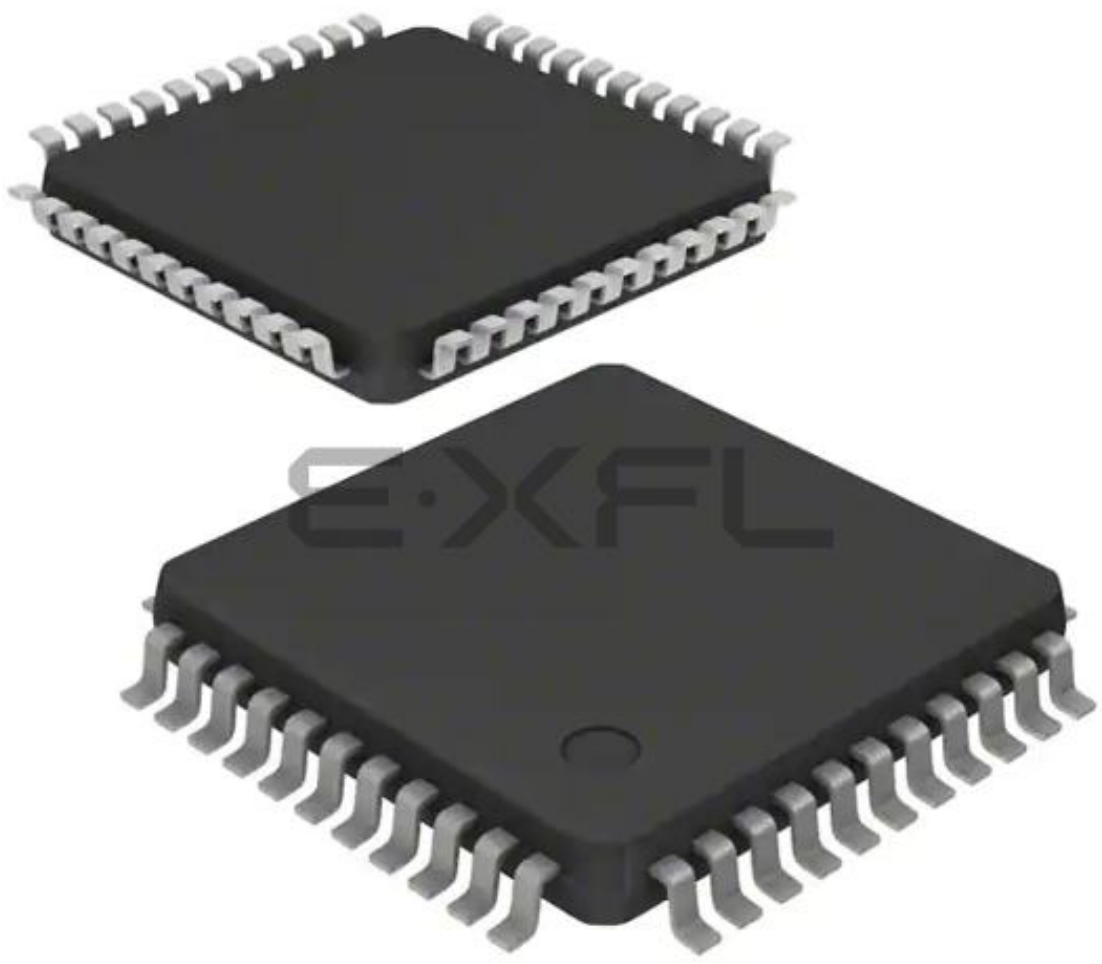

Welcome to E-XFL.COM

What is "Embedded - Microcontrollers"?

"Embedded - Microcontrollers" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "Embedded - Microcontrollers"

Details	
Product Status	Obsolete
Core Processor	Z8
Core Size	8-Bit
Speed	20MHz
Connectivity	EBI/EMI, UART/USART
Peripherals	-
Number of I/O	24
Program Memory Size	-
Program Memory Type	ROMless
EEPROM Size	-
RAM Size	236 x 8
Voltage - Supply (Vcc/Vdd)	4.5V ~ 5.5V
Data Converters	-
Oscillator Type	Internal
Operating Temperature	0°C ~ 70°C (TA)
Mounting Type	Surface Mount
Package / Case	44-LQFP
Supplier Device Package	44-LQFP (10x10)
Purchase URL	https://www.e-xfl.com/product-detail/zilog/z86c9320fsc00tr

PRODUCT SPECIFICATION

Z86C93

CMOS Z8® MULTIPLY/DIVIDE MICROCONTROLLER

FEATURES

- Complete microcontroller, up to 24 I/O lines, and up to 64 Kbytes of addressable external space each for program and data memory.
- 16-bit x 16-bit hardwired multiplier with 32-bit product in 17 clock cycles.
- 32-bit x 16-bit hardwired divider with 16-bit quotient and 16-bit remainder in 20 clock cycles.
- 256-byte register file, including 236 general-purpose registers, up to three I/O port registers and 16 status and control registers.
- 17-byte Expanded Register File, including two general-purpose registers and 15 status and control registers.
- Vectored, priority interrupts for I/O, counter/timers and UART.
- On-chip oscillator that accepts crystal or external clock drive.
- Two 16-bit counter timers with 6-bit prescalers.
- Third 16-bit counter/timer with 4-bit prescaler, one capture register and a fast decrement mode.
- Register Pointer for short, fast instructions that can access any one of the sixteen working register groups.
- Additional emulation signals SCLK, IACK, and /SYNC are made available.
- Two low power standby modes, STOP and HALT
- Full-duplex UART
- 3.3 ± 10% volt operation at 25 MHz
- 5.0 ± 10% volt operation at 20, 25 and 33 MHz

GENERAL DESCRIPTION

The Z86C93 is a CMOS ROMless Z8 microcontroller enhanced with a hardwired 16-bit x 16-bit multiplier and 32-bit/16-bit divider and three 16-bit counter timers (Figure 1). A capture register and a fast decrement mode is also provided. It is offered in 40-pin PDIP, 44-pin PLCC, 44-pin QFP and 48-pin VQFP (Figures 2, 3, 4, 5 and 6). Besides the four additional signals (SCLK, IACK, /SYNC and /WAIT), the Z86C93 is compatible with the Z86C91, yet it offers a much more powerful mathematical capability.

The Z86C93 provides up to 16 output address lines permitting an address space of up to 64 Kbytes of data and program memory each. Eight address outputs (AD7-AD0) are provided by a multiplexed, 8-bit, Address/Data bus. The remaining 8 bits can be provided by the software configuration of Port 0 to output address bits A15-A8.

ORDERING INFORMATION

Z86C93

20 MHz			
44-pin PLCC	44-pin QFP	40-pin DIP	48-pin VQFP
Z86C9320VSC	Z86C9320FSC	Z86C9320PSC	Z80C9320ASC
25 MHz			
44-pin PLCC	44-pin QFP	40-pin DIP	48-pin VQFP
Z86C9325VSC	Z86C9325FSC	Z86C9325PSC	Z80C9325ASC
33 MHz			
44-pin PLCC	44-pin QFP	40-pin DIP	48-pin VQFP
Z86C9333VSC	Z86C9333FSC	Z86C9333PSC	Z80C9333ASC

For fast results, contact your local Zilog sales office for assistance in ordering the part desired.

Package
V = Plastic Leaded Chip Carrier
P = Plastic Dual In Line Package

Longer Lead Time
F = Plastic Quad Flat Pack
A = Very Small Quad Flat Pack

Temperature
S= 0°C to +70°C

Speed
20 = 20 MHz
25 = 25 MHz
33 = 33 MHz

Environmental
C = Standard Flow

Example:
Z 86C93 33 V S C is an 86C93 33 MHz, PLCC. 0°C to +70°C, Plastic Standard Flow

Environmental Flow
Temperature
Package
Speed
Product Number
Zilog Prefix

ZILOG DOMESTIC SALES OFFICES AND TECHNICAL CENTERS

CALIFORNIA
Agoura 818-707-2160
Campbell 408-370-8120
Irvine 714-453-9701

COLORADO
Boulder 303-494-2905

FLORIDA
Largo 813-585-2533

GEORGIA
Norcross 404-448-9370

ILLINOIS
Schaumburg 708-517-8080

MINNESOTA
Minneapolis 612-944-0737

NEW HAMPSHIRE
Nashua 603-888-8590

OHIO
Independence 216-447-1480

OREGON
Portland 503-274-6250

PENNSYLVANIA
Ambler 215-653-0230

TEXAS
Dallas 214-987-9987

WASHINGTON
Seattle 206-523-3591

INTERNATIONAL SALES OFFICES

CANADA
Toronto 416-673-0634

GERMANY
Munich 49-8967-2045
Sömmerda 49-3634-23906

JAPAN
Tokyo 81-3-3587-0528

HONG KONG
Kowloon 852-7238979

KOREA
Seoul 82-2-577-3272

SINGAPORE
Singapore 65-2357155

TAIWAN
Taipei 886-2-741-3125

UNITED KINGDOM
Maidenhead 44-628-392-00

Zilog, Inc. 210 East Hacienda Ave.
Campbell, CA 95008-6600
Telephone (408) 370-8000
Telex 910-338-7621
FAX 408 370-8056

DC-2508-03