


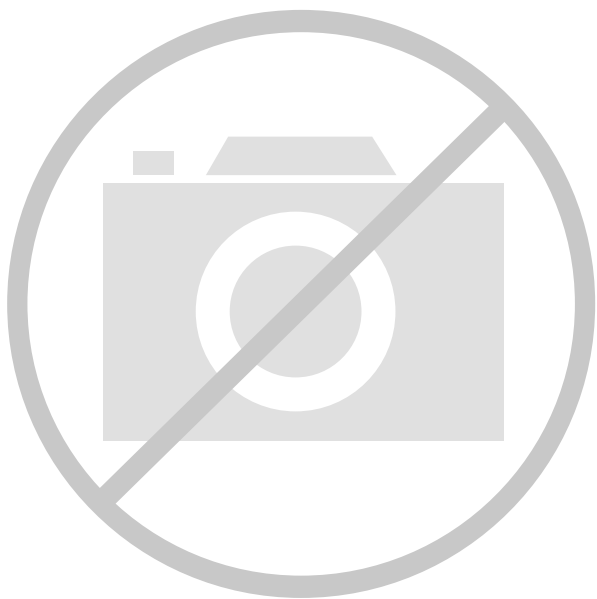

Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.


Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Obsolete
Number of LABs/CLBs	2880
Number of Logic Elements/Cells	-
Total RAM Bits	-
Number of I/O	249
Number of Gates	48000
Voltage - Supply	3V ~ 3.6V, 4.75V ~ 5.25V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 70°C (TA)
Package / Case	313-BBGA
Supplier Device Package	313-PBGA (35x35)
Purchase URL	https://www.e-xfl.com/product-detail/microsemi/a54sx32-bg313

Ordering Information

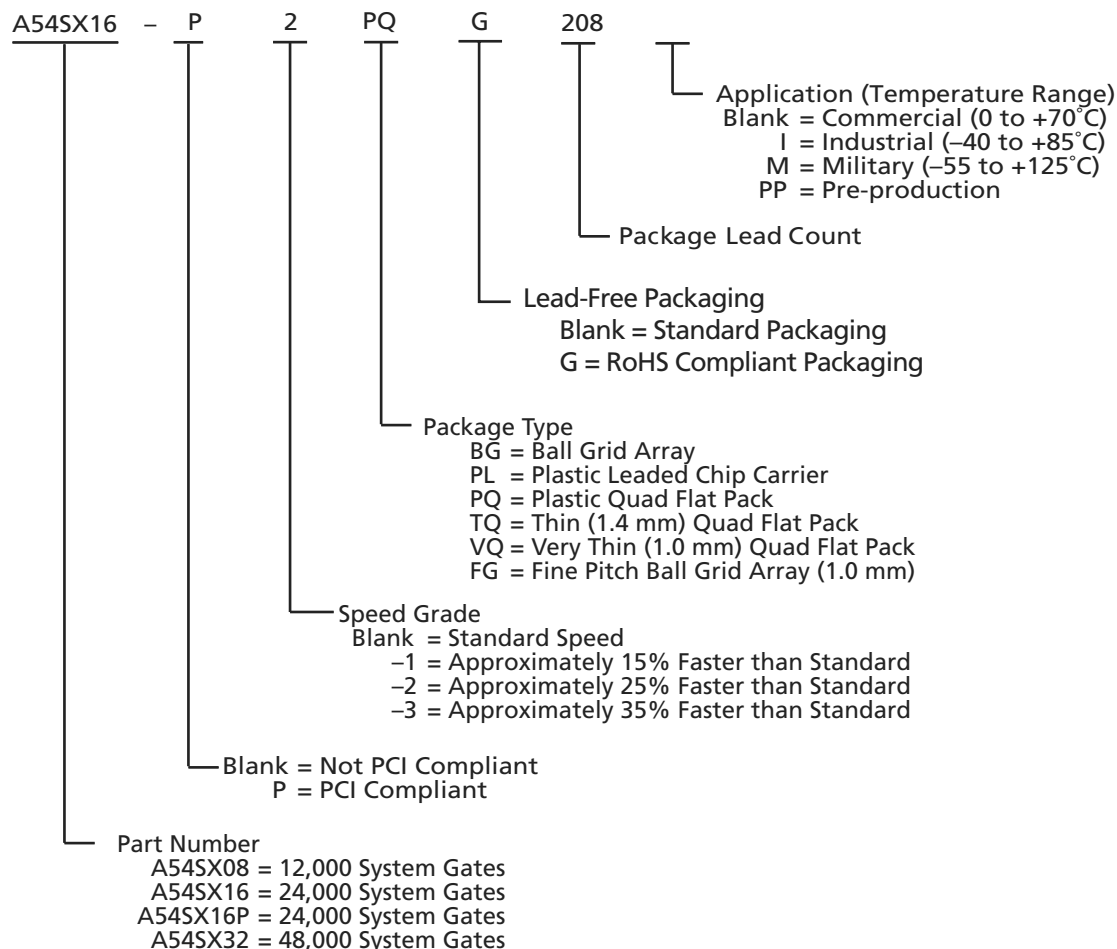

Plastic Device Resources

Device	User I/Os (including clock buffers)							
	PLCC 84-Pin	VQFP 100-Pin	PQFP 208-Pin	TQFP 144-Pin	TQFP 176-Pin	PBGA 313-Pin	PBGA 329-Pin	FBGA 144-Pin
A54SX08	69	81	130	113	128	–	–	111
A54SX16	–	81	175	–	147	–	–	–
A54SX16P	–	81	175	113	147	–	–	–
A54SX32	–	–	174	113	147	249	249	–

Note: Package Definitions (Consult your local Actel sales representative for product availability):

PLCC = Plastic Leaded Chip Carrier

PQFP = Plastic Quad Flat Pack

TQFP = Thin Quad Flat Pack

VQFP = Very Thin Quad Flat Pack

PBGA = Plastic Ball Grid Array

FBGA = Fine Pitch (1.0 mm) Ball Grid Array

Chip Architecture

The SX family chip architecture provides a unique approach to module organization and chip routing that delivers the best register/logic mix for a wide variety of new and emerging applications.

Module Organization

Actel has arranged all C-cell and R-cell logic modules into horizontal banks called *clusters*. There are two types of *clusters*: Type 1 contains two C-cells and one R-cell, while Type 2 contains one C-cell and two R-cells.

To increase design efficiency and device performance, Actel has further organized these modules into *SuperClusters* (Figure 1-4). SuperCluster 1 is a two-wide grouping of Type 1 clusters. SuperCluster 2 is a two-wide group containing one Type 1 cluster and one Type 2 cluster. SX devices feature more SuperCluster 1 modules than SuperCluster 2 modules because designers typically require significantly more combinatorial logic than flip-flops.

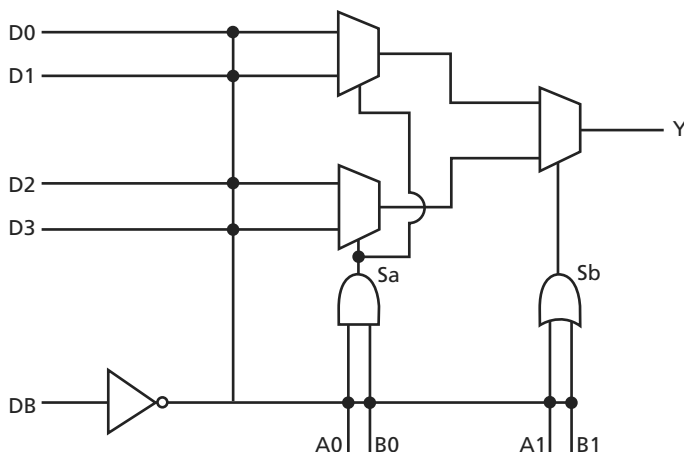


Figure 1-3 • C-Cell

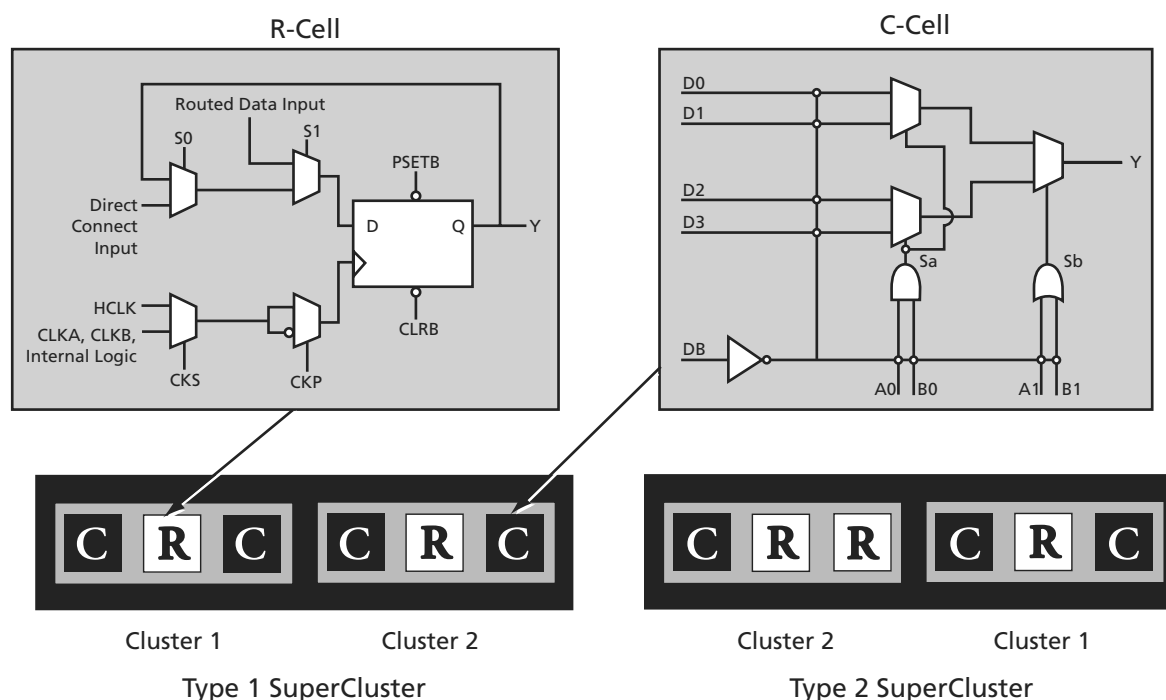


Figure 1-4 • Cluster Organization

Routing Resources

Clusters and SuperClusters can be connected through the use of two innovative local routing resources called *FastConnect* and *DirectConnect*, which enable extremely fast and predictable interconnection of modules within clusters and SuperClusters (Figure 1-5 and Figure 1-6). This routing architecture also dramatically reduces the number of antifuses required to complete a circuit, ensuring the highest possible performance.

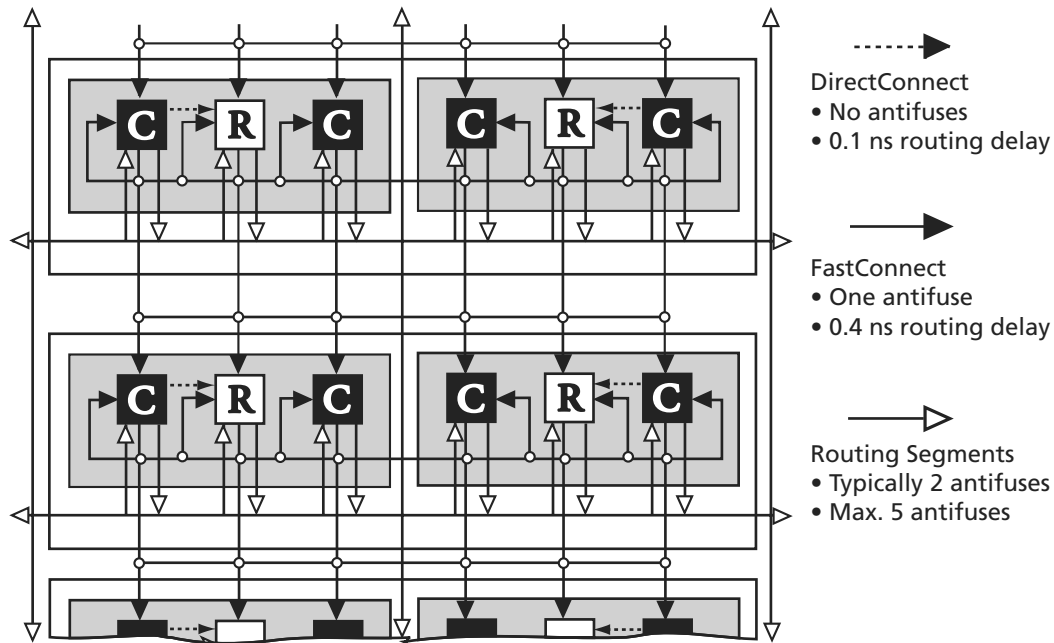


Figure 1-5 • DirectConnect and FastConnect for Type 1 SuperClusters

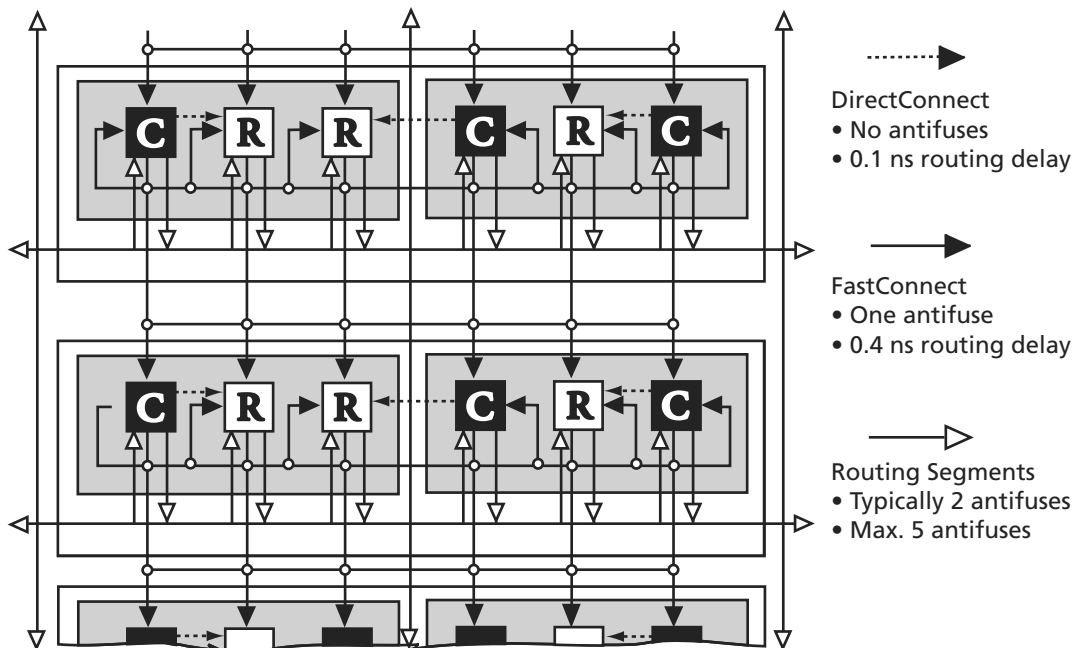


Figure 1-6 • DirectConnect and FastConnect for Type 2 SuperClusters

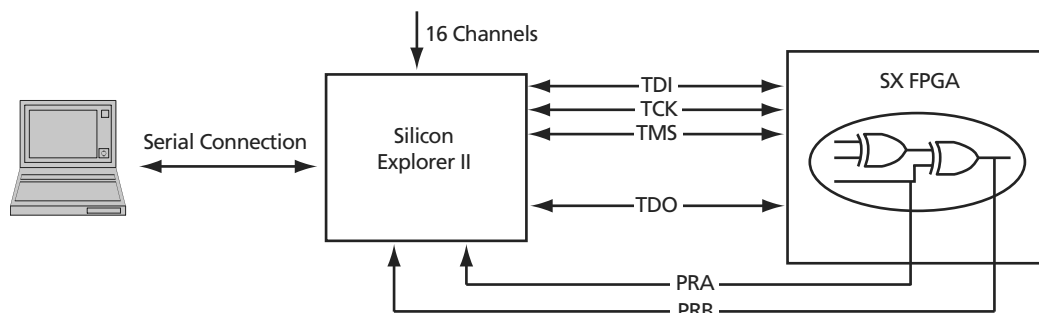


Figure 1-8 • Probe Setup

Programming

Device programming is supported through Silicon Sculptor series of programmers. In particular, Silicon Sculptor II are compact, robust, single-site and multi-site device programmer for the PC.

With standalone software, Silicon Sculptor II allows concurrent programming of multiple units from the same PC, ensuring the fastest programming times possible. Each fuse is subsequently verified by Silicon Sculptor II to insure correct programming. In addition, integrity tests ensure that no extra fuses are programmed. Silicon Sculptor II also provides extensive hardware self-testing capability.

The procedure for programming an SX device using Silicon Sculptor II are as follows:

1. Load the .AFM file
2. Select the device to be programmed
3. Begin programming

When the design is ready to go to production, Actel offers device volume-programming services either through distribution partners or via in-house programming from the factory.

For more details on programming SX devices, refer to the *Programming Antifuse Devices* application note and the *Silicon Sculptor II User's Guide*.

3.3 V / 5 V Operating Conditions

Table 1-3 • Absolute Maximum Ratings¹

Symbol	Parameter	Limits	Units
V_{CCR}^2	DC Supply Voltage ³	-0.3 to + 6.0	V
V_{CCA}^2	DC Supply Voltage	-0.3 to + 4.0	V
V_{CCI}^2	DC Supply Voltage (A54SX08, A54SX16, A54SX32)	-0.3 to + 4.0	V
V_{CCI}^2	DC Supply Voltage (A54SX16P)	-0.3 to + 6.0	V
V_I	Input Voltage	-0.5 to + 5.5	V
V_O	Output Voltage	-0.5 to + 3.6	V
I_{IO}	I/O Source Sink Current ³	-30 to + 5.0	mA
T_{STG}	Storage Temperature	-65 to +150	°C

Notes:

1. Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to absolute maximum rated conditions for extended periods may affect device reliability. Device should not be operated outside the Recommended Operating Conditions.
2. V_{CCR} in the A54SX16P must be greater than or equal to V_{CCI} during power-up and power-down sequences and during normal operation.
3. Device inputs are normally high impedance and draw extremely low current. However, when input voltage is greater than $V_{CC} + 0.5$ V or less than $GND - 0.5$ V, the internal protection diodes will forward-bias and can draw excessive current.

Figure 1-10 shows the 3.3 V PCI V/I curve and the minimum and maximum PCI drive characteristics of the A54SX16P device.

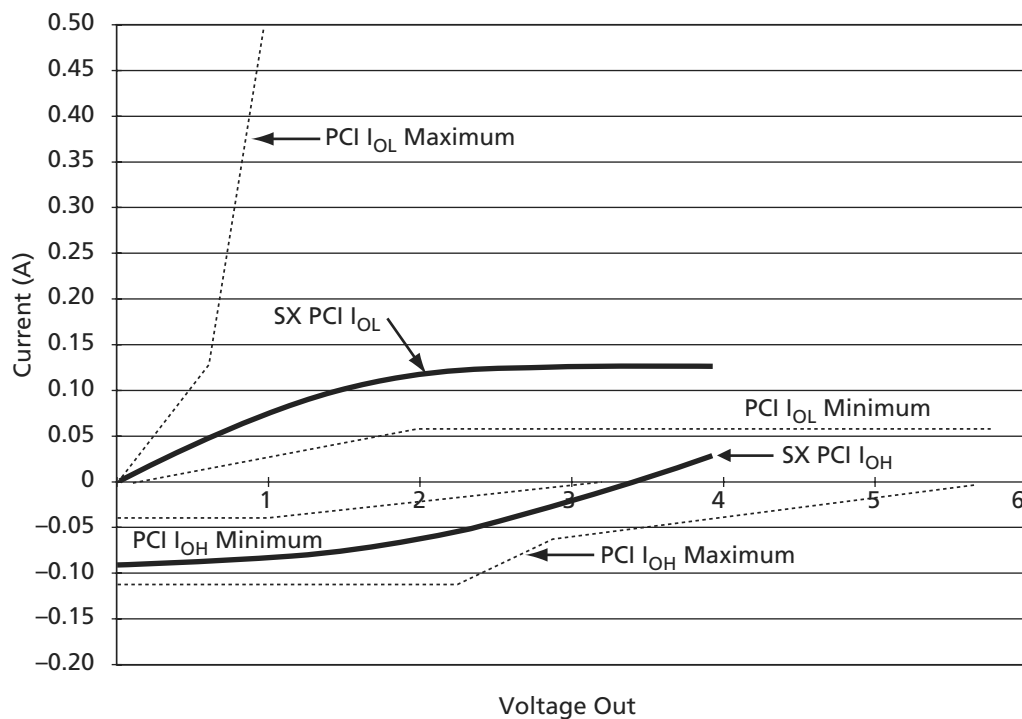


Figure 1-10 • 3.3 V PCI Curve for A54SX16P Device

$$I_{OH} = (98.0/V_{CC}) \times (V_{OUT} - V_{CC}) \times (V_{OUT} + 0.4V_{CC})$$

for $V_{CC} > V_{OUT} > 0.7 V_{CC}$

EQ 1-3

$$I_{OL} = (256/V_{CC}) \times V_{OUT} \times (V_{CC} - V_{OUT})$$

for $0 V < V_{OUT} < 0.18 V_{CC}$

EQ 1-4

Power-Up Sequencing

Table 1-10 • Power-Up Sequencing

V _{CCA}	V _{CCR}	V _{CCI}	Power-Up Sequence	Comments
A54SX08, A54SX16, A54SX32				
3.3 V	5.0 V	3.3 V	5.0 V First 3.3 V Second	No possible damage to device
			3.3 V First 5.0 V Second	Possible damage to device
A54SX16P				
3.3 V	3.3 V	3.3 V	3.3 V Only	No possible damage to device
3.3 V	5.0 V	3.3 V	5.0 V First 3.3 V Second	No possible damage to device
			3.3 V First 5.0 V Second	Possible damage to device
3.3 V	5.0 V	5.0 V	5.0 V First 3.3 V Second	No possible damage to device
			3.3 V First 5.0 V Second	No possible damage to device

Note: No inputs should be driven (high or low) before completion of power-up.

Power-Down Sequencing

Table 1-11 • Power-Down Sequencing

V _{CCA}	V _{CCR}	V _{CCI}	Power-Down Sequence	Comments
A54SX08, A54SX16, A54SX32				
3.3 V	5.0 V	3.3 V	5.0 V First 3.3 V Second	Possible damage to device
			3.3 V First 5.0 V Second	No possible damage to device
A54SX16P				
3.3 V	3.3 V	3.3 V	3.3 V Only	No possible damage to device
3.3 V	5.0 V	3.3 V	5.0 V First 3.3 V Second	Possible damage to device
			3.3 V First 5.0 V Second	No possible damage to device
3.3 V	5.0 V	5.0 V	5.0 V First 3.3 V Second	No possible damage to device
			3.3 V First 5.0 V Second	No possible damage to device

Note: No inputs should be driven (high or low) after the beginning of the power-down sequence.

Table 1-13 shows capacitance values for various devices.

Table 1-13 • Capacitance Values for Devices

	A545X08	A545X16	A545X16P	A545X32
C_{EQM} (pF)	4.0	4.0	4.0	4.0
C_{EQI} (pF)	3.4	3.4	3.4	3.4
C_{EQO} (pF)	4.7	4.7	4.7	4.7
C_{EQCR} (pF)	1.6	1.6	1.6	1.6
C_{EQHV}	0.615	0.615	0.615	0.615
C_{EQHF}	60	96	96	140
r_1 (pF)	87	138	138	171
r_2 (pF)	87	138	138	171

Table 1-14 • Power Consumption Guidelines

Description	Power Consumption Guideline
Logic Modules (m)	20% of modules
Inputs Switching (n)	# inputs/4
Outputs Switching (p)	# outputs/4
First Routed Array Clock Loads (q_1)	20% of register cells
Second Routed Array Clock Loads (q_2)	20% of register cells
Load Capacitance (C_L)	35 pF
Average Logic Module Switching Rate (f_m)	$f/10$
Average Input Switching Rate (f_n)	$f/5$
Average Output Switching Rate (f_p)	$f/10$
Average First Routed Array Clock Rate (f_{q1})	$f/2$
Average Second Routed Array Clock Rate (f_{q2})	$f/2$
Average Dedicated Array Clock Rate (f_{s1})	f
Dedicated Clock Array Clock Loads (s_1)	20% of regular modules

Follow the steps below to estimate power consumption. The values provided for the sample calculation below are for the shift register design above. This method for estimating power consumption is conservative and the actual power consumption of your design may be less than the estimated power consumption.

The total power dissipation for the SX family is the sum of the AC power dissipation and the DC power dissipation.

$$P_{\text{Total}} = P_{\text{AC}} (\text{dynamic power}) + P_{\text{DC}} (\text{static power})$$

EQ 1-9

Guidelines for Calculating Power Consumption

The power consumption guidelines are meant to represent worst-case scenarios so that they can be generally used to predict the upper limits of power dissipation. These guidelines are shown in Table 1-14.

Sample Power Calculation

One of the designs used to characterize the SX family was a 528 bit serial-in, serial-out shift register. The design utilized 100 percent of the dedicated flip-flops of an A545X16P device. A pattern of 0101... was clocked into the device at frequencies ranging from 1 MHz to 200 MHz. Shifting in a series of 0101... caused 50 percent of the flip-flops to toggle from low to high at every clock cycle.

AC Power Dissipation

$$P_{\text{AC}} = P_{\text{Module}} + P_{\text{RCLKA Net}} + P_{\text{RCLKB Net}} + P_{\text{HCLK Net}} + P_{\text{Output Buffer}} + P_{\text{Input Buffer}}$$

EQ 1-10

$$P_{\text{AC}} = V_{\text{CCA}}^2 \times [(m \times C_{\text{EQM}} \times f_m)_{\text{Module}} + (n \times C_{\text{EQI}} \times f_n)_{\text{Input Buffer}} + (p \times (C_{\text{EQO}} + C_L) \times f_p)_{\text{Output Buffer}} + (0.5 (q_1 \times C_{\text{EQCR}} \times f_{q1}) + (r_1 \times f_{q1}))_{\text{RCLKA}} + (0.5 (q_2 \times C_{\text{EQCR}} \times f_{q2}) + (r_2 \times f_{q2}))_{\text{RCLKB}} + (0.5 (s_1 \times C_{\text{EQHV}} \times f_{s1}) + (C_{\text{EQHF}} \times f_{s1}))_{\text{HCLK}}]$$

EQ 1-11

Figure 1-11 shows the characterized power dissipation numbers for the shift register design using frequencies ranging from 1 MHz to 200 MHz.

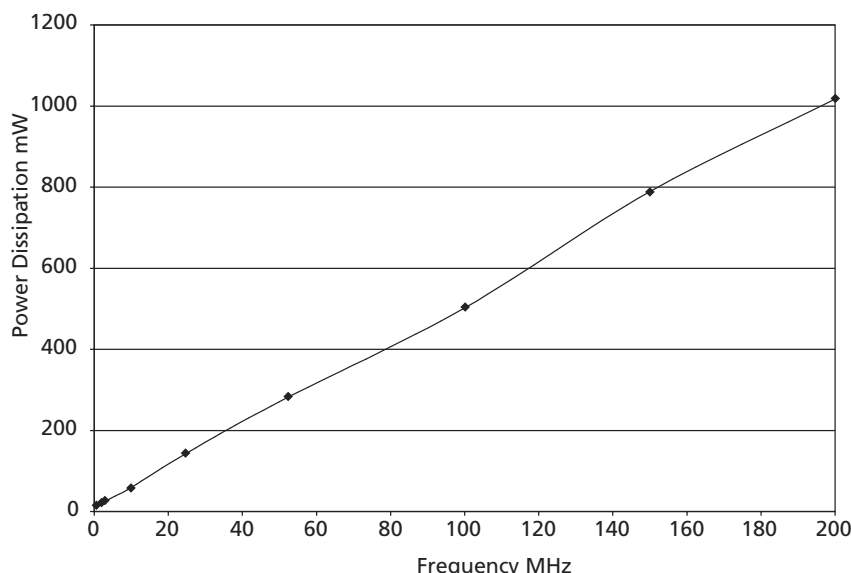


Figure 1-11 • Power Dissipation

Junction Temperature (T_j)

The temperature that you select in Designer Series software is the junction temperature, not ambient temperature. This is an important distinction because the heat generated from dynamic power consumption is usually hotter than the ambient temperature. Use the equation below to calculate junction temperature.

$$\text{Junction Temperature} = \Delta T + T_a$$

EQ 1-13

Where:

T_a = Ambient Temperature

ΔT = Temperature gradient between junction (silicon) and ambient

$$\Delta T = \theta_{ja} \times P$$

P = Power calculated from Estimating Power Consumption section

θ_{ja} = Junction to ambient of package. θ_{ja} numbers are located in the "Package Thermal Characteristics" section.

Package Thermal Characteristics

The device junction to case thermal characteristic is θ_{jc} , and the junction to ambient air characteristic is θ_{ja} . The thermal characteristics for θ_{ja} are shown with two different air flow rates.

The maximum junction temperature is 150 °C.

A sample calculation of the absolute maximum power dissipation allowed for a TQFP 176-pin package at commercial temperature and still air is as follows:

$$\text{Maximum Power Allowed} = \frac{\text{Max. junction temp. (°C)} - \text{Max. ambient temp. (°C)}}{\theta_{ja} \text{ (°C/W)}} = \frac{150^\circ\text{C} - 70^\circ\text{C}}{28^\circ\text{C/W}} = 2.86 \text{ W}$$

EQ 1-14

A54SX16 Timing Characteristics

Table 1-18 • **A54SX16 Timing Characteristics**
(Worst-Case Commercial Conditions, $V_{CCR} = 4.75\text{ V}$, $V_{CCA}, V_{CCI} = 3.0\text{ V}$, $T_J = 70^\circ\text{C}$)

Parameter	Description	'-3' Speed		'-2' Speed		'-1' Speed		'Std' Speed		
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
C-Cell Propagation Delays ¹										
t _{PD}	Internal Array Module	0.6		0.7		0.8		0.9		ns
Predicted Routing Delays ²										
t _{DC}	FO = 1 Routing Delay, Direct Connect	0.1		0.1		0.1		0.1		ns
t _{FC}	FO = 1 Routing Delay, Fast Connect	0.3		0.4		0.4		0.5		ns
t _{RD1}	FO = 1 Routing Delay	0.3		0.4		0.4		0.5		ns
t _{RD2}	FO = 2 Routing Delay	0.6		0.7		0.8		0.9		ns
t _{RD3}	FO = 3 Routing Delay	0.8		0.9		1.0		1.2		ns
t _{RD4}	FO = 4 Routing Delay	1.0		1.2		1.4		1.6		ns
t _{RD8}	FO = 8 Routing Delay	1.9		2.2		2.5		2.9		ns
t _{RD12}	FO = 12 Routing Delay	2.8		3.2		3.7		4.3		ns
R-Cell Timing										
t _{RCO}	Sequential Clock-to-Q	0.8		1.1		1.2		1.4		ns
t _{CLR}	Asynchronous Clear-to-Q	0.5		0.6		0.7		0.8		ns
t _{PRESET}	Asynchronous Preset-to-Q	0.7		0.8		0.9		1.0		ns
t _{SUD}	Flip-Flop Data Input Set-Up	0.5		0.5		0.7		0.8		ns
t _{HD}	Flip-Flop Data Input Hold	0.0		0.0		0.0		0.0		ns
t _{WASYN}	Asynchronous Pulse Width	1.4		1.6		1.8		2.1		ns
Input Module Propagation Delays										
t _{INYH}	Input Data Pad-to-Y HIGH	1.5		1.7		1.9		2.2		ns
t _{INYL}	Input Data Pad-to-Y LOW	1.5		1.7		1.9		2.2		ns
Predicted Input Routing Delays ²										
t _{IRD1}	FO = 1 Routing Delay	0.3		0.4		0.4		0.5		ns
t _{IRD2}	FO = 2 Routing Delay	0.6		0.7		0.8		0.9		ns
t _{IRD3}	FO = 3 Routing Delay	0.8		0.9		1.0		1.2		ns
t _{IRD4}	FO = 4 Routing Delay	1.0		1.2		1.4		1.6		ns
t _{IRD8}	FO = 8 Routing Delay	1.9		2.2		2.5		2.9		ns
t _{IRD12}	FO = 12 Routing Delay	2.8		3.2		3.7		4.3		ns

Notes:

- For dual-module macros, use $t_{PD} + t_{RD1} + t_{PDn}$, $t_{RCO} + t_{RD1} + t_{PDn}$, or $t_{PD1} + t_{RD1} + t_{SUD}$, whichever is appropriate.
- Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual worst-case performance. Post-route timing is based on actual routing delay measurements performed on the device prior to shipment.
- Delays based on 35 pF loading, except t_{ENZL} and t_{ENZH} . For t_{ENZL} and t_{ENZH} , the loading is 5 pF.

Table 1-18 • A54SX16 Timing Characteristics (Continued)
(Worst-Case Commercial Conditions, $V_{CCR} = 4.75\text{ V}$, $V_{CCA}, V_{CCI} = 3.0\text{ V}$, $T_J = 70^\circ\text{C}$)

Parameter	Description	'-3' Speed		'-2' Speed		'-1' Speed		'Std' Speed		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Dedicated (Hardwired) Array Clock Network										
t _{HCKH}	Input LOW to HIGH (pad to R-Cell input)	1.2		1.4		1.5		1.8		ns
t _{HCKL}	Input HIGH to LOW (pad to R-Cell input)	1.2		1.4		1.6		1.9		ns
t _{HPWH}	Minimum Pulse Width HIGH	1.4		1.6		1.8		2.1		ns
t _{HPWL}	Minimum Pulse Width LOW	1.4		1.6		1.8		2.1		ns
t _{HCKSW}	Maximum Skew	0.2		0.2		0.3		0.3		ns
t _{HP}	Minimum Period	2.7		3.1		3.6		4.2		ns
f _{HMAX}	Maximum Frequency	350		320		280		240		MHz
Routed Array Clock Networks										
t _{RCKH}	Input LOW to HIGH (light load) (pad to R-Cell input)	1.6		1.8		2.1		2.5		ns
t _{RCKL}	Input HIGH to LOW (light load) (pad to R-Cell input)	1.8		2.0		2.3		2.7		ns
t _{RCKH}	Input LOW to HIGH (50% load) (pad to R-Cell input)	1.8		2.1		2.5		2.8		ns
t _{RCKL}	Input HIGH to LOW (50% load) (pad to R-Cell input)	2.0		2.2		2.5		3.0		ns
t _{RCKH}	Input LOW to HIGH (100% load) (pad to R-Cell input)	1.8		2.1		2.4		2.8		ns
t _{RCKL}	Input HIGH to LOW (100% load) (pad to R-Cell input)	2.0		2.2		2.5		3.0		ns
t _{RPWH}	Min. Pulse Width HIGH	2.1		2.4		2.7		3.2		ns
t _{RPWL}	Min. Pulse Width LOW	2.1		2.4		2.7		3.2		ns
t _{RCKSW}	Maximum Skew (light load)	0.5		0.5		0.5		0.7		ns
t _{RCKSW}	Maximum Skew (50% load)	0.5		0.6		0.7		0.8		ns
t _{RCKSW}	Maximum Skew (100% load)	0.5		0.6		0.7		0.8		ns
TTL Output Module Timing ³										
t _{DLH}	Data-to-Pad LOW to HIGH	1.6		1.9		2.1		2.5		ns
t _{DHL}	Data-to-Pad HIGH to LOW	1.6		1.9		2.1		2.5		ns
t _{ENZL}	Enable-to-Pad, Z to L	2.1		2.4		2.8		3.2		ns
t _{ENZH}	Enable-to-Pad, Z to H	2.3		2.7		3.1		3.6		ns
t _{ENLZ}	Enable-to-Pad, L to Z	1.4		1.7		1.9		2.2		ns
t _{ENHZ}	Enable-to-Pad, H to Z	1.3		1.5		1.7		2.0		ns

Notes:

1. For dual-module macros, use $t_{PD} + t_{RD1} + t_{PDn}$, $t_{RCO} + t_{RD1} + t_{PDn}$, or $t_{PD1} + t_{RD1} + t_{SUD}$, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual worst-case performance. Post-route timing is based on actual routing delay measurements performed on the device prior to shipment.
3. Delays based on 35 pF loading, except t_{ENZL} and t_{ENZH} . For t_{ENZL} and t_{ENZH} , the loading is 5 pF.

Table 1-19 • A54SX16P Timing Characteristics (Continued)

(Worst-Case Commercial Conditions, $V_{CCR} = 4.75\text{ V}$, $V_{CCA}, V_{CCI} = 3.0\text{ V}$, $T_J = 70^\circ\text{C}$)

Parameter	Description	'-3' Speed		'-2' Speed		'-1' Speed		'Std' Speed		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
TTL/PCI Output Module Timing										
t _{DLH}	Data-to-Pad LOW to HIGH	1.5		1.7		2.0		2.3		ns
t _{DHL}	Data-to-Pad HIGH to LOW	1.9		2.2		2.4		2.9		ns
t _{ENZL}	Enable-to-Pad, Z to L	2.3		2.6		3.0		3.5		ns
t _{ENZH}	Enable-to-Pad, Z to H	1.5		1.7		1.9		2.3		ns
t _{ENLZ}	Enable-to-Pad, L to Z	2.7		3.1		3.5		4.1		ns
t _{ENHZ}	Enable-to-Pad, H to Z	2.9		3.3		3.7		4.4		ns
PCI Output Module Timing ³										
t _{DLH}	Data-to-Pad LOW to HIGH	1.8		2.0		2.3		2.7		ns
t _{DHL}	Data-to-Pad HIGH to LOW	1.7		2.0		2.2		2.6		ns
t _{ENZL}	Enable-to-Pad, Z to L	0.8		1.0		1.1		1.3		ns
t _{ENZH}	Enable-to-Pad, Z to H	1.2		1.2		1.5		1.8		ns
t _{ENLZ}	Enable-to-Pad, L to Z	1.0		1.1		1.3		1.5		ns
t _{ENHZ}	Enable-to-Pad, H to Z	1.1		1.3		1.5		1.7		ns
TTL Output Module Timing										
t _{DLH}	Data-to-Pad LOW to HIGH	2.1		2.5		2.8		3.3		ns
t _{DHL}	Data-to-Pad HIGH to LOW	2.0		2.3		2.6		3.1		ns
t _{ENZL}	Enable-to-Pad, Z to L	2.5		2.9		3.2		3.8		ns
t _{ENZH}	Enable-to-Pad, Z to H	3.0		3.5		3.9		4.6		ns
t _{ENLZ}	Enable-to-Pad, L to Z	2.3		2.7		3.1		3.6		ns
t _{ENHZ}	Enable-to-Pad, H to Z	2.9		3.3		3.7		4.4		ns

Note:

1. For dual-module macros, use $t_{PD} + t_{RD1} + t_{PDn}$, $t_{RCO} + t_{RD1} + t_{PDn}$, or $t_{PD1} + t_{RD1} + t_{SUD}$, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual worst-case performance. Post-route timing is based on actual routing delay measurements performed on the device prior to shipment.
3. Delays based on 10 pF loading.

Table 1-20 • A54SX32 Timing Characteristics (Continued)
(Worst-Case Commercial Conditions, $V_{CCR} = 4.75\text{ V}$, $V_{CCA}, V_{CCI} = 3.0\text{ V}$, $T_J = 70^\circ\text{C}$)

		'-3' Speed		'-2' Speed		'-1' Speed		'Std' Speed		
Parameter	Description	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Units
Dedicated (Hardwired) Array Clock Network										
t _{HCKH}	Input LOW to HIGH (pad to R-Cell input)	1.9		2.1		2.4		2.8		ns
t _{HCKL}	Input HIGH to LOW (pad to R-Cell input)	1.9		2.1		2.4		2.8		ns
t _{HPWH}	Minimum Pulse Width HIGH	1.4		1.6		1.8		2.1		ns
t _{HPWL}	Minimum Pulse Width LOW	1.4		1.6		1.8		2.1		ns
t _{HCKSW}	Maximum Skew	0.3		0.4		0.4		0.5		ns
t _{HP}	Minimum Period	2.7		3.1		3.6		4.2		ns
f _{HMAX}	Maximum Frequency	350		320		280		240		MHz
Routed Array Clock Networks										
t _{RCKH}	Input LOW to HIGH (light load) (pad to R-Cell input)	2.4		2.7		3.0		3.5		ns
t _{RCKL}	Input HIGH to LOW (light load) (pad to R-Cell input)	2.4		2.7		3.1		3.6		ns
t _{RCKH}	Input LOW to HIGH (50% load) (pad to R-Cell input)	2.7		3.0		3.5		4.1		ns
t _{RCKL}	Input HIGH to LOW (50% load) (pad to R-Cell input)	2.7		3.1		3.6		4.2		ns
t _{RCKH}	Input LOW to HIGH (100% load) (pad to R-Cell input)	2.7		3.1		3.5		4.1		ns
t _{RCKL}	Input HIGH to LOW (100% load) (pad to R-Cell input)	2.8		3.2		3.6		4.3		ns
t _{RPWH}	Min. Pulse Width HIGH	2.1		2.4		2.7		3.2		ns
t _{RPWL}	Min. Pulse Width LOW	2.1		2.4		2.7		3.2		ns
t _{RCKSW}	Maximum Skew (light load)	0.85		0.98		1.1		1.3		ns
t _{RCKSW}	Maximum Skew (50% load)	1.23		1.4		1.6		1.9		ns
t _{RCKSW}	Maximum Skew (100% load)	1.30		1.5		1.7		2.0		ns
TTL Output Module Timing ³										
t _{DLH}	Data-to-Pad LOW to HIGH	1.6		1.9		2.1		2.5		ns
t _{DHL}	Data-to-Pad HIGH to LOW	1.6		1.9		2.1		2.5		ns
t _{ENZL}	Enable-to-Pad, Z to L	2.1		2.4		2.8		3.2		ns
t _{ENZH}	Enable-to-Pad, Z to H	2.3		2.7		3.1		3.6		ns
t _{ENLZ}	Enable-to-Pad, L to Z	1.4		1.7		1.9		2.2		ns
t _{ENHZ}	Enable-to-Pad, H to Z	1.3		1.5		1.7		2.0		ns

Note:

- For dual-module macros, use $t_{PD} + t_{RD1} + t_{PDn}$, $t_{RCO} + t_{RD1} + t_{PDn}$, or $t_{PD1} + t_{RD1} + t_{SUD}$, whichever is appropriate.
- Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual worst-case performance. Post-route timing is based on actual routing delay measurements performed on the device prior to shipment.
- Delays based on 35 pF loading, except t_{ENZL} and t_{ENZH} . For t_{ENZL} and t_{ENZH} the loading is 5 pF.

Package Pin Assignments

84-Pin PLCC

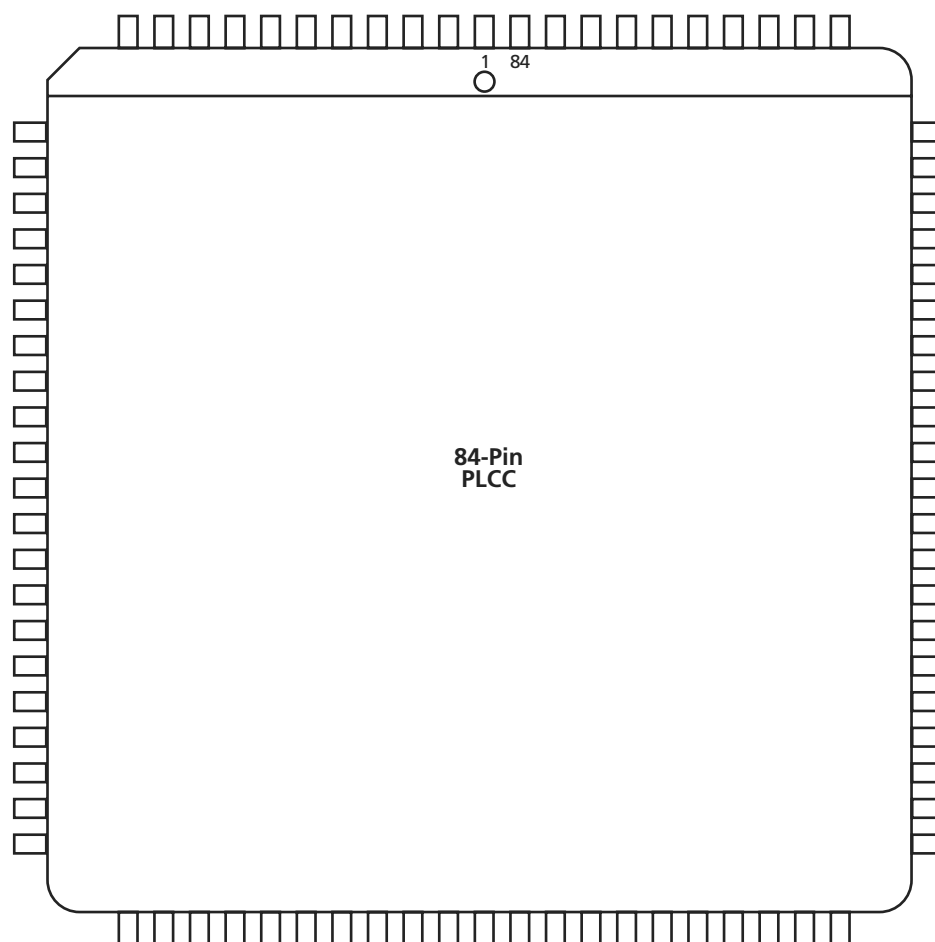


Figure 2-1 • 84-Pin PLCC (Top View)

Note

For Package Manufacturing and Environmental information, visit the Package Resource center at <http://www.actel.com/products/rescenter/package/index.html>.

208-Pin PQFP

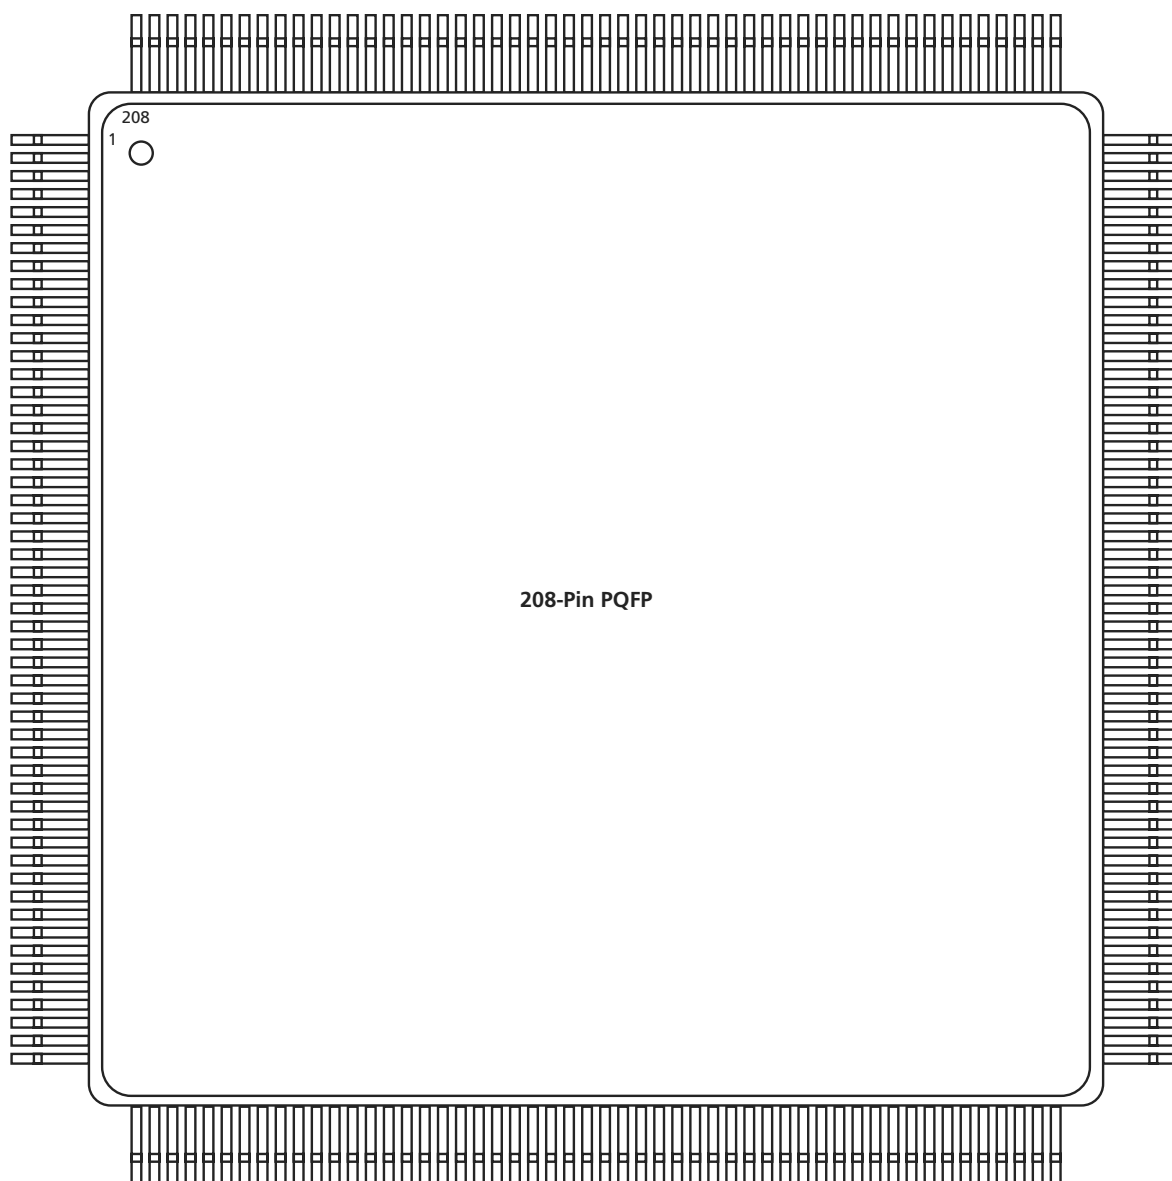


Figure 2-2 • 208-Pin PQFP (Top View)

Note

For Package Manufacturing and Environmental information, visit the Package Resource center at <http://www.actel.com/products/rescenter/package/index.html>.

176-Pin TQFP			
Pin Number	A54SX08 Function	A54SX16, A54SX16P Function	A54SX32 Function
1	GND	GND	GND
2	TDI, I/O	TDI, I/O	TDI, I/O
3	NC	I/O	I/O
4	I/O	I/O	I/O
5	I/O	I/O	I/O
6	I/O	I/O	I/O
7	I/O	I/O	I/O
8	I/O	I/O	I/O
9	I/O	I/O	I/O
10	TMS	TMS	TMS
11	V _{CCI}	V _{CCI}	V _{CCI}
12	NC	I/O	I/O
13	I/O	I/O	I/O
14	I/O	I/O	I/O
15	I/O	I/O	I/O
16	I/O	I/O	I/O
17	I/O	I/O	I/O
18	I/O	I/O	I/O
19	I/O	I/O	I/O
20	I/O	I/O	I/O
21	GND	GND	GND
22	V _{CCA}	V _{CCA}	V _{CCA}
23	GND	GND	GND
24	I/O	I/O	I/O
25	I/O	I/O	I/O
26	I/O	I/O	I/O
27	I/O	I/O	I/O
28	I/O	I/O	I/O
29	I/O	I/O	I/O
30	I/O	I/O	I/O
31	I/O	I/O	I/O
32	V _{CCI}	V _{CCI}	V _{CCI}
33	V _{CCA}	V _{CCA}	V _{CCA}
34	I/O	I/O	I/O

176-Pin TQFP			
Pin Number	A54SX08 Function	A54SX16, A54SX16P Function	A54SX32 Function
35	I/O	I/O	I/O
36	I/O	I/O	I/O
37	I/O	I/O	I/O
38	I/O	I/O	I/O
39	I/O	I/O	I/O
40	NC	I/O	I/O
41	I/O	I/O	I/O
42	NC	I/O	I/O
43	I/O	I/O	I/O
44	GND	GND	GND
45	I/O	I/O	I/O
46	I/O	I/O	I/O
47	I/O	I/O	I/O
48	I/O	I/O	I/O
49	I/O	I/O	I/O
50	I/O	I/O	I/O
51	I/O	I/O	I/O
52	V _{CCI}	V _{CCI}	V _{CCI}
53	I/O	I/O	I/O
54	NC	I/O	I/O
55	I/O	I/O	I/O
56	I/O	I/O	I/O
57	NC	I/O	I/O
58	I/O	I/O	I/O
59	I/O	I/O	I/O
60	I/O	I/O	I/O
61	I/O	I/O	I/O
62	I/O	I/O	I/O
63	I/O	I/O	I/O
64	PRB, I/O	PRB, I/O	PRB, I/O
65	GND	GND	GND
66	V _{CCA}	V _{CCA}	V _{CCA}
67	V _{CCR}	V _{CCR}	V _{CCR}
68	I/O	I/O	I/O

176-Pin TQFP			
Pin Number	A54SX08 Function	A54SX16, A54SX16P Function	A54SX32 Function
69	HCLK	HCLK	HCLK
70	I/O	I/O	I/O
71	I/O	I/O	I/O
72	I/O	I/O	I/O
73	I/O	I/O	I/O
74	I/O	I/O	I/O
75	I/O	I/O	I/O
76	I/O	I/O	I/O
77	I/O	I/O	I/O
78	I/O	I/O	I/O
79	NC	I/O	I/O
80	I/O	I/O	I/O
81	NC	I/O	I/O
82	V _{CCI}	V _{CCI}	V _{CCI}
83	I/O	I/O	I/O
84	I/O	I/O	I/O
85	I/O	I/O	I/O
86	I/O	I/O	I/O
87	TDO, I/O	TDO, I/O	TDO, I/O
88	I/O	I/O	I/O
89	GND	GND	GND
90	NC	I/O	I/O
91	NC	I/O	I/O
92	I/O	I/O	I/O
93	I/O	I/O	I/O
94	I/O	I/O	I/O
95	I/O	I/O	I/O
96	I/O	I/O	I/O
97	I/O	I/O	I/O
98	V _{CCA}	V _{CCA}	V _{CCA}
99	V _{CCI}	V _{CCI}	V _{CCI}
100	I/O	I/O	I/O
101	I/O	I/O	I/O
102	I/O	I/O	I/O

176-Pin TQFP			
Pin Number	A54SX08 Function	A54SX16, A54SX16P Function	A54SX32 Function
103	I/O	I/O	I/O
104	I/O	I/O	I/O
105	I/O	I/O	I/O
106	I/O	I/O	I/O
107	I/O	I/O	I/O
108	GND	GND	GND
109	V _{CCA}	V _{CCA}	V _{CCA}
110	GND	GND	GND
111	I/O	I/O	I/O
112	I/O	I/O	I/O
113	I/O	I/O	I/O
114	I/O	I/O	I/O
115	I/O	I/O	I/O
116	I/O	I/O	I/O
117	I/O	I/O	I/O
118	NC	I/O	I/O
119	I/O	I/O	I/O
120	NC	I/O	I/O
121	NC	I/O	I/O
122	V _{CCA}	V _{CCA}	V _{CCA}
123	GND	GND	GND
124	V _{CCI}	V _{CCI}	V _{CCI}
125	I/O	I/O	I/O
126	I/O	I/O	I/O
127	I/O	I/O	I/O
128	I/O	I/O	I/O
129	I/O	I/O	I/O
130	I/O	I/O	I/O
131	NC	I/O	I/O
132	NC	I/O	I/O
133	GND	GND	GND
134	I/O	I/O	I/O
135	I/O	I/O	I/O
136	I/O	I/O	I/O

176-Pin TQFP			
Pin Number	A54SX08 Function	A54SX16, A54SX16P Function	A54SX32 Function
137	I/O	I/O	I/O
138	I/O	I/O	I/O
139	I/O	I/O	I/O
140	V _{CCI}	V _{CCI}	V _{CCI}
141	I/O	I/O	I/O
142	I/O	I/O	I/O
143	I/O	I/O	I/O
144	I/O	I/O	I/O
145	I/O	I/O	I/O
146	I/O	I/O	I/O
147	I/O	I/O	I/O
148	I/O	I/O	I/O
149	I/O	I/O	I/O
150	I/O	I/O	I/O
151	I/O	I/O	I/O
152	CLKA	CLKA	CLKA
153	CLKB	CLKB	CLKB
154	V _{CCR}	V _{CCR}	V _{CCR}
155	GND	GND	GND
156	V _{CCA}	V _{CCA}	V _{CCA}

176-Pin TQFP			
Pin Number	A54SX08 Function	A54SX16, A54SX16P Function	A54SX32 Function
157	PRA, I/O	PRA, I/O	PRA, I/O
158	I/O	I/O	I/O
159	I/O	I/O	I/O
160	I/O	I/O	I/O
161	I/O	I/O	I/O
162	I/O	I/O	I/O
163	I/O	I/O	I/O
164	I/O	I/O	I/O
165	I/O	I/O	I/O
166	I/O	I/O	I/O
167	I/O	I/O	I/O
168	NC	I/O	I/O
169	V _{CCI}	V _{CCI}	V _{CCI}
170	I/O	I/O	I/O
171	NC	I/O	I/O
172	NC	I/O	I/O
173	NC	I/O	I/O
174	I/O	I/O	I/O
175	I/O	I/O	I/O
176	TCK, I/O	TCK, I/O	TCK, I/O

313-Pin PBGA		313-Pin PBGA		313-Pin PBGA		313-Pin PBGA	
Pin Number	A54SX32 Function	Pin Number	A54SX32 Function	Pin Number	A54SX32 Function	Pin Number	A54SX32 Function
H20	I/O	L25	I/O	R5	I/O	V10	I/O
H22	V _{CCI}	M2	I/O	R7	I/O	V12	I/O
H24	I/O	M4	I/O	R9	I/O	V14	I/O
J1	I/O	M6	I/O	R11	I/O	V16	NC
J3	I/O	M8	I/O	R13	GND	V18	I/O
J5	I/O	M10	I/O	R15	I/O	V20	I/O
J7	NC	M12	GND	R17	I/O	V22	V _{CCA}
J9	I/O	M14	GND	R19	I/O	V24	V _{CCI}
J11	I/O	M16	V _{CCI}	R21	I/O	W1	I/O
J13	CLKA	M18	I/O	R23	I/O	W3	I/O
J15	I/O	M20	I/O	R25	I/O	W5	I/O
J17	I/O	M22	I/O	T2	I/O	W7	NC
J19	I/O	M24	I/O	T4	I/O	W9	I/O
J21	GND	N1	I/O	T6	I/O	W11	I/O
J23	I/O	N3	V _{CCA}	T8	I/O	W13	V _{CCI}
J25	I/O	N5	V _{CCR}	T10	I/O	W15	I/O
K2	I/O	N7	I/O	T12	I/O	W17	I/O
K4	I/O	N9	V _{CCI}	T14	HCLK	W19	I/O
K6	I/O	N11	GND	T16	I/O	W21	I/O
K8	V _{CCI}	N13	GND	T18	I/O	W23	I/O
K10	I/O	N15	GND	T20	I/O	W25	I/O
K12	I/O	N17	I/O	T22	I/O	Y2	I/O
K14	I/O	N19	I/O	T24	I/O	Y4	I/O
K16	I/O	N21	I/O	U1	I/O	Y6	I/O
K18	I/O	N23	V _{CCR}	U3	I/O	Y8	I/O
K20	V _{CCA}	N25	V _{CCA}	U5	V _{CCI}	Y10	I/O
K22	I/O	P2	I/O	U7	I/O	Y12	I/O
K24	I/O	P4	I/O	U9	I/O	Y14	I/O
L1	I/O	P6	I/O	U11	I/O	Y16	I/O
L3	I/O	P8	I/O	U13	I/O	Y18	I/O
L5	I/O	P10	I/O	U15	I/O	Y20	NC
L7	I/O	P12	GND	U17	I/O	Y22	I/O
L9	I/O	P14	GND	U19	I/O	Y24	NC
L11	I/O	P16	I/O	U21	I/O		
L13	GND	P18	I/O	U23	I/O		
L15	I/O	P20	NC	U25	I/O		
L17	I/O	P22	I/O	V2	V _{CCA}		
L19	I/O	P24	I/O	V4	I/O		
L21	I/O	R1	I/O	V6	I/O		
L23	I/O	R3	I/O	V8	I/O		

144-Pin FBGA		144-Pin FBGA		144-Pin FBGA		144-Pin FBGA	
Pin Number	A54SX08 Function	Pin Number	A54SX08 Function	Pin Number	A54SX08 Function	Pin Number	A54SX08 Function
A1	I/O	D1	I/O	G1	I/O	K1	I/O
A2	I/O	D2	V _{CCI}	G2	GND	K2	I/O
A3	I/O	D3	TDI, I/O	G3	I/O	K3	I/O
A4	I/O	D4	I/O	G4	I/O	K4	I/O
A5	V _{CCA}	D5	I/O	G5	GND	K5	I/O
A6	GND	D6	I/O	G6	GND	K6	I/O
A7	CLKA	D7	I/O	G7	GND	K7	GND
A8	I/O	D8	I/O	G8	V _{CCI}	K8	I/O
A9	I/O	D9	I/O	G9	I/O	K9	I/O
A10	I/O	D10	I/O	G10	I/O	K10	GND
A11	I/O	D11	I/O	G11	I/O	K11	I/O
A12	I/O	D12	I/O	G12	I/O	K12	I/O
B1	I/O	E1	I/O	H1	I/O	L1	GND
B2	GND	E2	I/O	H2	I/O	L2	I/O
B3	I/O	E3	I/O	H3	I/O	L3	I/O
B4	I/O	E4	I/O	H4	I/O	L4	I/O
B5	I/O	E5	TMS	H5	V _{CCA}	L5	I/O
B6	I/O	E6	V _{CCI}	H6	V _{CCA}	L6	I/O
B7	CLKB	E7	V _{CCI}	H7	V _{CCI}	L7	HCLK
B8	I/O	E8	V _{CCI}	H8	V _{CCI}	L8	I/O
B9	I/O	E9	V _{CCA}	H9	V _{CCA}	L9	I/O
B10	I/O	E10	I/O	H10	I/O	L10	I/O
B11	GND	E11	GND	H11	I/O	L11	I/O
B12	I/O	E12	I/O	H12	V _{CCR}	L12	I/O
C1	I/O	F1	I/O	J1	I/O	M1	I/O
C2	I/O	F2	I/O	J2	I/O	M2	I/O
C3	TCK, I/O	F3	V _{CCR}	J3	I/O	M3	I/O
C4	I/O	F4	I/O	J4	I/O	M4	I/O
C5	I/O	F5	GND	J5	I/O	M5	I/O
C6	PRA, I/O	F6	GND	J6	PRB, I/O	M6	I/O
C7	I/O	F7	GND	J7	I/O	M7	V _{CCA}
C8	I/O	F8	V _{CCI}	J8	I/O	M8	I/O
C9	I/O	F9	I/O	J9	I/O	M9	I/O
C10	I/O	F10	GND	J10	I/O	M10	I/O
C11	I/O	F11	I/O	J11	I/O	M11	TDO, I/O
C12	I/O	F12	I/O	J12	V _{CCA}	M12	I/O