



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                |
| Number of LABs/CLBs            | 480                                                                                                                                     |
| Number of Logic Elements/Cells | 4320                                                                                                                                    |
| Total RAM Bits                 | 221184                                                                                                                                  |
| Number of I/O                  | 141                                                                                                                                     |
| Number of Gates                | 200000                                                                                                                                  |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                           |
| Mounting Type                  | Surface Mount                                                                                                                           |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                         |
| Package / Case                 | 208-BFQFP                                                                                                                               |
| Supplier Device Package        | 208-PQFP (28x28)                                                                                                                        |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/xilinx/xc3s200-4pqg208c">https://www.e-xfl.com/product-detail/xilinx/xc3s200-4pqg208c</a> |

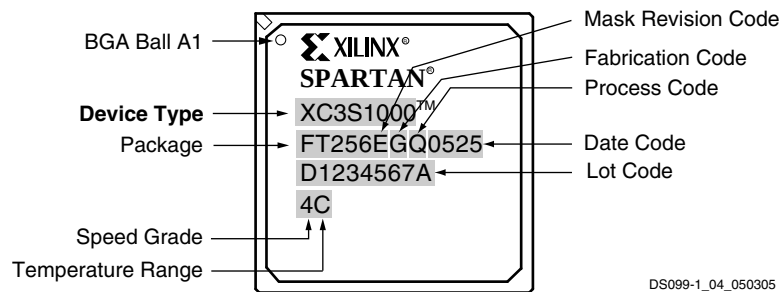


Figure 3: Spartan-3 FPGA BGA Package Marking Example for Part Number XC3S1000-4FT256C

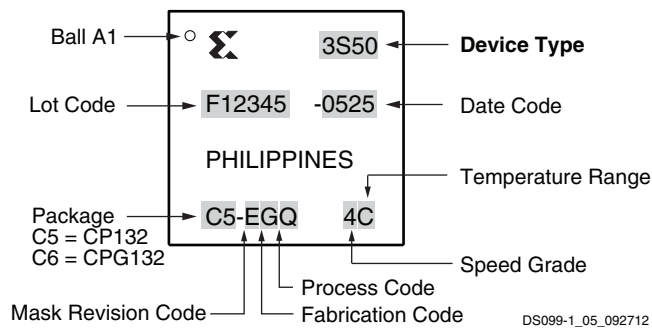


Figure 4: Spartan-3 FPGA CP132 and CPG132 Package Marking Example for XC3S50-4CP132C

## Ordering Information

Spartan-3 FPGAs are available in both standard (Figure 5) and Pb-free (Figure 6) packaging options for all device/package combinations. The Pb-free packages include a special 'G' character in the ordering code.

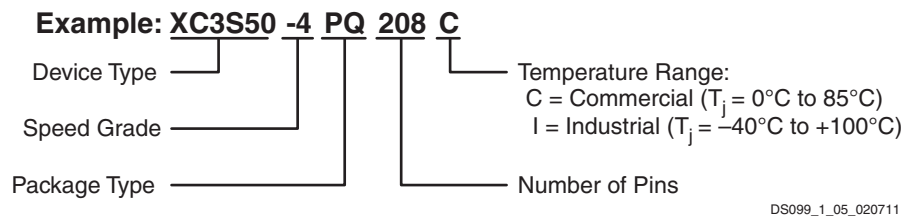


Figure 5: Standard Packaging

For additional information on Pb-free packaging, see [XAPP427: Implementation and Solder Reflow Guidelines for Pb-Free Packages](#).

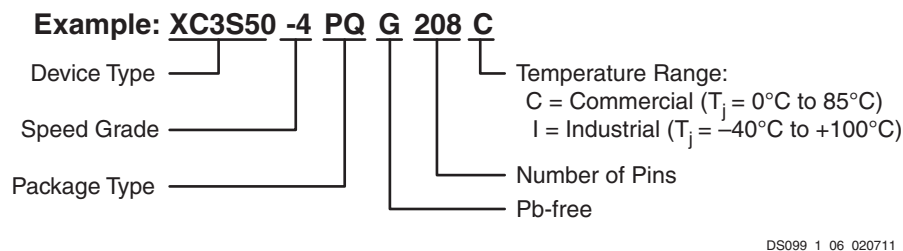


Figure 6: Pb-Free Packaging

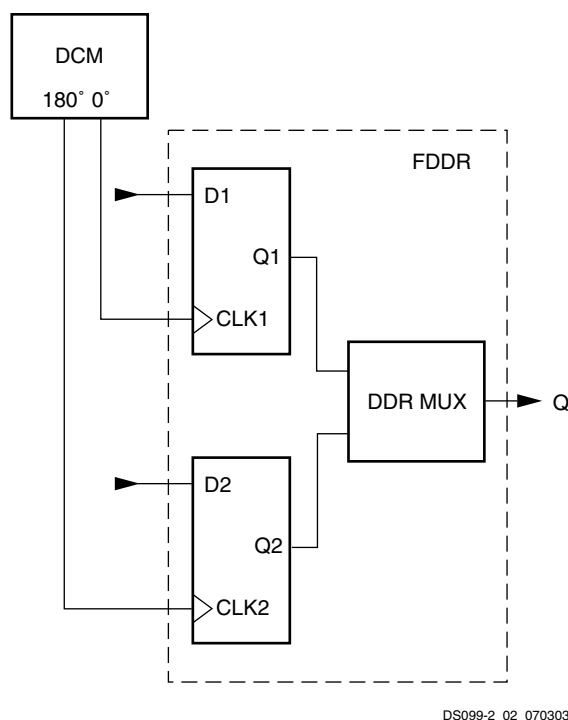


Figure 8: Clocking the DDR Register

Aside from high bandwidth data transfers, DDR can also be used to reproduce, or “mirror”, a clock signal on the output. This approach is used to transmit clock and data signals together. A similar approach is used to reproduce a clock signal at multiple outputs. The advantage for both approaches is that skew across the outputs will be minimal.

Some adjacent I/O blocks (IOBs) share common routing connecting the ICLK1, ICLK2, OTCLK1, and OTCLK2 clock inputs of both IOBs. These IOB pairs are identified by their differential pair names IO\_LxxN\_# and IO\_LxxP\_#, where “xx” is an I/O pair number and “#” is an I/O bank number. Two adjacent IOBs containing DDR registers must share common clock inputs, otherwise one or more of the clock signals will be unroutable.

## Pull-Up and Pull-Down Resistors

The optional pull-up and pull-down resistors are intended to establish High and Low levels, respectively, at unused I/Os. The pull-up resistor optionally connects each IOB pad to  $V_{CCO}$ . A pull-down resistor optionally connects each pad to GND. These resistors are placed in a design using the PULLUP and PULLDOWN symbols in a schematic, respectively. They can also be instantiated as components, set as constraints or passed as attributes in HDL code. These resistors can also be selected for all unused I/O using the Bitstream Generator (BitGen) option UnusedPin. A Low logic level on HSWAP\_EN activates the pull-up resistors on all I/Os during configuration (see [The I/Os During Power-On, Configuration, and User Mode, page 21](#)).


The Spartan-3 FPGAs I/O pull-up and pull-down resistors are significantly stronger than the “weak” pull-up/pull-down resistors used in previous Xilinx FPGA families. See [Table 33, page 61](#) for equivalent resistor strengths.

## Keeper Circuit

Each I/O has an optional keeper circuit that retains the last logic level on a line after all drivers have been turned off. This is useful to keep bus lines from floating when all connected drivers are in a high-impedance state. This function is placed in a design using the KEEPER symbol. Pull-up and pull-down resistors override the keeper circuit.

- **Phase Shifting:** The DCM provides the ability to shift the phase of all its output clock signals with respect to its input clock signal.

The DCM has four functional components: the Delay-Locked Loop (DLL), the Digital Frequency Synthesizer (DFS), the Phase Shifter (PS), and the Status Logic. Each component has its associated signals, as shown in Figure 19.

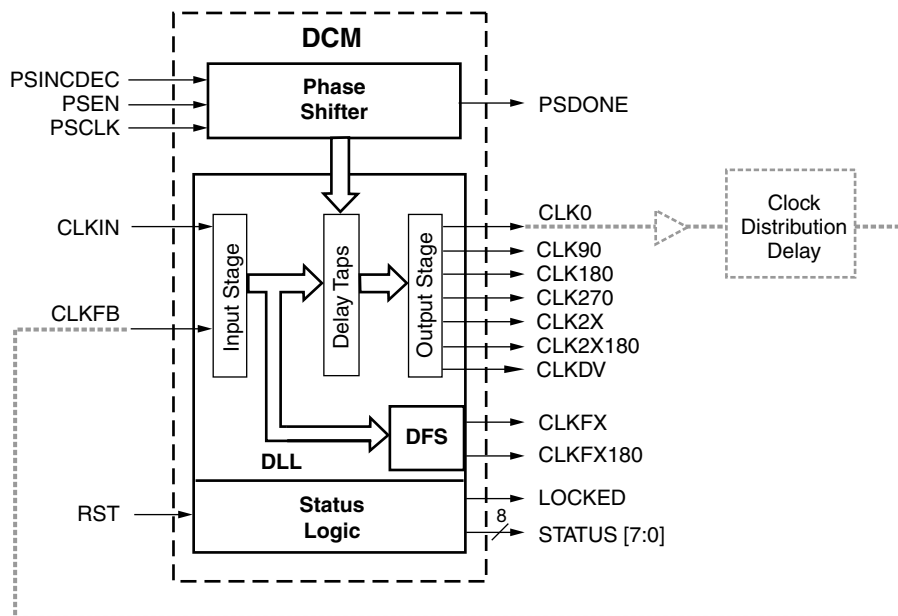


DS099-2\_07\_040103

Figure 19: DCM Functional Blocks and Associated Signals

## Delay-Locked Loop (DLL)

The most basic function of the DLL component is to eliminate clock skew. The main signal path of the DLL consists of an input stage, followed by a series of discrete delay elements or *taps*, which in turn leads to an output stage. This path together with logic for phase detection and control forms a system complete with feedback as shown in Figure 20.

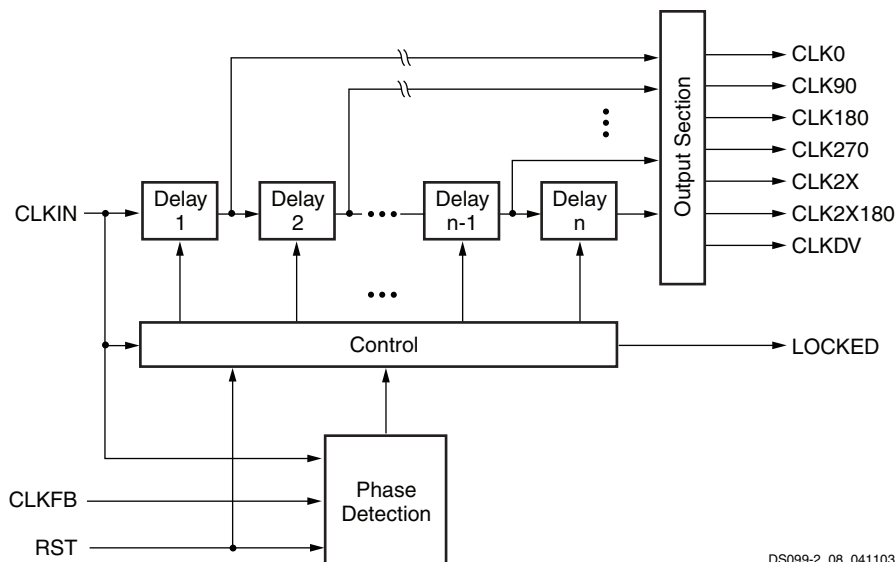

DS099-2\_08\_041103

Figure 20: Simplified Functional Diagram of DLL

## Configuration

Spartan-3 devices are configured by loading application specific configuration data into the internal configuration memory. Configuration is carried out using a subset of the device pins, some of which are "Dedicated" to one function only, while others, indicated by the term "Dual-Purpose", can be re-used as general-purpose User I/Os once configuration is complete.

Depending on the system design, several configuration modes are supported, selectable via mode pins. The mode pins M0, M1, and M2 are Dedicated pins. The mode pin settings are shown in [Table 26](#).

**Table 26: Spartan-3 FPGAs Configuration Mode Pin Settings**

| Configuration Mode <sup>(1)</sup> | M0 | M1 | M2 | Synchronizing Clock | Data Width | Serial DOUT <sup>(2)</sup> |
|-----------------------------------|----|----|----|---------------------|------------|----------------------------|
| Master Serial                     | 0  | 0  | 0  | CCLK Output         | 1          | Yes                        |
| Slave Serial                      | 1  | 1  | 1  | CCLK Input          | 1          | Yes                        |
| Master Parallel                   | 1  | 1  | 0  | CCLK Output         | 8          | No                         |
| Slave Parallel                    | 0  | 1  | 1  | CCLK Input          | 8          | No                         |
| JTAG                              | 1  | 0  | 1  | TCK Input           | 1          | No                         |

### Notes:

1. The voltage levels on the M0, M1, and M2 pins select the configuration mode.
2. The daisy chain is possible only in the Serial modes when DOUT is used.

The HSWAP\_EN input pin defines whether the I/O pins that are not actively used during configuration have pull-up resistors during configuration. By default, HSWAP\_EN is tied High (via an internal pull-up resistor if left floating) which shuts off the pull-up resistors on the user I/O pins during configuration. When HSWAP\_EN is tied Low, user I/Os have pull-ups during configuration. The Dedicated configuration pins (CCLK, DONE, PROG\_B, M2, M1, M0, HSWAP\_EN) and the JTAG pins (TDI, TMS, TCK, and TDO) always have a pull-up resistor to VCCAUX during configuration, regardless of the value on the HSWAP\_EN pin. Similarly, the dual-purpose INIT\_B pin has an internal pull-up resistor to VCCO\_4 or VCCO\_BOTTOM, depending on the package style.

Depending on the chosen configuration mode, the FPGA either generates a CCLK output, or CCLK is an input accepting an externally generated clock.

A persist option is available which can be used to force the configuration pins to retain their configuration function even after device configuration is complete. If the persist option is not selected then the configuration pins with the exception of CCLK, PROG\_B, and DONE can be used as user I/O in normal operation. The persist option does not apply to the boundary-scan related pins. The persist feature is valuable in applications that readback configuration data after entering the User mode.

[Table 27](#) lists the total number of bits required to configure each FPGA as well as the PROMs suitable for storing those bits. See [DS123: Platform Flash In-System Programmable Configuration PROMs](#) data sheet for more information.

**Table 27: Spartan-3 FPGA Configuration Data**

| Device   | File Sizes | Xilinx Platform Flash PROM |                        |
|----------|------------|----------------------------|------------------------|
|          |            | Serial Configuration       | Parallel Configuration |
| XC3S50   | 439,264    | XCF01S                     | XCF08P                 |
| XC3S200  | 1,047,616  | XCF01S                     | XCF08P                 |
| XC3S400  | 1,699,136  | XCF02S                     | XCF08P                 |
| XC3S1000 | 3,223,488  | XCF04S                     | XCF08P                 |
| XC3S1500 | 5,214,784  | XCF08P                     | XCF08P                 |
| XC3S2000 | 7,673,024  | XCF08P                     | XCF08P                 |
| XC3S4000 | 11,316,864 | XCF16P                     | XCF16P                 |
| XC3S5000 | 13,271,936 | XCF16P                     | XCF16P                 |

The maximum bitstream length that Spartan-3 FPGAs support in serial daisy-chains is 4,294,967,264 bits (4 Gbits), roughly equivalent to a daisy-chain with 323 XC3S5000 FPGAs. This is a limit only for serial daisy-chains where configuration data is passed via the FPGA's DOUT pin. There is no such limit for JTAG chains.

**Table 35: Recommended Operating Conditions for User I/Os Using Single-Ended Standards**

| Signal Standard<br>(IOSTANDARD)                                          | V <sub>CCO</sub> |         |         | V <sub>REF</sub> |         |         | V <sub>IL</sub>          | V <sub>IH</sub>          |
|--------------------------------------------------------------------------|------------------|---------|---------|------------------|---------|---------|--------------------------|--------------------------|
|                                                                          | Min (V)          | Nom (V) | Max (V) | Min (V)          | Nom (V) | Max (V) | Max (V)                  | Min (V)                  |
| GTL <sup>(3)</sup>                                                       | —                | —       | —       | 0.74             | 0.8     | 0.86    | V <sub>REF</sub> – 0.05  | V <sub>REF</sub> + 0.05  |
| GTL_DCI                                                                  | —                | 1.2     | —       | 0.74             | 0.8     | 0.86    | V <sub>REF</sub> – 0.05  | V <sub>REF</sub> + 0.05  |
| GTLP <sup>(3)</sup>                                                      | —                | —       | —       | 0.88             | 1       | 1.12    | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| GTLP_DCI                                                                 | —                | 1.5     | —       | 0.88             | 1       | 1.12    | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSLVDCI_15                                                               | 1.4              | 1.5     | 1.6     | —                | 0.75    | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSLVDCI_18                                                               | 1.7              | 1.8     | 1.9     | —                | 0.9     | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSLVDCI_25                                                               | 2.3              | 2.5     | 2.7     | —                | 1.25    | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSLVDCI_33                                                               | 3.0              | 3.3     | 3.465   | —                | 1.65    | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSTL_I, HSTL_I_DCI                                                       | 1.4              | 1.5     | 1.6     | 0.68             | 0.75    | 0.9     | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSTL_III,<br>HSTL_III_DCI                                                | 1.4              | 1.5     | 1.6     | —                | 0.9     | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSTL_I_18,<br>HSTL_I_DCI_18                                              | 1.7              | 1.8     | 1.9     | 0.8              | 0.9     | 1.1     | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSTL_II_18,<br>HSTL_II_DCI_18                                            | 1.7              | 1.8     | 1.9     | —                | 0.9     | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| HSTL_III_18,<br>HSTL_III_DCI_18                                          | 1.7              | 1.8     | 1.9     | —                | 1.1     | —       | V <sub>REF</sub> – 0.1   | V <sub>REF</sub> + 0.1   |
| LVC MOS12                                                                | 1.14             | 1.2     | 1.3     | —                | —       | —       | 0.37V <sub>CCO</sub>     | 0.58V <sub>CCO</sub>     |
| LVC MOS15,<br>LVDCI_15,<br>LVDCI_DV2_15                                  | 1.4              | 1.5     | 1.6     | —                | —       | —       | 0.30V <sub>CCO</sub>     | 0.70V <sub>CCO</sub>     |
| LVC MOS18,<br>LVDCI_18,<br>LVDCI_DV2_18                                  | 1.7              | 1.8     | 1.9     | —                | —       | —       | 0.30V <sub>CCO</sub>     | 0.70V <sub>CCO</sub>     |
| LVC MOS25 <sup>(4,5)</sup> ,<br>LVDCI_25,<br>LVDCI_DV2_25 <sup>(4)</sup> | 2.3              | 2.5     | 2.7     | —                | —       | —       | 0.7                      | 1.7                      |
| LVC MOS33,<br>LVDCI_33,<br>LVDCI_DV2_33 <sup>(4)</sup>                   | 3.0              | 3.3     | 3.465   | —                | —       | —       | 0.8                      | 2.0                      |
| LVTTL                                                                    | 3.0              | 3.3     | 3.465   | —                | —       | —       | 0.8                      | 2.0                      |
| PCI33_3 <sup>(7)</sup>                                                   | 3.0              | 3.3     | 3.465   | —                | —       | —       | 0.30V <sub>CCO</sub>     | 0.50V <sub>CCO</sub>     |
| SSTL18_I,<br>SSTL18_I_DCI                                                | 1.7              | 1.8     | 1.9     | 0.833            | 0.900   | 0.969   | V <sub>REF</sub> – 0.125 | V <sub>REF</sub> + 0.125 |
| SSTL18_II                                                                | 1.7              | 1.8     | 1.9     | 0.833            | 0.900   | 0.969   | V <sub>REF</sub> – 0.125 | V <sub>REF</sub> + 0.125 |
| SSTL2_I,<br>SSTL2_I_DCI                                                  | 2.3              | 2.5     | 2.7     | 1.15             | 1.25    | 1.35    | V <sub>REF</sub> – 0.15  | V <sub>REF</sub> + 0.15  |
| SSTL2_II,<br>SSTL2_II_DCI                                                | 2.3              | 2.5     | 2.7     | 1.15             | 1.25    | 1.35    | V <sub>REF</sub> – 0.15  | V <sub>REF</sub> + 0.15  |

**Notes:**

- Descriptions of the symbols used in this table are as follows:  
V<sub>CCO</sub> – the supply voltage for output drivers as well as LVC MOS, LVTTL, and PCI inputs  
V<sub>REF</sub> – the reference voltage for setting the input switching threshold  
V<sub>IL</sub> – the input voltage that indicates a Low logic level  
V<sub>IH</sub> – the input voltage that indicates a High logic level
- For device operation, the maximum signal voltage (V<sub>IH</sub> max) may be as high as V<sub>IN</sub> max. See [Table 28](#).
- Because the GTL and GTLP standards employ open-drain output buffers, V<sub>CCO</sub> lines do not supply current to the I/O circuit, rather this current is provided using an external pull-up resistor connected from the I/O pin to a termination voltage (V<sub>TT</sub>). Nevertheless, the voltage applied to the associated V<sub>CCO</sub> lines must always be at or above V<sub>TT</sub> and I/O pad voltages.
- There is approximately 100 mV of hysteresis on inputs using LVC MOS25 or LVC MOS33 standards.
- All dedicated pins (M0-M2, CCLK, PROG\_B, DONE, HSWAP\_EN, TCK, TDI, TDO, and TMS) use the LVC MOS standard and draw power from the V<sub>CCAUX</sub> rail (2.5V). The dual-purpose configuration pins (DIN/D0, D1-D7, CS\_B, RDWR\_B, BUSY/DOUT, and INIT\_B) use the LVC MOS standard before the user mode. For these pins, apply 2.5V to the V<sub>CCO</sub> Bank 4 and V<sub>CCO</sub> Bank 5 rails at power-on and throughout configuration. For information concerning the use of 3.3V signals, see [3.3V-Tolerant Configuration Interface, page 47](#).
- The Global Clock Inputs (GCLK0-GCLK7) are dual-purpose pins to which any signal standard can be assigned.
- For more information, see [XAPP457](#).

Table 71: Dual-Purpose Pins Used in Master or Slave Serial Mode

| Pin Name | Direction                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DIN      | Input                      | <b>Serial Data Input:</b><br>During the Master or Slave Serial configuration modes, DIN is the serial configuration data input, and all data is synchronized to the rising CCLK edge. After configuration, this pin is available as a user I/O. This signal is located in Bank 4 and its output voltage determined by VCCO_4.<br>The BitGen option <b>Persist</b> permits this pin to retain its configuration function in the User mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| DOUT     | Output                     | <b>Serial Data Output:</b><br>In a multi-FPGA design where all the FPGAs use serial mode, connect the DOUT output of one FPGA—in either Master or Slave Serial mode—to the DIN input of the next FPGA—in Slave Serial mode—so that configuration data passes from one to the next, in daisy-chain fashion. This “daisy chain” permits sequential configuration of multiple FPGAs.<br>This signal is located in Bank 4 and its output voltage determined by VCCO_4.<br>The BitGen option <b>Persist</b> permits this pin to retain its configuration function in the User mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| INIT_B   | Bidirectional (open-drain) | <b>Initializing Configuration Memory/Configuration Error:</b><br>Just after power is applied, the FPGA produces a Low-to-High transition on this pin indicating that initialization ( <i>i.e.</i> , clearing) of the configuration memory has finished. Before entering the User mode, this pin functions as an open-drain output, which requires a pull-up resistor in order to produce a High logic level. In a multi-FPGA design, tie (wire AND) the INIT_B pins from all FPGAs together so that the common node transitions High only after all of the FPGAs have been successfully initialized.<br>Externally holding this pin Low beyond the initialization phase delays the start of configuration. This action stalls the FPGA at the configuration step just before the mode select pins are sampled.<br>During configuration, the FPGA indicates the occurrence of a data ( <i>i.e.</i> , CRC) error by asserting INIT_B Low.<br>This signal is located in Bank 4 and its output voltage determined by VCCO_4.<br>The BitGen option <b>Persist</b> permits this pin to retain its configuration function in the User mode. |

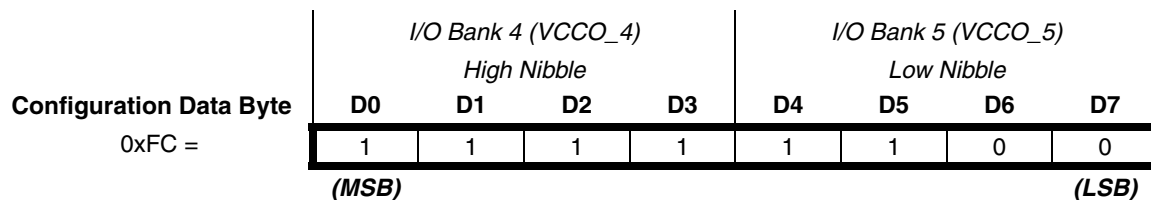


Figure 41: Configuration Data Byte Mapping to D0-D7 Bits

## Parallel Configuration Modes (SelectMAP)

This section describes the dual-purpose configuration pins used during the Master and Slave Parallel configuration modes, sometimes also called the SelectMAP modes. In both Master and Slave Parallel configuration modes, D0-D7 form the byte-wide configuration data input. See Table 75 for Mode Select pin settings required for Parallel modes.

As shown in Figure 41, D0 is the most-significant bit while D7 is the least-significant bit. Bits D0-D3 form the high nibble of the byte and bits D4-D7 form the low nibble.

In the Parallel configuration modes, both the VCCO\_4 and VCCO\_5 voltage supplies are required and must both equal the voltage of the attached configuration device, typically either 2.5V or 3.3V.

Assert Low both the chip-select pin, CS\_B, and the read/write control pin, RDWR\_B, to write the configuration data byte presented on the D0-D7 pins to the FPGA on a rising-edge of the configuration clock, CCLK. The order of CS\_B and RDWR\_B does not matter, although RDWR\_B must be asserted throughout the configuration process. If RDWR\_B is de-asserted during configuration, the FPGA aborts the configuration operation.

After configuration, these pins are available as general-purpose user I/O. However, the SelectMAP configuration interface is optionally available for debugging and dynamic reconfiguration. To use these SelectMAP pins after configuration, set the Persist bitstream generation option.

The Readback debugging option, for example, requires the Persist bitstream generation option. During Readback mode, assert CS\_B Low, along with RDWR\_B High, to read a configuration data byte from the FPGA to the D0-D7 bus on a rising CCLK edge. During Readback mode, D0-D7 are output pins.

In all the cases, the configuration data and control signals are synchronized to the rising edge of the CCLK clock signal.

**Table 89: CP132 Package Pinout (Cont'd)**

| Bank   | XC3S50 Pin Name | CP132 Ball | Type   |
|--------|-----------------|------------|--------|
| N/A    | GND             | M3         | GND    |
| N/A    | GND             | M13        | GND    |
| N/A    | GND             | N6         | GND    |
| N/A    | GND             | N11        | GND    |
| N/A    | VCCAUX          | A5         | VCCAUX |
| N/A    | VCCAUX          | C10        | VCCAUX |
| N/A    | VCCAUX          | M5         | VCCAUX |
| N/A    | VCCAUX          | P10        | VCCAUX |
| N/A    | VCCINT          | B10        | VCCINT |
| N/A    | VCCINT          | C6         | VCCINT |
| N/A    | VCCINT          | M9         | VCCINT |
| N/A    | VCCINT          | N5         | VCCINT |
| VCCAUX | CCLK            | P14        | CONFIG |
| VCCAUX | DONE            | P13        | CONFIG |
| VCCAUX | HSWAP_EN        | B3         | CONFIG |
| VCCAUX | M0              | N1         | CONFIG |
| VCCAUX | M1              | M2         | CONFIG |
| VCCAUX | M2              | P1         | CONFIG |
| VCCAUX | PROG_B          | A2         | CONFIG |
| VCCAUX | TCK             | B14        | JTAG   |
| VCCAUX | TDI             | A1         | JTAG   |
| VCCAUX | TDO             | C13        | JTAG   |
| VCCAUX | TMS             | A14        | JTAG   |

## User I/Os by Bank

**Table 90** indicates how the 89 available user-I/O pins are distributed between the eight I/O banks on the CP132 package. There are only four output banks, each with its own VCCO voltage input.

**Table 90: User I/Os Per Bank for XC3S50 in CP132 Package**

| Package Edge | I/O Bank | Maximum I/O | All Possible I/O Pins by Type |      |     |      |      |
|--------------|----------|-------------|-------------------------------|------|-----|------|------|
|              |          |             | I/O                           | DUAL | DCI | VREF | GCLK |
| Top          | 0        | 10          | 5                             | 0    | 2   | 1    | 2    |
|              | 1        | 10          | 5                             | 0    | 2   | 1    | 2    |
| Right        | 2        | 12          | 8                             | 0    | 2   | 2    | 0    |
|              | 3        | 12          | 8                             | 0    | 2   | 2    | 0    |
| Bottom       | 4        | 11          | 0                             | 6    | 2   | 1    | 2    |
|              | 5        | 10          | 1                             | 6    | 0   | 1    | 2    |
| Left         | 6        | 12          | 8                             | 0    | 2   | 2    | 0    |
|              | 7        | 12          | 9                             | 0    | 2   | 1    | 0    |

**Notes:**

- The CP132 and CPG132 packages are discontinued. See [www.xilinx.com/support/documentation/spartan-3.htm#19600](http://www.xilinx.com/support/documentation/spartan-3.htm#19600).

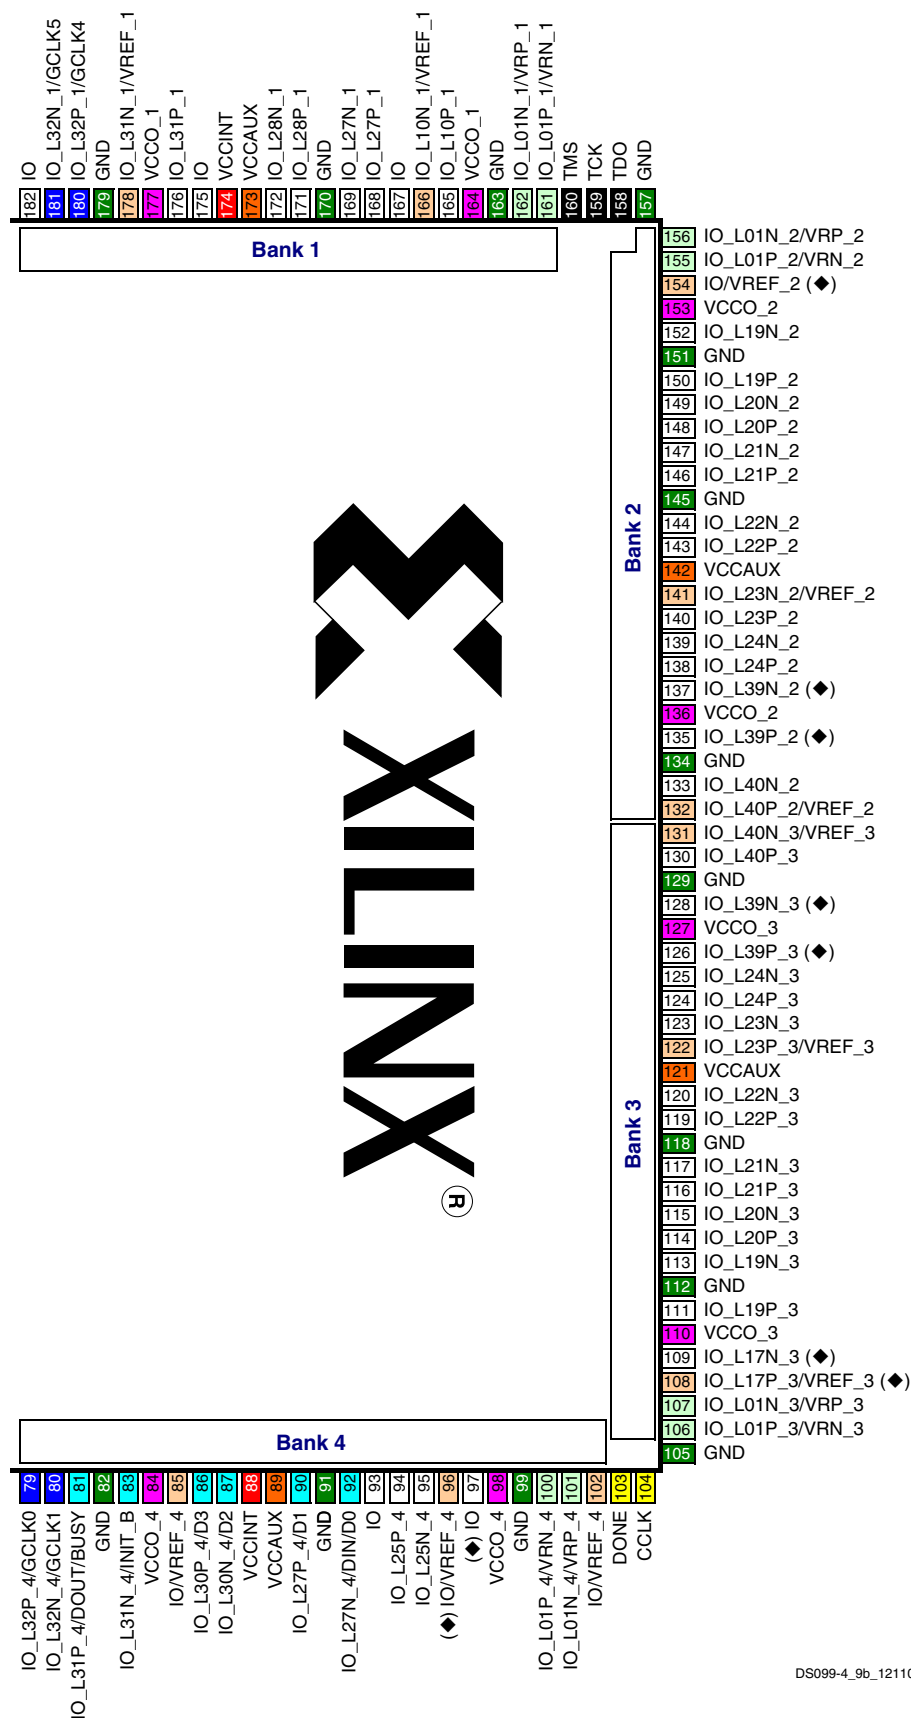


**Table 91: TQ144 Package Pinout (Cont'd)**

| Bank   | XC3S50, XC3S200,<br>XC3S400 Pin Name | TQ144 Pin<br>Number | Type   |
|--------|--------------------------------------|---------------------|--------|
| 6,7    | VCCO_LEFT                            | P34                 | VCCO   |
| 6,7    | VCCO_LEFT                            | P3                  | VCCO   |
| N/A    | GND                                  | P136                | GND    |
| N/A    | GND                                  | P139                | GND    |
| N/A    | GND                                  | P114                | GND    |
| N/A    | GND                                  | P117                | GND    |
| N/A    | GND                                  | P94                 | GND    |
| N/A    | GND                                  | P101                | GND    |
| N/A    | GND                                  | P81                 | GND    |
| N/A    | GND                                  | P88                 | GND    |
| N/A    | GND                                  | P64                 | GND    |
| N/A    | GND                                  | P67                 | GND    |
| N/A    | GND                                  | P42                 | GND    |
| N/A    | GND                                  | P45                 | GND    |
| N/A    | GND                                  | P22                 | GND    |
| N/A    | GND                                  | P29                 | GND    |
| N/A    | GND                                  | P9                  | GND    |
| N/A    | GND                                  | P16                 | GND    |
| N/A    | VCCAUX                               | P134                | VCCAUX |
| N/A    | VCCAUX                               | P120                | VCCAUX |
| N/A    | VCCAUX                               | P62                 | VCCAUX |
| N/A    | VCCAUX                               | P48                 | VCCAUX |
| N/A    | VCCINT                               | P133                | VCCINT |
| N/A    | VCCINT                               | P121                | VCCINT |
| N/A    | VCCINT                               | P61                 | VCCINT |
| N/A    | VCCINT                               | P49                 | VCCINT |
| VCCAUX | CCLK                                 | P72                 | CONFIG |
| VCCAUX | DONE                                 | P71                 | CONFIG |
| VCCAUX | HSWAP_EN                             | P142                | CONFIG |
| VCCAUX | M0                                   | P38                 | CONFIG |
| VCCAUX | M1                                   | P37                 | CONFIG |
| VCCAUX | M2                                   | P39                 | CONFIG |
| VCCAUX | PROG_B                               | P143                | CONFIG |
| VCCAUX | TCK                                  | P110                | JTAG   |
| VCCAUX | TDI                                  | P144                | JTAG   |
| VCCAUX | TDO                                  | P109                | JTAG   |
| VCCAUX | TMS                                  | P111                | JTAG   |

**Table 93: PQ208 Package Pinout (Cont'd)**

| Bank | XC3S50<br>Pin Name | XC3S200, XC3S400<br>Pin Names | PQ208 Pin<br>Number | Type |
|------|--------------------|-------------------------------|---------------------|------|
| 5    | IO_L10P_5/VRN_5    | IO_L10P_5/VRN_5               | P61                 | DCI  |
| 5    | IO_L27N_5/VREF_5   | IO_L27N_5/VREF_5              | P65                 | VREF |
| 5    | IO_L27P_5          | IO_L27P_5                     | P64                 | I/O  |
| 5    | IO_L28N_5/D6       | IO_L28N_5/D6                  | P68                 | DUAL |
| 5    | IO_L28P_5/D7       | IO_L28P_5/D7                  | P67                 | DUAL |
| 5    | IO_L31N_5/D4       | IO_L31N_5/D4                  | P74                 | DUAL |
| 5    | IO_L31P_5/D5       | IO_L31P_5/D5                  | P72                 | DUAL |
| 5    | IO_L32N_5/GCLK3    | IO_L32N_5/GCLK3               | P77                 | GCLK |
| 5    | IO_L32P_5/GCLK2    | IO_L32P_5/GCLK2               | P76                 | GCLK |
| 5    | VCCO_5             | VCCO_5                        | P60                 | VCCO |
| 5    | VCCO_5             | VCCO_5                        | P73                 | VCCO |
| 6    | N.C. (◆)           | IO/VREF_6                     | P50                 | VREF |
| 6    | IO_L01N_6/VRP_6    | IO_L01N_6/VRP_6               | P52                 | DCI  |
| 6    | IO_L01P_6/VRN_6    | IO_L01P_6/VRN_6               | P51                 | DCI  |
| 6    | IO_L19N_6          | IO_L19N_6                     | P48                 | I/O  |
| 6    | IO_L19P_6          | IO_L19P_6                     | P46                 | I/O  |
| 6    | IO_L20N_6          | IO_L20N_6                     | P45                 | I/O  |
| 6    | IO_L20P_6          | IO_L20P_6                     | P44                 | I/O  |
| 6    | IO_L21N_6          | IO_L21N_6                     | P43                 | I/O  |
| 6    | IO_L21P_6          | IO_L21P_6                     | P42                 | I/O  |
| 6    | IO_L22N_6          | IO_L22N_6                     | P40                 | I/O  |
| 6    | IO_L22P_6          | IO_L22P_6                     | P39                 | I/O  |
| 6    | IO_L23N_6          | IO_L23N_6                     | P37                 | I/O  |
| 6    | IO_L23P_6          | IO_L23P_6                     | P36                 | I/O  |
| 6    | IO_L24N_6/VREF_6   | IO_L24N_6/VREF_6              | P35                 | VREF |
| 6    | IO_L24P_6          | IO_L24P_6                     | P34                 | I/O  |
| 6    | N.C. (◆)           | IO_L39N_6                     | P33                 | I/O  |
| 6    | N.C. (◆)           | IO_L39P_6                     | P31                 | I/O  |
| 6    | IO_L40N_6          | IO_L40N_6                     | P29                 | I/O  |
| 6    | IO_L40P_6/VREF_6   | IO_L40P_6/VREF_6              | P28                 | VREF |
| 6    | VCCO_6             | VCCO_6                        | P32                 | VCCO |
| 6    | VCCO_6             | VCCO_6                        | P49                 | VCCO |
| 7    | IO_L01N_7/VRP_7    | IO_L01N_7/VRP_7               | P3                  | DCI  |
| 7    | IO_L01P_7/VRN_7    | IO_L01P_7/VRN_7               | P2                  | DCI  |
| 7    | N.C. (◆)           | IO_L16N_7                     | P5                  | I/O  |
| 7    | N.C. (◆)           | IO_L16P_7/VREF_7              | P4                  | VREF |
| 7    | IO_L19N_7/VREF_7   | IO_L19N_7/VREF_7              | P9                  | VREF |
| 7    | IO_L19P_7          | IO_L19P_7                     | P7                  | I/O  |
| 7    | IO_L20N_7          | IO_L20N_7                     | P11                 | I/O  |
| 7    | IO_L20P_7          | IO_L20P_7                     | P10                 | I/O  |



Right Half of Package  
(Top View)

Figure 48: PQ208 Package Footprint (Top View) Continued

DS099-4\_9b\_121103

**Table 98: FG320 Package Pinout (Cont'd)**

| Bank   | XC3S400, XC3S1000, XC3S1500<br>Pin Name | FG320<br>Pin Number | Type   |
|--------|-----------------------------------------|---------------------|--------|
| N/A    | VCCINT                                  | N6                  | VCCINT |
| N/A    | VCCINT                                  | N7                  | VCCINT |
| VCCAUX | CCLK                                    | T15                 | CONFIG |
| VCCAUX | DONE                                    | R15                 | CONFIG |
| VCCAUX | HSWAP_EN                                | E6                  | CONFIG |
| VCCAUX | M0                                      | P5                  | CONFIG |
| VCCAUX | M1                                      | U3                  | CONFIG |
| VCCAUX | M2                                      | R4                  | CONFIG |
| VCCAUX | PROG_B                                  | E5                  | CONFIG |
| VCCAUX | TCK                                     | E14                 | JTAG   |
| VCCAUX | TDI                                     | D4                  | JTAG   |
| VCCAUX | TDO                                     | D15                 | JTAG   |
| VCCAUX | TMS                                     | B16                 | JTAG   |

## User I/Os by Bank

Table 99 indicates how the available user-I/O pins are distributed between the eight I/O banks on the FG320 package.

**Table 99: User I/Os Per Bank in FG320 Package**

| Package Edge | I/O Bank | Maximum<br>I/O | Maximum<br>LVDS Pairs | All Possible I/O Pins by Type |      |     |      |      |
|--------------|----------|----------------|-----------------------|-------------------------------|------|-----|------|------|
|              |          |                |                       | I/O                           | DUAL | DCI | VREF | GCLK |
| Top          | 0        | 26             | 11                    | 19                            | 0    | 2   | 3    | 2    |
|              | 1        | 26             | 11                    | 19                            | 0    | 2   | 3    | 2    |
| Right        | 2        | 29             | 14                    | 23                            | 0    | 2   | 4    | 0    |
|              | 3        | 29             | 14                    | 23                            | 0    | 2   | 4    | 0    |
| Bottom       | 4        | 27             | 11                    | 13                            | 6    | 2   | 4    | 2    |
|              | 5        | 26             | 11                    | 13                            | 6    | 2   | 3    | 2    |
| Left         | 6        | 29             | 14                    | 23                            | 0    | 2   | 4    | 0    |
|              | 7        | 29             | 14                    | 23                            | 0    | 2   | 4    | 0    |

**Table 100: FG456 Package Pinout (Cont'd)**

| Bank | 3S400<br>Pin Name | 3S1000, 3S1500, 3S2000<br>Pin Name | FG456<br>Pin Number | Type |
|------|-------------------|------------------------------------|---------------------|------|
| 6    | N.C. (◆)          | IO_L28N_6                          | R5                  | I/O  |
| 6    | N.C. (◆)          | IO_L28P_6                          | P6                  | I/O  |
| 6    | N.C. (◆)          | IO_L29N_6                          | R2                  | I/O  |
| 6    | N.C. (◆)          | IO_L29P_6                          | R1                  | I/O  |
| 6    | N.C. (◆)          | IO_L31N_6                          | P5                  | I/O  |
| 6    | N.C. (◆)          | IO_L31P_6                          | P4                  | I/O  |
| 6    | N.C. (◆)          | IO_L32N_6                          | P2                  | I/O  |
| 6    | N.C. (◆)          | IO_L32P_6                          | P1                  | I/O  |
| 6    | N.C. (◆)          | IO_L33N_6                          | N6                  | I/O  |
| 6    | N.C. (◆)          | IO_L33P_6                          | N5                  | I/O  |
| 6    | IO_L34N_6/VREF_6  | IO_L34N_6/VREF_6                   | N4                  | VREF |
| 6    | IO_L34P_6         | IO_L34P_6                          | N3                  | I/O  |
| 6    | IO_L35N_6         | IO_L35N_6                          | N2                  | I/O  |
| 6    | IO_L35P_6         | IO_L35P_6                          | N1                  | I/O  |
| 6    | IO_L38N_6         | IO_L38N_6                          | M6                  | I/O  |
| 6    | IO_L38P_6         | IO_L38P_6                          | M5                  | I/O  |
| 6    | IO_L39N_6         | IO_L39N_6                          | M4                  | I/O  |
| 6    | IO_L39P_6         | IO_L39P_6                          | M3                  | I/O  |
| 6    | IO_L40N_6         | IO_L40N_6                          | M2                  | I/O  |
| 6    | IO_L40P_6/VREF_6  | IO_L40P_6/VREF_6                   | M1                  | VREF |
| 6    | VCCO_6            | VCCO_6                             | M7                  | VCCO |
| 6    | VCCO_6            | VCCO_6                             | N7                  | VCCO |
| 6    | VCCO_6            | VCCO_6                             | P7                  | VCCO |
| 6    | VCCO_6            | VCCO_6                             | R3                  | VCCO |
| 6    | VCCO_6            | VCCO_6                             | R6                  | VCCO |
| 7    | IO                | IO                                 | C2                  | I/O  |
| 7    | IO_L01N_7/VRP_7   | IO_L01N_7/VRP_7                    | C3                  | DCI  |
| 7    | IO_L01P_7/VRN_7   | IO_L01P_7/VRN_7                    | C4                  | DCI  |
| 7    | IO_L16N_7         | IO_L16N_7                          | D1                  | I/O  |
| 7    | IO_L16P_7/VREF_7  | IO_L16P_7/VREF_7                   | C1                  | VREF |
| 7    | IO_L17N_7         | IO_L17N_7                          | E4                  | I/O  |
| 7    | IO_L17P_7         | IO_L17P_7                          | D4                  | I/O  |
| 7    | IO_L19N_7/VREF_7  | IO_L19N_7/VREF_7                   | D3                  | VREF |
| 7    | IO_L19P_7         | IO_L19P_7                          | D2                  | I/O  |
| 7    | IO_L20N_7         | IO_L20N_7                          | F4                  | I/O  |
| 7    | IO_L20P_7         | IO_L20P_7                          | E3                  | I/O  |
| 7    | IO_L21N_7         | IO_L21N_7                          | E1                  | I/O  |
| 7    | IO_L21P_7         | IO_L21P_7                          | E2                  | I/O  |
| 7    | IO_L22N_7         | IO_L22N_7                          | G6                  | I/O  |
| 7    | IO_L22P_7         | IO_L22P_7                          | F5                  | I/O  |

**Table 100: FG456 Package Pinout (Cont'd)**

| Bank | 3S400<br>Pin Name | 3S1000, 3S1500, 3S2000<br>Pin Name | FG456<br>Pin Number | Type |
|------|-------------------|------------------------------------|---------------------|------|
| N/A  | GND               | GND                                | B21                 | GND  |
| N/A  | GND               | GND                                | C9                  | GND  |
| N/A  | GND               | GND                                | C14                 | GND  |
| N/A  | GND               | GND                                | J3                  | GND  |
| N/A  | GND               | GND                                | J9                  | GND  |
| N/A  | GND               | GND                                | J10                 | GND  |
| N/A  | GND               | GND                                | J11                 | GND  |
| N/A  | GND               | GND                                | J12                 | GND  |
| N/A  | GND               | GND                                | J13                 | GND  |
| N/A  | GND               | GND                                | J14                 | GND  |
| N/A  | GND               | GND                                | J20                 | GND  |
| N/A  | GND               | GND                                | K9                  | GND  |
| N/A  | GND               | GND                                | K10                 | GND  |
| N/A  | GND               | GND                                | K11                 | GND  |
| N/A  | GND               | GND                                | K12                 | GND  |
| N/A  | GND               | GND                                | K13                 | GND  |
| N/A  | GND               | GND                                | K14                 | GND  |
| N/A  | GND               | GND                                | L9                  | GND  |
| N/A  | GND               | GND                                | L10                 | GND  |
| N/A  | GND               | GND                                | L11                 | GND  |
| N/A  | GND               | GND                                | L12                 | GND  |
| N/A  | GND               | GND                                | L13                 | GND  |
| N/A  | GND               | GND                                | L14                 | GND  |
| N/A  | GND               | GND                                | M9                  | GND  |
| N/A  | GND               | GND                                | M10                 | GND  |
| N/A  | GND               | GND                                | M11                 | GND  |
| N/A  | GND               | GND                                | M12                 | GND  |
| N/A  | GND               | GND                                | M13                 | GND  |
| N/A  | GND               | GND                                | M14                 | GND  |
| N/A  | GND               | GND                                | N9                  | GND  |
| N/A  | GND               | GND                                | N10                 | GND  |
| N/A  | GND               | GND                                | N11                 | GND  |
| N/A  | GND               | GND                                | N12                 | GND  |
| N/A  | GND               | GND                                | N13                 | GND  |
| N/A  | GND               | GND                                | N14                 | GND  |
| N/A  | GND               | GND                                | P3                  | GND  |
| N/A  | GND               | GND                                | P9                  | GND  |
| N/A  | GND               | GND                                | P10                 | GND  |
| N/A  | GND               | GND                                | P11                 | GND  |
| N/A  | GND               | GND                                | P12                 | GND  |

**Table 107: FG900 Package Pinout (Cont'd)**

| Bank | XC3S2000<br>Pin Name | XC3S4000, XC3S5000<br>Pin Name | FG900 Pin<br>Number | Type |
|------|----------------------|--------------------------------|---------------------|------|
| 0    | IO_L10N_0            | IO_L10N_0                      | J9                  | I/O  |
| 0    | IO_L10P_0            | IO_L10P_0                      | H9                  | I/O  |
| 0    | IO_L11N_0            | IO_L11N_0                      | G10                 | I/O  |
| 0    | IO_L11P_0            | IO_L11P_0                      | F10                 | I/O  |
| 0    | IO_L12N_0            | IO_L12N_0                      | C10                 | I/O  |
| 0    | IO_L12P_0            | IO_L12P_0                      | B10                 | I/O  |
| 0    | IO_L13N_0            | IO_L13N_0                      | J10                 | I/O  |
| 0    | IO_L13P_0            | IO_L13P_0                      | K11                 | I/O  |
| 0    | IO_L14N_0            | IO_L14N_0                      | H11                 | I/O  |
| 0    | IO_L14P_0            | IO_L14P_0                      | G11                 | I/O  |
| 0    | IO_L15N_0            | IO_L15N_0                      | F11                 | I/O  |
| 0    | IO_L15P_0            | IO_L15P_0                      | E11                 | I/O  |
| 0    | IO_L16N_0            | IO_L16N_0                      | D11                 | I/O  |
| 0    | IO_L16P_0            | IO_L16P_0                      | C11                 | I/O  |
| 0    | IO_L17N_0            | IO_L17N_0                      | B11                 | I/O  |
| 0    | IO_L17P_0            | IO_L17P_0                      | A11                 | I/O  |
| 0    | IO_L18N_0            | IO_L18N_0                      | K12                 | I/O  |
| 0    | IO_L18P_0            | IO_L18P_0                      | J12                 | I/O  |
| 0    | IO_L19N_0            | IO_L19N_0                      | H12                 | I/O  |
| 0    | IO_L19P_0            | IO_L19P_0                      | G12                 | I/O  |
| 0    | IO_L20N_0            | IO_L20N_0                      | F12                 | I/O  |
| 0    | IO_L20P_0            | IO_L20P_0                      | E12                 | I/O  |
| 0    | IO_L21N_0            | IO_L21N_0                      | D12                 | I/O  |
| 0    | IO_L21P_0            | IO_L21P_0                      | C12                 | I/O  |
| 0    | IO_L22N_0            | IO_L22N_0                      | B12                 | I/O  |
| 0    | IO_L22P_0            | IO_L22P_0                      | A12                 | I/O  |
| 0    | IO_L23N_0            | IO_L23N_0                      | J13                 | I/O  |
| 0    | IO_L23P_0            | IO_L23P_0                      | H13                 | I/O  |
| 0    | IO_L24N_0            | IO_L24N_0                      | F13                 | I/O  |
| 0    | IO_L24P_0            | IO_L24P_0                      | E13                 | I/O  |
| 0    | IO_L25N_0            | IO_L25N_0                      | B13                 | I/O  |
| 0    | IO_L25P_0            | IO_L25P_0                      | A13                 | I/O  |
| 0    | IO_L26N_0            | IO_L26N_0                      | K14                 | I/O  |
| 0    | IO_L26P_0/VREF_0     | IO_L26P_0/VREF_0               | J14                 | VREF |
| 0    | IO_L27N_0            | IO_L27N_0                      | G14                 | I/O  |
| 0    | IO_L27P_0            | IO_L27P_0                      | F14                 | I/O  |
| 0    | IO_L28N_0            | IO_L28N_0                      | C14                 | I/O  |
| 0    | IO_L28P_0            | IO_L28P_0                      | B14                 | I/O  |
| 0    | IO_L29N_0            | IO_L29N_0                      | J15                 | I/O  |
| 0    | IO_L29P_0            | IO_L29P_0                      | H15                 | I/O  |

**Table 107: FG900 Package Pinout (Cont'd)**

| Bank | XC3S2000<br>Pin Name | XC3S4000, XC3S5000<br>Pin Name | FG900 Pin<br>Number | Type |
|------|----------------------|--------------------------------|---------------------|------|
| 2    | IO_L28N_2            | IO_L28N_2                      | M26                 | I/O  |
| 2    | IO_L28P_2            | IO_L28P_2                      | N25                 | I/O  |
| 2    | IO_L29N_2            | IO_L29N_2                      | N26                 | I/O  |
| 2    | IO_L29P_2            | IO_L29P_2                      | N27                 | I/O  |
| 2    | IO_L31N_2            | IO_L31N_2                      | N29                 | I/O  |
| 2    | IO_L31P_2            | IO_L31P_2                      | N30                 | I/O  |
| 2    | IO_L32N_2            | IO_L32N_2                      | P21                 | I/O  |
| 2    | IO_L32P_2            | IO_L32P_2                      | P22                 | I/O  |
| 2    | IO_L33N_2            | IO_L33N_2                      | P24                 | I/O  |
| 2    | IO_L33P_2            | IO_L33P_2                      | P25                 | I/O  |
| 2    | IO_L34N_2/VREF_2     | IO_L34N_2/VREF_2               | P28                 | VREF |
| 2    | IO_L34P_2            | IO_L34P_2                      | P29                 | I/O  |
| 2    | IO_L35N_2            | IO_L35N_2                      | R21                 | I/O  |
| 2    | IO_L35P_2            | IO_L35P_2                      | R22                 | I/O  |
| 2    | IO_L37N_2            | IO_L37N_2                      | R23                 | I/O  |
| 2    | IO_L37P_2            | IO_L37P_2                      | R24                 | I/O  |
| 2    | IO_L38N_2            | IO_L38N_2                      | R25                 | I/O  |
| 2    | IO_L38P_2            | IO_L38P_2                      | R26                 | I/O  |
| 2    | IO_L39N_2            | IO_L39N_2                      | R27                 | I/O  |
| 2    | IO_L39P_2            | IO_L39P_2                      | R28                 | I/O  |
| 2    | IO_L40N_2            | IO_L40N_2                      | R29                 | I/O  |
| 2    | IO_L40P_2/VREF_2     | IO_L40P_2/VREF_2               | R30                 | VREF |
| 2    | N.C. (◆)             | IO_L41N_2                      | E27                 | I/O  |
| 2    | N.C. (◆)             | IO_L41P_2                      | F26                 | I/O  |
| 2    | N.C. (◆)             | IO_L45N_2                      | K28                 | I/O  |
| 2    | N.C. (◆)             | IO_L45P_2                      | K29                 | I/O  |
| 2    | N.C. (◆)             | IO_L46N_2                      | K21                 | I/O  |
| 2    | N.C. (◆)             | IO_L46P_2                      | L21                 | I/O  |
| 2    | N.C. (◆)             | IO_L47N_2                      | L23                 | I/O  |
| 2    | N.C. (◆)             | IO_L47P_2                      | L24                 | I/O  |
| 2    | N.C. (◆)             | IO_L50N_2                      | M29                 | I/O  |
| 2    | N.C. (◆)             | IO_L50P_2                      | M30                 | I/O  |
| 2    | VCCO_2               | VCCO_2                         | M20                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | N20                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | P20                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | L22                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | J24                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | N24                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | G26                 | VCCO |
| 2    | VCCO_2               | VCCO_2                         | E28                 | VCCO |



**Table 107: FG900 Package Pinout (Cont'd)**

| Bank | XC3S2000<br>Pin Name | XC3S4000, XC3S5000<br>Pin Name | FG900 Pin<br>Number | Type |
|------|----------------------|--------------------------------|---------------------|------|
| N/A  | GND                  | GND                            | R17                 | GND  |
| N/A  | GND                  | GND                            | T17                 | GND  |
| N/A  | GND                  | GND                            | U17                 | GND  |
| N/A  | GND                  | GND                            | V17                 | GND  |
| N/A  | GND                  | GND                            | AC17                | GND  |
| N/A  | GND                  | GND                            | AF17                | GND  |
| N/A  | GND                  | GND                            | AK17                | GND  |
| N/A  | GND                  | GND                            | N18                 | GND  |
| N/A  | GND                  | GND                            | P18                 | GND  |
| N/A  | GND                  | GND                            | R18                 | GND  |
| N/A  | GND                  | GND                            | T18                 | GND  |
| N/A  | GND                  | GND                            | U18                 | GND  |
| N/A  | GND                  | GND                            | V18                 | GND  |
| N/A  | GND                  | GND                            | R19                 | GND  |
| N/A  | GND                  | GND                            | T19                 | GND  |
| N/A  | GND                  | GND                            | A21                 | GND  |
| N/A  | GND                  | GND                            | E21                 | GND  |
| N/A  | GND                  | GND                            | H21                 | GND  |
| N/A  | GND                  | GND                            | AC21                | GND  |
| N/A  | GND                  | GND                            | AF21                | GND  |
| N/A  | GND                  | GND                            | AK21                | GND  |
| N/A  | GND                  | GND                            | K23                 | GND  |
| N/A  | GND                  | GND                            | P23                 | GND  |
| N/A  | GND                  | GND                            | U23                 | GND  |
| N/A  | GND                  | GND                            | AA23                | GND  |
| N/A  | GND                  | GND                            | A25                 | GND  |
| N/A  | GND                  | GND                            | AK25                | GND  |
| N/A  | GND                  | GND                            | E26                 | GND  |
| N/A  | GND                  | GND                            | K26                 | GND  |
| N/A  | GND                  | GND                            | P26                 | GND  |
| N/A  | GND                  | GND                            | U26                 | GND  |
| N/A  | GND                  | GND                            | AA26                | GND  |
| N/A  | GND                  | GND                            | AF26                | GND  |
| N/A  | GND                  | GND                            | A29                 | GND  |
| N/A  | GND                  | GND                            | B29                 | GND  |
| N/A  | GND                  | GND                            | AJ29                | GND  |
| N/A  | GND                  | GND                            | AK29                | GND  |
| N/A  | GND                  | GND                            | A30                 | GND  |
| N/A  | GND                  | GND                            | B30                 | GND  |
| N/A  | GND                  | GND                            | F30                 | GND  |

**Table 110: FG1156 Package Pinout (Cont'd)**

| Bank | XC3S4000<br>Pin Name | XC3S5000<br>Pin Name | FG1156<br>Pin Number | Type |
|------|----------------------|----------------------|----------------------|------|
| 0    | VCCO_0               | VCCO_0               | F13                  | VCCO |
| 0    | VCCO_0               | VCCO_0               | G8                   | VCCO |
| 0    | VCCO_0               | VCCO_0               | H11                  | VCCO |
| 0    | VCCO_0               | VCCO_0               | H15                  | VCCO |
| 0    | VCCO_0               | VCCO_0               | M13                  | VCCO |
| 0    | VCCO_0               | VCCO_0               | M14                  | VCCO |
| 0    | VCCO_0               | VCCO_0               | M15                  | VCCO |
| 0    | VCCO_0               | VCCO_0               | M16                  | VCCO |
| 1    | IO                   | IO                   | B26                  | I/O  |
| 1    | IO                   | IO                   | A18                  | I/O  |
| 1    | IO                   | IO                   | C23                  | I/O  |
| 1    | IO                   | IO                   | E21                  | I/O  |
| 1    | IO                   | IO                   | E25                  | I/O  |
| 1    | IO                   | IO                   | F18                  | I/O  |
| 1    | IO                   | IO                   | F27                  | I/O  |
| 1    | IO                   | IO                   | F29                  | I/O  |
| 1    | IO                   | IO                   | H23                  | I/O  |
| 1    | IO                   | IO                   | H26                  | I/O  |
| 1    | N.C. (◆)             | IO                   | J26                  | I/O  |
| 1    | IO                   | IO                   | K19                  | I/O  |
| 1    | IO                   | IO                   | L19                  | I/O  |
| 1    | IO                   | IO                   | L20                  | I/O  |
| 1    | IO                   | IO                   | L21                  | I/O  |
| 1    | N.C. (◆)             | IO                   | L23                  | I/O  |
| 1    | IO                   | IO                   | L24                  | I/O  |
| 1    | IO/VREF_1            | IO/VREF_1            | D30                  | VREF |
| 1    | IO/VREF_1            | IO/VREF_1            | K21                  | VREF |
| 1    | IO/VREF_1            | IO/VREF_1            | L18                  | VREF |
| 1    | IO_L01N_1/VRP_1      | IO_L01N_1/VRP_1      | A32                  | DCI  |
| 1    | IO_L01P_1/VRN_1      | IO_L01P_1/VRN_1      | B32                  | DCI  |
| 1    | IO_L02N_1            | IO_L02N_1            | A31                  | I/O  |
| 1    | IO_L02P_1            | IO_L02P_1            | B31                  | I/O  |
| 1    | IO_L03N_1            | IO_L03N_1            | B30                  | I/O  |
| 1    | IO_L03P_1            | IO_L03P_1            | C30                  | I/O  |
| 1    | IO_L04N_1            | IO_L04N_1            | C29                  | I/O  |
| 1    | IO_L04P_1            | IO_L04P_1            | D29                  | I/O  |
| 1    | IO_L05N_1            | IO_L05N_1            | A29                  | I/O  |
| 1    | IO_L05P_1            | IO_L05P_1            | B29                  | I/O  |
| 1    | IO_L06N_1/VREF_1     | IO_L06N_1/VREF_1     | E28                  | VREF |
| 1    | IO_L06P_1            | IO_L06P_1            | F28                  | I/O  |

**Table 110: FG1156 Package Pinout (Cont'd)**

| Bank | XC3S4000<br>Pin Name | XC3S5000<br>Pin Name | FG1156<br>Pin Number | Type |
|------|----------------------|----------------------|----------------------|------|
| 2    | IO_L19N_2            | IO_L19N_2            | M29                  | I/O  |
| 2    | IO_L19P_2            | IO_L19P_2            | M30                  | I/O  |
| 2    | IO_L20N_2            | IO_L20N_2            | M31                  | I/O  |
| 2    | IO_L20P_2            | IO_L20P_2            | M32                  | I/O  |
| 2    | IO_L21N_2            | IO_L21N_2            | M26                  | I/O  |
| 2    | IO_L21P_2            | IO_L21P_2            | N25                  | I/O  |
| 2    | IO_L22N_2            | IO_L22N_2            | N27                  | I/O  |
| 2    | IO_L22P_2            | IO_L22P_2            | N28                  | I/O  |
| 2    | IO_L23N_2/VREF_2     | IO_L23N_2/VREF_2     | N31                  | VREF |
| 2    | IO_L23P_2            | IO_L23P_2            | N32                  | I/O  |
| 2    | IO_L24N_2            | IO_L24N_2            | N24                  | I/O  |
| 2    | IO_L24P_2            | IO_L24P_2            | P24                  | I/O  |
| 2    | IO_L26N_2            | IO_L26N_2            | P29                  | I/O  |
| 2    | IO_L26P_2            | IO_L26P_2            | P30                  | I/O  |
| 2    | IO_L27N_2            | IO_L27N_2            | P31                  | I/O  |
| 2    | IO_L27P_2            | IO_L27P_2            | P32                  | I/O  |
| 2    | IO_L28N_2            | IO_L28N_2            | P33                  | I/O  |
| 2    | IO_L28P_2            | IO_L28P_2            | P34                  | I/O  |
| 2    | IO_L29N_2            | IO_L29N_2            | R24                  | I/O  |
| 2    | IO_L29P_2            | IO_L29P_2            | R25                  | I/O  |
| 2    | IO_L30N_2            | IO_L30N_2            | R28                  | I/O  |
| 2    | IO_L30P_2            | IO_L30P_2            | R29                  | I/O  |
| 2    | IO_L31N_2            | IO_L31N_2            | R31                  | I/O  |
| 2    | IO_L31P_2            | IO_L31P_2            | R32                  | I/O  |
| 2    | IO_L32N_2            | IO_L32N_2            | R33                  | I/O  |
| 2    | IO_L32P_2            | IO_L32P_2            | R34                  | I/O  |
| 2    | IO_L33N_2            | IO_L33N_2            | R26                  | I/O  |
| 2    | IO_L33P_2            | IO_L33P_2            | T25                  | I/O  |
| 2    | IO_L34N_2/VREF_2     | IO_L34N_2/VREF_2     | T28                  | VREF |
| 2    | IO_L34P_2            | IO_L34P_2            | T29                  | I/O  |
| 2    | IO_L35N_2            | IO_L35N_2            | T32                  | I/O  |
| 2    | IO_L35P_2            | IO_L35P_2            | T33                  | I/O  |
| 2    | IO_L37N_2            | IO_L37N_2            | U27                  | I/O  |
| 2    | IO_L37P_2            | IO_L37P_2            | U28                  | I/O  |
| 2    | IO_L38N_2            | IO_L38N_2            | U29                  | I/O  |
| 2    | IO_L38P_2            | IO_L38P_2            | U30                  | I/O  |
| 2    | IO_L39N_2            | IO_L39N_2            | U31                  | I/O  |
| 2    | IO_L39P_2            | IO_L39P_2            | U32                  | I/O  |
| 2    | IO_L40N_2            | IO_L40N_2            | U33                  | I/O  |
| 2    | IO_L40P_2/VREF_2     | IO_L40P_2/VREF_2     | U34                  | VREF |

**Table 110: FG1156 Package Pinout (Cont'd)**

| Bank | XC3S4000<br>Pin Name | XC3S5000<br>Pin Name | FG1156<br>Pin Number | Type |
|------|----------------------|----------------------|----------------------|------|
| 3    | IO_L24P_3            | IO_L24P_3            | AC26                 | I/O  |
| 3    | IO_L26N_3            | IO_L26N_3            | AA28                 | I/O  |
| 3    | IO_L26P_3            | IO_L26P_3            | AA27                 | I/O  |
| 3    | IO_L27N_3            | IO_L27N_3            | AA30                 | I/O  |
| 3    | IO_L27P_3            | IO_L27P_3            | AA29                 | I/O  |
| 3    | IO_L28N_3            | IO_L28N_3            | AA32                 | I/O  |
| 3    | IO_L28P_3            | IO_L28P_3            | AA31                 | I/O  |
| 3    | IO_L29N_3            | IO_L29N_3            | AA34                 | I/O  |
| 3    | IO_L29P_3            | IO_L29P_3            | AA33                 | I/O  |
| 3    | IO_L30N_3            | IO_L30N_3            | Y29                  | I/O  |
| 3    | IO_L30P_3            | IO_L30P_3            | Y28                  | I/O  |
| 3    | IO_L31N_3            | IO_L31N_3            | Y32                  | I/O  |
| 3    | IO_L31P_3            | IO_L31P_3            | Y31                  | I/O  |
| 3    | IO_L32N_3            | IO_L32N_3            | Y34                  | I/O  |
| 3    | IO_L32P_3            | IO_L32P_3            | Y33                  | I/O  |
| 3    | IO_L33N_3            | IO_L33N_3            | W25                  | I/O  |
| 3    | IO_L33P_3            | IO_L33P_3            | Y26                  | I/O  |
| 3    | IO_L34N_3            | IO_L34N_3            | W29                  | I/O  |
| 3    | IO_L34P_3/VREF_3     | IO_L34P_3/VREF_3     | W28                  | VREF |
| 3    | IO_L35N_3            | IO_L35N_3            | W33                  | I/O  |
| 3    | IO_L35P_3            | IO_L35P_3            | W32                  | I/O  |
| 3    | IO_L37N_3            | IO_L37N_3            | V28                  | I/O  |
| 3    | IO_L37P_3            | IO_L37P_3            | V27                  | I/O  |
| 3    | IO_L38N_3            | IO_L38N_3            | V30                  | I/O  |
| 3    | IO_L38P_3            | IO_L38P_3            | V29                  | I/O  |
| 3    | IO_L39N_3            | IO_L39N_3            | V32                  | I/O  |
| 3    | IO_L39P_3            | IO_L39P_3            | V31                  | I/O  |
| 3    | IO_L40N_3/VREF_3     | IO_L40N_3/VREF_3     | V34                  | VREF |
| 3    | IO_L40P_3            | IO_L40P_3            | V33                  | I/O  |
| 3    | N.C. (◆)             | IO_L41N_3            | AH32                 | I/O  |
| 3    | N.C. (◆)             | IO_L41P_3            | AH31                 | I/O  |
| 3    | N.C. (◆)             | IO_L44N_3            | AD29                 | I/O  |
| 3    | N.C. (◆)             | IO_L44P_3            | AD28                 | I/O  |
| 3    | IO_L45N_3            | IO_L45N_3            | AC34                 | I/O  |
| 3    | IO_L45P_3            | IO_L45P_3            | AC33                 | I/O  |
| 3    | IO_L46N_3            | IO_L46N_3            | AB28                 | I/O  |
| 3    | IO_L46P_3            | IO_L46P_3            | AB27                 | I/O  |
| 3    | IO_L47N_3            | IO_L47N_3            | AB32                 | I/O  |
| 3    | IO_L47P_3            | IO_L47P_3            | AB31                 | I/O  |
| 3    | IO_L48N_3            | IO_L48N_3            | AA24                 | I/O  |

**Table 110: FG1156 Package Pinout (Cont'd)**

| Bank | XC3S4000<br>Pin Name | XC3S5000<br>Pin Name | FG1156<br>Pin Number | Type |
|------|----------------------|----------------------|----------------------|------|
| 7    | IO_L45P_7            | IO_L45P_7            | M2                   | I/O  |
| 7    | IO_L46N_7            | IO_L46N_7            | N7                   | I/O  |
| 7    | IO_L46P_7            | IO_L46P_7            | N8                   | I/O  |
| 7    | N.C. (◆)             | IO_L47N_7            | P9                   | I/O  |
| 7    | N.C. (◆)             | IO_L47P_7            | P10                  | I/O  |
| 7    | IO_L49N_7            | IO_L49N_7            | P1                   | I/O  |
| 7    | IO_L49P_7            | IO_L49P_7            | P2                   | I/O  |
| 7    | IO_L50N_7            | IO_L50N_7            | R10                  | I/O  |
| 7    | IO_L50P_7            | IO_L50P_7            | R11                  | I/O  |
| 7    | N.C. (◆)             | IO_L51N_7            | U11                  | I/O  |
| 7    | N.C. (◆)             | IO_L51P_7            | T11                  | I/O  |
| 7    | VCCO_7               | VCCO_7               | D3                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | H3                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | H7                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | L4                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | L8                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | N12                  | VCCO |
| 7    | VCCO_7               | VCCO_7               | N2                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | N6                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | P12                  | VCCO |
| 7    | VCCO_7               | VCCO_7               | R12                  | VCCO |
| 7    | VCCO_7               | VCCO_7               | R8                   | VCCO |
| 7    | VCCO_7               | VCCO_7               | T12                  | VCCO |
| 7    | VCCO_7               | VCCO_7               | T4                   | VCCO |
| N/A  | GND                  | GND                  | A1                   | GND  |
| N/A  | GND                  | GND                  | A13                  | GND  |
| N/A  | GND                  | GND                  | A16                  | GND  |
| N/A  | GND                  | GND                  | A19                  | GND  |
| N/A  | GND                  | GND                  | A2                   | GND  |
| N/A  | GND                  | GND                  | A22                  | GND  |
| N/A  | GND                  | GND                  | A26                  | GND  |
| N/A  | GND                  | GND                  | A30                  | GND  |
| N/A  | GND                  | GND                  | A33                  | GND  |
| N/A  | GND                  | GND                  | A34                  | GND  |
| N/A  | GND                  | GND                  | A5                   | GND  |
| N/A  | GND                  | GND                  | A9                   | GND  |
| N/A  | GND                  | GND                  | AA14                 | GND  |
| N/A  | GND                  | GND                  | AA15                 | GND  |
| N/A  | GND                  | GND                  | AA16                 | GND  |
| N/A  | GND                  | GND                  | AA17                 | GND  |