



Welcome to [E-XFL.COM](#)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.


Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Active
Core Processor	dsPIC
Core Size	16-Bit
Speed	70 MIPS
Connectivity	I ² C, IrDA, LINbus, SPI, UART/USART
Peripherals	Brown-out Detect/Reset, I ² S, POR, PWM, WDT
Number of I/O	33
Program Memory Size	128KB (43K x 24)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	8K x 8
Voltage - Supply (Vcc/Vdd)	3V ~ 3.6V
Data Converters	A/D 17x12b; D/A 1x12b
Oscillator Type	Internal
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	48-TQFP
Supplier Device Package	48-TQFP (7x7)
Purchase URL	https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep128gs705-i-pt

dsPIC33EPXXXGS70X/80X FAMILY

FIGURE 4-6: DATA MEMORY MAP FOR dsPIC33EP64GS70X/80X DEVICES

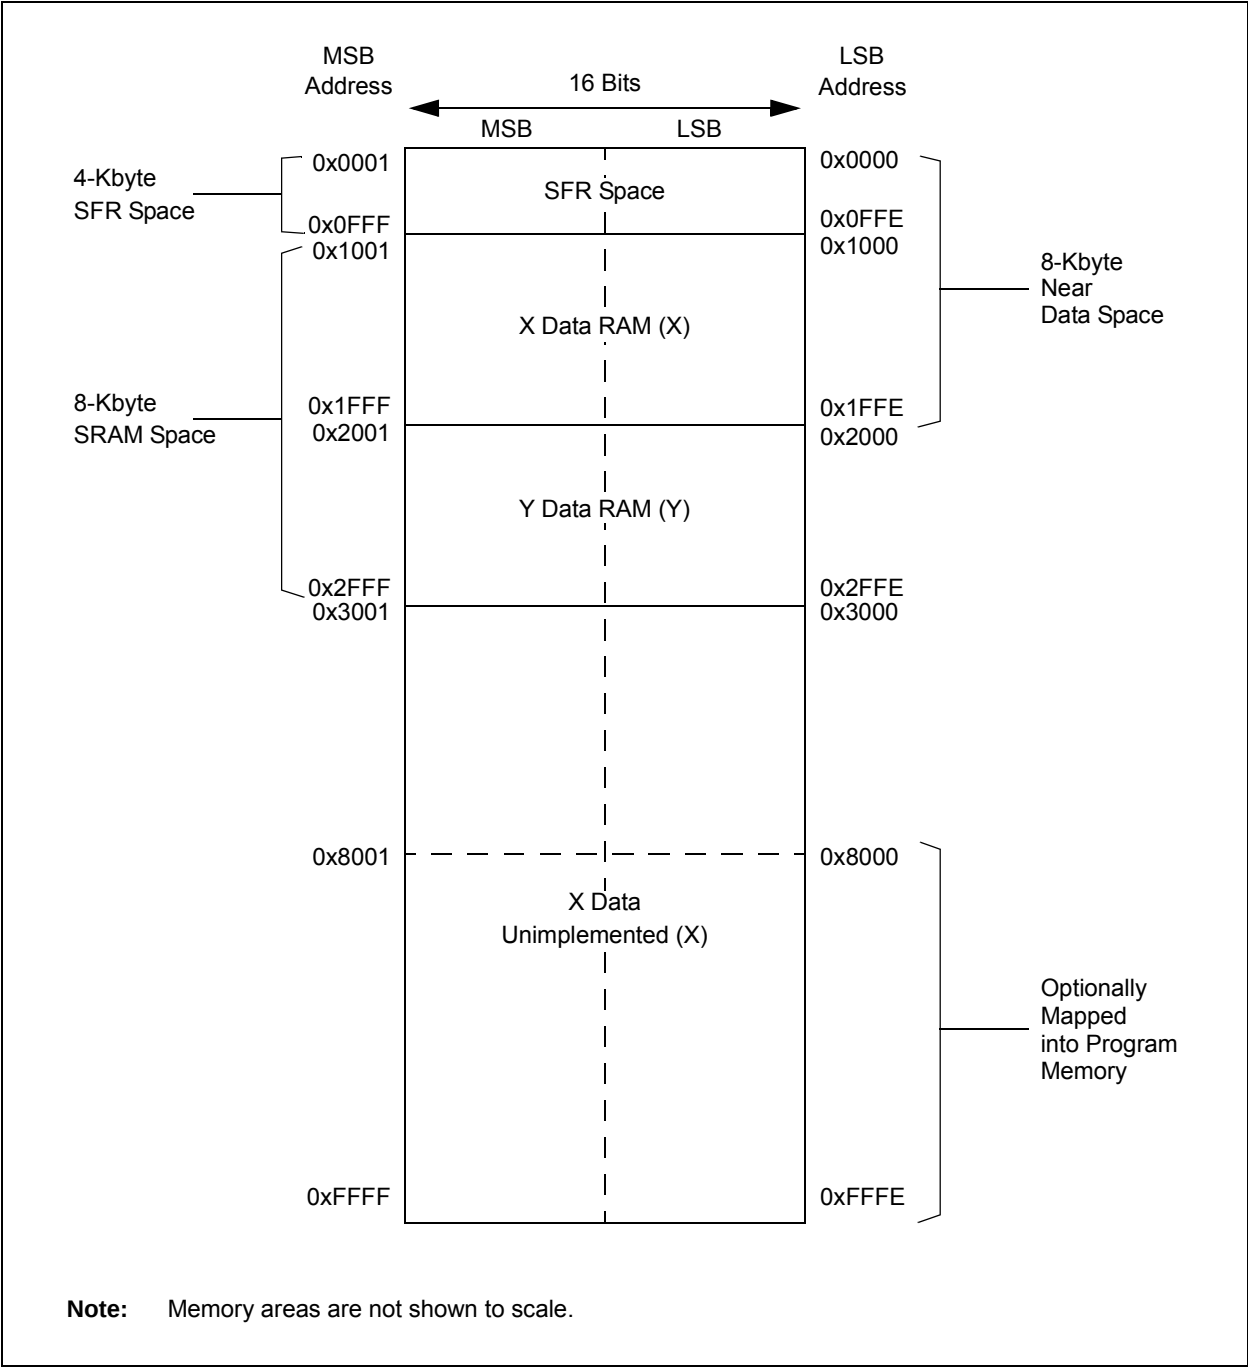

dsPIC33EPXXXGS70X/80X FAMILY

TABLE 4-4: SFR BLOCK 200h

Register	Address	All Resets	Register	Address	All Resets	Register	Address	All Resets
I2C1 and I2C2			U1STA	222	0000000010010000	SPI1BRGH	252	0000000000000000
I2C1CONL	200	0001000000000000	U1TXREG	224	0000000xxxxxxx	SPI1IMSKL	254	0000000000000000
I2C1CONH	202	0000000000000000	U1RXREG	226	0000000000000000	SPI1IMSKH	256	0000000000000000
I2C1STAT	204	0000000000000000	U1BRG	228	0000000000000000	SPI1URDTL	258	0000000000000000
I2C1ADD	206	0000000000000000	U2MODE	230	0000000000000000	SPI1URDTH	25A	0000000000000000
I2C1MSK	208	0000000000000000	U2STA	232	0000000010010000	SPI2CON1L	260	0000000000000000
I2C1BRG	20A	0000000000000000	U2TXREG	234	0000000xxxxxxx	SPI2CON1H	262	0000000000000000
I2C1TRN	20C	0000000011111111	U2RXREG	236	0000000000000000	SPI2CON2L	264	0000000000000000
I2C1RCV	20E	0000000000000000	U2BRG	238	0000000000000000	SPI2CON2H	266	0000000000000000
I2C2CON1	210	0001000000000000	SPI			SPI2STATL	268	000000000101000
I2C2CON2	212	0000000000000000	SPI1CON1L	240	0000000000000000	SPI2STATH	26A	0000000000000000
I2C2STAT	214	0000000000000000	SPI1CON1H	242	0000000000000000	SPI2BUFL	26C	0000000000000000
I2C2ADD	216	0000000000000000	SPI1CON2L	244	0000000000000000	SPI2BUFH	26E	0000000000000000
I2C2MSK	218	0000000000000000	SPI1CON2H	246	0000000000000000	SPI3STAT	270	000xxxxxxx
I2C2BRG	21A	0000000000000000	SPI1STATL	248	000000000101000	SPI2BRGH	272	0000000000000000
I2C2TRN	21C	0000000011111111	SPI1STATH	24A	0000000000000000	SPI2IMSKL	274	0000000000000000
I2C2RCV	21E	0000000000000000	SPI1BUFL	24C	0000000000000000	SPI2IMSKH	276	0000000000000000
UART1 and UART2			SPI1BUFH	24E	0000000000000000	SPI2URDTL	278	0000000000000000
U1MODE	220	0000000000000000	SPI1BRGL	250	000xxxxxxx	SPI2URDTH	27A	0000000000000000

Legend: x = unknown or indeterminate value. Address values are in hexadecimal. Reset values are in binary.

TABLE 4-5: SFR BLOCK 300h

Register	Address	All Resets	Register	Address	All Resets	Register	Address	All Resets
ADC			ADCMPOENH	33A	0000000000000000	ADTRIG4L	390	0000000000000000
ADCON1L	300	0000000000000000	ADCMPOLO	33C	0000000000000000	ADTRIG4H	392	0000000000000000
ADCON1H	302	0000000001100000	ADCMPOHI	33E	0000000000000000	ADCMPOCON	3A0	0000000000000000
ADCON2L	304	0000000000000000	ADCMPIENL	340	0000000000000000	ADCMPICON	3A4	0000000000000000
ADCON2H	306	0000000000000000	ADCMPIENH	342	0000000000000000	ADBASE	3C0	0000000000000000
ADCON3L	308	0000000000000000	ADCMP1LO	344	0000000000000000	ADLVLTRGL	3D0	0000000000000000
ADCON3H	30A	0000000000000000	ADCMP1HI	346	0000000000000000	ADLVLTRGH	3D2	0000000000000000
ADCON4L	30C	0000000000000000	ADFL0DAT	368	0000000000000000	ADCORE0L	3D4	0000000000000000
ADCON4H	30E	0000000000000000	ADFL0CON	36A	0000000000000000	ADCORE0H	3D6	0000001100000000
ADMOD0L	310	0000000000000000	ADFL1DAT	36C	0000000000000000	ADCORE1L	3D8	0000000000000000
ADMOD0H	312	0000000000000000	ADFL1CON	36E	0000000000000000	ADCORE1H	3DA	0000001100000000
ADMOD1L	314	0000000000000000	ADTRIG0L	380	0000000000000000	ADCORE2L	3DC	0000000000000000
ADIEL	320	0000000000000000	ADTRIG0H	382	0000000000000000	ADCORE2H	3DE	0000001100000000
ADIEH	322	0000000000000000	ADTRIG1L	384	0000000000000000	ADCORE3L	3E0	0000000000000000
ADCSS1L	328	0000000000000000	ADTRIG1H	386	0000000000000000	ADCORE3H	3E2	0000001100000000
ADCSS1H	32A	0000000000000000	ADTRIG2L	388	0000000000000000	ADEIEL	3F0	0000000000000000
ADSTATL	330	0000000000000000	ADTRIG2H	38A	0000000000000000	ADEIEH	3F2	0000000000000000
ADSTATH	332	0000000000000000	ADTRIG3L	38C	0000000000000000	ADEISTATL	3F8	0000000000000000
ADCMPOENL	338	0000000000000000	ADTRIG3H	38E	0000000000000000	ADEISTATH	3FA	0000000000000000

Legend: x = unknown or indeterminate value. Address values are in hexadecimal. Reset values are in binary.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 9-5: ACLKCON: AUXILIARY CLOCK DIVISOR CONTROL REGISTER

R/W-0	R-0	R/W-1	U-0	U-0	R/W-1	R/W-1	R/W-1
ENAPLL	APLLCK	SELACLK	—	—	APSTSCLR2	APSTSCLR1	APSTSCLR0
bit 15							bit 8

R/W-0	R/W-0	U-0	U-0	U-0	U-0	U-0	U-0
ASRCSEL	FRCSEL	—	—	—	—	—	—
bit 7							bit 0

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
 -n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

- bit 15 **ENAPLL:** Auxiliary PLL Enable bit
 1 = APLL is enabled
 0 = APLL is disabled
- bit 14 **APLLCK:** APLL Locked Status bit (read-only)
 1 = Indicates that Auxiliary PLL is in lock
 0 = Indicates that Auxiliary PLL is not in lock
- bit 13 **SELACLK:** Select Auxiliary Clock Source for Auxiliary Clock Divider bit
 1 = Auxiliary oscillators provide the source clock for the auxiliary clock divider
 0 = Primary PLL (Fvco) provides the source clock for the auxiliary clock divider
- bit 12-11 **Unimplemented:** Read as '0'
- bit 10-8 **APSTSCLR<2:0>:** Auxiliary Clock Output Divider bits
 111 = Divided by 1
 110 = Divided by 2
 101 = Divided by 4
 100 = Divided by 8
 011 = Divided by 16
 010 = Divided by 32
 001 = Divided by 64
 000 = Divided by 256
- bit 7 **ASRCSEL:** Select Reference Clock Source for Auxiliary Clock bit
 1 = Primary oscillator is the clock source
 0 = No clock input is selected
- bit 6 **FRCSEL:** Select Reference Clock Source for Auxiliary PLL bit
 1 = Selects the FRC clock for Auxiliary PLL
 0 = Input clock source is determined by the ASRCSEL bit setting
- bit 5-0 **Unimplemented:** Read as '0'

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 11-53: RPOR20: PERIPHERAL PIN SELECT OUTPUT REGISTER 20

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP70R6	RP70R5	RP70R4	RP70R3	RP70R2	RP70R1	RP70R0
bit 15							bit 8

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP69R6	RP69R5	RP69R4	RP69R3	RP69R2	RP69R1	RP69R0
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **RP70R<6:0>:** Peripheral Output Function is Assigned to RP70 Output Pin bits
(see Table 11-13 for peripheral function numbers)

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **RP69R<6:0>:** Peripheral Output Function is Assigned to RP69 Output Pin bits
(see Table 11-13 for peripheral function numbers)

REGISTER 11-54: RPOR21: PERIPHERAL PIN SELECT OUTPUT REGISTER 21

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP72R6	RP72R5	RP72R4	RP72R3	RP72R2	RP72R1	RP72R0
bit 15							bit 8

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP71R6	RP71R5	RP71R4	RP71R3	RP71R2	RP71R1	RP71R0
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **RP72R<6:0>:** Peripheral Output Function is Assigned to RP72 Output Pin bits
(see Table 11-13 for peripheral function numbers)

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **RP71R<6:0>:** Peripheral Output Function is Assigned to RP71 Output Pin bits
(see Table 11-13 for peripheral function numbers)

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 14-2: ICxCON2: INPUT CAPTURE x CONTROL REGISTER 2 (CONTINUED)

bit 4-0 **SYNCSEL<4:0>**: Input Source Select for Synchronization and Trigger Operation bits⁽⁴⁾

11111 = No sync or trigger source for ICx
11110 = Reserved
11101 = Reserved
11100 = Reserved
11011 = CMP4 module synchronizes or triggers ICx⁽⁵⁾
11010 = CMP3 module synchronizes or triggers ICx⁽⁵⁾
11001 = CMP2 module synchronizes or triggers ICx⁽⁵⁾
11000 = CMP1 module synchronizes or triggers ICx⁽⁵⁾
10111 = Reserved
10110 = Reserved
10101 = Reserved
10100 = Reserved
10011 = IC4 module interrupt synchronizes or triggers ICx
10010 = IC3 module interrupt synchronizes or triggers ICx
10001 = IC2 module interrupt synchronizes or triggers ICx
10000 = IC1 module interrupt synchronizes or triggers ICx
01111 = Timer5 synchronizes or triggers ICx
01110 = Timer4 synchronizes or triggers ICx
01101 = Timer3 synchronizes or triggers ICx **(default)**
01100 = Timer2 synchronizes or triggers ICx
01011 = Timer1 synchronizes or triggers ICx
01010 = Reserved
01001 = Reserved
01000 = IC4 module synchronizes or triggers ICx
00111 = IC3 module synchronizes or triggers ICx
00110 = IC2 module synchronizes or triggers ICx
00101 = IC1 module synchronizes or triggers ICx
00100 = OC4 module synchronizes or triggers ICx
00011 = OC3 module synchronizes or triggers ICx
00010 = OC2 module synchronizes or triggers ICx
00001 = OC1 module synchronizes or triggers ICx
00000 = No sync or trigger source for ICx

- Note 1:** The IC32 bit in both the odd and even ICx must be set to enable Cascade mode.
- 2:** The input source is selected by the SYNCSEL<4:0> bits of the ICxCON2 register.
- 3:** This bit is set by the selected input source (selected by SYNCSEL<4:0> bits); it can be read, set and cleared in software.
- 4:** Do not use the ICx module as its own sync or trigger source.
- 5:** This option should only be selected as a trigger source and not as a synchronization source.

dsPIC33EPXXXGS70X/80X FAMILY

NOTES:

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 17-3: PTGBTE: PTG BROADCAST TRIGGER ENABLE REGISTER^(1,2) (CONTINUED)

bit 4	OC1CS: Clock Source for OC1 bit 1 = Generates clock pulse when the broadcast command is executed 0 = Does not generate clock pulse when the broadcast command is executed
bit 3	OC4TSS: Trigger/Synchronization Source for OC4 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed
bit 2	OC3TSS: Trigger/Synchronization Source for OC3 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed
bit 1	OC2TSS: Trigger/Synchronization Source for OC2 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed
bit 0	OC1TSS: Trigger/Synchronization Source for OC1 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed

Note 1: This register is read-only when the PTG module is executing Step commands (PTGEN = 1 and PTGSTRT = 1).

2: This register is only used with the PTGCTRL OPTION = 1111 Step command.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 19-4: I2CxMSK: I2Cx SLAVE MODE ADDRESS MASK REGISTER

U-0	U-0	U-0	U-0	U-0	U-0	R/W-0	R/W-0
—	—	—	—	—	—	AMSK<9:8>	
bit 15							bit 8

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
AMSK<7:0>							
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-10

Unimplemented: Read as '0'

bit 9-0

AMSK<9:0>: Address Mask Select bits

For 10-Bit Address:

1 = Enables masking for bit Ax of incoming message address; bit match is not required in this position

0 = Disables masking for bit Ax; bit match is required in this position

For 7-Bit Address (I2CxMSK<6:0> only):

1 = Enables masking for bit Ax + 1 of incoming message address; bit match is not required in this position

0 = Disables masking for bit Ax + 1; bit match is required in this position

23.0 CONTROLLER AREA NETWORK (CAN) MODULE (dsPIC33EPXXXGS80X DEVICES ONLY)

Note 1: This data sheet summarizes the features of the dsPIC33EPXXXGS70X/80X family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “**Enhanced Controller Area Network (ECAN™)**” (DS70353) in the “*dsPIC33/PIC24 Family Reference Manual*”, which is available from the Microchip web site (www.microchip.com).

2: Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

23.1 Overview

The Controller Area Network (CAN) module is a serial interface, useful for communicating with other CAN modules or microcontroller devices. This interface/protocol was designed to allow communications within noisy environments. The dsPIC33EPXXXGS80X devices contain two CAN modules.

The CAN module is a communication controller, implementing the CAN 2.0 A/B protocol, as defined in the BOSCH CAN specification. The module supports CAN 1.2, CAN 2.0A, CAN 2.0B Passive and CAN 2.0B Active versions of the protocol. The module implementation is a full CAN system. The CAN specification is not covered within this data sheet. The reader can refer to the BOSCH CAN specification for further details.

The CAN module features are as follows:

- Implementation of the CAN Protocol, CAN 1.2, CAN 2.0A and CAN 2.0B
- Standard and Extended Data Frames
- 0-8 Bytes of Data Length
- Programmable Bit Rate, up to 1 Mbit/sec
- Automatic Response to Remote Transmission Requests
- Up to 8 Transmit Buffers with Application Specified Prioritization and Abort Capability (each buffer can contain up to 8 bytes of data)
- Up to 32 Receive Buffers (each buffer can contain up to 8 bytes of data)
- Up to 16 Full (Standard/Extended Identifier) Acceptance Filters
- Three Full Acceptance Filter Masks
- DeviceNet™ Addressing Support
- Programmable Wake-up Functionality with Integrated Low-Pass Filter
- Programmable Loopback mode supports Self-Test Operation
- Signaling via Interrupt Capabilities for All CAN Receiver and Transmitter Error States
- Programmable Clock Source
- Programmable Link to Input Capture 2 (IC2) module for Timestamping and Network Synchronization
- Low-Power Sleep and Idle modes

The CAN bus module consists of a protocol engine and message buffering/control. The CAN protocol engine handles all functions for receiving and transmitting messages on the CAN bus. Messages are transmitted by first loading the appropriate data registers. Status and errors can be checked by reading the appropriate registers. Any message detected on the CAN bus is checked for errors and then matched against filters to see if it should be received and stored in one of the receive registers.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 23-3: CxVEC: CANx INTERRUPT CODE REGISTER

U-0	U-0	U-0	R-0	R-0	R-0	R-0	R-0
—	—	—	FILHIT4	FILHIT3	FILHIT2	FILHIT1	FILHIT0
bit 15							
							bit 8

U-0	R-1	R-0	R-0	R-0	R-0	R-0	R-0
—	ICODE6	ICODE5	ICODE4	ICODE3	ICODE2	ICODE1	ICODE0
bit 7							
							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **FILHIT<4:0>:** Filter Hit Number bits

10000-11111 = Reserved

01111 = Filter 15

•

•

•

00001 = Filter 1

00000 = Filter 0

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **ICODE<6:0>:** Interrupt Flag Code bits

1000101-1111111 = Reserved

1000100 = FIFO almost full interrupt

1000011 = Receiver overflow interrupt

1000010 = Wake-up interrupt

1000001 = Error interrupt

1000000 = No interrupt

•

•

•

0010000-0111111 = Reserved

0001111 = RB15 buffer interrupt

•

•

•

0001001 = RB9 buffer interrupt

0001000 = RB8 buffer interrupt

0000111 = TRB7 buffer interrupt

0000110 = TRB6 buffer interrupt

0000101 = TRB5 buffer interrupt

0000100 = TRB4 buffer interrupt

0000011 = TRB3 buffer interrupt

0000010 = TRB2 buffer interrupt

0000001 = TRB1 buffer interrupt

0000000 = TRB0 buffer interrupt

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 23-24: CxRXOVF1: CANx RECEIVE BUFFER OVERFLOW REGISTER 1

R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0
RXOVF<15:8>							
bit 15				bit 8			

R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0
RXOVF<7:0>							
bit 7				bit 0			

Legend:	C = Writable bit, but only '0' can be Written to Clear bit		
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown

bit 15-0 **RXOVF<15:0>**: Receive Buffer n Overflow bits
1 = Module attempted to write to a full buffer (set by module)
0 = No overflow condition (cleared by user software)

REGISTER 23-25: CxRXOVF2: CANx RECEIVE BUFFER OVERFLOW REGISTER 2

R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0
RXOVF<31:24>							
bit 15				bit 8			

R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0	R/C-0
RXOVF<23:16>							
bit 7				bit 0			

Legend:	C = Writable bit, but only '0' can be Written to Clear bit		
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
-n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown

bit 15-0 **RXOVF<31:16>**: Receive Buffer n Overflow bits
1 = Module attempted to write to a full buffer (set by module)
0 = No overflow condition (cleared by user software)

dsPIC33EPXXXGS70X/80X FAMILY

NOTES:

dsPIC33EPXXXGS70X/80X FAMILY

TABLE 30-4: DC TEMPERATURE AND VOLTAGE SPECIFICATIONS

DC CHARACTERISTICS			Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated) ⁽¹⁾ Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended				
Param No.	Symbol	Characteristic	Min.	Typ.	Max.	Units	Conditions
Operating Voltage							
DC10	VDD	Supply Voltage	3.0	—	3.6	V	
DC12	VDR	RAM Retention Voltage ⁽²⁾	—	—	1.95	V	+25°C, +85°C, +125°C
			—	—	2.0	V	-40°C
DC16	VPOR	VDD Start Voltage to Ensure Internal Power-on Reset Signal	—	—	VSS	V	
DC17	SVDD	VDD Rise Rate to Ensure Internal Power-on Reset Signal	1.0	—	—	V/ms	0V-3V in 3 ms

Note 1: Device is functional at VBORMIN < VDD < VDDMIN. Analog modules (ADC, PGAs and comparators) may have degraded performance. Device functionality is tested but not characterized. Refer to Parameter BO10 in Table 30-13 for the minimum and maximum BOR values.

2: This is the limit to which VDD may be lowered and the RAM contents will always be retained.

TABLE 30-5: FILTER CAPACITOR (CEFC) SPECIFICATIONS

Standard Operating Conditions (unless otherwise stated): Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended							
Param No.	Symbol	Characteristics	Min.	Typ.	Max.	Units	Comments
	CEFC	External Filter Capacitor Value ⁽¹⁾	4.7	—	10	μF	Capacitor must have a low series resistance (<1 Ohm)

Note 1: Typical VCAP Voltage = 1.8 volts when VDD ≥ VDDMIN.

dsPIC33EPXXXGS70X/80X FAMILY

TABLE 30-12: DC CHARACTERISTICS: I/O PIN OUTPUT SPECIFICATIONS

DC CHARACTERISTICS			Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated) Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended				
Param.	Symbol	Characteristic	Min.	Typ.	Max.	Units	Conditions
DO10	VOL	Output Low Voltage 4x Sink Driver Pins ⁽²⁾	—	—	0.4	V	VDD = 3.3V, IOL ≤ 6 mA, -40°C ≤ TA ≤ +85°C, IOL ≤ 5 mA, +85°C < TA ≤ +125°C
		Output Low Voltage 8x Sink Driver Pins ⁽³⁾	—	—	0.4	V	VDD = 3.3V, IOL ≤ 12 mA, -40°C ≤ TA ≤ +85°C, IOL ≤ 8 mA, +85°C < TA ≤ +125°C
DO20	VOH	Output High Voltage 4x Source Driver Pins ⁽²⁾	2.4	—	—	V	IOH ≥ -10 mA, VDD = 3.3V
		Output High Voltage 8x Source Driver Pins ⁽³⁾	2.4	—	—	V	IOH ≥ -15 mA, VDD = 3.3V
DO20A	VOH1	Output High Voltage 4x Source Driver Pins ⁽²⁾	1.5 ⁽¹⁾	—	—	V	IOH ≥ -14 mA, VDD = 3.3V
			2.0 ⁽¹⁾	—	—		IOH ≥ -12 mA, VDD = 3.3V
			3.0 ⁽¹⁾	—	—		IOH ≥ -7 mA, VDD = 3.3V
		Output High Voltage 8x Source Driver Pins ⁽³⁾	1.5 ⁽¹⁾	—	—	V	IOH ≥ -22 mA, VDD = 3.3V
			2.0 ⁽¹⁾	—	—		IOH ≥ -18 mA, VDD = 3.3V
			3.0 ⁽¹⁾	—	—		IOH ≥ -10 mA, VDD = 3.3V

Note 1: Parameters are characterized but not tested.

2: Includes RA0-RA2, RB0-RB1, RB9, RC1-RC2, RC9-RC10, RC12, RD7, RD8, RE4-RE5, RE8-RE9 and RE12-RE13 pins.

3: Includes all I/O pins that are not 4x driver pins (see **Note 2**).

TABLE 30-13: ELECTRICAL CHARACTERISTICS: BOR

DC CHARACTERISTICS			Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated) ⁽¹⁾ Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended				
Param No.	Symbol	Characteristic	Min. ⁽²⁾	Typ.	Max.	Units	Conditions
BO10	VBOR	BOR Event on VDD Transition High-to-Low	2.65	—	2.95	V	VDD (Notes 2 and 3)

Note 1: Device is functional at VBORMIN < VDD < VDDMIN, but will have degraded performance. Device functionality is tested, but not characterized. Analog modules (ADC, PGAs and comparators) may have degraded performance.

2: Parameters are for design guidance only and are not tested in manufacturing.

3: The VBOR specification is relative to VDD.

dsPIC33EPXXXGS70X/80X FAMILY

FIGURE 30-14: SPI1, SPI2 AND SPI3 MASTER MODE (FULL-DUPLEX, CKE = 0, CKP = x, SMP = 1) TIMING CHARACTERISTICS^(1,2)

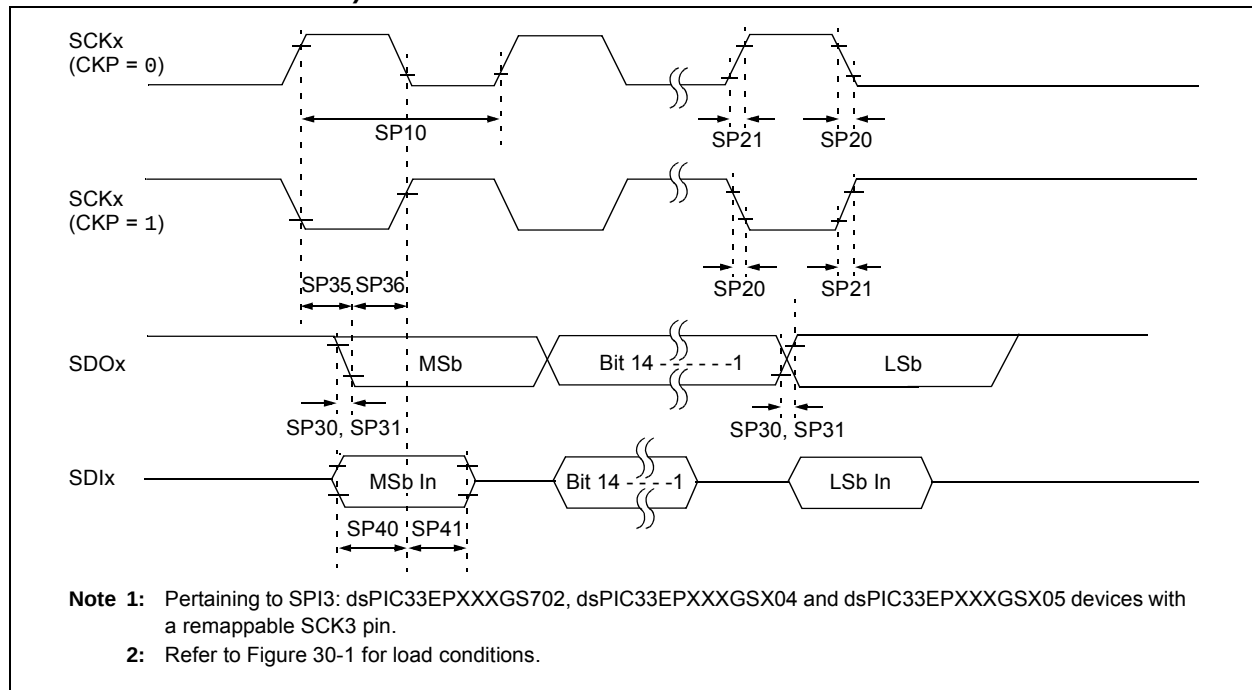


TABLE 30-34: SPI1, SPI2 AND SPI3 MASTER MODE (FULL-DUPLEX, CKE = 0, CKP = x, SMP = 1) TIMING REQUIREMENTS⁽⁵⁾

AC CHARACTERISTICS			Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated) Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended				
Param.	Symbol	Characteristic ⁽¹⁾	Min.	Typ. ⁽²⁾	Max.	Units	Conditions
SP10	FscP	Maximum SCKx Frequency	—	—	9	MHz	-40°C to +125°C (Note 3)
SP20	TscF	SCKx Output Fall Time	—	—	—	ns	See Parameter DO32 (Note 4)
SP21	TscR	SCKx Output Rise Time	—	—	—	ns	See Parameter DO31 (Note 4)
SP30	TdoF	SDOx Data Output Fall Time	—	—	—	ns	See Parameter DO32 (Note 4)
SP31	TdoR	SDOx Data Output Rise Time	—	—	—	ns	See Parameter DO31 (Note 4)
SP35	Tsch2doV, TscL2doV	SDOx Data Output Valid after SCKx Edge	—	6	20	ns	
SP36	TdoV2sch, TdoV2scL	SDOx Data Output Setup to First SCKx Edge	30	—	—	ns	
SP40	TdiV2sch, TdiV2scL	Setup Time of SDIx Data Input to SCKx Edge	30	—	—	ns	
SP41	Tsch2diL, TscL2diL	Hold Time of SDIx Data Input to SCKx Edge	30	—	—	ns	

- Note 1:** These parameters are characterized, but are not tested in manufacturing.
- Note 2:** Data in "Typical" column is at 3.3V, +25°C unless otherwise stated.
- Note 3:** The minimum clock period for SCKx is 111 ns. The clock generated in Master mode must not violate this specification.
- Note 4:** Assumes 50 pF load on all SPIx pins.
- Note 5:** Pertaining to SPI3: dsPIC33EPXXXGS702, dsPIC33EPXXXGSX04 and dsPIC33EPXXXGSX05 devices with a remappable SCK3 pin.

dsPIC33EPXXXGS70X/80X FAMILY

**TABLE 30-37: SPI1, SPI2 AND SPI3 SLAVE MODE (FULL-DUPLEX, CKE = 0, CKP = 1, SMP = 0)
TIMING REQUIREMENTS⁽⁵⁾**


AC CHARACTERISTICS			Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated) Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended				
Param.	Symbol	Characteristic ⁽¹⁾	Min.	Typ. ⁽²⁾	Max.	Units	Conditions
SP70	FscP	Maximum SCKx Input Frequency	—	—	15	MHz	(Note 3)
SP72	TscF	SCKx Input Fall Time	—	—	—	ns	See Parameter DO32 (Note 4)
SP73	TscR	SCKx Input Rise Time	—	—	—	ns	See Parameter DO31 (Note 4)
SP30	TdoF	SDOx Data Output Fall Time	—	—	—	ns	See Parameter DO32 (Note 4)
SP31	TdoR	SDOx Data Output Rise Time	—	—	—	ns	See Parameter DO31 (Note 4)
SP35	Tsch2doV, TscL2doV	SDOx Data Output Valid after SCKx Edge	—	6	20	ns	
SP36	TdoV2scH, TdoV2scL	SDOx Data Output Setup to First SCKx Edge	30	—	—	ns	
SP40	TdiV2scH, TdiV2scL	Setup Time of SDIx Data Input to SCKx Edge	30	—	—	ns	
SP41	Tsch2diL, TscL2diL	Hold Time of SDIx Data Input to SCKx Edge	30	—	—	ns	
SP50	TssL2scH, TssL2scL	$\overline{SSx}$ ↓ to SCKx ↑ or SCKx ↓ Input	120	—	—	ns	
SP51	TssH2doZ	$\overline{SSx}$ ↑ to SDOx Output High-Impedance	10	—	50	ns	(Note 4)
SP52	Tsch2ssH TscL2ssH	$\overline{SSx}$ ↑ after SCKx Edge	1.5 TCY + 40	—	—	ns	(Note 4)

- Note 1:** These parameters are characterized, but are not tested in manufacturing.
- 2:** Data in “Typical” column is at 3.3V, +25°C unless otherwise stated.
- 3:** The minimum clock period for SCKx is 66.7 ns. Therefore, the SCKx clock generated by the master must not violate this specification.
- 4:** Assumes 50 pF load on all SPIx pins.
- 5:** Pertaining to SPI3: dsPIC33EPXXXGS702, dsPIC33EPXXXGSX04 and dsPIC33EPXXXGSX05 devices with a remappable SCK3 pin.

dsPIC33EPXXXGS70X/80X FAMILY

44-Lead Plastic Thin Quad Flatpack (PT) - 10x10x1.0 mm Body [TQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

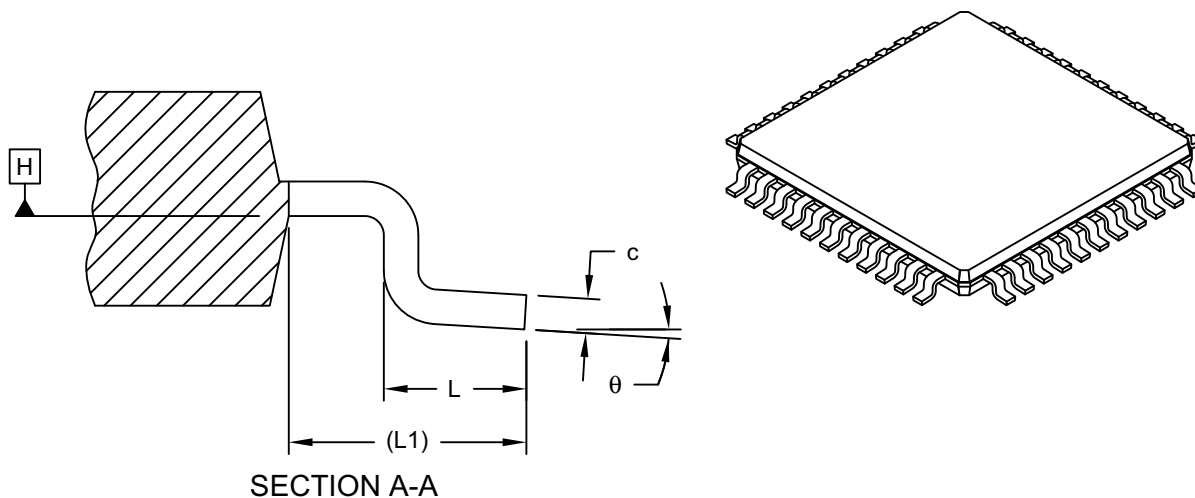

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Number of Leads	N	44		
Lead Pitch	e	0.80 BSC		
Overall Height	A	-	-	1.20
Standoff	A1	0.05	-	0.15
Molded Package Thickness	A2	0.95	1.00	1.05
Overall Width	E	12.00 BSC		
Molded Package Width	E1	10.00 BSC		
Overall Length	D	12.00 BSC		
Molded Package Length	D1	10.00 BSC		
Lead Width	b	0.30	0.37	0.45
Lead Thickness	c	0.09	-	0.20
Lead Length	L	0.45	0.60	0.75
Footprint	L1	1.00 REF		
Foot Angle	θ	0°	3.5°	7°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Exact shape of each corner is optional.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.



REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-076C Sheet 2 of 2

dsPIC33EPXXXGS70X/80X FAMILY

64-Lead Plastic Thin Quad Flatpack (PT)-10x10x1 mm Body, 2.00 mm Footprint [TQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

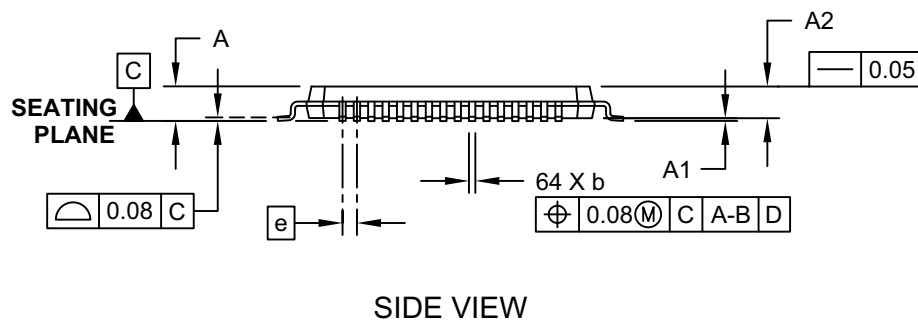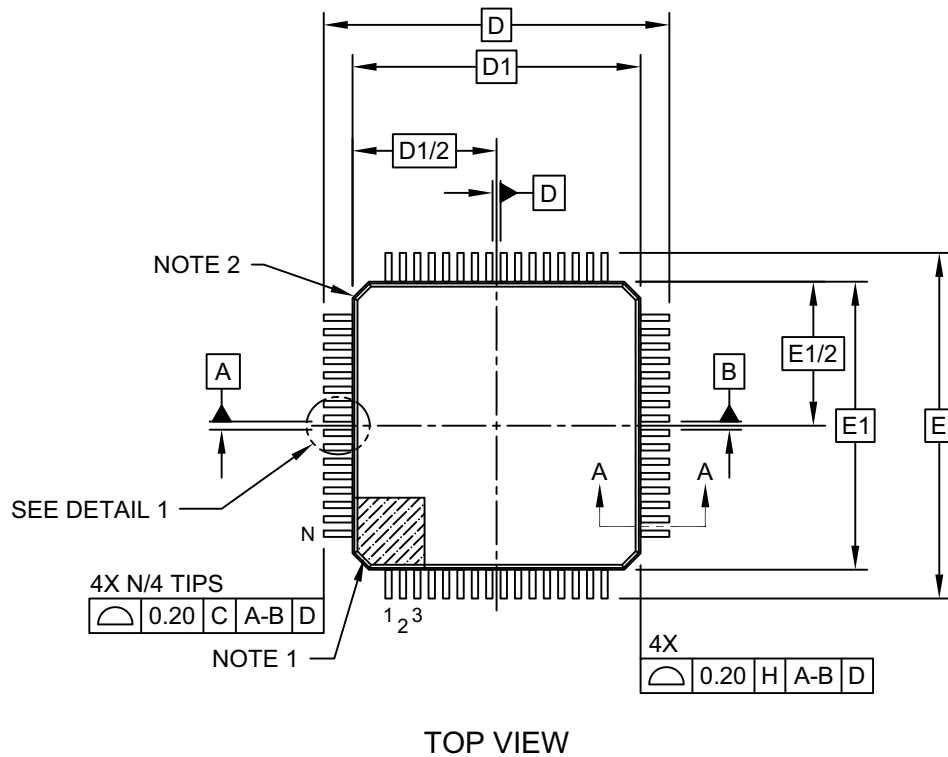

Microchip Technology Drawing C04-085C Sheet 1 of 2

dsPIC33EPXXXGS70X/80X FAMILY

SPIx Slave, Frame Master Connection	244
SPIx Slave, Frame Slave Connection	244
Suggested Oscillator Circuit Placement	17
Timerx (x = 2 through 5)	174
Type B/Type C Timer Pair (32-Bit Timer)	174
UARTx Module	253
Watchdog Timer (WDT)	356
Brown-out Reset (BOR)	347, 355

C

C Compilers	
MPLAB XC	372
CAN Module	
Control Registers	309
Message Buffers	328
Word 0	328
Word 1	328
Word 2	329
Word 3	329
Word 4	330
Word 5	330
Word 6	331
Word 7	331
Modes of Operation	308
Overview	307
CAN Module (CAN)	307
CLC	
Control Registers	262
Code Examples	
Port Write/Read	130
PWM Write-Protected Register	
Unlock Sequence	188
PWSAV Instruction Syntax	115
Code Protection	347, 357
CodeGuard Security	347, 357
Configurable Logic Cell (CLC)	259
Configurable Logic Cell. See CLC.	
Configuration Bits	347
Description	349
Configuration Register Map	348
Constant-Current Source	345
Control Register	346
Description	345
Features Overview	345
Controller Area Network. See CAN.	
CPU	
Addressing Modes	21
Clocking System Options	105
Fast RC (FRC) Oscillator	105
FRC Oscillator with PLL (FRCPLL)	105
FRC Oscillator with Postscaler	105
Low-Power RC (LPRC) Oscillator	105
Primary (XT, HS, EC) Oscillator	105
Primary Oscillator with PLL	
(XTPLL, HSPLL, ECPLL)	105
Control Registers	26
Data Space Addressing	21
Instruction Set	21
Registers	21
Resources	25
Customer Change Notification Service	474
Customer Notification Service	474
Customer Support	474

D

Data Address Space	37
Memory Map for dsPIC33EP64GS70X/80X	
Devices	38
Near Data Space	37
Organization, Alignment	37
SFR Space	37
Width	37
Data Space	
Extended X	52
Paged Data Memory Space (figure)	50
Paged Memory Scheme	49
DC Characteristics	
Brown-out Reset (BOR)	385
Constant-Current Source Specifications	433
DACx Output (DACOUTx Pin) Specifications	431
Doze Current (IDOZE)	381
I/O Pin Input Specifications	382
I/O Pin Output Specifications	385
Idle Current (IDLE)	379
Operating Current (IDD)	378
Operating MIPS vs. Voltage	376
Power-Down Current (IPD)	380
Program Memory	386
Temperature and Voltage Specifications	377
Watchdog Timer Delta Current (ΔI_{WDT})	380
DC/AC Characteristics	
Graphs and Tables	435
Demo/Development Boards, Evaluation and	
Starter Kits	374
Development Support	371
Device Calibration	353
Addresses	353
and Identification	353
Device Programmer	
MPLAB PM3	373
Direct Memory Access. See DMA.	
DMA Controller	
Channel to Peripheral Associations	90
Control Registers	92
DMAxCNT	92
DMAxCON	92
DMAxPAD	92
DMAxREQ	92
DMAxSTAL/H	92
DMAxSTBL/H	92
Supported Peripherals	89
Doze Mode	117
DSP Engine	30

E

Electrical Characteristics	375
AC	387
Equations	
Device Operating Frequency	105
FPLLO Calculation	105
FVCO Calculation	105
Relationship Between Device and SPIx	
Clock Speed	244
Errata	10

dsPIC33EPXXXGS70X/80X FAMILY

RPINR11 (Peripheral Pin Select Input 11)	145
RPINR12 (Peripheral Pin Select Input 12)	145
RPINR13 (Peripheral Pin Select Input 13)	146
RPINR18 (Peripheral Pin Select Input 18)	146
RPINR19 (Peripheral Pin Select Input 19)	147
RPINR2 (Peripheral Pin Select Input 2)	143
RPINR20 (Peripheral Pin Select Input 20)	147
RPINR21 (Peripheral Pin Select Input 21)	148
RPINR22 (Peripheral Pin Select Input 22)	148
RPINR23 (Peripheral Pin Select Input 23)	149
RPINR26 (Peripheral Pin Select Input 26)	149
RPINR29 (Peripheral Pin Select Input 29)	150
RPINR3 (Peripheral Pin Select Input 3)	143
RPINR30 (Peripheral Pin Select Input 30)	150
RPINR37 (Peripheral Pin Select Input 37)	151
RPINR38 (Peripheral Pin Select Input 38)	151
RPINR42 (Peripheral Pin Select Input 42)	152
RPINR43 (Peripheral Pin Select Input 43)	152
RPINR45 (Peripheral Pin Select Input 45)	153
RPINR46 (Peripheral Pin Select Input 46)	153
RPINR7 (Peripheral Pin Select Input 7)	144
RPINR8 (Peripheral Pin Select Input 8)	144
RPOR0 (Peripheral Pin Select Output 0)	154
RPOR1 (Peripheral Pin Select Output 1)	154
RPOR10 (Peripheral Pin Select Output 10)	159
RPOR11 (Peripheral Pin Select Output 11)	159
RPOR12 (Peripheral Pin Select Output 12)	160
RPOR13 (Peripheral Pin Select Output 13)	160
RPOR14 (Peripheral Pin Select Output 14)	161
RPOR15 (Peripheral Pin Select Output 15)	161
RPOR16 (Peripheral Pin Select Output 16)	162
RPOR17 (Peripheral Pin Select Output 17)	162
RPOR18 (Peripheral Pin Select Output 18)	163
RPOR19 (Peripheral Pin Select Output 19)	163
RPOR2 (Peripheral Pin Select Output 2)	155
RPOR20 (Peripheral Pin Select Output 20)	164
RPOR21 (Peripheral Pin Select Output 21)	164
RPOR22 (Peripheral Pin Select Output 22)	165
RPOR23 (Peripheral Pin Select Output 23)	165
RPOR24 (Peripheral Pin Select Output 24)	166
RPOR25 (Peripheral Pin Select Output 25)	166
RPOR26 (Peripheral Pin Select Output 26)	167
RPOR3 (Peripheral Pin Select Output 3)	155
RPOR4 (Peripheral Pin Select Output 4)	156
RPOR5 (Peripheral Pin Select Output 5)	156
RPOR6 (Peripheral Pin Select Output 6)	157
RPOR7 (Peripheral Pin Select Output 7)	157
RPOR8 (Peripheral Pin Select Output 8)	158
RPOR9 (Peripheral Pin Select Output 9)	158
SDCx (PWMx Secondary Duty Cycle)	200
SEVTCMP (PWMx Special Event Compare)	193
SPHASEx (PWMx Secondary Phase-Shift)	202
SPIxCON1H (SPIx Control 1 High)	234
SPIxCON1L (SPIx Control 1 Low)	232
SPIxCON2L (SPIx Control 2 Low)	236
SPIxIMSKH (SPIx Interrupt Mask High)	241
SPIxIMSKL (SPIx Interrupt Mask Low)	240
SPIxSTATH (SPIx Status High)	239
SPIxSTATL (SPIx Status Low)	237
SR (CPU STATUS)	26, 82
SSEVTCMP (PWMx Secondary Special Event Compare)	196
STCON (PWMx Secondary Master Time Base Control)	194

STCON2 (PWMx Secondary Clock Divider Select)	195
STPER (PWMx Secondary Master Time Base Period)	195
STRIGx (PWMx Secondary Trigger Compare Value)	208
T1CON (Timer1 Control)	171
TRGCONx (PWMx Trigger Control)	204
TRIGx (PWMx Primary Trigger Compare Value)	206
TRISx (PORTx Data Direction Control)	131
TxCON (Timer2/4 Control)	175
TyCON (Timer3/5 Control)	176
UxMODE (UARTx Mode)	255
UxSTA (UARTx Status and Control)	257
Resets	69
Brown-out Reset (BOR)	69
Configuration Mismatch Reset (CM)	69
Illegal Condition Reset (IOPUWR)	69
Illegal Opcode	69
Security	69
Uninitialized W Register	69
Master Clear (MCLR) Pin Reset	69
Power-on Reset (POR)	69
RESET Instruction (SWR)	69
Resources	70
Trap Conflict Reset (TRAPR)	69
Watchdog Timer Time-out Reset (WDTO)	69
Revision History	465

S

Serial Peripheral Interface (SPI)	229
Serial Peripheral Interface. See SPI.	
SFR Blocks	
000h	40
100h	40
200h	41
300h	41
400h	42
500h	42
600h	43
700h	44
800h	45
900h	45
A00h	46
B00h	46
C00h-D00h	47
E00h-F00h	48
Software Simulator	
MPLAB X SIM	373
Special Features of the CPU	347

T

Thermal Operating Conditions	376
Thermal Packaging Characteristics	376
Third-Party Development Tools	374
Timer1	169
Control Register	171
Mode Settings	169
Resources	170
Timer2/3 and Timer4/5	173
Control Registers	175
Resources	173