# E·XFL

# NXP USA Inc. - MCF51JM128VLH Datasheet



#### Welcome to E-XFL.COM

#### What is "Embedded - Microcontrollers"?

"Embedded - Microcontrollers" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.


### Applications of "<u>Embedded -</u> <u>Microcontrollers</u>"

#### Details


Product Status	Active
Core Processor	Coldfire V1
Core Size	32-Bit Single-Core
Speed	50MHz
Connectivity	CANbus, I <sup>2</sup> C, SCI, SPI, USB OTG
Peripherals	LVD, PWM, WDT
Number of I/O	51
Program Memory Size	128KB (128K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	16K x 8
Voltage - Supply (Vcc/Vdd)	2.7V ~ 5.5V
Data Converters	A/D 12x12b
Oscillator Type	External
Operating Temperature	-40°C ~ 105°C (TA)
Mounting Type	Surface Mount
Package / Case	64-LQFP
Supplier Device Package	64-LQFP (10x10)
Purchase URL	https://www.e-xfl.com/product-detail/nxp-semiconductors/mcf51jm128vlh

Email: info@E-XFL.COM

Address: Room A, 16/F, Full Win Commercial Centre, 573 Nathan Road, Mongkok, Hong Kong

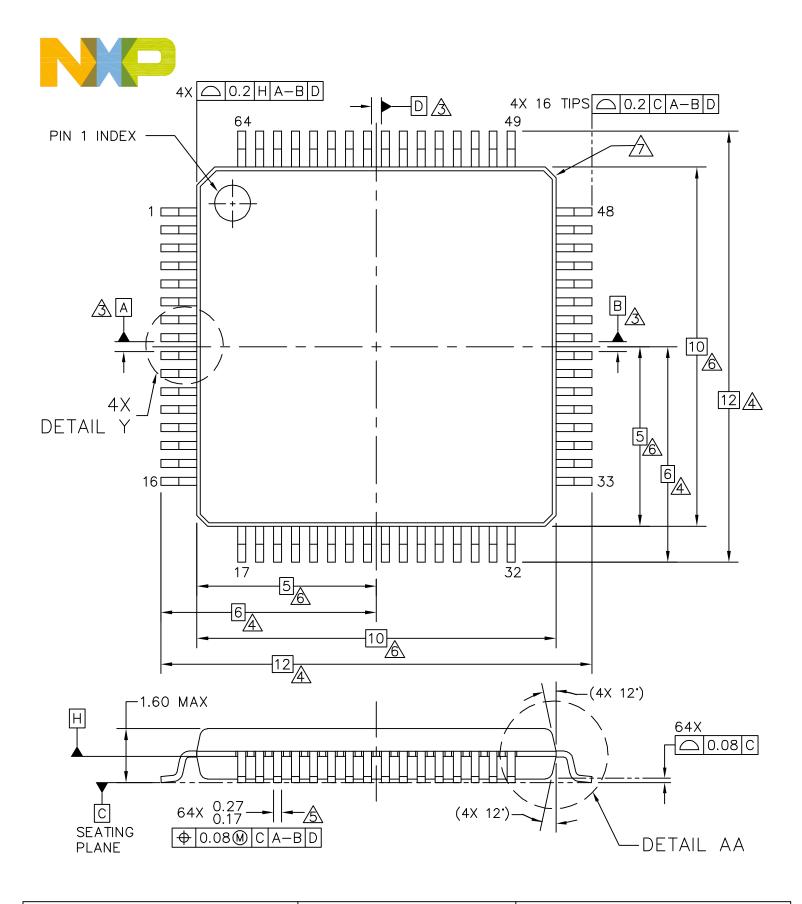

© NXP SEMICONDUCTORS N. V. All Rights reserved	MECHANICAL OU	TLINE	PRINT VERSION N	OT TO SCALE
TITLE:		DOCUMEN	NT NO: 98ASS23234W	REV: G
LQFP, 10 X 10 X 1.4 PKG, 0.5	PITCH, 64LD	STANDAF	RD: JEDEC MS-026 B	CD
		SOT1699	9–1	25 JAN 2016

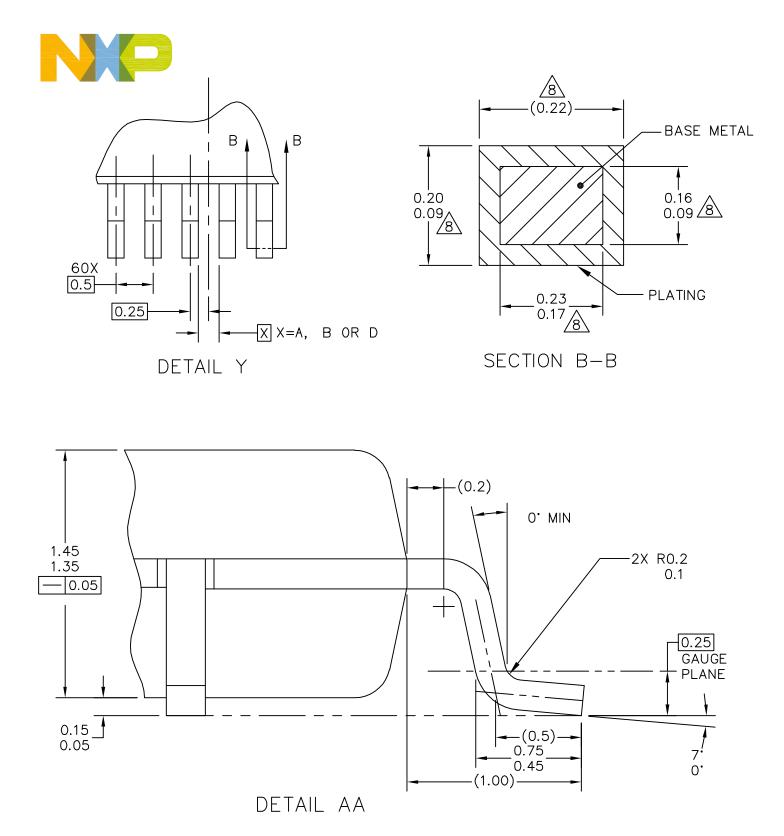

ICONDUCTORS N.V. GHTS RESERVED	MECHANICAL OUTLINE	PF

© NXP SEMICONDUCTORS N.V. All RIGHTS RESERVED	MECHANICAL OUTLINE		PRINT VERSION NO	DT TO SCALE
TITLE:		DOCUMEN	NT NO: 98ASS23234W	REV: G
LQFP, 10 X 10 X 1.4 PKG, 0.5 PITCH, 64LD		STANDARD: JEDEC MS-026 BCD		
		S0T1699	9–1	25 JAN 2016



## NOTES:

- 1. DIMENSIONS ARE IN MILLIMETERS.
- 2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
- $\overline{3}$  datums a, b and d to be determined at datum plane H.

 $\overline{/4}$  dimensions to be determined at seating plane C.

- 5. THIS DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED THE UPPER LIMIT BY MORE THAN 0.08 MM AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSION AND ADJACENT LEAD SHALL NOT BE LESS THAN 0.07 MM.
- 6. THIS DIMENSION DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 MM PER SIDE. THIS DIMENSION IS MAXIMUM PLASTIC BODY SIZE DIMENSION INCLUDING MOLD MISMATCH.
- $/\overline{2}$  exact shape of each corner is optional.
- 8. THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.1 MM AND 0.25 MM FROM THE LEAD TIP.

NXP SEMICONDUCTORS N. V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE		PRINT VERSION N	IOT TO SCALE
TITLE:	PITCH, 64LD	DOCUMEN	NT NO: 98ASS23234W	REV: G
LQFP, 10 X 10 X 1.4 PKG, 0.5		STANDARD: JEDEC MS-026 BCD		
10 / 10 / 1.1 11(0, 0.0		SOT1699	9-1	25 JAN 2016