



Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

### Details

|                                |                                                                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                              |
| Number of LABs/CLBs            | 6000                                                                                                                                                                  |
| Number of Logic Elements/Cells | 48000                                                                                                                                                                 |
| Total RAM Bits                 | 4246528                                                                                                                                                               |
| Number of I/O                  | 372                                                                                                                                                                   |
| Number of Gates                | -                                                                                                                                                                     |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                         |
| Mounting Type                  | Surface Mount                                                                                                                                                         |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                                                    |
| Package / Case                 | 672-BBGA                                                                                                                                                              |
| Supplier Device Package        | 672-FPBGA (27x27)                                                                                                                                                     |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2m50se-6f672i">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2m50se-6f672i</a> |

## Modes of Operation

Each slice has up to four potential modes of operation: Logic, Ripple, RAM and ROM.

### Logic Mode

In this mode, the LUTs in each slice are configured as 4-input combinatorial lookup tables. A LUT4 can have 16 possible input combinations. Any four input logic functions can be generated by programming this lookup table. Since there are two LUT4s per slice, a LUT5 can be constructed within one slice. Larger look-up tables such as LUT6, LUT7 and LUT8 can be constructed by concatenating other slices. Note LUT8 requires more than four slices.

### Ripple Mode

Ripple mode supports the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each slice:

- Addition 2-bit
- Subtraction 2-bit
- Add/Subtract 2-bit using dynamic control
- Up counter 2-bit
- Down counter 2-bit
- Up/Down counter with Async clear
- Up/Down counter with preload (sync)
- Ripple mode multiplier building block
- Multiplier support
- Comparator functions of A and B inputs
  - A greater-than-or-equal-to B
  - A not-equal-to B
  - A less-than-or-equal-to B

Ripple Mode includes an optional configuration that performs arithmetic using fast carry chain methods. In this configuration (also referred to as CCU2 mode) two additional signals, Carry Generate and Carry Propagate, are generated on a per slice basis to allow fast arithmetic functions to be constructed by concatenating Slices.

### RAM Mode

In this mode, a 16x4-bit distributed single port RAM (SPR) can be constructed using each LUT block in Slice 0 and Slice 2 as a 16x1-bit memory. Slice 1 is used to provide memory address and control signals. A 16x2-bit pseudo dual port RAM (PDPR) memory is created by using one Slice as the read-write port and the other companion slice as the read-only port.

The Lattice design tools support the creation of a variety of different size memories. Where appropriate, the software will construct these using distributed memory primitives that represent the capabilities of the PFU. Table 2-3 shows the number of slices required to implement different distributed RAM primitives. For more information about using RAM in LatticeECP2/M devices, please see the list of additional technical documentation at the end of this data sheet.

**Table 2-3. Number of Slices Required to Implement Distributed RAM**


|                  | SPR 16X4 | PDPR 16X4 |
|------------------|----------|-----------|
| Number of slices | 3        | 3         |

Note: SPR = Single Port RAM, PDPR = Pseudo Dual Port RAM

By combining input blocks of the complementary PIOs and sharing some registers from output blocks, a gearbox function can be implemented, which takes a double data rate signal applied to PIOA and converts it as four data streams, IPOS0A, IPOS1A, IPOS0B and IPOS1B. Figure 2-29 shows the diagram using this gearbox function. For more information about this topic, please see information regarding additional documentation at the end of this data sheet.

The signal DDRCLKPOL controls the polarity of the clock used in the synchronization registers. It ensures adequate timing when data is transferred from the DQS to the system clock domain. For further information about this topic, see the DDR Memory section of this data sheet.

**Figure 2-29. Input Register Block for Left, Right and Bottom Edges**

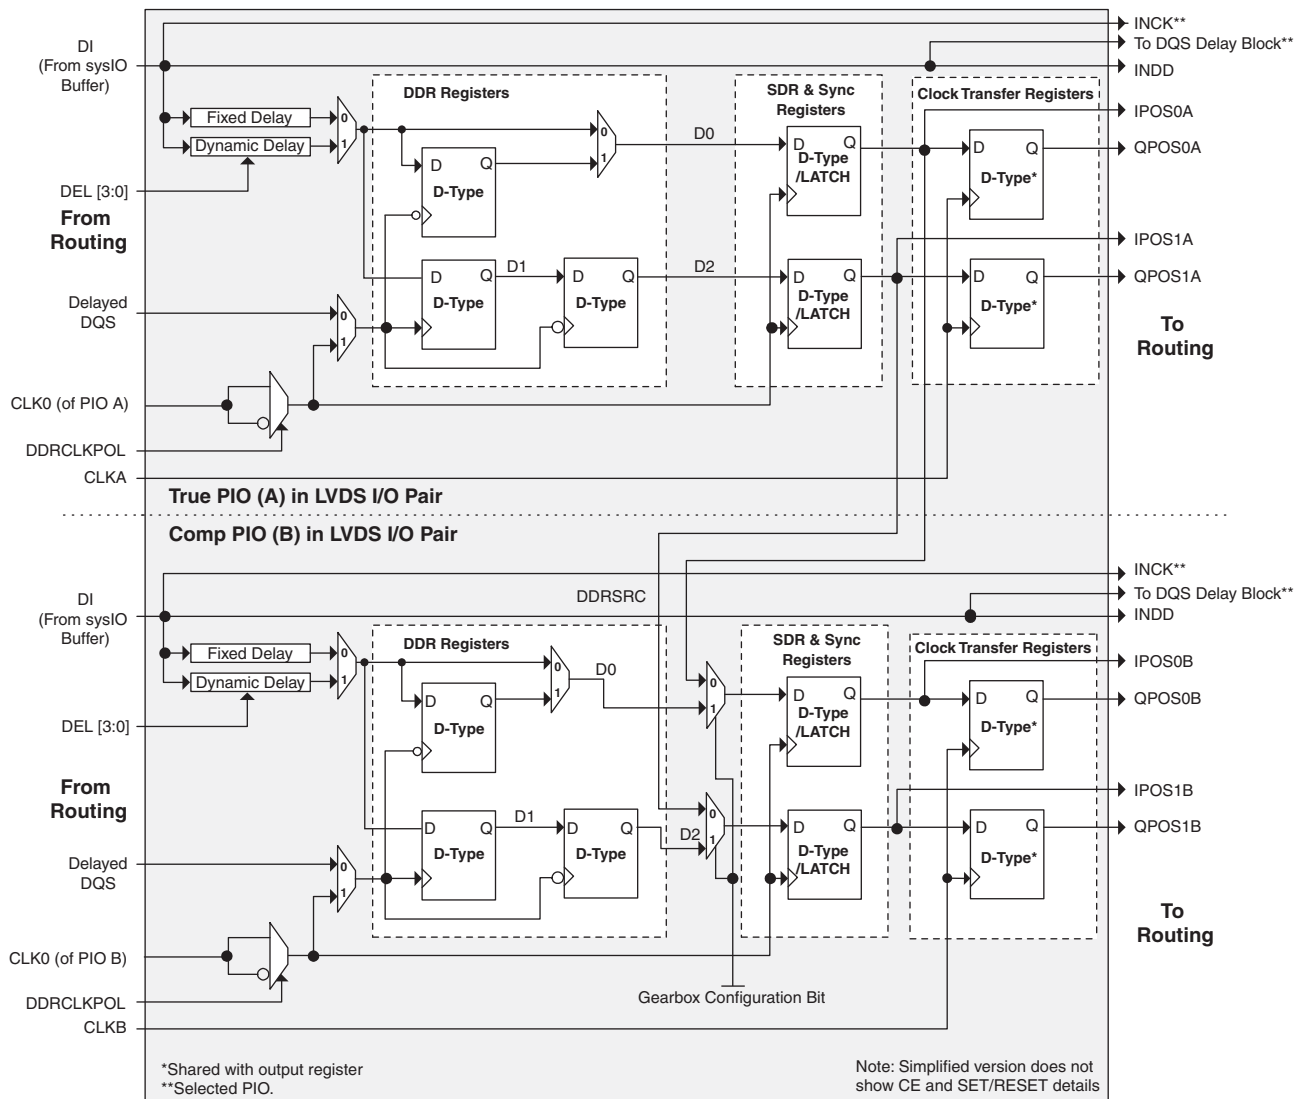

**Table 2-14. Supported Output Standards**

| Output Standard                  | Drive                      | V <sub>CCIO</sub> (Nom.) |
|----------------------------------|----------------------------|--------------------------|
| <b>Single-ended Interfaces</b>   |                            |                          |
| LVTTL                            | 4mA, 8mA, 12mA, 16mA, 20mA | 3.3                      |
| LVC MOS33                        | 4mA, 8mA, 12mA 16mA, 20mA  | 3.3                      |
| LVC MOS25                        | 4mA, 8mA, 12mA, 16mA, 20mA | 2.5                      |
| LVC MOS18                        | 4mA, 8mA, 12mA, 16mA       | 1.8                      |
| LVC MOS15                        | 4mA, 8mA                   | 1.5                      |
| LVC MOS12                        | 2mA, 6mA                   | 1.2                      |
| LVC MOS33, Open Drain            | 4mA, 8mA, 12mA 16mA, 20mA  | —                        |
| LVC MOS25, Open Drain            | 4mA, 8mA, 12mA 16mA, 20mA  | —                        |
| LVC MOS18, Open Drain            | 4mA, 8mA, 12mA 16mA        | —                        |
| LVC MOS15, Open Drain            | 4mA, 8mA                   | —                        |
| LVC MOS12, Open Drain            | 2mA, 6mA                   | —                        |
| PCI33                            | N/A                        | 3.3                      |
| HSTL18 Class I, II               | N/A                        | 1.8                      |
| HSTL15 Class I                   | N/A                        | 1.5                      |
| SSTL3 Class I, II                | N/A                        | 3.3                      |
| SSTL2 Class I, II                | N/A                        | 2.5                      |
| SSTL18 Class I, II               | N/A                        | 1.8                      |
| <b>Differential Interfaces</b>   |                            |                          |
| Differential SSTL3, Class I, II  | N/A                        | 3.3                      |
| Differential SSTL2, Class I, II  | N/A                        | 2.5                      |
| Differential SSTL18, Class I, II | N/A                        | 1.8                      |
| Differential HSTL18, Class I, II | N/A                        | 1.8                      |
| Differential HSTL15, Class I     | N/A                        | 1.5                      |
| LVDS                             | N/A                        | 2.5                      |
| MLVDS <sup>1</sup>               | N/A                        | 2.5                      |
| BLVDS <sup>1</sup>               | N/A                        | 2.5                      |
| LVPECL <sup>1</sup>              | N/A                        | 3.3                      |
| RSDS <sup>1</sup>                | N/A                        | 2.5                      |
| LVC MOS33D <sup>1</sup>          | 4mA, 8mA, 12mA, 16mA, 20mA | 3.3                      |

1. Emulated with external resistors. For more detail, please see information regarding additional technical documentation at the end of this data sheet.

## Hot Socketing

LatticeECP2/M devices have been carefully designed to ensure predictable behavior during power-up and power-down. During power-up and power-down sequences, the I/Os remain in tri-state until the power supply voltage is high enough to ensure reliable operation. In addition, leakage into I/O pins is controlled within specified limits. This allows for easy integration with the rest of the system. These capabilities make the LatticeECP2/M ideal for many multiple power supply and hot-swap applications.

| Symbol      | Parameter                            | Min. | Max. | Units |
|-------------|--------------------------------------|------|------|-------|
| $V_{CCP}^6$ | PLL and Reference Clock Buffer Power | 1.14 | 1.26 | V     |

1. If  $V_{CCIO}$  or  $V_{CCJ}$  is set to 1.2V, they must be connected to the same power supply as  $V_{CC}$ . If  $V_{CCIO}$  or  $V_{CCJ}$  is set to 3.3V, they must be connected to the same power supply as  $V_{CCAUX}$ .  $V_{CCPLL}$  must be connected to the same power supply as  $V_{CC}$  through careful filtering and decoupling.
2. See recommended voltages by I/O standard in subsequent table.
3.  $V_{CCAUX}$  ramp rate must not exceed 30mV/ $\mu$ s during power-up when transitioning between 0V and 3.3V.
4. For proper power-up configuration, users must ensure that the configuration control signals such as the CFGx, INITN, PROGRAMN and DONE pins are driven to the proper logic levels when the device powers up. The device power-up is triggered by the last of  $V_{CC}$ ,  $V_{CCAUX}$  or  $V_{CCIO8}$  supplies that reaches its minimum valid levels. Alternatively, if the configuration control signals are pulled up by  $V_{CCIO8}$ , the  $V_{CCIO8}$  (configuration I/O bank) voltage must be powered up prior to or at the same time as the last of  $V_{CC}$  or  $V_{CCAUX}$  reaches its minimum levels.
5. For power-up,  $V_{CC}$  must reach its valid minimum value before powering up  $V_{CCAUX}$  (LatticeECP2/M "S" version devices only).
6.  $V_{CCRX}$ ,  $V_{CCTX}$  and  $V_{CCP}$  must be tied together in each quad and all quads need to be powered up.
7. For more power supply design recommendations, refer to TN1114 [Electrical Recommendations for Lattice SERDES](#).

## Hot Socketing Specifications<sup>1, 2, 3, 4</sup>

| Symbol       | Parameter                                                                      | Condition                                  | Min. | Typ. | Max.    | Units   |
|--------------|--------------------------------------------------------------------------------|--------------------------------------------|------|------|---------|---------|
| $I_{DK}$     | Input or I/O leakage current                                                   | $0 \leq V_{IN} \leq V_{IH} \text{ (MAX.)}$ | —    | —    | +/-1000 | $\mu$ A |
| $I_{HDIN}^5$ | SERDES average input current when device is powered down and inputs are driven |                                            | —    | —    | 4       | mA      |

1.  $V_{CC}$ ,  $V_{CCAUX}$  and  $V_{CCIO}$  should rise/fall monotonically.  $V_{CC}$  and  $V_{CCPLL}$  must be connected to the same power supply (applies to ECP2-6, ECP2-12 and ECP2-20 only).
2.  $0 \leq V_{CC} \leq V_{CC} \text{ (MAX.)}$ ,  $0 \leq V_{CCIO} \leq V_{CCIO} \text{ (MAX.)}$  or  $0 \leq V_{CCAUX} \leq V_{CCAUX} \text{ (MAX.)}$ .
3.  $I_{DK}$  is additive to  $I_{PU}$ ,  $I_{PW}$  or  $I_{BH}$ .
4. LVCMOS and LVTTL only.
5. Assumes that the device is powered down with all supplies grounded, both P and N inputs driven by a CML driver with maximum allowed  $V_{CCIB}$  of 1.575V, 8b10b data and internal AC coupling.

## ESD Performance

Please refer to [LatticeECP2/M Product Family Qualification Summary](#) for complete qualification data, including ESD performance.

**Table 3-13. Periodic Receiver Jitter Tolerance Specification<sup>1</sup>**

| Description | Frequency             | Condition               | Min. | Typ. | Max. | Units   |
|-------------|-----------------------|-------------------------|------|------|------|---------|
| Periodic    | 3.125 Gbps            | 600 mV differential eye | —    | —    | 0.20 | UI, p-p |
|             | 2.5 Gbps              | 600 mV differential eye | —    | —    | 0.22 | UI, p-p |
|             | 1.25 Gbps             | 600 mV differential eye | —    | —    | 0.20 | UI, p-p |
|             | 250 Mbps <sup>2</sup> | 600 mV differential eye | —    | —    | 0.08 | UI, p-p |

1. Values are measured with PRBS 2<sup>7</sup>-1, all channels operating.

2. Jitter specification is limited by measurement equipment capability.


## JTAG Port Timing Specifications

Over Recommended Operating Conditions

| Symbol        | Parameter                                                          | Min | Max | Units |
|---------------|--------------------------------------------------------------------|-----|-----|-------|
| $f_{MAX}$     | TCK clock frequency                                                | —   | 25  | MHz   |
| $t_{BTCP}$    | TCK [BSCAN] clock pulse width                                      | 40  | —   | ns    |
| $t_{BTCPH}$   | TCK [BSCAN] clock pulse width high                                 | 20  | —   | ns    |
| $t_{BTCPL}$   | TCK [BSCAN] clock pulse width low                                  | 20  | —   | ns    |
| $t_{BTS}$     | TCK [BSCAN] setup time                                             | 8   | —   | ns    |
| $t_{BTH}$     | TCK [BSCAN] hold time                                              | 10  | —   | ns    |
| $t_{BTRF}$    | TCK [BSCAN] rise/fall time                                         | 50  | —   | mV/ns |
| $t_{BTCO}$    | TAP controller falling edge of clock to valid output               | —   | 10  | ns    |
| $t_{BTCODIS}$ | TAP controller falling edge of clock to valid disable              | —   | 10  | ns    |
| $t_{BTCOEN}$  | TAP controller falling edge of clock to valid enable               | —   | 10  | ns    |
| $t_{BTCRS}$   | BSCAN test capture register setup time                             | 8   | —   | ns    |
| $t_{BTCRH}$   | BSCAN test capture register hold time                              | 25  | —   | ns    |
| $t_{BUTCO}$   | BSCAN test update register, falling edge of clock to valid output  | —   | 25  | ns    |
| $t_{BTUODIS}$ | BSCAN test update register, falling edge of clock to valid disable | —   | 25  | ns    |
| $t_{BTUPOEN}$ | BSCAN test update register, falling edge of clock to valid enable  | —   | 25  | ns    |

Timing v.A 0.11

**Figure 3-21. JTAG Port Timing Waveforms**

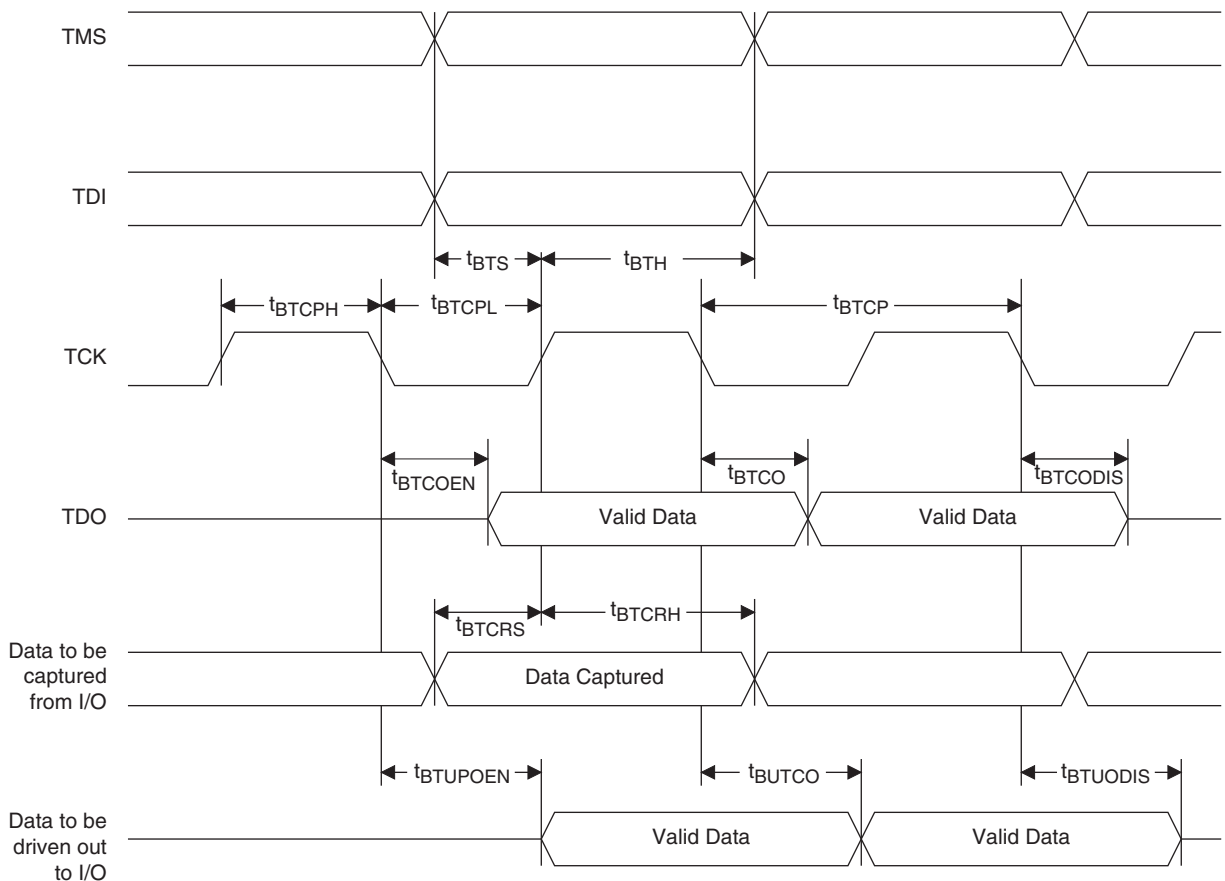

## LFE2-35E/SE and LFE2-50E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2-35E/SE |                   |      |                |              | LFE2-50E/SE       |      |                |              |
|-------------|-------------------|------|----------------|--------------|-------------------|------|----------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function  | Differential | Ball/Pad Function | Bank | Dual Function  | Differential |
| U8          | PB23A             | 5    | BDQ24          | T            | PB32A             | 5    | BDQ33          | T            |
| U9          | PB23B             | 5    | BDQ24          | C            | PB32B             | 5    | BDQ33          | C            |
| W9          | PB24A             | 5    | BDQS24         | T            | PB33A             | 5    | BDQS33         | T            |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |
| V9          | PB24B             | 5    | BDQ24          | C            | PB33B             | 5    | BDQ33          | C            |
| Y8          | PB25A             | 5    | BDQ24          | T            | PB34A             | 5    | BDQ33          | T            |
| AA8         | PB25B             | 5    | BDQ24          | C            | PB34B             | 5    | BDQ33          | C            |
| W10         | PB26A             | 5    | BDQ24          | T            | PB35A             | 5    | BDQ33          | T            |
| VCCIO       | VCCIO5            | 5    |                |              | VCCIO             | 5    |                |              |
| V10         | PB26B             | 5    | BDQ24          | C            | PB35B             | 5    | BDQ33          | C            |
| AB8         | PB27A             | 5    | BDQ24          | T            | PB36A             | 5    | BDQ33          | T            |
| AA9         | PB27B             | 5    | BDQ24          | C            | PB36B             | 5    | BDQ33          | C            |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |
| AB9         | PB29A             | 5    | BDQ33          | T            | PB38A             | 5    | BDQ42          | T            |
| AB10        | PB29B             | 5    | BDQ33          | C            | PB38B             | 5    | BDQ42          | C            |
| Y10         | PB30A             | 5    | BDQ33          | T            | PB39A             | 5    | BDQ42          | T            |
| AA10        | PB30B             | 5    | BDQ33          | C            | PB39B             | 5    | BDQ42          | C            |
| U10         | PB31A             | 5    | BDQ33          | T            | PB40A             | 5    | BDQ42          | T            |
| U11         | PB31B             | 5    | BDQ33          | C            | PB40B             | 5    | BDQ42          | C            |
| VCCIO       | VCCIO5            | 5    |                |              | VCCIO             | 5    |                |              |
| AB11        | PB32A             | 5    | BDQ33          | T            | PB41A             | 5    | BDQ42          | T            |
| AA11        | PB32B             | 5    | BDQ33          | C            | PB41B             | 5    | BDQ42          | C            |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |
| Y11         | PB33A             | 5    | BDQS33         | T            | PB42A             | 5    | BDQS42         | T            |
| W11         | PB33B             | 5    | BDQ33          | C            | PB42B             | 5    | BDQ42          | C            |
| AB12        | PB34A             | 5    | BDQ33          | T            | PB43A             | 5    | BDQ42          | T            |
| AA12        | PB34B             | 5    | BDQ33          | C            | PB43B             | 5    | BDQ42          | C            |
| AB13        | PB35A             | 5    | PCLKT5_0/BDQ33 | T            | PB44A             | 5    | PCLKT5_0/BDQ42 | T            |
| AB14        | PB35B             | 5    | PCLKC5_0/BDQ33 | C            | PB44B             | 5    | PCLKC5_0/BDQ42 | C            |
| VCCIO       | VCCIO5            | 5    |                |              | VCCIO             | 5    |                |              |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |
| U12         | PB40A             | 4    | PCLKT4_0/BDQ42 | T            | PB49A             | 4    | PCLKT4_0/BDQ51 | T            |
| VCCIO       | VCCIO4            | 4    |                |              | VCCIO             | 4    |                |              |
| V12         | PB40B             | 4    | PCLKC4_0/BDQ42 | C            | PB49B             | 4    | PCLKC4_0/BDQ51 | C            |
| Y12         | PB41A             | 4    | BDQ42          | T            | PB50A             | 4    | BDQ51          | T            |
| W12         | PB41B             | 4    | BDQ42          | C            | PB50B             | 4    | BDQ51          | C            |
| AA13        | PB42A             | 4    | BDQS42         | T            | PB51A             | 4    | BDQS51         | T            |
| GNDIO       | GNDIO4            | -    |                |              | GNDIO4            | -    |                |              |
| Y13         | PB42B             | 4    | BDQ42          | C            | PB51B             | 4    | BDQ51          | C            |
| U13         | PB43A             | 4    | BDQ42          | T            | PB52A             | 4    | BDQ51          | T            |
| U14         | PB43B             | 4    | BDQ42          | C            | PB52B             | 4    | BDQ51          | C            |
| AB15        | PB44A             | 4    | BDQ42          | T            | PB53A             | 4    | BDQ51          | T            |
| VCCIO       | VCCIO4            | 4    |                |              | VCCIO             | 4    |                |              |
| AA14        | PB44B             | 4    | BDQ42          | C            | PB53B             | 4    | BDQ51          | C            |
| AB16        | PB45A             | 4    | BDQ42          | T            | PB54A             | 4    | BDQ51          | T            |
| AB17        | PB45B             | 4    | BDQ42          | C            | PB54B             | 4    | BDQ51          | C            |

## LFE2-20E/SE and LFE2-35E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-20E/20SE |                   |      |               |              | LFE2-35E/35SE     |      |               |              |  |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| GND           | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| W10           | PB11A             | 5    | BDQ15         | T            | PB11A             | 5    | BDQ15         | T            |  |
| Y10           | PB11B             | 5    | BDQ15         | C            | PB11B             | 5    | BDQ15         | C            |  |
| W11           | PB12A             | 5    | BDQ15         | T            | PB12A             | 5    | BDQ15         | T            |  |
| AA10          | PB12B             | 5    | BDQ15         | C            | PB12B             | 5    | BDQ15         | C            |  |
| AC8           | PB13A             | 5    | BDQ15         | T            | PB13A             | 5    | BDQ15         | T            |  |
| AD8           | PB13B             | 5    | BDQ15         | C            | PB13B             | 5    | BDQ15         | C            |  |
| VCCIO         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AB8           | PB14A             | 5    | BDQ15         | T            | PB14A             | 5    | BDQ15         | T            |  |
| AB10          | PB14B             | 5    | BDQ15         | C            | PB14B             | 5    | BDQ15         | C            |  |
| GND           | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AE6           | PB15A             | 5    | BDQS15        | T            | PB15A             | 5    | BDQS15        | T            |  |
| AF6           | PB15B             | 5    | BDQ15         | C            | PB15B             | 5    | BDQ15         | C            |  |
| AA11          | PB16A             | 5    | BDQ15         | T            | PB16A             | 5    | BDQ15         | T            |  |
| AC9           | PB16B             | 5    | BDQ15         | C            | PB16B             | 5    | BDQ15         | C            |  |
| AB9           | PB17A             | 5    | BDQ15         | T            | PB17A             | 5    | BDQ15         | T            |  |
| AD9           | PB17B             | 5    | BDQ15         | C            | PB17B             | 5    | BDQ15         | C            |  |
| VCCIO         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| Y11           | PB18A             | 5    | BDQ15         | T            | PB18A             | 5    | BDQ15         | T            |  |
| AB11          | PB18B             | 5    | BDQ15         | C            | PB18B             | 5    | BDQ15         | C            |  |
| AE7           | PB19A             | 5    | BDQ15         | T            | PB19A             | 5    | BDQ15         | T            |  |
| AF7           | PB19B             | 5    | BDQ15         | C            | PB19B             | 5    | BDQ15         | C            |  |
| GND           | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AC10          | PB20A             | 5    | BDQ24         | T            | PB20A             | 5    | BDQ24         | T            |  |
| AD10          | PB20B             | 5    | BDQ24         | C            | PB20B             | 5    | BDQ24         | C            |  |
| AA12          | PB21A             | 5    | BDQ24         | T            | PB21A             | 5    | BDQ24         | T            |  |
| W12           | PB21B             | 5    | BDQ24         | C            | PB21B             | 5    | BDQ24         | C            |  |
| AB12          | PB22A             | 5    | BDQ24         | T            | PB22A             | 5    | BDQ24         | T            |  |
| VCCIO         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| Y12           | PB22B             | 5    | BDQ24         | C            | PB22B             | 5    | BDQ24         | C            |  |
| AD12          | PB23A             | 5    | BDQ24         | T            | PB23A             | 5    | BDQ24         | T            |  |
| AC12          | PB23B             | 5    | BDQ24         | C            | PB23B             | 5    | BDQ24         | C            |  |
| AC13          | PB24A             | 5    | BDQS24        | T            | PB24A             | 5    | BDQS24        | T            |  |
| GND           | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AA13          | PB24B             | 5    | BDQ24         | C            | PB24B             | 5    | BDQ24         | C            |  |
| AD13          | PB25A             | 5    | BDQ24         | T            | PB25A             | 5    | BDQ24         | T            |  |
| AC14          | PB25B             | 5    | BDQ24         | C            | PB25B             | 5    | BDQ24         | C            |  |
| AE8           | PB26A             | 5    | BDQ24         | T            | PB26A             | 5    | BDQ24         | T            |  |
| VCCIO         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AF8           | PB26B             | 5    | BDQ24         | C            | PB26B             | 5    | BDQ24         | C            |  |
| AB15          | PB27A             | 5    | BDQ24         | T            | PB27A             | 5    | BDQ24         | T            |  |
| Y13           | PB27B             | 5    | BDQ24         | C            | PB27B             | 5    | BDQ24         | C            |  |
| AE9           | PB28A             | 5    | BDQ24         | T            | PB28A             | 5    | BDQ24         | T            |  |
| GND           | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AF9           | PB28B             | 5    | BDQ24         | C            | PB28B             | 5    | BDQ24         | C            |  |
| W13           | PB29A             | 5    | BDQ33         | T            | PB29A             | 5    | BDQ33         | T            |  |

## LFE2-50E/SE and LFE2-70E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-50E/SE |                   |      |               |              | LFE2-70E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| D4          | PT7B              | 0    |               | C            | PT7B              | 0    |               | C            |
| D3          | PT7A              | 0    |               | T            | PT7A              | 0    |               | T            |
| C2          | PT6B              | 0    |               | C            | PT6B              | 0    |               | C            |
| C1          | PT6A              | 0    |               | T            | PT6A              | 0    |               | T            |
| G8          | PT5B              | 0    |               | C            | PT5B              | 0    |               | C            |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| G7          | PT5A              | 0    |               | T            | PT5A              | 0    |               | T            |
| E7          | PT4B              | 0    |               | C            | PT4B              | 0    |               | C            |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| F7          | PT4A              | 0    |               | T            | PT4A              | 0    |               | T            |
| E6          | PT3B              | 0    |               | C            | PT3B              | 0    |               | C            |
| E5          | PT3A              | 0    |               | T            | PT3A              | 0    |               | T            |
| G6          | PT2B              | 0    | VREF2_0       | C            | PT2B              | 0    | VREF2_0       | C            |
| G5          | PT2A              | 0    | VREF1_0       | T            | PT2A              | 0    | VREF1_0       | T            |
| L12         | VCC               | -    |               |              | VCC               | -    |               |              |
| L13         | VCC               | -    |               |              | VCC               | -    |               |              |
| L14         | VCC               | -    |               |              | VCC               | -    |               |              |
| L15         | VCC               | -    |               |              | VCC               | -    |               |              |
| M11         | VCC               | -    |               |              | VCC               | -    |               |              |
| M12         | VCC               | -    |               |              | VCC               | -    |               |              |
| M15         | VCC               | -    |               |              | VCC               | -    |               |              |
| M16         | VCC               | -    |               |              | VCC               | -    |               |              |
| N11         | VCC               | -    |               |              | VCC               | -    |               |              |
| N16         | VCC               | -    |               |              | VCC               | -    |               |              |
| P11         | VCC               | -    |               |              | VCC               | -    |               |              |
| P16         | VCC               | -    |               |              | VCC               | -    |               |              |
| R11         | VCC               | -    |               |              | VCC               | -    |               |              |
| R12         | VCC               | -    |               |              | VCC               | -    |               |              |
| R15         | VCC               | -    |               |              | VCC               | -    |               |              |
| R16         | VCC               | -    |               |              | VCC               | -    |               |              |
| T12         | VCC               | -    |               |              | VCC               | -    |               |              |
| T13         | VCC               | -    |               |              | VCC               | -    |               |              |
| T14         | VCC               | -    |               |              | VCC               | -    |               |              |
| T15         | VCC               | -    |               |              | VCC               | -    |               |              |
| D11         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| D6          | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| G9          | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| K12         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| J12         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| D16         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| D21         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| G18         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| J15         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| K15         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| F23         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| J20         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |

## LFE2-50E/SE and LFE2-70E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-50E/SE |                   |      |               |              | LFE2-70E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| L23         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| M17         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| M18         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| AA23        | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| R17         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| R18         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| T23         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| V20         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| AC16        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AC21        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| U15         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| V15         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| Y18         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AC11        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AC6         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| U12         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| V12         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| Y9          | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AA4         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| R10         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| R9          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| T4          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| V7          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| F4          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| J7          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| L4          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| M10         | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| M9          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| AE25        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| V18         | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| J10         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| J11         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| J16         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| J17         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| K18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| K9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| L18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| L9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| T18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| T9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| U18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| U9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V10         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V11         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V16         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V17         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |

**LFE2-70E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2-70E/SE |                   |      |                       |              |
|-------------|-------------------|------|-----------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function         | Differential |
| K28         | PR25A             | 2    | RDQ29                 | T (LVDS)*    |
| J24         | PR24B             | 2    | RDQ21                 | C            |
| J26         | PR24A             | 2    | RDQ21                 | T            |
| GND         | GNDIO2            | -    |                       |              |
| K29         | PR23B             | 2    | RDQ21                 | C (LVDS)*    |
| K30         | PR23A             | 2    | RDQ21                 | T (LVDS)*    |
| J23         | PR22B             | 2    | RDQ21                 | C            |
| J25         | PR22A             | 2    | RDQ21                 | T            |
| VCCIO       | VCCIO2            | 99   |                       |              |
| J27         | PR21B             | 2    | RDQ21                 | C (LVDS)*    |
| J28         | PR21A             | 2    | RDQS21                | T (LVDS)*    |
| H26         | PR20B             | 2    | RDQ21                 | C            |
| GND         | GNDIO2            | -    |                       |              |
| H24         | PR20A             | 2    | RDQ21                 | T            |
| J29         | PR19B             | 2    | RDQ21                 | C (LVDS)*    |
| J30         | PR19A             | 2    | RDQ21                 | T (LVDS)*    |
| H25         | PR18B             | 2    | RDQ21                 | C            |
| VCCIO       | VCCIO2            | 2    |                       |              |
| H23         | PR18A             | 2    | RDQ21                 | T            |
| G27         | PR15B             | 2    | RUM1_SPLLC_FB_A/RDQ12 | C            |
| GND         | GNDIO2            | -    |                       |              |
| H27         | PR15A             | 2    | RUM1_SPLLT_FB_A/RDQ12 | T            |
| G29         | PR14B             | 2    | RUM1_SPLLC_IN_A/RDQ12 | C (LVDS)*    |
| G28         | PR14A             | 2    | RUM1_SPLLT_IN_A/RDQ12 | T (LVDS)*    |
| VCCIO       | VCCIO2            | 2    |                       |              |
| GND         | GNDIO2            | -    |                       |              |
| G26         | PR6B              | 2    |                       | C (LVDS)*    |
| G25         | PR6A              | 2    |                       | T (LVDS)*    |
| G30         | PR5B              | 2    |                       | C            |
| F30         | PR5A              | 2    |                       | T            |
| VCCIO       | VCCIO2            | 2    |                       |              |
| F26         | PR4B              | 2    |                       | C (LVDS)*    |
| F27         | PR4A              | 2    |                       | T (LVDS)*    |
| F29         | PR3B              | 2    |                       | C            |
| GND         | GNDIO2            | -    |                       |              |
| F28         | PR3A              | 2    |                       | T            |
| H29         | PR2B              | 2    | VREF2_2               | C (LVDS)*    |
| H30         | PR2A              | 2    | VREF1_2               | T (LVDS)*    |
| VCCIO       | VCCIO2            | 2    |                       |              |
| B26         | PT100B            | 1    | VREF2_1               | C            |
| A26         | PT100A            | 1    | VREF1_1               | T            |
| GND         | GNDIO1            | -    |                       |              |
| C25         | PT99B             | 1    |                       | C            |

## LFE2M20E/SE and LFE2M35E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2M20E/SE |                   |      |               |              | LFE2M35E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| V5          | PL51A             | 6    | LDQS51        | T (LVDS)*    | PL66A             | 6    | LDQS66        | T (LVDS)*    |  |
| U4          | PL51B             | 6    | LDQ51         | C (LVDS)*    | PL66B             | 6    | LDQ66         | C (LVDS)*    |  |
| V1          | PL52A             | 6    | LDQ51         | T            | PL67A             | 6    | LDQ66         | T            |  |
| VCCIO       | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| V3          | PL52B             | 6    | LDQ51         | C            | PL67B             | 6    | LDQ66         | C            |  |
| W1          | PL53A             | 6    | LDQ51         | T (LVDS)*    | PL68A             | 6    | LDQ66         | T (LVDS)*    |  |
| Y1          | PL53B             | 6    | LDQ51         | C (LVDS)*    | PL68B             | 6    | LDQ66         | C (LVDS)*    |  |
| AA1         | PL54A             | 6    | LDQ51         | T            | PL69A             | 6    | LDQ66         | T            |  |
| GNDIO       | GNDIO6            | -    |               |              | GNDIO6            | -    |               |              |  |
| AA2         | PL54B             | 6    | LDQ51         | C            | PL69B             | 6    | LDQ66         | C            |  |
| V4          | TCK               | -    |               |              | TCK               | -    |               |              |  |
| Y2          | TDI               | -    |               |              | TDI               | -    |               |              |  |
| Y3          | TMS               | -    |               |              | TMS               | -    |               |              |  |
| W3          | TDO               | -    |               |              | TDO               | -    |               |              |  |
| W4          | VCCJ              | -    |               |              | VCCJ              | -    |               |              |  |
| W5          | PB2A              | 5    | BDQ6          | T            | PB2A              | 5    | BDQ6          | T            |  |
| Y4          | PB2B              | 5    | BDQ6          | C            | PB2B              | 5    | BDQ6          | C            |  |
| W6          | PB3A              | 5    | BDQ6          | T            | PB3A              | 5    | BDQ6          | T            |  |
| V6          | PB3B              | 5    | BDQ6          | C            | PB3B              | 5    | BDQ6          | C            |  |
| AA3         | PB4A              | 5    | BDQ6          | T            | PB4A              | 5    | BDQ6          | T            |  |
| VCCIO       | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AB2         | PB4B              | 5    | BDQ6          | C            | PB4B              | 5    | BDQ6          | C            |  |
| T8          | PB5A              | 5    | BDQ6          | T            | PB5A              | 5    | BDQ6          | T            |  |
| U7          | PB5B              | 5    | BDQ6          | C            | PB5B              | 5    | BDQ6          | C            |  |
| U8          | PB6A              | 5    | BDQS6         | T            | PB6A              | 5    | BDQS6         | T            |  |
| GNDIO       | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| T9          | PB6B              | 5    | BDQ6          | C            | PB6B              | 5    | BDQ6          | C            |  |
| V8          | PB7A              | 5    | BDQ6          | T            | PB7A              | 5    | BDQ6          | T            |  |
| W8          | PB7B              | 5    | BDQ6          | C            | PB7B              | 5    | BDQ6          | C            |  |
| Y6          | PB8A              | 5    | BDQ6          | T            | PB8A              | 5    | BDQ6          | T            |  |
| VCCIO       | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| Y5          | PB8B              | 5    | BDQ6          | C            | PB8B              | 5    | BDQ6          | C            |  |
| AB3         | PB9A              | 5    | BDQ6          | T            | PB9A              | 5    | BDQ6          | T            |  |
| AB4         | PB9B              | 5    | BDQ6          | C            | PB9B              | 5    | BDQ6          | C            |  |
| AB5         | PB10A             | 5    | BDQ6          | T            | PB10A             | 5    | BDQ6          | T            |  |
| GNDIO       | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AA6         | PB10B             | 5    | BDQ6          | C            | PB10B             | 5    | BDQ6          | C            |  |
| V9          | PB13A             | 5    | BDQ15         | T            | PB31A             | 5    | BDQ33         | T            |  |
| U9          | PB13B             | 5    | BDQ15         | C            | PB31B             | 5    | BDQ33         | C            |  |
| VCCIO       | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| -           | -                 | -    |               |              | GNDIO5            | -    |               |              |  |
| U10         | PB14A             | 5    | BDQ15         | T            | PB32A             | 5    | BDQ33         | T            |  |
| T10         | PB14B             | 5    | BDQ15         | C            | PB32B             | 5    | BDQ33         | C            |  |
| GNDIO       | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| W9          | PB15A             | 5    | BDQS15****    | T            | PB33A             | 5    | BDQS33****    | T            |  |
| Y8          | PB15B             | 5    | BDQ15         | C            | PB33B             | 5    | BDQ33         | C            |  |
| AA7         | PB16A             | 5    | VREF2_5/BDQ15 | T            | PB34A             | 5    | VREF2_5/BDQ33 | T            |  |
| Y7          | PB16B             | 5    | VREF1_5/BDQ15 | C            | PB34B             | 5    | VREF1_5/BDQ33 | C            |  |

## LFE2M20E/SE and LFE2M35E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2M20E/SE |                   |      |               |              | LFE2M35E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| GNDIO       | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |  |
| F7          | PT9B              | 0    |               | C            | PT9B              | 0    |               | C            |  |
| G7          | PT9A              | 0    |               | T            | PT9A              | 0    |               | T            |  |
| C3          | PT8B              | 0    |               | C            | PT8B              | 0    |               | C            |  |
| D4          | PT8A              | 0    |               | T            | PT8A              | 0    |               | T            |  |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| F6          | PT7B              | 0    |               | C            | PT7B              | 0    |               | C            |  |
| E6          | PT7A              | 0    |               | T            | PT7A              | 0    |               | T            |  |
| E5          | PT6B              | 0    |               | C            | PT6B              | 0    |               | C            |  |
| D6          | PT6A              | 0    |               | T            | PT6A              | 0    |               | T            |  |
| GNDIO       | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |  |
| D3          | PT5B              | 0    |               | C            | PT5B              | 0    |               | C            |  |
| E3          | PT5A              | 0    |               | T            | PT5A              | 0    |               | T            |  |
| D5          | PT4B              | 0    |               | C            | PT4B              | 0    |               | C            |  |
| E4          | PT4A              | 0    |               | T            | PT4A              | 0    |               | T            |  |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| C2          | PT3B              | 0    |               | C            | PT3B              | 0    |               | C            |  |
| B2          | PT3A              | 0    |               | T            | PT3A              | 0    |               | T            |  |
| B1          | PT2B              | 0    |               | C            | PT2B              | 0    |               | C            |  |
| C1          | PT2A              | 0    |               | T            | PT2A              | 0    |               | T            |  |
| R8          | VCCPLL            | -    |               |              | VCCPLL            | -    |               |              |  |
| H15         | VCCPLL            | -    |               |              | VCCPLL            | -    |               |              |  |
| H8          | VCCPLL            | -    |               |              | VCCPLL            | -    |               |              |  |
| R15         | VCCPLL            | -    |               |              | VCCPLL            | -    |               |              |  |
| J10         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| J11         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| J12         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| J13         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| K14         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| K9          | VCC               | -    |               |              | VCC               | -    |               |              |  |
| L14         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| L9          | VCC               | -    |               |              | VCC               | -    |               |              |  |
| M14         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| M9          | VCC               | -    |               |              | VCC               | -    |               |              |  |
| N14         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| N9          | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P10         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P11         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P12         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P13         | VCC               | -    |               |              | VCC               | -    |               |              |  |
| B5          | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| B9          | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| E7          | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| H9          | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| D13         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| E16         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| H14         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| E21         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |                   |              | LFE2M70E/SE       |      |                          |              |  |
|-------------|-------------------|------|-------------------|--------------|-------------------|------|--------------------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function     | Differential | Ball/Pad Function | Bank | Dual Function            | Differential |  |
| AA6         | NC                | -    |                   |              | PL79B             | 6    | LDQ82                    | C            |  |
| AB4         | NC                | -    |                   |              | PL80A             | 6    | LDQ82                    | T (LVDS)*    |  |
| -           | -                 | -    |                   |              | VCCIO6            | 6    |                          |              |  |
| AB5         | NC                | -    |                   |              | PL80B             | 6    | LDQ82                    | C (LVDS)*    |  |
| AA8         | NC                | -    |                   |              | PL81A             | 6    | LDQ82                    | T            |  |
| AA9         | NC                | -    |                   |              | PL81B             | 6    | LDQ82                    | C            |  |
| AC1         | PL62A             | 6    | LLM0_GPLLT_IN_A** | T (LVDS)*    | PL82A             | 6    | LLM0_GPLLT_IN_A**/LDQS82 | T (LVDS)*    |  |
| GNDIO       | GNDIO6            | -    |                   |              | GNDIO6            | -    |                          |              |  |
| AC2         | PL62B             | 6    | LLM0_GPLLC_IN_A** | C (LVDS)*    | PL82B             | 6    | LLM0_GPLLC_IN_A**/LDQ82  | C (LVDS)*    |  |
| AC4         | PL63A             | 6    | LLM0_GPLLT_FB_A   | T            | PL83A             | 6    | LLM0_GPLLT_FB_A/LDQ82    | T            |  |
| AC3         | PL63B             | 6    | LLM0_GPLLC_FB_A   | C            | PL83B             | 6    | LLM0_GPLLC_FB_A/LDQ82    | C            |  |
| VCCIO       | VCCIO6            | 6    |                   |              | VCCIO6            | 6    |                          |              |  |
| AC7         | PL64A             | 6    | LLM0_GDLLT_IN_A** | T (LVDS)*    | PL84A             | 6    | LLM0_GDLLT_IN_A**/LDQ82  | T (LVDS)*    |  |
| AC6         | PL64B             | 6    | LLM0_GDLLC_IN_A** | C (LVDS)*    | PL84B             | 6    | LLM0_GDLLC_IN_A**/LDQ82  | C (LVDS)*    |  |
| AC5         | PL65A             | 6    | LLM0_GDLLT_FB_A   | T            | PL85A             | 6    | LLM0_GDLLT_FB_A/LDQ82    | T            |  |
| AD3         | PL65B             | 6    | LLM0_GDLLC_FB_A   | C            | PL85B             | 6    | LLM0_GDLLC_FB_A/LDQ82    | C            |  |
| GNDIO       | GNDIO6            | -    |                   |              | GNDIO6            | -    |                          |              |  |
| AB8         | LLM0_PLLCAP       | 6    |                   |              | LLM0_PLLCAP       | 6    |                          |              |  |
| AD2         | PL67A             | 6    | LDQ71             | T (LVDS)*    | PL87A             | 6    |                          | T            |  |
| AD1         | PL67B             | 6    | LDQ71             | C (LVDS)*    | PL87B             | 6    |                          | C            |  |
| AE2         | TCK               | -    |                   |              | TCK               | -    |                          |              |  |
| AE1         | TDI               | -    |                   |              | TDI               | -    |                          |              |  |
| AF2         | TMS               | -    |                   |              | TMS               | -    |                          |              |  |
| AF1         | TDO               | -    |                   |              | TDO               | -    |                          |              |  |
| AG1         | VCCJ              | -    |                   |              | VCCJ              | -    |                          |              |  |
| AH1         | VCC               | -    |                   |              | LLC_SQ_VCCR3      | 14   |                          |              |  |
| AK2         | PB11A             | 5    | BDQ15             | T            | LLC_SQ_HDINP3     | 14   |                          | T            |  |
| AJ1         | NC                | -    |                   |              | LLC_SQ_VCCIB3     | 14   |                          |              |  |
| AJ2         | PB11B             | 5    | BDQ15             | C            | LLC_SQ_HDINN3     | 14   |                          | C            |  |
| AH4         | VCC               | -    |                   |              | LLC_SQ_VCCTX3     | 14   |                          |              |  |
| AK5         | PB13A             | 5    | BDQ15             | T            | LLC_SQ_HDOUTP3    | 14   |                          | T            |  |
| AK4         | NC                | -    |                   |              | LLC_SQ_VCCOB3     | 14   |                          |              |  |
| AJ5         | PB13B             | 5    | BDQ15             | C            | LLC_SQ_HDOUTN3    | 14   |                          | C            |  |
| AH5         | VCC               | -    |                   |              | LLC_SQ_VCCTX2     | 14   |                          |              |  |
| AJ6         | PB14B             | 5    | BDQ15             | C            | LLC_SQ_HDOUTN2    | 14   |                          | C            |  |
| AH6         | NC                | -    |                   |              | LLC_SQ_VCCOB2     | 14   |                          |              |  |
| AK6         | PB14A             | 5    | BDQ15             | T            | LLC_SQ_HDOUTP2    | 14   |                          | T            |  |
| AH2         | VCC               | -    |                   |              | LLC_SQ_VCCR2      | 14   |                          |              |  |
| AJ3         | PB12B             | 5    | BDQ15             | C            | LLC_SQ_HDINN2     | 14   |                          | C            |  |
| AH3         | NC                | -    |                   |              | LLC_SQ_VCCIB2     | 14   |                          |              |  |
| AK3         | PB12A             | 5    | BDQ15             | T            | LLC_SQ_HDINP2     | 14   |                          | T            |  |
| AH7         | VCC               | -    |                   |              | LLC_SQ_VCCP       | 14   |                          |              |  |
| AG7         | PB15A             | 5    | BDQS15            | T            | LLC_SQ_REFCLKP    | 14   |                          | T            |  |
| AF7         | PB15B             | 5    | BDQ15             | C            | LLC_SQ_REFCLKN    | 14   |                          | C            |  |
| AJ7         | VCCAUX            | -    |                   |              | LLC_SQ_VCCAUX33   | 14   |                          |              |  |
| AK11        | PB18A             | 5    | BDQ15             | T            | LLC_SQ_HDINP1     | 14   |                          | T            |  |
| AH11        | NC                | -    |                   |              | LLC_SQ_VCCIB1     | 14   |                          |              |  |
| AJ11        | PB18B             | 5    | BDQ15             | C            | LLC_SQ_HDINN1     | 14   |                          | C            |  |

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |               |              | LFE2M70E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| AH12        | VCC               | -    |               |              | LLC_SQ_VCCR1      | 14   |               |              |  |
| AK8         | PB16A             | 5    | BDQ15         | T            | LLC_SQ_HDOUTP1    | 14   |               | T            |  |
| AH8         | NC                | -    |               |              | LLC_SQ_VCCOB1     | 14   |               |              |  |
| AJ8         | PB16B             | 5    | BDQ15         | C            | LLC_SQ_HDOUTN1    | 14   |               | C            |  |
| AH9         | VCC               | -    |               |              | LLC_SQ_VCCTX1     | 14   |               |              |  |
| AJ9         | PB17B             | 5    | BDQ15         | C            | LLC_SQ_HDOUTN0    | 14   |               | C            |  |
| AK10        | NC                | -    |               |              | LLC_SQ_VCCOB0     | 14   |               |              |  |
| AK9         | PB17A             | 5    | BDQ15         | T            | LLC_SQ_HDOUTP0    | 14   |               | T            |  |
| AH10        | VCC               | -    |               |              | LLC_SQ_VCCTX0     | 14   |               |              |  |
| AJ12        | PB19B             | 5    | BDQ15         | C            | LLC_SQ_HDINN0     | 14   |               | C            |  |
| AJ13        | NC                | -    |               |              | LLC_SQ_VCCIB0     | 14   |               |              |  |
| AK12        | PB19A             | 5    | BDQ15         | T            | LLC_SQ_HDINP0     | 14   |               | T            |  |
| AH13        | VCC               | -    |               |              | LLC_SQ_VCCR0      | 14   |               |              |  |
| AF10        | PB3A              | 5    | BDQ6          | T            | PB30A             | 5    | BDQ33         | T            |  |
| AE8         | PB3B              | 5    | BDQ6          | C            | PB30B             | 5    | BDQ33         | C            |  |
| AE11        | PB4A              | 5    | BDQ6          | T            | PB31A             | 5    | BDQ33         | T            |  |
| VCCIO       | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AD9         | PB4B              | 5    | BDQ6          | C            | PB31B             | 5    | BDQ33         | C            |  |
| AE10        | PB5A              | 5    | BDQ6          | T            | PB32A             | 5    | BDQ33         | T            |  |
| AD10        | PB5B              | 5    | BDQ6          | C            | PB32B             | 5    | BDQ33         | C            |  |
| AE13        | PB6A              | 5    | BDQS6         | T            | PB33A             | 5    | BDQS33        | T            |  |
| GNDIO       | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AC12        | PB6B              | 5    | BDQ6          | C            | PB33B             | 5    | BDQ33         | C            |  |
| AG2         | PB7A              | 5    | BDQ6          | T            | PB34A             | 5    | BDQ33         | T            |  |
| AG3         | PB7B              | 5    | BDQ6          | C            | PB34B             | 5    | BDQ33         | C            |  |
| AD13        | PB8A              | 5    | BDQ6          | T            | PB35A             | 5    | BDQ33         | T            |  |
| VCCIO       | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AC13        | PB8B              | 5    | BDQ6          | C            | PB35B             | 5    | BDQ33         | C            |  |
| AE14        | PB9A              | 5    | BDQ6          | T            | PB36A             | 5    | BDQ33         | T            |  |
| AC14        | PB9B              | 5    | BDQ6          | C            | PB36B             | 5    | BDQ33         | C            |  |
| AF3         | PB10A             | 5    | BDQ6          | T            | PB37A             | 5    | BDQ33         | T            |  |
| GNDIO       | GNDIO5            | -    |               |              | GNDIO5            | -    |               |              |  |
| AF4         | PB10B             | 5    | BDQ6          | C            | PB37B             | 5    | BDQ33         | C            |  |
| VCCIO       | VCCIO5            | 5    |               |              | -                 | -    |               |              |  |
| AG4         | PB20A             | 5    | BDQ24         | T            | PB38A             | 5    | BDQ42         | T            |  |
| AG5         | PB20B             | 5    | BDQ24         | C            | PB38B             | 5    | BDQ42         | C            |  |
| GNDIO       | GNDIO5            | -    |               |              | -                 | -    |               |              |  |
| VCCIO       | VCCIO5            | 5    |               |              | -                 | -    |               |              |  |
| AD11        | PB24A             | 5    | BDQS24****    | T            | PB39A             | 5    | BDQ42         | T            |  |
| AF13        | PB24B             | 5    | BDQ24         | C            | PB39B             | 5    | BDQ42         | C            |  |
| AF12        | PB25A             | 5    | BDQ24         | T            | PB40A             | 5    | BDQ42         | T            |  |
| -           | -                 | -    |               |              | VCCIO5            | 5    |               |              |  |
| AD14        | PB25B             | 5    | BDQ24         | C            | PB40B             | 5    | BDQ42         | C            |  |
| AG8         | PB26A             | 5    | BDQ24         | T            | PB41A             | 5    | BDQ42         | T            |  |
| AF8         | PB26B             | 5    | BDQ24         | C            | PB41B             | 5    | BDQ42         | C            |  |
| AE15        | PB27A             | 5    | BDQ24         | T            | PB42A             | 5    | BDQS42****    | T            |  |
| -           | -                 | -    |               |              | GNDIO5            | -    |               |              |  |
| VCCIO       | VCCIO5            | 5    |               |              | -                 | -    |               |              |  |

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |               |              | LFE2M70E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| E13         | PT28A             | 0    |               | T            | PT37A             | 0    |               | T            |  |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| GNDIO       | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |  |
| J12         | PT5B              | 0    |               | C            | PT31B             | 0    |               | C            |  |
| GNDIO       | GNDIO0            | -    |               |              | -                 | -    |               |              |  |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| H10         | PT5A              | 0    |               | T            | PT31A             | 0    |               | T            |  |
| E12         | PT4B              | 0    |               | C            | PT30B             | 0    |               | C            |  |
| D11         | PT4A              | 0    |               | T            | PT30A             | 0    |               | T            |  |
| H11         | PT3B              | 0    |               | C            | PT29B             | 0    |               | C            |  |
| F11         | PT3A              | 0    |               | T            | PT29A             | 0    |               | T            |  |
| C13         | VCC               | -    |               |              | ULC_SQ_VCCR0      | 11   |               |              |  |
| A12         | PT19A             | 0    |               | T            | ULC_SQ_HDINP0     | 11   |               | T            |  |
| B13         | NC                | -    |               |              | ULC_SQ_VCCIB0     | 11   |               |              |  |
| B12         | PT19B             | 0    |               | C            | ULC_SQ_HDINN0     | 11   |               | C            |  |
| C10         | VCC               | -    |               |              | ULC_SQ_VCCTX0     | 11   |               |              |  |
| A9          | PT17A             | 0    |               | T            | ULC_SQ_HDOUTP0    | 11   |               | T            |  |
| A10         | NC                | -    |               |              | ULC_SQ_VCCOB0     | 11   |               |              |  |
| B9          | PT17B             | 0    |               | C            | ULC_SQ_HDOUTN0    | 11   |               | C            |  |
| C9          | VCC               | -    |               |              | ULC_SQ_VCCTX1     | 11   |               |              |  |
| B8          | PT18B             | 0    |               | C            | ULC_SQ_HDOUTN1    | 11   |               | C            |  |
| C8          | NC                | -    |               |              | ULC_SQ_VCCOB1     | 11   |               |              |  |
| A8          | PT18A             | 0    |               | T            | ULC_SQ_HDOUTP1    | 11   |               | T            |  |
| C12         | VCC               | -    |               |              | ULC_SQ_VCCR1      | 11   |               |              |  |
| B11         | PT16B             | 0    |               | C            | ULC_SQ_HDINN1     | 11   |               | C            |  |
| C11         | NC                | -    |               |              | ULC_SQ_VCCIB1     | 11   |               |              |  |
| A11         | PT16A             | 0    |               | T            | ULC_SQ_HDINP1     | 11   |               | T            |  |
| B7          | VCCAUX            | -    |               |              | ULC_SQ_VCCAUX33   | 11   |               |              |  |
| E7          | PT15B             | 0    |               | C            | ULC_SQ_REFCLKN    | 11   |               | C            |  |
| D7          | PT15A             | 0    |               | T            | ULC_SQ_REFCLKP    | 11   |               | T            |  |
| C7          | VCC               | -    |               |              | ULC_SQ_VCCP       | 11   |               |              |  |
| A3          | PT12A             | 0    |               | T            | ULC_SQ_HDINP2     | 11   |               | T            |  |
| C3          | NC                | -    |               |              | ULC_SQ_VCCIB2     | 11   |               |              |  |
| B3          | PT12B             | 0    |               | C            | ULC_SQ_HDINN2     | 11   |               | C            |  |
| C2          | VCC               | -    |               |              | ULC_SQ_VCCR2      | 11   |               |              |  |
| A6          | PT14A             | 0    |               | T            | ULC_SQ_HDOUTP2    | 11   |               | T            |  |
| C6          | NC                | -    |               |              | ULC_SQ_VCCOB2     | 11   |               |              |  |
| B6          | PT14B             | 0    |               | C            | ULC_SQ_HDOUTN2    | 11   |               | C            |  |
| C5          | VCC               | -    |               |              | ULC_SQ_VCCTX2     | 11   |               |              |  |
| B5          | PT13B             | 0    |               | C            | ULC_SQ_HDOUTN3    | 11   |               | C            |  |
| A4          | NC                | -    |               |              | ULC_SQ_VCCOB3     | 11   |               |              |  |
| A5          | PT13A             | 0    |               | T            | ULC_SQ_HDOUTP3    | 11   |               | T            |  |
| C4          | VCC               | -    |               |              | ULC_SQ_VCCTX3     | 11   |               |              |  |
| B2          | PT11B             | 0    |               | C            | ULC_SQ_HDINN3     | 11   |               | C            |  |
| B1          | NC                | -    |               |              | ULC_SQ_VCCIB3     | 11   |               |              |  |
| A2          | PT11A             | 0    |               | T            | ULC_SQ_HDINP3     | 11   |               | T            |  |
| C1          | VCC               | -    |               |              | ULC_SQ_VCCR3      | 11   |               |              |  |
| L12         | VCC               | -    |               |              | VCC               | -    |               |              |  |

**LFE2M100E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2M100E/SE |                   |      |                |              |
|--------------|-------------------|------|----------------|--------------|
| Ball Number  | Ball/Pad Function | Bank | Dual Function  | Differential |
| AF11         | PB62B             | 5    | PCLKC5_0/BDQ60 | C            |
| VCCIO        | VCCIO5            | 5    |                |              |
| GNDIO        | GNDIO5            | -    |                |              |
| AJ14         | PB67A             | 4    | PCLKT4_0/BDQ69 | T            |
| VCCIO        | VCCIO4            | 4    |                |              |
| AK14         | PB67B             | 4    | PCLKC4_0/BDQ69 | C            |
| AK15         | PB68A             | 4    | VREF2_4/BDQ69  | T            |
| AK16         | PB68B             | 4    | VREF1_4/BDQ69  | C            |
| AF18         | PB69A             | 4    | BDQS69         | T            |
| GNDIO        | GNDIO4            | -    |                |              |
| AD16         | PB69B             | 4    | BDQ69          | C            |
| AJ15         | PB70A             | 4    | BDQ69          | T            |
| AG16         | PB70B             | 4    | BDQ69          | C            |
| AE17         | PB71A             | 4    | BDQ69          | T            |
| VCCIO        | VCCIO4            | 4    |                |              |
| AC17         | PB71B             | 4    | BDQ69          | C            |
| AH16         | PB72A             | 4    | BDQ69          | T            |
| AK17         | PB72B             | 4    | BDQ69          | C            |
| AG20         | PB73A             | 4    | BDQ69          | T            |
| GNDIO        | GNDIO4            | -    |                |              |
| AG21         | PB73B             | 4    | BDQ69          | C            |
| AG18         | PB74A             | 4    | BDQ78          | T            |
| AJ16         | PB74B             | 4    | BDQ78          | C            |
| AF21         | PB75A             | 4    | BDQ78          | T            |
| AG22         | PB75B             | 4    | BDQ78          | C            |
| AD17         | PB76A             | 4    | BDQ78          | T            |
| AF19         | PB76B             | 4    | BDQ78          | C            |
| VCCIO        | VCCIO4            | 4    |                |              |
| GNDIO        | GNDIO4            | -    |                |              |
| AH17         | PB80A             | 4    | BDQ78          | T            |
| AJ17         | PB80B             | 4    | BDQ78          | C            |
| VCCIO        | VCCIO4            | 4    |                |              |
| AF26         | PB82A             | 4    | BDQ78          | T            |
| AE25         | PB82B             | 4    | BDQ78          | C            |
| GNDIO        | GNDIO4            | -    |                |              |
| AD24         | PB92A             | 4    | BDQ96          | T            |
| AE24         | PB92B             | 4    | BDQ96          | C            |
| AD18         | PB93A             | 4    | BDQ96          | T            |
| AC18         | PB93B             | 4    | BDQ96          | C            |
| AE18         | PB94A             | 4    | BDQ96          | T            |
| AG19         | PB94B             | 4    | BDQ96          | C            |
| VCCIO        | VCCIO4            | 4    |                |              |
| GNDIO        | GNDIO4            | -    |                |              |

**LFE2M100E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2M100E/SE |                   |      |               |              |
|--------------|-------------------|------|---------------|--------------|
| Ball Number  | Ball/Pad Function | Bank | Dual Function | Differential |
| K19          | VCCIO1            | 1    |               |              |
| F28          | VCCIO2            | 2    |               |              |
| J25          | VCCIO2            | 2    |               |              |
| K28          | VCCIO2            | 2    |               |              |
| M21          | VCCIO2            | 2    |               |              |
| M24          | VCCIO2            | 2    |               |              |
| N21          | VCCIO2            | 2    |               |              |
| N28          | VCCIO2            | 2    |               |              |
| P21          | VCCIO2            | 2    |               |              |
| R25          | VCCIO2            | 2    |               |              |
| AA28         | VCCIO3            | 3    |               |              |
| AB25         | VCCIO3            | 3    |               |              |
| AE28         | VCCIO3            | 3    |               |              |
| T25          | VCCIO3            | 3    |               |              |
| U21          | VCCIO3            | 3    |               |              |
| V21          | VCCIO3            | 3    |               |              |
| V28          | VCCIO3            | 3    |               |              |
| W21          | VCCIO3            | 3    |               |              |
| W24          | VCCIO3            | 3    |               |              |
| AA18         | VCCIO4            | 4    |               |              |
| AA19         | VCCIO4            | 4    |               |              |
| AE19         | VCCIO4            | 4    |               |              |
| AF22         | VCCIO4            | 4    |               |              |
| AG17         | VCCIO4            | 4    |               |              |
| AG25         | VCCIO4            | 4    |               |              |
| AA12         | VCCIO5            | 5    |               |              |
| AA13         | VCCIO5            | 5    |               |              |
| AE12         | VCCIO5            | 5    |               |              |
| AF9          | VCCIO5            | 5    |               |              |
| AG14         | VCCIO5            | 5    |               |              |
| AG6          | VCCIO5            | 5    |               |              |
| AA3          | VCCIO6            | 6    |               |              |
| AB6          | VCCIO6            | 6    |               |              |
| AE3          | VCCIO6            | 6    |               |              |
| T6           | VCCIO6            | 6    |               |              |
| U10          | VCCIO6            | 6    |               |              |
| V10          | VCCIO6            | 6    |               |              |
| V3           | VCCIO6            | 6    |               |              |
| W10          | VCCIO6            | 6    |               |              |
| W7           | VCCIO6            | 6    |               |              |
| F3           | VCCIO7            | 7    |               |              |
| J6           | VCCIO7            | 7    |               |              |
| K3           | VCCIO7            | 7    |               |              |

## LFE2M70E/SE and LFE2M100E/SE Logic Signal Connections: 1152 fpBGA (Cont.)

| LFE2M70E/SE |                   |      |               | LFE2M100E/SE |                   |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| AG23        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AK21        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AM19        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AM23        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AC14        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AC15        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AG12        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AG16        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AK14        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AM12        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AM16        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AA12        | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AB3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AB8         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AE3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AE7         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AH3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| W3          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| W8          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| Y12         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| G3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| K3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| K7          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| N3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| N8          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| P12         | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| R12         | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| T3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| T8          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| AD28        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| AG32        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| AB12        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AB13        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AB22        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AB23        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AC13        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AC22        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| M13         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| M22         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N12         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N13         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N22         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N23         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| A1          | GND               | -    |               |              | GND               | -    |               |              |
| A10         | GND               | -    |               |              | GND               | -    |               |              |
| A13         | GND               | -    |               |              | GND               | -    |               |              |
| A22         | GND               | -    |               |              | GND               | -    |               |              |
| A25         | GND               | -    |               |              | GND               | -    |               |              |
| A34         | GND               | -    |               |              | GND               | -    |               |              |

**LatticeECP2M S-Series Devices, Lead-Free Packaging**
**Commercial**

| Part Number       | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|-------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2M20SE-5FN484C | 304  | 1.2V    | -5    | Lead-Free fpBGA | 484  | Com   | 20       |
| LFE2M20SE-6FN484C | 304  | 1.2V    | -6    | Lead-Free fpBGA | 484  | Com   | 20       |
| LFE2M20SE-7FN484C | 304  | 1.2V    | -7    | Lead-Free fpBGA | 484  | Com   | 20       |
| LFE2M20SE-5FN256C | 140  | 1.2V    | -5    | Lead-Free fpBGA | 256  | Com   | 20       |
| LFE2M20SE-6FN256C | 140  | 1.2V    | -6    | Lead-Free fpBGA | 256  | Com   | 20       |
| LFE2M20SE-7FN256C | 140  | 1.2V    | -7    | Lead-Free fpBGA | 256  | Com   | 20       |

| Part Number       | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|-------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2M35SE-5FN672C | 410  | 1.2V    | -5    | Lead-Free fpBGA | 672  | Com   | 35       |
| LFE2M35SE-6FN672C | 410  | 1.2V    | -6    | Lead-Free fpBGA | 672  | Com   | 35       |
| LFE2M35SE-7FN672C | 410  | 1.2V    | -7    | Lead-Free fpBGA | 672  | Com   | 35       |
| LFE2M35SE-5FN484C | 303  | 1.2V    | -5    | Lead-Free fpBGA | 484  | Com   | 35       |
| LFE2M35SE-6FN484C | 303  | 1.2V    | -6    | Lead-Free fpBGA | 484  | Com   | 35       |
| LFE2M35SE-7FN484C | 303  | 1.2V    | -7    | Lead-Free fpBGA | 484  | Com   | 35       |
| LFE2M35SE-5FN256C | 140  | 1.2V    | -5    | Lead-Free fpBGA | 256  | Com   | 35       |
| LFE2M35SE-6FN256C | 140  | 1.2V    | -6    | Lead-Free fpBGA | 256  | Com   | 35       |
| LFE2M35SE-7FN256C | 140  | 1.2V    | -7    | Lead-Free fpBGA | 256  | Com   | 35       |

| Part Number       | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|-------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2M50SE-5FN900C | 410  | 1.2V    | -5    | Lead-Free fpBGA | 900  | Com   | 50       |
| LFE2M50SE-6FN900C | 410  | 1.2V    | -6    | Lead-Free fpBGA | 900  | Com   | 50       |
| LFE2M50SE-7FN900C | 410  | 1.2V    | -7    | Lead-Free fpBGA | 900  | Com   | 50       |
| LFE2M50SE-5FN672C | 372  | 1.2V    | -5    | Lead-Free fpBGA | 672  | Com   | 50       |
| LFE2M50SE-6FN672C | 372  | 1.2V    | -6    | Lead-Free fpBGA | 672  | Com   | 50       |
| LFE2M50SE-7FN672C | 372  | 1.2V    | -7    | Lead-Free fpBGA | 672  | Com   | 50       |
| LFE2M50SE-5FN484C | 270  | 1.2V    | -5    | Lead-Free fpBGA | 484  | Com   | 50       |
| LFE2M50SE-6FN484C | 270  | 1.2V    | -6    | Lead-Free fpBGA | 484  | Com   | 50       |
| LFE2M50SE-7FN484C | 270  | 1.2V    | -7    | Lead-Free fpBGA | 484  | Com   | 50       |

| Part Number        | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|--------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2M70SE-5FN1152C | 436  | 1.2V    | -5    | Lead-Free fpBGA | 1152 | Com   | 70       |
| LFE2M70SE-6FN1152C | 436  | 1.2V    | -6    | Lead-Free fpBGA | 1152 | Com   | 70       |
| LFE2M70SE-7FN1152C | 436  | 1.2V    | -7    | Lead-Free fpBGA | 1152 | Com   | 70       |
| LFE2M70SE-5FN900C  | 416  | 1.2V    | -5    | Lead-Free fpBGA | 900  | Com   | 70       |
| LFE2M70SE-6FN900C  | 416  | 1.2V    | -6    | Lead-Free fpBGA | 900  | Com   | 70       |
| LFE2M70SE-7FN900C  | 416  | 1.2V    | -7    | Lead-Free fpBGA | 900  | Com   | 70       |