


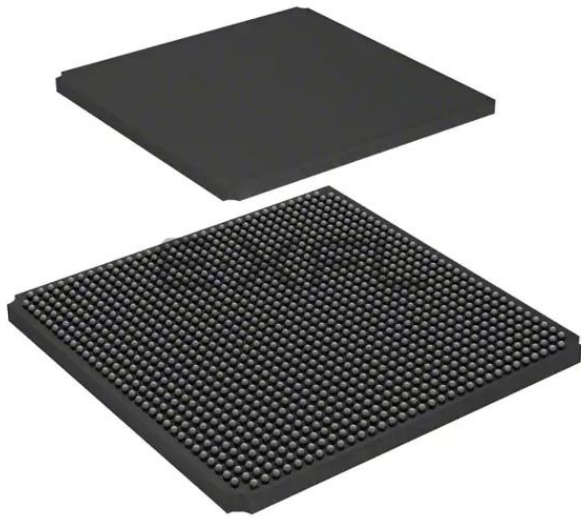

Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications,


### Details

|                                |                                                                                                                                                                         |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                                |
| Number of LABs/CLBs            | 8375                                                                                                                                                                    |
| Number of Logic Elements/Cells | 67000                                                                                                                                                                   |
| Total RAM Bits                 | 4642816                                                                                                                                                                 |
| Number of I/O                  | 436                                                                                                                                                                     |
| Number of Gates                | -                                                                                                                                                                       |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                           |
| Mounting Type                  | Surface Mount                                                                                                                                                           |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                                                      |
| Package / Case                 | 1152-BBGA                                                                                                                                                               |
| Supplier Device Package        | 1152-FPBGA (35x35)                                                                                                                                                      |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2m70se-6f1152i">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2m70se-6f1152i</a> |

## MAC sysDSP Element

In this case, the two operands, A and B, are multiplied and the result is added with the previous accumulated value. This accumulated value is available at the output. The user can enable the input and pipeline registers, but the output register is always enabled. The output register is used to store the accumulated value. The Accumulators in the DSP blocks in the LatticeECP2/M family can be initialized dynamically. A registered overflow signal is also available. The overflow conditions are provided later in this document. Figure 2-24 shows the MAC sysDSP element.

**Figure 2-24. MAC sysDSP**

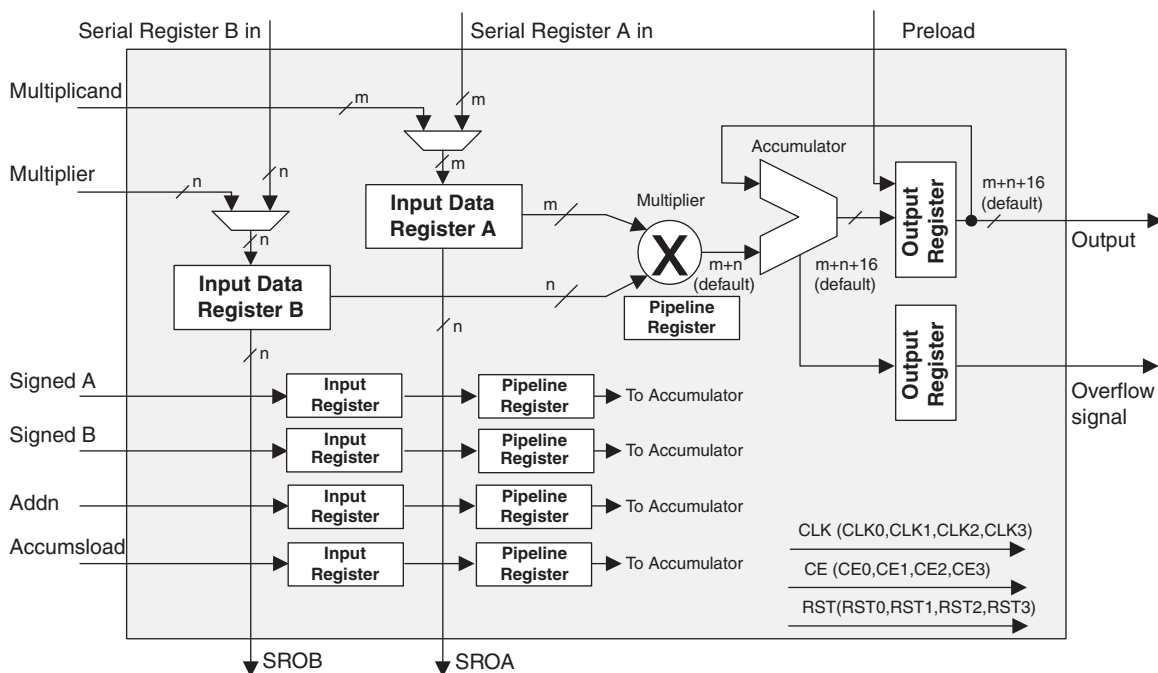

## IPexpress™

The user can access the sysDSP block via the IPexpress tool, which provides the option to configure each DSP module (or group of modules) or by direct HDL instantiation. In addition, Lattice has partnered with The Math-Works® to support instantiation in the Simulink® tool, a graphical simulation environment. Simulink works with Diamond to dramatically shorten the DSP design cycle in Lattice FPGAs.

## Optimized DSP Functions

Lattice provides a library of optimized DSP IP functions. Some of the IP cores planned for the LatticeECP2/M DSP include the Bit Correlator, Fast Fourier Transform, Finite Impulse Response (FIR) Filter, Reed-Solomon Encoder/Decoder, Turbo Encoder/Decoder and Convolutional Encoder/Decoder. Please contact Lattice to obtain the latest list of available DSP IP cores.

## Resources Available in the LatticeECP2/M Family

Table 2-9 shows the maximum number of multipliers for each member of the LatticeECP2/M family. Table 2-10 shows the maximum available EBR RAM Blocks in each LatticeECP2/M device. EBR blocks, together with Distributed RAM can be used to store variables locally for fast DSP operations.

**Table 2-9. Maximum Number of DSP Blocks in the LatticeECP2/M Family**

| Device   | DSP Block | 9x9 Multiplier | 18x18 Multiplier | 36x36 Multiplier |
|----------|-----------|----------------|------------------|------------------|
| ECP2-6   | 3         | 24             | 12               | 3                |
| ECP2-12  | 6         | 48             | 24               | 6                |
| ECP2-20  | 7         | 56             | 28               | 7                |
| ECP2-35  | 8         | 64             | 32               | 8                |
| ECP2-50  | 18        | 144            | 72               | 18               |
| ECP2-70  | 22        | 176            | 88               | 22               |
| ECP2M20  | 6         | 48             | 24               | 6                |
| ECP2M35  | 8         | 64             | 32               | 8                |
| ECP2M50  | 22        | 176            | 88               | 22               |
| ECP2M70  | 24        | 192            | 96               | 24               |
| ECP2M100 | 42        | 336            | 168              | 42               |

**Table 2-10. Embedded SRAM in the LatticeECP2/M Family**

| Device   | EBR SRAM Block | Total EBR SRAM (Kbits) |
|----------|----------------|------------------------|
| ECP2-6   | 3              | 55                     |
| ECP2-12  | 12             | 221                    |
| ECP2-20  | 15             | 277                    |
| ECP2-35  | 18             | 332                    |
| ECP2-50  | 21             | 387                    |
| ECP2-70  | 60             | 1106                   |
| ECP2M20  | 66             | 1217                   |
| ECP2M35  | 114            | 2101                   |
| ECP2M50  | 225            | 4147                   |
| ECP2M70  | 246            | 4534                   |
| ECP2M100 | 288            | 5308                   |


**Table 3-13. Periodic Receiver Jitter Tolerance Specification<sup>1</sup>**

| Description | Frequency             | Condition               | Min. | Typ. | Max. | Units   |
|-------------|-----------------------|-------------------------|------|------|------|---------|
| Periodic    | 3.125 Gbps            | 600 mV differential eye | —    | —    | 0.20 | UI, p-p |
|             | 2.5 Gbps              | 600 mV differential eye | —    | —    | 0.22 | UI, p-p |
|             | 1.25 Gbps             | 600 mV differential eye | —    | —    | 0.20 | UI, p-p |
|             | 250 Mbps <sup>2</sup> | 600 mV differential eye | —    | —    | 0.08 | UI, p-p |

1. Values are measured with PRBS 2<sup>7</sup>-1, all channels operating.


2. Jitter specification is limited by measurement equipment capability.

**Figure 3-15. sysCONFIG Parallel Port Write Cycle**

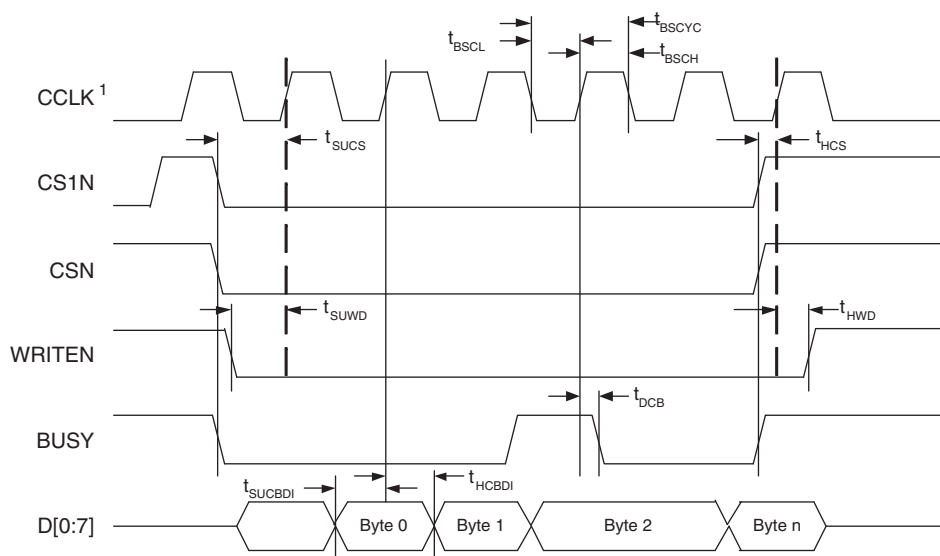


1. In Master Parallel Mode the FPGA provides CCLK. In Slave Parallel Mode the external device provides CCLK.

**Figure 3-16. sysCONFIG Slave Serial Port Timing**

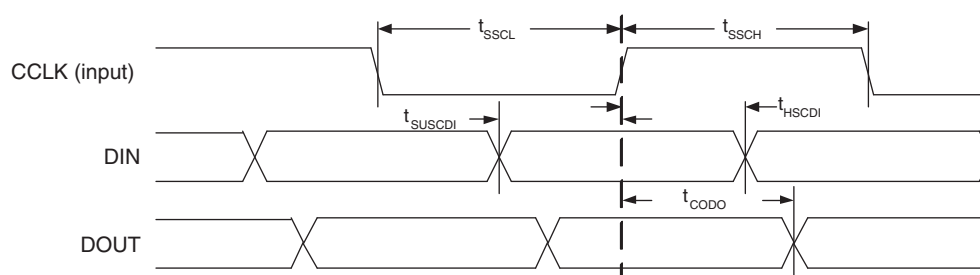

**Figure 3-17. Power-On-Reset (POR) Timing**

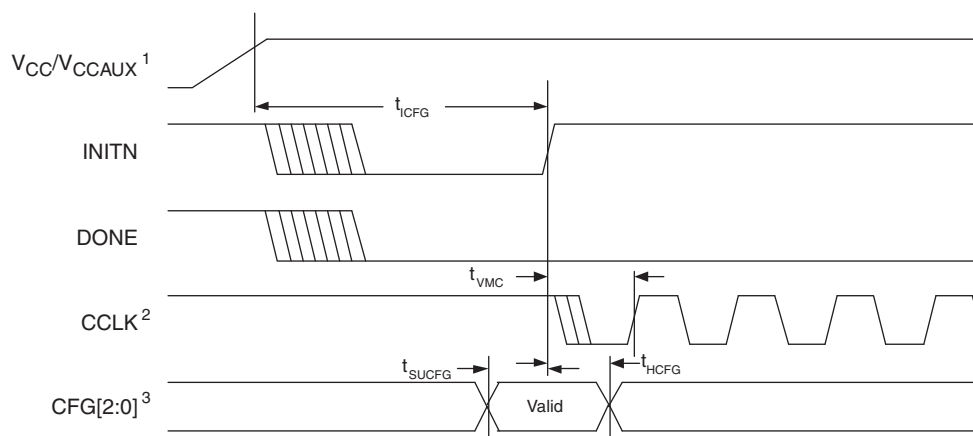

1. Time taken from  $V_{CC}$  or  $V_{CCAUX}$ , whichever is the last to reach its  $V_{MIN}$ .
2. Device is in a Master Mode.
3. The CFG pins are normally static (hard wired).

## Signal Descriptions (Cont.)

| Signal Name                              | I/O | Description                                                                                                   |
|------------------------------------------|-----|---------------------------------------------------------------------------------------------------------------|
| [LOC]_SQ_VCCI <sub>Bm</sub>              | —   | Input buffer power supply, channel m (1.2V/1.5V). This pin should be left floating if the channel is unused.  |
| [LOC]_SQ_VCCO <sub>Bm</sub>              | —   | Output buffer power supply, channel m (1.2V/1.5V). This pin should be left floating if the channel is unused. |
| [LOC]_SQ_HDOU <sub>TNm</sub>             | O   | High-speed output, negative channel m                                                                         |
| [LOC]_SQ_HDOU <sub>TPm</sub>             | O   | High-speed output, positive channel m                                                                         |
| [LOC]_SQ_HDIN <sub>Nm</sub>              | I   | High-speed input, negative channel m                                                                          |
| [LOC]_SQ_HDIN <sub>Pm</sub>              | I   | High-speed input, positive channel m                                                                          |
| [LOC]_SQ_VCCT <sub>Xm</sub> <sup>4</sup> | —   | Transmitter power supply, channel m (1.2V). This pin must be tied to 1.2V even if the channel is unused.      |
| [LOC]_SQ_VCCR <sub>Xm</sub> <sup>4</sup> | —   | Receiver power supply, channel m (1.2V). This pin must be tied to 1.2V even if the channel is unused.         |

1. These signals are relevant for LatticeECP2M family.
2. m defines the associated channel in the Quad.
3. These signals are defined in Quads [LOC] indicates the corner SERDES Quad is located: ULC (upper left), URC (upper right), LLC (lower left), LRC (lower right).
4. When placing switching I/Os around these critical pins that are designed to supply the device with the proper reference or supply voltage, care must be given. For more information, refer to TN1159, [LatticeECP2/M Pin Assignment Recommendations](#).
5. There may be SPLs that do not have dedicated I/Os.

## LatticeECP2M Pin Information Summary, LFE2M50, LFE2M70 and LFE2M100

| Pin Type                                                                          |                          | LFE2M50   |           |           | LFE2M70   |            | LFE2M100  |            |
|-----------------------------------------------------------------------------------|--------------------------|-----------|-----------|-----------|-----------|------------|-----------|------------|
|                                                                                   |                          | 484 fpBGA | 672 fpBGA | 900 fpBGA | 900 fpBGA | 1152 fpBGA | 900 fpBGA | 1152 fpBGA |
| Single Ended User I/O                                                             |                          | 270       | 372       | 410       | 416       | 436        | 416       | 520        |
| Differential Pair User I/O                                                        |                          | 135       | 185       | 205       | 208       | 218        | 207       | 260        |
| Configuration                                                                     | TAP Pins                 | 5         | 5         | 5         | 5         | 5          | 5         | 5          |
|                                                                                   | Muxed Pins               | 14        | 14        | 14        | 14        | 14         | 14        | 14         |
|                                                                                   | Dedicated Pins (Non TAP) | 7         | 7         | 7         | 7         | 7          | 7         | 7          |
| Non Configuration                                                                 | Muxed Pins               | 69        | 72        | 72        | 75        | 76         | 74        | 78         |
|                                                                                   | Dedicated Pins           | 3         | 3         | 3         | 3         | 3          | 3         | 3          |
| VCC                                                                               |                          | 16        | 20        | 62        | 44        | 44         | 44        | 44         |
| VCCAUX                                                                            |                          | 8         | 26        | 18        | 16        | 12         | 16        | 12         |
| VCCPLL                                                                            |                          | 4         | 8         | 4         | 4         | 4          | 4         | 4          |
| VCCIO                                                                             | Bank0                    | 4         | 5         | 6         | 6         | 7          | 6         | 7          |
|                                                                                   | Bank1                    | 3         | 4         | 6         | 6         | 7          | 6         | 7          |
|                                                                                   | Bank2                    | 4         | 5         | 9         | 9         | 9          | 9         | 9          |
|                                                                                   | Bank3                    | 4         | 5         | 9         | 9         | 9          | 9         | 9          |
|                                                                                   | Bank4                    | 4         | 4         | 6         | 6         | 7          | 6         | 7          |
|                                                                                   | Bank5                    | 4         | 5         | 6         | 6         | 7          | 6         | 7          |
|                                                                                   | Bank6                    | 4         | 5         | 9         | 9         | 9          | 9         | 9          |
|                                                                                   | Bank7                    | 4         | 5         | 9         | 9         | 9          | 9         | 9          |
|                                                                                   | Bank8                    | 2         | 2         | 2         | 2         | 2          | 2         | 2          |
| GND, GND0 to GND7                                                                 |                          | 57        | 80        | 122       | 122       | 134        | 122       | 134        |
| NC                                                                                |                          | 31        | 35        | 121       | 63        | 283        | 63        | 199        |
| Single Ended/ Differential I/O Pairs per Bank (including emulated with resistors) | Bank0                    | 36/18     | 63/31     | 56/28     | 34/17     | 46/23      | 34/17     | 54/27      |
|                                                                                   | Bank1                    | 18/9      | 18/9      | 36/18     | 42/21     | 34/17      | 42/21     | 44/22      |
|                                                                                   | Bank2                    | 30/15     | 50/25     | 54/27     | 70/35     | 72/36      | 70/35     | 80/40      |
|                                                                                   | Bank3                    | 36/18     | 43/21     | 44/22     | 60/30     | 64/32      | 60/30     | 80/40      |
|                                                                                   | Bank4                    | 42/21     | 24/12     | 38/19     | 38/19     | 40/20      | 38/19     | 44/22      |
|                                                                                   | Bank5                    | 28/14     | 60/30     | 58/29     | 40/20     | 40/20      | 40/20     | 46/23      |
|                                                                                   | Bank6                    | 40/20     | 54/27     | 60/30     | 62/31     | 66/33      | 62/31     | 82/41      |
|                                                                                   | Bank7                    | 40/20     | 60/30     | 64/32     | 70/35     | 74/37      | 70/35     | 90/45      |
|                                                                                   | Bank8                    | 0/0       | 0/0       | 0/0       | 0/0       | 0/0        | 0/0       | 0/0        |
| True LVDS I/O Pairs per Bank                                                      | Bank0 (Top Edge)         | 0         | 0         | 0         | 0         | 0          | 0         | 0          |
|                                                                                   | Bank1 (Top Edge)         | 0         | 0         | 0         | 0         | 0          | 0         | 0          |
|                                                                                   | Bank2 (Right Edge)       | 7         | 12        | 13        | 17        | 18         | 17        | 20         |
|                                                                                   | Bank3 (Right Edge)       | 9         | 11        | 11        | 15        | 16         | 15        | 20         |
|                                                                                   | Bank4 (Bottom Edge)      | 0         | 0         | 0         | 0         | 0          | 0         | 0          |
|                                                                                   | Bank5 (Bottom Edge)      | 0         | 0         | 0         | 0         | 0          | 0         | 0          |
|                                                                                   | Bank6 (Left Edge)        | 10        | 14        | 15        | 15        | 16         | 15        | 20         |
|                                                                                   | Bank7 (Left Edge)        | 10        | 15        | 17        | 17        | 18         | 17        | 22         |
|                                                                                   | Bank8 (Right Edge)       | 0         | 0         | 0         | 0         | 0          | 0         | 0          |

**LFE2-6E/SE and LFE2-12E/SE Logic Signal Connections: 144 TQFP (Cont.)**

| LFE2-6E/SE |                  |      |               |              | LFE2-12E/12SE    |      |               |              |
|------------|------------------|------|---------------|--------------|------------------|------|---------------|--------------|
| Pin Number | Pin/Pad Function | Bank | Dual Function | Differential | Pin/Pad Function | Bank | Dual Function | Differential |
| 136        | PT6B             | 0    |               | C            | PT16B            | 0    |               | C            |
| 137        | PT6A             | 0    |               | T            | PT16A            | 0    |               | T            |
| 138        | GND              | -    |               |              | GND              | -    |               |              |
| 139        | VCCIO0           | 0    |               |              | VCCIO0           | 0    |               |              |
| 140        | PT4B             | 0    |               | C            | PT6B             | 0    |               | C            |
| 141        | PT4A             | 0    |               | T            | PT6A             | 0    |               | T            |
| 142        | VCCAUX           | -    |               |              | VCCAUX           | -    |               |              |
| 143        | PT2B             | 0    | VREF2_0       | C            | PT2B             | 0    | VREF2_0       | C            |
| 144        | PT2A             | 0    | VREF1_0       | T            | PT2A             | 0    | VREF1_0       | T            |

\* Supports true LVDS. Other differential signals must be emulated with external resistors.

\*\* These dedicated input pins can be used for GPLLs or GDLLs within the respective quadrant.

Note: VCCIO and GND pads are used to determine the average DC current drawn by I/Os between GND/VCCIO connections, or between the last GND/VCCIO in an I/O bank and the end of an I/O bank. The substrate pads listed in the Pin Table do not necessarily have a one-to-one connection with a package ball or pin.

**LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA**  
**(Cont.)**

| LFE2-12E/12SE |                   |      |                |              | LFE2-20E/20SE     |      |                |              |
|---------------|-------------------|------|----------------|--------------|-------------------|------|----------------|--------------|
| Ball Number   | Ball/Pad Function | Bank | Dual Function  | Differential | Ball/Pad Function | Bank | Dual Function  | Differential |
| AB7           | PB13B             | 5    | BDQ15          | C            | PB22B             | 5    | BDQ24          | C            |
| Y8            | PB16A             | 5    | BDQ15          | T            | PB25A             | 5    | BDQ24          | T            |
| GNDIO         | GNDIO5            | -    |                |              | GNDIO             | -    |                |              |
| W9            | PB15A             | 5    | BDQS15         | T            | PB24A             | 5    | BDQS24         | T            |
| AA8           | PB16B             | 5    | BDQ15          | C            | PB25B             | 5    | BDQ24          | C            |
| V9            | PB15B             | 5    | BDQ15          | C            | PB24B             | 5    | BDQ24          | C            |
| AB8           | PB18A             | 5    | BDQ15          | T            | PB27A             | 5    | BDQ24          | T            |
| VCCIO         | VCCIO5            | 5    |                |              | VCCIO5            | 5    |                |              |
| W10           | PB17A             | 5    | BDQ15          | T            | PB26A             | 5    | BDQ24          | T            |
| AA9           | PB18B             | 5    | BDQ15          | C            | PB27B             | 5    | BDQ24          | C            |
| V10           | PB17B             | 5    | BDQ15          | C            | PB26B             | 5    | BDQ24          | C            |
| GNDIO         | GNDIO5            | -    |                |              | GNDIO             | -    |                |              |
| Y10           | PB21A             | 5    | BDQ24          | T            | PB30A             | 5    | BDQ33          | T            |
| AB9           | PB20A             | 5    | BDQ24          | T            | PB29A             | 5    | BDQ33          | T            |
| AA10          | PB21B             | 5    | BDQ24          | C            | PB30B             | 5    | BDQ33          | C            |
| AB10          | PB20B             | 5    | BDQ24          | C            | PB29B             | 5    | BDQ33          | C            |
| AB11          | PB23A             | 5    | BDQ24          | T            | PB32A             | 5    | BDQ33          | T            |
| U10           | PB22A             | 5    | BDQ24          | T            | PB31A             | 5    | BDQ33          | T            |
| VCCIO         | VCCIO5            | 5    |                |              | VCCIO5            | 5    |                |              |
| AA11          | PB23B             | 5    | BDQ24          | C            | PB32B             | 5    | BDQ33          | C            |
| U11           | PB22B             | 5    | BDQ24          | C            | PB31B             | 5    | BDQ33          | C            |
| GNDIO         | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |
| AB12          | PB25A             | 5    | BDQ24          | T            | PB34A             | 5    | BDQ33          | T            |
| Y11           | PB24A             | 5    | BDQS24         | T            | PB33A             | 5    | BDQS33         | T            |
| AA12          | PB25B             | 5    | BDQ24          | C            | PB34B             | 5    | BDQ33          | C            |
| W11           | PB24B             | 5    | BDQ24          | C            | PB33B             | 5    | BDQ33          | C            |
| AB13          | PB26A             | 5    | PCLKT5_0/BDQ24 | T            | PB35A             | 5    | PCLKT5_0/BDQ33 | T            |
| VCCIO         | VCCIO5            | 5    |                |              | VCCIO5            | 5    |                |              |
| AB14          | PB26B             | 5    | PCLKC5_0/BDQ24 | C            | PB35B             | 5    | PCLKC5_0/BDQ33 | C            |
| GNDIO         | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |
| Y12           | PB32A             | 4    | BDQ33          | T            | PB41A             | 4    | BDQ42          | T            |
| W12           | PB32B             | 4    | BDQ33          | C            | PB41B             | 4    | BDQ42          | C            |
| VCCIO         | VCCIO4            | 4    |                |              | VCCIO4            | 4    |                |              |
| U12           | PB31A             | 4    | PCLKT4_0/BDQ33 | T            | PB40A             | 4    | PCLKT4_0/BDQ42 | T            |
| V12           | PB31B             | 4    | PCLKC4_0/BDQ33 | C            | PB40B             | 4    | PCLKC4_0/BDQ42 | C            |
| U13           | PB34A             | 4    | BDQ33          | T            | PB43A             | 4    | BDQ42          | T            |
| GNDIO         | GNDIO4            | -    |                |              | GNDIO4            | -    |                |              |
| AA13          | PB33A             | 4    | BDQS33         | T            | PB42A             | 4    | BDQS42         | T            |
| U14           | PB34B             | 4    | BDQ33          | C            | PB43B             | 4    | BDQ42          | C            |
| Y13           | PB33B             | 4    | BDQ33          | C            | PB42B             | 4    | BDQ42          | C            |
| AB16          | PB36A             | 4    | BDQ33          | T            | PB45A             | 4    | BDQ42          | T            |
| VCCIO         | VCCIO4            | 4    |                |              | VCCIO4            | 4    |                |              |
| AB15          | PB35A             | 4    | BDQ33          | T            | PB44A             | 4    | BDQ42          | T            |
| AB17          | PB36B             | 4    | BDQ33          | C            | PB45B             | 4    | BDQ42          | C            |

**LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA**  
**(Cont.)**

| LFE2-12E/12SE |                   |      |                    |              | LFE2-20E/20SE     |      |                          |              |
|---------------|-------------------|------|--------------------|--------------|-------------------|------|--------------------------|--------------|
| Ball Number   | Ball/Pad Function | Bank | Dual Function      | Differential | Ball/Pad Function | Bank | Dual Function            | Differential |
| W19           | CFG2              | 8    |                    |              | CFG2              | 8    |                          |              |
| V19           | CFG1              | 8    |                    |              | CFG1              | 8    |                          |              |
| V20           | PROGRAMN          | 8    |                    |              | PROGRAMN          | 8    |                          |              |
| W20           | CFG0              | 8    |                    |              | CFG0              | 8    |                          |              |
| U22           | PR28B             | 8    | D1                 | C            | PR42B             | 8    | D1                       | C            |
| V22           | INITN             | 8    |                    |              | INITN             | 8    |                          |              |
| R16           | PR30B             | 8    | WRITEN             | C            | PR44B             | 8    | WRITEN                   | C            |
| GNDIO         | GNDIO8            | -    |                    |              | GNDIO8            | -    |                          |              |
| W22           | CCLK              | 8    |                    |              | CCLK              | 8    |                          |              |
| R17           | PR30A             | 8    | CS1N               | T            | PR44A             | 8    | CS1N                     | T            |
| V21           | DONE              | 8    |                    |              | DONE              | 8    |                          |              |
| VCCIO         | VCCIO8            | 8    |                    |              | VCCIO8            | 8    |                          |              |
| U19           | PR29B             | 8    | CSN                | C            | PR43B             | 8    | CSN                      | C            |
| T17           | PR26B             | 8    | D5                 | C            | PR40B             | 8    | D5                       | C            |
| U20           | PR29A             | 8    | D0/SPIFASTN        | T            | PR43A             | 8    | D0/SPIFASTN              | T            |
| U21           | PR28A             | 8    | D2                 | T            | PR42A             | 8    | D2                       | T            |
| GNDIO         | GNDIO8            | -    |                    |              | GNDIO8            | -    |                          |              |
| T18           | PR26A             | 8    | D6                 | T            | PR40A             | 8    | D6                       | T            |
| T20           | PR27B             | 8    | D3                 | C            | PR41B             | 8    | D3                       | C            |
| T21           | PR25B             | 8    | D7/SPID0           | C            | PR39B             | 8    | D7/SPID0                 | C            |
| T19           | PR27A             | 8    | D4                 | T            | PR41A             | 8    | D4                       | T            |
| VCCIO         | VCCIO8            | 8    |                    |              | VCCIO8            | 8    |                          |              |
| T22           | PR25A             | 8    | DI/CSSPI0N         | T            | PR39A             | 8    | DI/CSSPI0N               | T            |
| R18           | PR24B             | 8    | DOUT/CSON          | C            | PR38B             | 8    | DOUT/CSON                | C            |
| R19           | PR24A             | 8    | BUSY/SISPI         | T            | PR38A             | 8    | BUSY/SISPI               | T            |
| -             | -                 | -    |                    |              | VCCIO3            | 3    |                          |              |
| GNDIO         | GNDIO3            | -    |                    |              | GNDIO3            | -    |                          |              |
| P18           | PR22B             | 3    |                    | C (LVDS)*    | PR32B             | 3    | RDQ34                    | C (LVDS)*    |
| R22           | PR23B             | 3    |                    | C            | PR33B             | 3    | RDQ34                    | C            |
| P19           | PR22A             | 3    |                    | T (LVDS)*    | PR32A             | 3    | RDQ34                    | T (LVDS)*    |
| R21           | PR23A             | 3    |                    | T            | PR33A             | 3    | RDQ34                    | T            |
| VCCIO         | VCCIO3            | 3    |                    |              | VCCIO3            | 3    |                          |              |
| R20           | PR21B             | 3    | RLM0_GPLL_C_FB_A   | C            | PR31B             | 3    | RLM0_GPLL_C_FB_A/RDQ34   | C            |
| P22           | PR21A             | 3    | RLM0_GPLLT_FB_A    | T            | PR31A             | 3    | RLM0_GPLLT_FB_A/RDQ34    | T            |
| P21           | PR20B             | 3    | RLM0_GPLL_C_IN_A** | C (LVDS)*    | PR30B             | 3    | RLM0_GPLL_C_IN_A**/RDQ34 | C (LVDS)*    |
| N21           | PR20A             | 3    | RLM0_GPLLT_IN_A**  | T (LVDS)*    | PR30A             | 3    | RLM0_GPLLT_IN_A**/RDQ34  | T (LVDS)*    |
| N17           | RLM0_PLLCAP       | 3    |                    |              | RLM0_PLLCAP       | 3    |                          |              |
| N22           | PR18B             | 3    | RLM0_GDLL_C_FB_A   | C            | PR28B             | 3    | RLM0_GDLL_C_FB_A/RDQ25   | C            |
| M22           | PR17B             | 3    | RLM0_GDLL_C_IN_A** | C (LVDS)*    | PR27B             | 3    | RLM0_GDLL_C_IN_A**/RDQ25 | C (LVDS)*    |
| GNDIO         | GNDIO3            | -    |                    |              | GNDIO3            | -    |                          |              |
| N20           | PR18A             | 3    | RLM0_GDLLT_FB_A    | T            | PR28A             | 3    | RLM0_GDLLT_FB_A/RDQ25    | T            |
| M21           | PR17A             | 3    | RLM0_GDLLT_IN_A**  | T (LVDS)*    | PR27A             | 3    | RLM0_GDLLT_IN_A**/RDQ25  | T (LVDS)*    |
| N19           | NC                | -    |                    |              | PR26B             | 3    | RDQ25                    | C            |
| -             | -                 | -    |                    |              | VCCIO3            | 3    |                          |              |

## LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2-12E/12SE |                   |      |               |              | LFE2-20E/20SE     |      |               |              |  |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| R8            | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| J8            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| K7            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| L7            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| M7            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| P15           | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |  |
| R15           | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |  |
| C5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| D11           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| E17           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| E6            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| F13           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| G18           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| G5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| K5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| M17           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| P17           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| R5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V11           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V13           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V15           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V7            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V8            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| A1            | GND               | -    |               |              | GND               | -    |               |              |  |
| A22           | GND               | -    |               |              | GND               | -    |               |              |  |
| AA19          | GND               | -    |               |              | GND               | -    |               |              |  |
| AA4           | GND               | -    |               |              | GND               | -    |               |              |  |
| AB1           | GND               | -    |               |              | GND               | -    |               |              |  |
| AB22          | GND               | -    |               |              | GND               | -    |               |              |  |
| B19           | GND               | -    |               |              | GND               | -    |               |              |  |
| B4            | GND               | -    |               |              | GND               | -    |               |              |  |
| C14           | GND               | -    |               |              | GND               | -    |               |              |  |
| C9            | GND               | -    |               |              | GND               | -    |               |              |  |
| D2            | GND               | -    |               |              | GND               | -    |               |              |  |
| D21           | GND               | -    |               |              | GND               | -    |               |              |  |
| F17           | GND               | -    |               |              | GND               | -    |               |              |  |
| F6            | GND               | -    |               |              | GND               | -    |               |              |  |
| H10           | GND               | -    |               |              | GND               | -    |               |              |  |
| H11           | GND               | -    |               |              | GND               | -    |               |              |  |
| H12           | GND               | -    |               |              | GND               | -    |               |              |  |
| H13           | GND               | -    |               |              | GND               | -    |               |              |  |
| J14           | GND               | -    |               |              | GND               | -    |               |              |  |
| J20           | GND               | -    |               |              | GND               | -    |               |              |  |
| J3            | GND               | -    |               |              | GND               | -    |               |              |  |

## LFE2-20E/SE and LFE2-35E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-20E/20SE |                   |      |                          |              | LFE2-35E/35SE     |      |                          |              |  |
|---------------|-------------------|------|--------------------------|--------------|-------------------|------|--------------------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function            | Differential | Ball/Pad Function | Bank | Dual Function            | Differential |  |
| U24           | PR30B             | 3    | RLM0_GPLL_C_IN_A**/RDQ34 | C (LVDS)*    | PR44B             | 3    | RLM0_GPLL_C_IN_A**/RDQ48 | C (LVDS)*    |  |
| U25           | PR30A             | 3    | RLM0_GPLL_T_IN_A**/RDQ34 | T (LVDS)*    | PR44A             | 3    | RLM0_GPLL_T_IN_A**/RDQ48 | T (LVDS)*    |  |
| R20           | RLM0_PLLCAP       | 3    |                          |              | RLM0_PLLCAP       | 3    |                          |              |  |
| P18           | VCC               | 3    |                          |              | VCCPLL            | 3    |                          |              |  |
| T19           | PR28B             | 3    | RLM0_GDLLC_FB_A/RDQ25    | C            | PR42B             | 3    | RLM0_GDLLC_FB_A/RDQ39    | C            |  |
| U20           | PR28A             | 3    | RLM0_GDLLT_FB_A/RDQ25    | T            | PR42A             | 3    | RLM0_GDLLT_FB_A/RDQ39    | T            |  |
| GND           | GNDIO3            | -    |                          |              | GNDIO3            | -    |                          |              |  |
| T25           | PR27B             | 3    | RLM0_GDLLC_IN_A**/RDQ25  | C (LVDS)*    | PR41B             | 3    | RLM0_GDLLC_IN_A**/RDQ39  | C (LVDS)*    |  |
| T26           | PR27A             | 3    | RLM0_GDLLT_IN_A**/RDQ25  | T (LVDS)*    | PR41A             | 3    | RLM0_GDLLT_IN_A**/RDQ39  | T (LVDS)*    |  |
| T20           | PR26B             | 3    | RDQ25                    | C            | PR40B             | 3    | RDQ39                    | C            |  |
| T22           | PR26A             | 3    | RDQ25                    | T            | PR40A             | 3    | RDQ39                    | T            |  |
| VCCIO         | VCCIO3            | 3    |                          |              | VCCIO3            | 3    |                          |              |  |
| R26           | PR25B             | 3    | RDQ25                    | C (LVDS)*    | PR39B             | 3    | RDQ39                    | C (LVDS)*    |  |
| R25           | PR25A             | 3    | RDQS25***                | T (LVDS)*    | PR39A             | 3    | RDQS39***                | T (LVDS)*    |  |
| R22           | NC                | -    |                          |              | PR38B             | 3    | RDQ39                    | C            |  |
| GND           | GNDIO3            | -    |                          |              | GNDIO3            | -    |                          |              |  |
| T21           | NC                | -    |                          |              | PR38A             | 3    | RDQ39                    | T            |  |
| P26           | NC                | -    |                          |              | NC                | -    |                          |              |  |
| P25           | NC                | -    |                          |              | NC                | -    |                          |              |  |
| R24           | NC                | -    |                          |              | NC                | -    |                          |              |  |
| VCCIO         | VCCIO3            | 3    |                          |              | VCCIO3            | 3    |                          |              |  |
| R23           | NC                | -    |                          |              | NC                | -    |                          |              |  |
| P20           | NC                | -    |                          |              | NC                | -    |                          |              |  |
| R19           | NC                | -    |                          |              | NC                | -    |                          |              |  |
| P21           | NC                | -    |                          |              | PR34B             | 3    | RDQ31                    | C            |  |
| GND           | GNDIO3            | -    |                          |              | GNDIO3            | -    |                          |              |  |
| P19           | NC                | -    |                          |              | PR34A             | 3    | RDQ31                    | T            |  |
| P23           | NC                | -    |                          |              | PR33B             | 3    | RDQ31                    | C (LVDS)*    |  |
| P22           | NC                | -    |                          |              | PR33A             | 3    | RDQ31                    | T (LVDS)*    |  |
| N22           | NC                | -    |                          |              | PR32B             | 3    | RDQ31                    | C            |  |
| VCCIO         | VCCIO3            | 3    |                          |              | VCCIO3            | 3    |                          |              |  |
| R21           | NC                | -    |                          |              | PR32A             | 3    | RDQ31                    | T            |  |
| N26           | NC                | -    |                          |              | PR31B             | 3    | RDQ31                    | C (LVDS)*    |  |
| N25           | NC                | -    |                          |              | PR31A             | 3    | RDQS31                   | T (LVDS)*    |  |
| GND           | GNDIO3            | -    |                          |              | GNDIO3            | -    |                          |              |  |
| N19           | PR24B             | 3    | RDQ25                    | C            | PR30B             | 3    | RDQ31                    | C            |  |
| N20           | PR24A             | 3    | RDQ25                    | T            | PR30A             | 3    | RDQ31                    | T            |  |
| M26           | PR23B             | 3    | RDQ25                    | C (LVDS)*    | PR29B             | 3    | RDQ31                    | C (LVDS)*    |  |
| M25           | PR23A             | 3    | RDQ25                    | T (LVDS)*    | PR29A             | 3    | RDQ31                    | T (LVDS)*    |  |
| VCCIO         | VCCIO3            | 3    |                          |              | VCCIO3            | 3    |                          |              |  |
| N18           | PR22B             | 3    | VREF2_3/RDQ25            | C            | PR28B             | 3    | VREF2_3/RDQ31            | C            |  |
| N21           | PR22A             | 3    | VREF1_3/RDQ25            | T            | PR28A             | 3    | VREF1_3/RDQ31            | T            |  |
| L26           | PR21B             | 3    | PCLKC3_0/RDQ25           | C (LVDS)*    | PR27B             | 3    | PCLKC3_0/RDQ31           | C (LVDS)*    |  |
| L25           | PR21A             | 3    | PCLKT3_0/RDQ25           | T (LVDS)*    | PR27A             | 3    | PCLKT3_0/RDQ31           | T (LVDS)*    |  |
| N24           | PR19B             | 2    | PCLKC2_0/RDQ16           | C            | PR25B             | 2    | PCLKC2_0/RDQ22           | C            |  |
| M23           | PR19A             | 2    | PCLKT2_0/RDQ16           | T            | PR25A             | 2    | PCLKT2_0/RDQ22           | T            |  |

## LFE2-50E/SE and LFE2-70E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-50E/SE |                   |      |               |              | LFE2-70E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| A7          | PT35B             | 0    |               | C            | PT44B             | 0    |               | C            |
| B7          | PT35A             | 0    |               | T            | PT44A             | 0    |               | T            |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| F12         | PT34B             | 0    |               | C            | PT43B             | 0    |               | C            |
| D10         | PT34A             | 0    |               | T            | PT43A             | 0    |               | T            |
| H11         | PT33B             | 0    |               | C            | PT42B             | 0    |               | C            |
| G11         | PT33A             | 0    |               | T            | PT42A             | 0    |               | T            |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| A6          | PT32B             | 0    |               | C            | PT41B             | 0    |               | C            |
| B6          | PT32A             | 0    |               | T            | PT41A             | 0    |               | T            |
| D8          | PT31B             | 0    |               | C            | PT40B             | 0    |               | C            |
| C8          | PT31A             | 0    |               | T            | PT40A             | 0    |               | T            |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| F11         | PT30B             | 0    |               | C            | PT39B             | 0    |               | C            |
| E10         | PT30A             | 0    |               | T            | PT39A             | 0    |               | T            |
| E9          | PT29B             | 0    |               | C            | PT38B             | 0    |               | C            |
| D9          | PT29A             | 0    |               | T            | PT38A             | 0    |               | T            |
| G10         | PT28B             | 0    |               | C            | PT37B             | 0    |               | C            |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| H10         | PT28A             | 0    |               | T            | PT37A             | 0    |               | T            |
| A5          | PT27B             | 0    |               | C            | PT36B             | 0    |               | C            |
| B5          | PT27A             | 0    |               | T            | PT36A             | 0    |               | T            |
| C7          | PT26B             | 0    |               | C            | PT35B             | 0    |               | C            |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| D7          | PT26A             | 0    |               | T            | PT35A             | 0    |               | T            |
| E8          | PT25B             | 0    |               | C            | PT34B             | 0    |               | C            |
| F10         | PT25A             | 0    |               | T            | PT34A             | 0    |               | T            |
| F8          | PT24B             | 0    |               | C            | PT33B             | 0    |               | C            |
| H9          | PT24A             | 0    |               | T            | PT33A             | 0    |               | T            |
| C5          | PT23B             | 0    |               | C            | PT32B             | 0    |               | C            |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| D5          | PT23A             | 0    |               | T            | PT32A             | 0    |               | T            |
| B4          | PT22B             | 0    |               |              | PT31B             | 0    |               |              |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| C4          | PT10B             | 0    |               | C            | PT10B             | 0    |               | C            |
| GND         | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| C3          | PT10A             | 0    |               | T            | PT10A             | 0    |               | T            |
| A4          | PT9B              | 0    |               | C            | PT9B              | 0    |               | C            |
| A3          | PT9A              | 0    |               | T            | PT9A              | 0    |               | T            |
| B3          | PT8B              | 0    |               | C            | PT8B              | 0    |               | C            |
| VCCIO       | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| B2          | PT8A              | 0    |               | T            | PT8A              | 0    |               | T            |

## LFE2-50E/SE and LFE2-70E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-50E/SE |                   |      |               |              | LFE2-70E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| L23         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| M17         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| M18         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| AA23        | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| R17         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| R18         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| T23         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| V20         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |
| AC16        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AC21        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| U15         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| V15         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| Y18         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AC11        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AC6         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| U12         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| V12         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| Y9          | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AA4         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| R10         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| R9          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| T4          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| V7          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| F4          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| J7          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| L4          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| M10         | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| M9          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| AE25        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| V18         | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| J10         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| J11         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| J16         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| J17         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| K18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| K9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| L18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| L9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| T18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| T9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| U18         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| U9          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V10         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V11         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V16         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| V17         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |

**LFE2-70E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2-70E/SE |                   |      |                       |              |
|-------------|-------------------|------|-----------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function         | Differential |
| K1          | PL27B             | 7    | LDQ29                 | C (LVDS)*    |
| K5          | PL28A             | 7    | LDQ29                 | T            |
| K7          | PL28B             | 7    | LDQ29                 | C            |
| GND         | GNDIO7            | -    |                       |              |
| K4          | PL29A             | 7    | LDQS29                | T (LVDS)*    |
| K3          | PL29B             | 7    | LDQ29                 | C (LVDS)*    |
| L8          | PL30A             | 7    | LDQ29                 | T            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| L6          | PL30B             | 7    | LDQ29                 | C            |
| L2          | PL31A             | 7    | LDQ29                 | T (LVDS)*    |
| L1          | PL31B             | 7    | LDQ29                 | C (LVDS)*    |
| L7          | PL32A             | 7    | LDQ29                 | T            |
| GND         | GNDIO7            | -    |                       |              |
| L5          | PL32B             | 7    | LDQ29                 | C            |
| L4          | PL33A             | 7    | LDQ37                 | T (LVDS)*    |
| L3          | PL33B             | 7    | LDQ37                 | C (LVDS)*    |
| M8          | PL34A             | 7    | LDQ37                 | T            |
| M6          | PL34B             | 7    | LDQ37                 | C            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| M2          | PL35A             | 7    | LDQ37                 | T (LVDS)*    |
| M1          | PL35B             | 7    | LDQ37                 | C (LVDS)*    |
| M7          | PL36A             | 7    | LDQ37                 | T            |
| M5          | PL36B             | 7    | LDQ37                 | C            |
| GND         | GNDIO7            | -    |                       |              |
| M4          | PL37A             | 7    | LDQS37                | T (LVDS)*    |
| M3          | PL37B             | 7    | LDQ37                 | C (LVDS)*    |
| N6          | PL38A             | 7    | LUM0_SPLLT_IN_A/LDQ37 | T            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| N8          | PL38B             | 7    | LUM0_SPLLC_IN_A/LDQ37 | C            |
| N5          | PL39A             | 7    | LUM0_SPLLT_FB_A/LDQ37 | T            |
| N7          | PL39B             | 7    | LUM0_SPLLC_FB_A/LDQ37 | C            |
| GND         | GNDIO7            | -    |                       |              |
| VCCIO       | VCCIO7            | 7    |                       |              |
| T9          | PL50A             | 7    | LDQ54                 |              |
| R9          | PL51A             | 7    | LDQ54                 | T            |
| P7          | PL51B             | 7    | LDQ54                 | C            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| N2          | PL52A             | 7    | LDQ54                 | T (LVDS)*    |
| N1          | PL52B             | 7    | LDQ54                 | C (LVDS)*    |
| P6          | PL53A             | 7    | LDQ54                 | T            |
| P5          | PL53B             | 7    | LDQ54                 | C            |
| GND         | GNDIO7            | -    |                       |              |
| P4          | PL54A             | 7    | LDQS54                | T (LVDS)*    |

## LFE2M20E/SE and LFE2M35E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2M20E/SE |                   |      |               |              | LFE2M35E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| G18         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| J15         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| K19         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| N19         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| P15         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| T18         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| V21         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| AA18        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| R14         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| V16         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| W13         | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AA5         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| R9          | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| V7          | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| W10         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| N4          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| P8          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| T5          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| V2          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| E2          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| G5          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| J8          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| K4          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| AA22        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |  |
| U19         | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |  |
| H11         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| H12         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| L15         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| L8          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| M15         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| M8          | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| R11         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| R12         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| A1          | GND               | -    |               |              | GND               | -    |               |              |  |
| A10         | GND               | -    |               |              | GND               | -    |               |              |  |
| A16         | GND               | -    |               |              | GND               | -    |               |              |  |
| A22         | GND               | -    |               |              | GND               | -    |               |              |  |
| AA19        | GND               | -    |               |              | GND               | -    |               |              |  |
| AA4         | GND               | -    |               |              | GND               | -    |               |              |  |
| AB1         | GND               | -    |               |              | GND               | -    |               |              |  |
| AB22        | GND               | -    |               |              | GND               | -    |               |              |  |
| B13         | GND               | -    |               |              | GND               | -    |               |              |  |
| B19         | GND               | -    |               |              | GND               | -    |               |              |  |
| B4          | GND               | -    |               |              | GND               | -    |               |              |  |
| D16         | GND               | -    |               |              | GND               | -    |               |              |  |
| D2          | GND               | -    |               |              | GND               | -    |               |              |  |
| D21         | GND               | -    |               |              | GND               | -    |               |              |  |
| D7          | GND               | -    |               |              | GND               | -    |               |              |  |

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |               |              | LFE2M70E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| M26         | PR27A             | 2    | RDQS27        | T (LVDS)*    | PR37A             | 2    | RDQS37        | T (LVDS)*    |  |
| L30         | PR26B             | 2    | RDQ27         | C            | PR36B             | 2    | RDQ37         | C            |  |
| GNDIO       | GNDIO2            | -    |               |              | GNDIO2            | -    |               |              |  |
| L29         | PR26A             | 2    | RDQ27         | T            | PR36A             | 2    | RDQ37         | T            |  |
| L28         | PR25B             | 2    | RDQ27         | C (LVDS)*    | PR35B             | 2    | RDQ37         | C (LVDS)*    |  |
| L27         | PR25A             | 2    | RDQ27         | T (LVDS)*    | PR35A             | 2    | RDQ37         | T (LVDS)*    |  |
| H29         | PR24B             | 2    | RDQ27         | C            | PR34B             | 2    | RDQ37         | C            |  |
| VCCIO       | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| G29         | PR24A             | 2    | RDQ27         | T            | PR34A             | 2    | RDQ37         | T            |  |
| L22         | PR23B             | 2    | RDQ27         | C (LVDS)*    | PR33B             | 2    | RDQ37         | C (LVDS)*    |  |
| M22         | PR23A             | 2    | RDQ27         | T (LVDS)*    | PR33A             | 2    | RDQ37         | T (LVDS)*    |  |
| F30         | PR21B             | 2    |               | C            | PR31B             | 2    | RDQ28         | C            |  |
| GNDIO       | GNDIO2            | -    |               |              | GNDIO2            | -    |               |              |  |
| F29         | PR21A             | 2    |               | T            | PR31A             | 2    | RDQ28         | T            |  |
| -           | -                 | -    |               |              | -                 | -    |               |              |  |
| -           | -                 | -    |               |              | -                 | -    |               |              |  |
| E30         | PR20B             | 2    |               | C (LVDS)*    | PR30B             | 2    | RDQ28         | C (LVDS)*    |  |
| E29         | PR20A             | 2    |               | T (LVDS)*    | PR30A             | 2    | RDQ28         | T (LVDS)*    |  |
| VCCIO       | VCCIO2            | 2    |               |              | -                 | -    |               |              |  |
| L25         | PR19B             | 2    |               | C            | PR29B             | 2    | RDQ28         | C            |  |
| L26         | PR19A             | 2    |               | T            | PR29A             | 2    | RDQ28         | T            |  |
| -           | -                 | -    |               |              | VCCIO2            | 2    |               |              |  |
| H28         | PR18B             | 2    |               | C (LVDS)*    | PR28B             | 2    | RDQ28         | C (LVDS)*    |  |
| J28         | PR18A             | 2    |               | T (LVDS)*    | PR28A             | 2    | RDQS28        | T (LVDS)*    |  |
| G28         | PR16B             | 2    |               | C            | PR27B             | 2    | RDQ28         | C            |  |
| GNDIO       | GNDIO2            | -    |               |              | GNDIO2            | -    |               |              |  |
| G27         | PR16A             | 2    |               | T            | PR27A             | 2    | RDQ28         | T            |  |
| L24         | NC                | -    |               |              | PR26B             | 2    | RDQ28         | C (LVDS)*    |  |
| L23         | NC                | -    |               |              | PR26A             | 2    | RDQ28         | T (LVDS)*    |  |
| D30         | NC                | -    |               |              | PR25B             | 2    | RDQ28         | C            |  |
| -           | -                 | -    |               |              | VCCIO2            | 2    |               |              |  |
| D29         | NC                | -    |               |              | PR25A             | 2    | RDQ28         | T            |  |
| K24         | NC                | -    |               |              | PR24B             | 2    | RDQ28         | C (LVDS)*    |  |
| K25         | NC                | -    |               |              | PR24A             | 2    | RDQ28         | T (LVDS)*    |  |
| J27         | NC                | -    |               |              | PR22B             | 2    |               | C            |  |
| -           | -                 | -    |               |              | GNDIO2            | -    |               |              |  |
| K26         | NC                | -    |               |              | PR22A             | 2    |               | T            |  |
| K23         | PR15B             | 2    |               | C (LVDS)*    | PR21B             | 2    |               | C (LVDS)*    |  |
| K22         | PR15A             | 2    |               | T (LVDS)*    | PR21A             | 2    |               | T (LVDS)*    |  |
| J22         | PR14B             | 2    |               | C            | PR20B             | 2    |               | C            |  |
| VCCIO       | VCCIO2            | -    |               |              | VCCIO2            | 2    |               |              |  |
| J23         | PR14A             | 2    |               | T            | PR20A             | 2    |               | T            |  |
| -           | -                 | -    |               |              | GNDIO2            | -    |               |              |  |
| -           | -                 | -    |               |              | -                 | -    |               |              |  |
| J26         | NC                | -    |               |              | PR17B             | 2    | RDQ15         | C (LVDS)*    |  |
| H26         | NC                | -    |               |              | PR17A             | 2    | RDQ15         | T (LVDS)*    |  |
| H27         | NC                | -    |               |              | PR16B             | 2    | RDQ15         | C            |  |
| G26         | NC                | -    |               |              | PR16A             | 2    | RDQ15         | T            |  |

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |               |              | LFE2M70E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| K13         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| D17         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| E22         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| E25         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| F19         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| K18         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| K19         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| F28         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| J25         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| K28         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| M21         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| M24         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| N21         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| N28         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| P21         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| R25         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| AA28        | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| AB25        | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| AE28        | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| T25         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| U21         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| V21         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| V28         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| W21         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| W24         | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| AA18        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AA19        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AE19        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AF22        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AG17        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AG25        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| AA12        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AA13        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AE12        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AF9         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AG14        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AG6         | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| AA3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| AB6         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| AE3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| T6          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| U10         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| V10         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| V3          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| W10         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| W7          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| F3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| J6          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |               |              | LFE2M70E/SE       |      |               |              |  |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| P13         | GND               | -    |               |              | GND               | -    |               |              |  |
| P14         | GND               | -    |               |              | GND               | -    |               |              |  |
| P15         | GND               | -    |               |              | GND               | -    |               |              |  |
| P16         | GND               | -    |               |              | GND               | -    |               |              |  |
| P17         | GND               | -    |               |              | GND               | -    |               |              |  |
| P18         | GND               | -    |               |              | GND               | -    |               |              |  |
| P20         | GND               | -    |               |              | GND               | -    |               |              |  |
| R10         | GND               | -    |               |              | GND               | -    |               |              |  |
| R11         | GND               | -    |               |              | GND               | -    |               |              |  |
| R13         | GND               | -    |               |              | GND               | -    |               |              |  |
| R14         | GND               | -    |               |              | GND               | -    |               |              |  |
| R15         | GND               | -    |               |              | GND               | -    |               |              |  |
| R16         | GND               | -    |               |              | GND               | -    |               |              |  |
| R17         | GND               | -    |               |              | GND               | -    |               |              |  |
| R18         | GND               | -    |               |              | GND               | -    |               |              |  |
| R20         | GND               | -    |               |              | GND               | -    |               |              |  |
| R21         | GND               | -    |               |              | GND               | -    |               |              |  |
| R24         | GND               | -    |               |              | GND               | -    |               |              |  |
| R7          | GND               | -    |               |              | GND               | -    |               |              |  |
| T10         | GND               | -    |               |              | GND               | -    |               |              |  |
| T11         | GND               | -    |               |              | GND               | -    |               |              |  |
| T13         | GND               | -    |               |              | GND               | -    |               |              |  |
| T14         | GND               | -    |               |              | GND               | -    |               |              |  |
| T15         | GND               | -    |               |              | GND               | -    |               |              |  |
| T16         | GND               | -    |               |              | GND               | -    |               |              |  |
| T17         | GND               | -    |               |              | GND               | -    |               |              |  |
| T18         | GND               | -    |               |              | GND               | -    |               |              |  |
| T20         | GND               | -    |               |              | GND               | -    |               |              |  |
| T21         | GND               | -    |               |              | GND               | -    |               |              |  |
| T24         | GND               | -    |               |              | GND               | -    |               |              |  |
| T7          | GND               | -    |               |              | GND               | -    |               |              |  |
| U11         | GND               | -    |               |              | GND               | -    |               |              |  |
| U13         | GND               | -    |               |              | GND               | -    |               |              |  |
| U14         | GND               | -    |               |              | GND               | -    |               |              |  |
| U15         | GND               | -    |               |              | GND               | -    |               |              |  |
| U16         | GND               | -    |               |              | GND               | -    |               |              |  |
| U17         | GND               | -    |               |              | GND               | -    |               |              |  |
| U18         | GND               | -    |               |              | GND               | -    |               |              |  |
| U20         | GND               | -    |               |              | GND               | -    |               |              |  |
| V14         | GND               | -    |               |              | GND               | -    |               |              |  |
| V15         | GND               | -    |               |              | GND               | -    |               |              |  |
| V16         | GND               | -    |               |              | GND               | -    |               |              |  |
| V17         | GND               | -    |               |              | GND               | -    |               |              |  |
| V27         | GND               | -    |               |              | GND               | -    |               |              |  |
| V4          | GND               | -    |               |              | GND               | -    |               |              |  |
| W23         | GND               | -    |               |              | GND               | -    |               |              |  |
| W8          | GND               | -    |               |              | GND               | -    |               |              |  |
| Y14         | GND               | -    |               |              | GND               | -    |               |              |  |

**LFE2M100E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2M100E/SE |                   |      |                          |              |
|--------------|-------------------|------|--------------------------|--------------|
| Ball Number  | Ball/Pad Function | Bank | Dual Function            | Differential |
| AA1          | PL81A             | 6    | LDQS81                   | T (LVDS)*    |
| GNDIO        | GNDIO6            | -    |                          |              |
| AA2          | PL81B             | 6    | LDQ81                    | C (LVDS)*    |
| Y3           | PL82A             | 6    | LDQ81                    | T            |
| AB1          | PL82B             | 6    | LDQ81                    | C            |
| VCCIO        | VCCIO6            | 6    |                          |              |
| Y9           | PL83A             | 6    | LDQ81                    | T (LVDS)*    |
| Y8           | PL83B             | 6    | LDQ81                    | C (LVDS)*    |
| Y7           | PL84A             | 6    | LDQ81                    | T            |
| AA7          | PL84B             | 6    | LDQ81                    | C            |
| GNDIO        | GNDIO6            | -    |                          |              |
| VCCIO        | VCCIO6            | 6    |                          |              |
| AB2          | PL95A             | 6    | LDQ99                    | T (LVDS)*    |
| AB3          | PL95B             | 6    | LDQ99                    | C (LVDS)*    |
| AA5          | PL96A             | 6    | LDQ99                    | T            |
| AA6          | PL96B             | 6    | LDQ99                    | C            |
| AB4          | PL97A             | 6    | LDQ99                    | T (LVDS)*    |
| VCCIO        | VCCIO6            | 6    |                          |              |
| AB5          | PL97B             | 6    | LDQ99                    | C (LVDS)*    |
| AA8          | PL98A             | 6    | LDQ99                    | T            |
| AA9          | PL98B             | 6    | LDQ99                    | C            |
| AC1          | PL99A             | 6    | LLM0_GPLLT_IN_A**/LDQS99 | T (LVDS)*    |
| GNDIO        | GNDIO6            | -    |                          |              |
| AC2          | PL99B             | 6    | LLM0_GPLLC_IN_A**/LDQ99  | C (LVDS)*    |
| AC4          | PL100A            | 6    | LLM0_GPLLT_FB_A/LDQ99    | T            |
| AC3          | PL100B            | 6    | LLM0_GPLLC_FB_A/LDQ99    | C            |
| VCCIO        | VCCIO6            | 6    |                          |              |
| AC7          | PL101A            | 6    | LLM0_GDLLT_IN_A**/LDQ99  | T (LVDS)*    |
| AC6          | PL101B            | 6    | LLM0_GDLLC_IN_A**/LDQ99  | C (LVDS)*    |
| AC5          | PL102A            | 6    | LLM0_GDLLT_FB_A/LDQ99    | T            |
| AD3          | PL102B            | 6    | LLM0_GDLLC_FB_A/LDQ99    | C            |
| GNDIO        | GNDIO6            | -    |                          |              |
| AB8          | LLM0_PLLCAP       | 6    |                          |              |
| AD2          | PL104A            | 6    |                          | T            |
| AD1          | PL104B            | 6    |                          | C            |
| AE2          | TCK               | -    |                          |              |
| AE1          | TDI               | -    |                          |              |
| AF2          | TMS               | -    |                          |              |
| AF1          | TDO               | -    |                          |              |
| AG1          | VCCJ              | -    |                          |              |
| AH1          | LLC_SQ_VCCR3      | 14   |                          |              |
| AK2          | LLC_SQ_HDINP3     | 14   |                          | T            |
| AJ1          | LLC_SQ_VCCIB3     | 14   |                          |              |

**LFE2M100E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2M100E/SE |                   |      |               |              |
|--------------|-------------------|------|---------------|--------------|
| Ball Number  | Ball/Pad Function | Bank | Dual Function | Differential |
| AE27         | GND               | -    |               |              |
| AE4          | GND               | -    |               |              |
| AE9          | GND               | -    |               |              |
| AF14         | GND               | -    |               |              |
| AF17         | GND               | -    |               |              |
| AF25         | GND               | -    |               |              |
| AF6          | GND               | -    |               |              |
| AJ10         | GND               | -    |               |              |
| AJ21         | GND               | -    |               |              |
| AJ27         | GND               | -    |               |              |
| AJ4          | GND               | -    |               |              |
| AK1          | GND               | -    |               |              |
| AK13         | GND               | -    |               |              |
| AK18         | GND               | -    |               |              |
| AK24         | GND               | -    |               |              |
| AK30         | GND               | -    |               |              |
| AK7          | GND               | -    |               |              |
| B10          | GND               | -    |               |              |
| B21          | GND               | -    |               |              |
| B27          | GND               | -    |               |              |
| B4           | GND               | -    |               |              |
| D25          | GND               | -    |               |              |
| D6           | GND               | -    |               |              |
| E14          | GND               | -    |               |              |
| E17          | GND               | -    |               |              |
| F22          | GND               | -    |               |              |
| F27          | GND               | -    |               |              |
| F4           | GND               | -    |               |              |
| F9           | GND               | -    |               |              |
| G12          | GND               | -    |               |              |
| G19          | GND               | -    |               |              |
| J24          | GND               | -    |               |              |
| J7           | GND               | -    |               |              |
| K14          | GND               | -    |               |              |
| K15          | GND               | -    |               |              |
| K16          | GND               | -    |               |              |
| K17          | GND               | -    |               |              |
| K27          | GND               | -    |               |              |
| K4           | GND               | -    |               |              |
| L14          | GND               | -    |               |              |
| L15          | GND               | -    |               |              |
| L16          | GND               | -    |               |              |
| L17          | GND               | -    |               |              |