


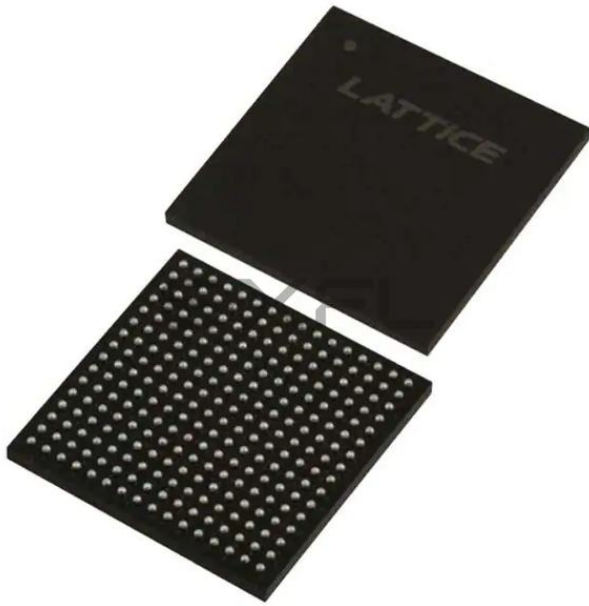

Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - CPLDs \(Complex Programmable Logic Devices\)](#)

Embedded - CPLDs, or Complex Programmable Logic Devices, are highly versatile digital logic devices used in electronic systems. These programmable components are designed to perform complex logical operations and can be customized for specific applications. Unlike fixed-function ICs, CPLDs offer the flexibility to reprogram their configuration, making them an ideal choice for various embedded systems. They consist of a set of logic gates and programmable interconnects, allowing designers to implement complex logic circuits without needing custom hardware.

## Applications of Embedded - CPLDs

### Details

|                                 |                                                                                                                                                                           |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                  | Active                                                                                                                                                                    |
| Programmable Type               | In System Programmable                                                                                                                                                    |
| Delay Time tpd(1) Max           | 7.5 ns                                                                                                                                                                    |
| Voltage Supply - Internal       | 3V ~ 3.6V                                                                                                                                                                 |
| Number of Logic Elements/Blocks | 16                                                                                                                                                                        |
| Number of Macrocells            | 256                                                                                                                                                                       |
| Number of Gates                 | -                                                                                                                                                                         |
| Number of I/O                   | 128                                                                                                                                                                       |
| Operating Temperature           | -40°C ~ 105°C (TJ)                                                                                                                                                        |
| Mounting Type                   | Surface Mount                                                                                                                                                             |
| Package / Case                  | 256-LBGA                                                                                                                                                                  |
| Supplier Device Package         | 256-FTBGA (17x17)                                                                                                                                                         |
| Purchase URL                    | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lc4256v-75ftn256ai">https://www.e-xfl.com/product-detail/lattice-semiconductor/lc4256v-75ftn256ai</a> |

**Table 2. ispMACH 4000Z Family Selection Guide**

|                                   | ispMACH 4032ZC      | ispMACH 4064ZC                               | ispMACH 4128ZC       | ispMACH 4256ZC                    |
|-----------------------------------|---------------------|----------------------------------------------|----------------------|-----------------------------------|
| Macrocells                        | 32                  | 64                                           | 128                  | 256                               |
| I/O + Dedicated Inputs            | 32+4/32+4           | 32+4/32+12/<br>64+10/64+10                   | 64+10/96+4           | 64+10/96+6/<br>128+4              |
| t <sub>PD</sub> (ns)              | 3.5                 | 3.7                                          | 4.2                  | 4.5                               |
| t <sub>S</sub> (ns)               | 2.2                 | 2.5                                          | 2.7                  | 2.9                               |
| t <sub>CO</sub> (ns)              | 3.0                 | 3.2                                          | 3.5                  | 3.8                               |
| f <sub>MAX</sub> (MHz)            | 267                 | 250                                          | 220                  | 200                               |
| Supply Voltage (V)                | 1.8                 | 1.8                                          | 1.8                  | 1.8                               |
| Max. Standby I <sub>CC</sub> (μA) | 20                  | 25                                           | 35                   | 55                                |
| Pins/Package                      | 48 TQFP<br>56 csBGA | 48 TQFP<br>56 csBGA<br>100 TQFP<br>132 csBGA | 100 TQFP<br>132csBGA | 100 TQFP<br>132 csBGA<br>176 TQFP |

## ispMACH 4000 Introduction

The high performance ispMACH 4000 family from Lattice offers a SuperFAST CPLD solution. The family is a blend of Lattice's two most popular architectures: the ispLSI® 2000 and ispMACH 4A. Retaining the best of both families, the ispMACH 4000 architecture focuses on significant innovations to combine the highest performance with low power in a flexible CPLD family.

The ispMACH 4000 combines high speed and low power with the flexibility needed for ease of design. With its robust Global Routing Pool and Output Routing Pool, this family delivers excellent First-Time-Fit, timing predictability, routing, pin-out retention and density migration.

The ispMACH 4000 family offers densities ranging from 32 to 512 macrocells. There are multiple density-I/O combinations in Thin Quad Flat Pack (TQFP), Chip Scale BGA (csBGA) and Fine Pitch Thin BGA (ftBGA) packages ranging from 44 to 256 pins/balls. Table 1 shows the macrocell, package and I/O options, along with other key parameters.

The ispMACH 4000 family has enhanced system integration capabilities. It supports 3.3V (4000V), 2.5V (4000B) and 1.8V (4000C/Z) supply voltages and 3.3V, 2.5V and 1.8V interface voltages. Additionally, inputs can be safely driven up to 5.5V when an I/O bank is configured for 3.3V operation, making this family 5V tolerant. The ispMACH 4000 also offers enhanced I/O features such as slew rate control, PCI compatibility, bus-keeper latches, pull-up resistors, pull-down resistors, open drain outputs and hot socketing. The ispMACH 4000 family members are 3.3V/2.5V/1.8V in-system programmable through the IEEE Standard 1532 interface. IEEE Standard 1149.1 boundary scan testing capability also allows product testing on automated test equipment. The 1532 interface signals TCK, TMS, TDI and TDO are referenced to V<sub>CC</sub> (logic core).

## Overview

The ispMACH 4000 devices consist of multiple 36-input, 16-macrocell Generic Logic Blocks (GLBs) interconnected by a Global Routing Pool (GRP). Output Routing Pools (ORPs) connect the GLBs to the I/O Blocks (IOBs), which contain multiple I/O cells. This architecture is shown in Figure 1.

- Block CLK2
- Block CLK3
- PT Clock
- PT Clock Inverted
- Shared PT Clock
- Ground

### Clock Enable Multiplexer

Each macrocell has a 4:1 clock enable multiplexer. This allows the clock enable signal to be selected from the following four sources:

- PT Initialization/CE
- PT Initialization/CE Inverted
- Shared PT Clock
- Logic High

### Initialization Control


The ispMACH 4000 family architecture accommodates both block-level and macrocell-level set and reset capability. There is one block-level initialization term that is distributed to all macrocell registers in a GLB. At the macrocell level, two product terms can be “stolen” from the cluster associated with a macrocell to be used for set/reset functionality. A reset/preset swapping feature in each macrocell allows for reset and preset to be exchanged, providing flexibility.

Note that the reset/preset swapping selection feature affects power-up reset as well. All flip-flops power up to a known state for predictable system initialization. If a macrocell is configured to SET on a signal from the block-level initialization, then that macrocell will be SET during device power-up. If a macrocell is configured to RESET on a signal from the block-level initialization or is not configured for set/reset, then that macrocell will RESET on power-up. To guarantee initialization values, the  $V_{CC}$  rise must be monotonic, and the clock must be inactive until the reset delay time has elapsed.

### GLB Clock Generator

Each ispMACH 4000 device has up to four clock pins that are also routed to the GRP to be used as inputs. These pins drive a clock generator in each GLB, as shown in Figure 6. The clock generator provides four clock signals that can be used anywhere in the GLB. These four GLB clock signals can consist of a number of combinations of the true and complement edges of the global clock signals.

**Figure 6. GLB Clock Generator**

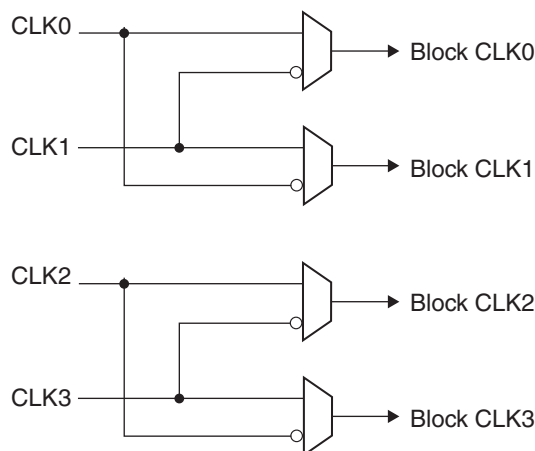


## Output Routing Pool (ORP)

The Output Routing Pool allows macrocell outputs to be connected to any of several I/O cells within an I/O block. This provides greater flexibility in determining the pinout and allows design changes to occur without affecting the pinout. The output routing pool also provides a parallel capability for routing macrocell-level OE product terms. This allows the OE product term to follow the macrocell output as it is switched between I/O cells. Additionally, the output routing pool allows the macrocell output or true and complement forms of the 5-PT bypass signal to bypass the output routing multiplexers and feed the I/O cell directly. The enhanced ORP of the ispMACH 4000 family consists of the following elements:

- Output Routing Multiplexers
- OE Routing Multiplexers
- Output Routing Pool Bypass Multiplexers

Figure 7 shows the structure of the ORP from the I/O cell perspective. This is referred to as an ORP slice. Each ORP has as many ORP slices as there are I/O cells in the corresponding I/O block.

**Figure 7. ORP Slice**

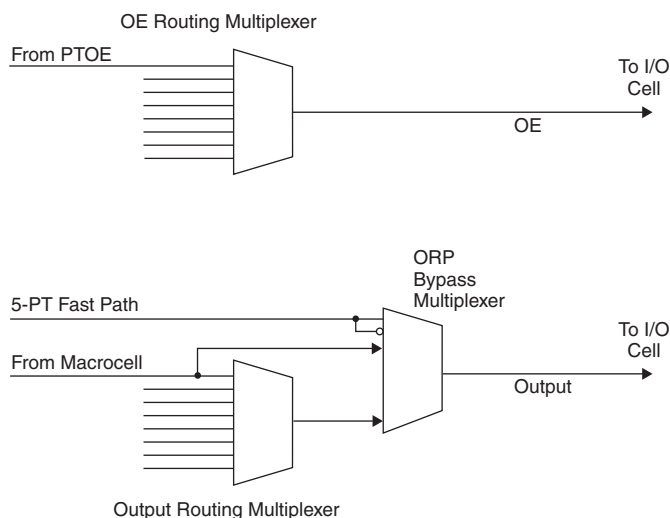

## Output Routing Multiplexers

The details of connections between the macrocells and the I/O cells vary across devices and within a device dependent on the maximum number of I/Os available. Tables 5-9 provide the connection details.

**Table 6. ORP Combinations for I/O Blocks with 8 I/Os**

| I/O Cell | Available Macrocells                 |
|----------|--------------------------------------|
| I/O 0    | M0, M1, M2, M3, M4, M5, M6, M7       |
| I/O 1    | M2, M3, M4, M5, M6, M7, M8, M9       |
| I/O 2    | M4, M5, M6, M7, M8, M9, M10, M11     |
| I/O 3    | M6, M7, M8, M9, M10, M11, M12, M13   |
| I/O 4    | M8, M9, M10, M11, M12, M13, M14, M15 |
| I/O 5    | M10, M11, M12, M13, M14, M15, M0, M1 |
| I/O 6    | M12, M13, M14, M15, M0, M1, M2, M3   |
| I/O 7    | M14, M15, M0, M1, M2, M3, M4, M5     |

**Table 7. ORP Combinations for I/O Blocks with 16 I/Os**

| <b>I/O Cell</b> | <b>Available Macrocells</b>          |
|-----------------|--------------------------------------|
| I/O 0           | M0, M1, M2, M3, M4, M5, M6, M7       |
| I/O 1           | M1, M2, M3, M4, M5, M6, M7, M8       |
| I/O 2           | M2, M3, M4, M5, M6, M7, M8, M9       |
| I/O 3           | M3, M4, M5, M6, M7, M8, M9, M10      |
| I/O 4           | M4, M5, M6, M7, M8, M9, M10, M11     |
| I/O 5           | M5, M6, M7, M8, M9, M10, M11, M12    |
| I/O 6           | M6, M7, M8, M9, M10, M11, M12, M13   |
| I/O 7           | M7, M8, M9, M10, M11, M12, M13, M14  |
| I/O 8           | M8, M9, M10, M11, M12, M13, M14, M15 |
| I/O 9           | M9, M10, M11, M12, M13, M14, M15, M0 |
| I/O 10          | M10, M11, M12, M13, M14, M15, M0, M1 |
| I/O 11          | M11, M12, M13, M14, M15, M0, M1, M2  |
| I/O 12          | M12, M13, M14, M15, M0, M1, M2, M3   |
| I/O 13          | M13, M14, M15, M0, M1, M2, M3, M4    |
| I/O 14          | M14, M15, M0, M1, M2, M3, M4, M5     |
| I/O 15          | M15, M0, M1, M2, M3, M4, M5, M6      |

**Table 8. ORP Combinations for I/O Blocks with 4 I/Os**

| <b>I/O Cell</b> | <b>Available Macrocells</b>          |
|-----------------|--------------------------------------|
| I/O 0           | M0, M1, M2, M3, M4, M5, M6, M7       |
| I/O 1           | M4, M5, M6, M7, M8, M9, M10, M11     |
| I/O 2           | M8, M9, M10, M11, M12, M13, M14, M15 |
| I/O 3           | M12, M13, M14, M15, M0, M1, M2, M3   |

**Table 9. ORP Combinations for I/O Blocks with 10 I/Os**

| <b>I/O Cell</b> | <b>Available Macrocells</b>          |
|-----------------|--------------------------------------|
| I/O 0           | M0, M1, M2, M3, M4, M5, M6, M7       |
| I/O 1           | M2, M3, M4, M5, M6, M7, M8, M9       |
| I/O 2           | M4, M5, M6, M7, M8, M9, M10, M11     |
| I/O 3           | M6, M7, M8, M9, M10, M11, M12, M13   |
| I/O 4           | M8, M9, M10, M11, M12, M13, M14, M15 |
| I/O 5           | M10, M11, M12, M13, M14, M15, M0, M1 |
| I/O 6           | M12, M13, M14, M15, M0, M1, M2, M3   |
| I/O 7           | M14, M15, M0, M1, M2, M3, M4, M5     |
| I/O 8           | M2, M3, M4, M5, M6, M7, M8, M9       |
| I/O 9           | M10, M11, M12, M13, M14, M15, M0, M1 |

- LVTTTL
- LVCMOS 3.3
- LVCMOS 2.5
- LVCMOS 1.8
- 3.3V PCI Compatible

All of the I/Os and dedicated inputs have the capability to provide a bus-keeper latch, Pull-up Resistor or Pull-down Resistor. A fourth option is to provide none of these. The selection is done on a global basis. The default in both hardware and software is such that when the device is erased or if the user does not specify, the input structure is configured to be a Pull-up Resistor.


Each ispMACH 4000 device I/O has an individually programmable output slew rate control bit. Each output can be individually configured for fast slew or slow slew. The typical edge rate difference between fast and slow slew setting is 20%. For high-speed designs with long, unterminated traces, the slow-slew rate will introduce fewer reflections, less noise and keep ground bounce to a minimum. For designs with short traces or well terminated lines, the fast slew rate can be used to achieve the highest speed.




## Global OE Generation

Most ispMACH 4000 family devices have a 4-bit wide Global OE Bus, except the ispMACH 4032 device that has a 2-bit wide Global OE Bus. This bus is derived from a 4-bit internal global OE PT bus and two dual purpose I/O or GOE pins. Each signal that drives the bus can optionally be inverted.

Each GLB has a block-level OE PT that connects to all bits of the Global OE PT bus with four fuses. Hence, for a 256-macrocell device (with 16 blocks), each line of the bus is driven from 16 OE product terms. Figures 9 and 10 show a graphical representation of the global OE generation.

**Figure 9. Global OE Generation for All Devices Except ispMACH 4032**

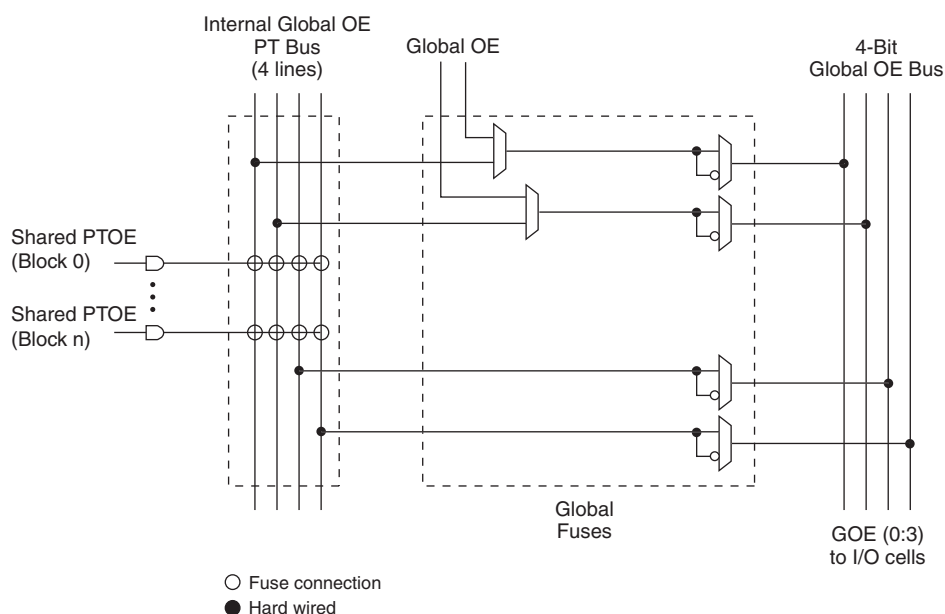

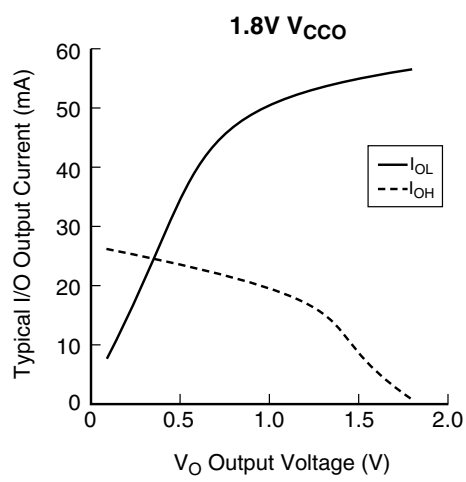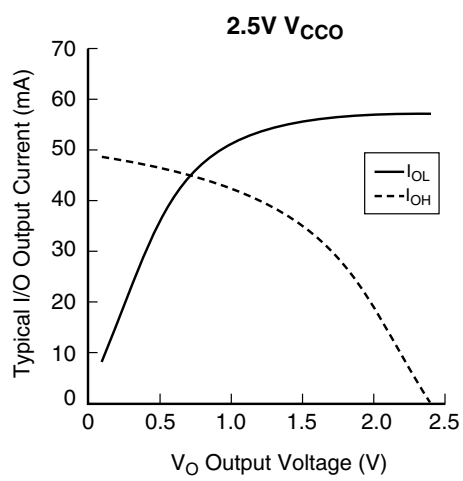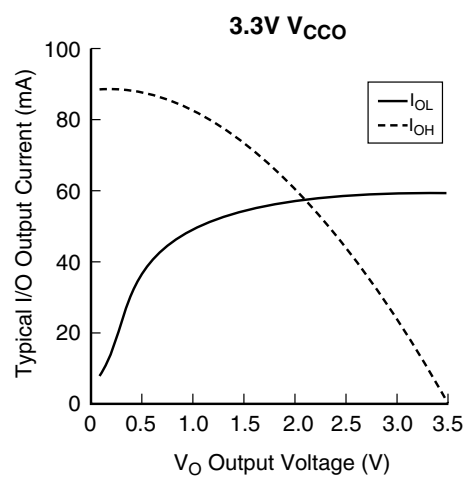

## ispMACH 4000V/B/C Internal Timing Parameters

Over Recommended Operating Conditions

| Parameter             | Description                                      | -2.5 |      | -2.7 |      | -3   |      | -3.5 |      | Units |
|-----------------------|--------------------------------------------------|------|------|------|------|------|------|------|------|-------|
| In/Out Delays         |                                                  |      |      |      |      |      |      |      |      |       |
| t <sub>IN</sub>       | Input Buffer Delay                               | —    | 0.60 | —    | 0.60 | —    | 0.70 | —    | 0.70 | ns    |
| t <sub>GOE</sub>      | Global OE Pin Delay                              | —    | 2.04 | —    | 2.54 | —    | 3.04 | —    | 3.54 | ns    |
| t <sub>GCLK_IN</sub>  | Global Clock Input Buffer Delay                  | —    | 0.78 | —    | 1.28 | —    | 1.28 | —    | 1.28 | ns    |
| t <sub>BUF</sub>      | Delay through Output Buffer                      | —    | 0.85 | —    | 0.85 | —    | 0.85 | —    | 0.85 | ns    |
| t <sub>EN</sub>       | Output Enable Time                               | —    | 0.96 | —    | 0.96 | —    | 0.96 | —    | 0.96 | ns    |
| t <sub>DIS</sub>      | Output Disable Time                              | —    | 0.96 | —    | 0.96 | —    | 0.96 | —    | 0.96 | ns    |
| Routing/GLB Delays    |                                                  |      |      |      |      |      |      |      |      |       |
| t <sub>ROUTE</sub>    | Delay through GRP                                | —    | 0.61 | —    | 0.81 | —    | 1.01 | —    | 1.01 | ns    |
| t <sub>MCELL</sub>    | Macrocell Delay                                  | —    | 0.45 | —    | 0.55 | —    | 0.55 | —    | 0.65 | ns    |
| t <sub>INREG</sub>    | Input Buffer to Macrocell Register Delay         | —    | 0.11 | —    | 0.31 | —    | 0.31 | —    | 0.31 | ns    |
| t <sub>FBK</sub>      | Internal Feedback Delay                          | —    | 0.00 | —    | 0.00 | —    | 0.00 | —    | 0.00 | ns    |
| t <sub>PDb</sub>      | 5-PT Bypass Propagation Delay                    | —    | 0.44 | —    | 0.44 | —    | 0.44 | —    | 0.94 | ns    |
| t <sub>PDi</sub>      | Macrocell Propagation Delay                      | —    | 0.64 | —    | 0.64 | —    | 0.64 | —    | 0.94 | ns    |
| Register/Latch Delays |                                                  |      |      |      |      |      |      |      |      |       |
| t <sub>S</sub>        | D-Register Setup Time (Global Clock)             | 0.92 | —    | 1.12 | —    | 1.02 | —    | 0.92 | —    | ns    |
| t <sub>S_PT</sub>     | D-Register Setup Time (Product Term Clock)       | 1.42 | —    | 1.32 | —    | 1.32 | —    | 1.32 | —    | ns    |
| t <sub>ST</sub>       | T-Register Setup Time (Global Clock)             | 1.12 | —    | 1.32 | —    | 1.22 | —    | 1.12 | —    | ns    |
| t <sub>ST_PT</sub>    | T-Register Setup Time (Product Term Clock)       | 1.42 | —    | 1.32 | —    | 1.32 | —    | 1.32 | —    | ns    |
| t <sub>H</sub>        | D-Register Hold Time                             | 0.88 | —    | 0.68 | —    | 0.98 | —    | 1.08 | —    | ns    |
| t <sub>HT</sub>       | T-Register Hold Time                             | 0.88 | —    | 0.68 | —    | 0.98 | —    | 1.08 | —    | ns    |
| t <sub>SIR</sub>      | D-Input Register Setup Time (Global Clock)       | 0.82 | —    | 1.37 | —    | 1.27 | —    | 1.27 | —    | ns    |
| t <sub>SIR_PT</sub>   | D-Input Register Setup Time (Product Term Clock) | 1.45 | —    | 1.45 | —    | 1.45 | —    | 1.45 | —    | ns    |
| t <sub>HIR</sub>      | D-Input Register Hold Time (Global Clock)        | 0.88 | —    | 0.63 | —    | 0.73 | —    | 0.73 | —    | ns    |
| t <sub>HIR_PT</sub>   | D-Input Register Hold Time (Product Term Clock)  | 0.88 | —    | 0.63 | —    | 0.73 | —    | 0.73 | —    | ns    |
| t <sub>COi</sub>      | Register Clock to Output/Feedback MUX Time       | —    | 0.52 | —    | 0.52 | —    | 0.52 | —    | 0.52 | ns    |
| t <sub>CES</sub>      | Clock Enable Setup Time                          | 2.25 | —    | 2.25 | —    | 2.25 | —    | 2.25 | —    | ns    |
| t <sub>CEH</sub>      | Clock Enable Hold Time                           | 1.88 | —    | 1.88 | —    | 1.88 | —    | 1.88 | —    | ns    |
| t <sub>SL</sub>       | Latch Setup Time (Global Clock)                  | 0.92 | —    | 1.12 | —    | 1.02 | —    | 0.92 | —    | ns    |
| t <sub>SL_PT</sub>    | Latch Setup Time (Product Term Clock)            | 1.42 | —    | 1.32 | —    | 1.32 | —    | 1.32 | —    | ns    |
| t <sub>HL</sub>       | Latch Hold Time                                  | 1.17 | —    | 1.17 | —    | 1.17 | —    | 1.17 | —    | ns    |
| t <sub>GOi</sub>      | Latch Gate to Output/Feedback MUX Time           | —    | 0.33 | —    | 0.33 | —    | 0.33 | —    | 0.33 | ns    |

**ispMACH 4000Z Internal Timing Parameters (Cont.)****Over Recommended Operating Conditions**

| Parameter             | Description                                                            | -45  |      | -5   |      | -75  |      | Units |
|-----------------------|------------------------------------------------------------------------|------|------|------|------|------|------|-------|
|                       |                                                                        | Min. | Max. | Min. | Max. | Min. | Max. |       |
| In/Out Delays         |                                                                        |      |      |      |      |      |      |       |
| t <sub>IN</sub>       | Input Buffer Delay                                                     | —    | 0.95 | —    | 1.25 | —    | 1.80 | ns    |
| t <sub>GOE</sub>      | Global OE Pin Delay                                                    | —    | 3.00 | —    | 3.50 | —    | 4.30 | ns    |
| t <sub>GCLK_IN</sub>  | Global Clock Input Buffer Delay                                        | —    | 1.95 | —    | 2.05 | —    | 2.15 | ns    |
| t <sub>BUF</sub>      | Delay through Output Buffer                                            | —    | 1.10 | —    | 1.00 | —    | 1.30 | ns    |
| t <sub>EN</sub>       | Output Enable Time                                                     | —    | 2.50 | —    | 2.50 | —    | 2.70 | ns    |
| t <sub>DIS</sub>      | Output Disable Time                                                    | —    | 2.50 | —    | 2.50 | —    | 2.70 | ns    |
| Routing/GLB Delays    |                                                                        |      |      |      |      |      |      |       |
| t <sub>ROUTE</sub>    | Delay through GRP                                                      | —    | 2.25 | —    | 2.05 | —    | 2.50 | ns    |
| t <sub>MCELL</sub>    | Macrocell Delay                                                        | —    | 0.65 | —    | 0.65 | —    | 1.00 | ns    |
| t <sub>INREG</sub>    | Input Buffer to Macrocell Register Delay                               | —    | 1.00 | —    | 1.00 | —    | 1.00 | ns    |
| t <sub>FBK</sub>      | Internal Feedback Delay                                                | —    | 0.35 | —    | 0.05 | —    | 0.05 | ns    |
| t <sub>PDb</sub>      | 5-PT Bypass Propagation Delay                                          | —    | 0.20 | —    | 0.70 | —    | 1.90 | ns    |
| t <sub>PDi</sub>      | Macrocell Propagation Delay                                            | —    | 0.45 | —    | 0.65 | —    | 1.00 | ns    |
| Register/Latch Delays |                                                                        |      |      |      |      |      |      |       |
| t <sub>S</sub>        | D-Register Setup Time (Global Clock)                                   | 1.00 | —    | 1.10 | —    | 1.35 | —    | ns    |
| t <sub>S_PT</sub>     | D-Register Setup Time (Product Term Clock)                             | 2.10 | —    | 1.90 | —    | 2.45 | —    | ns    |
| t <sub>ST</sub>       | T-Register Setup Time (Global Clock)                                   | 1.20 | —    | 1.30 | —    | 1.55 | —    | ns    |
| t <sub>ST_PT</sub>    | T-register Setup Time (Product Term Clock)                             | 2.30 | —    | 2.10 | —    | 2.75 | —    | ns    |
| t <sub>H</sub>        | D-Register Hold Time                                                   | 1.90 | —    | 1.90 | —    | 3.15 | —    | ns    |
| t <sub>HT</sub>       | T-Resister Hold Time                                                   | 1.90 | —    | 1.90 | —    | 3.15 | —    | ns    |
| t <sub>SIR</sub>      | D-Input Register Setup Time (Global Clock)                             | 1.30 | —    | 1.10 | —    | 0.75 | —    | ns    |
| t <sub>SIR_PT</sub>   | D-Input Register Setup Time (Product Term Clock)                       | 1.45 | —    | 1.45 | —    | 1.45 | —    | ns    |
| t <sub>HIR</sub>      | D-Input Register Hold Time (Global Clock)                              | 1.30 | —    | 1.50 | —    | 1.95 | —    | ns    |
| t <sub>HIR_PT</sub>   | D-Input Register Hold Time (Product Term Clock)                        | 1.00 | —    | 1.00 | —    | 1.18 | —    | ns    |
| t <sub>COi</sub>      | Register Clock to Output/Feedback MUX Time                             | —    | 0.75 | —    | 1.15 | —    | 1.05 | ns    |
| t <sub>CES</sub>      | Clock Enable Setup Time                                                | 2.00 | —    | 2.00 | —    | 2.00 | —    | ns    |
| t <sub>CEH</sub>      | Clock Enable Hold Time                                                 | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
| t <sub>SL</sub>       | Latch Setup Time (Global Clock)                                        | 1.00 | —    | 1.00 | —    | 1.65 | —    | ns    |
| t <sub>SL_PT</sub>    | Latch Setup Time (Product Term Clock)                                  | 2.10 | —    | 1.90 | —    | 2.15 | —    | ns    |
| t <sub>HL</sub>       | Latch Hold Time                                                        | 2.00 | —    | 2.00 | —    | 1.17 | —    | ns    |
| t <sub>GOi</sub>      | Latch Gate to Output/Feedback MUX Time                                 | —    | 0.33 | —    | 0.33 | —    | 0.33 | ns    |
| t <sub>PDLi</sub>     | Propagation Delay through Transparent Latch to Output/<br>Feedback MUX | —    | 0.25 | —    | 0.25 | —    | 0.25 | ns    |
| t <sub>SRi</sub>      | Asynchronous Reset or Set to Output/Feedback MUX Delay                 | —    | 0.97 | —    | 0.97 | —    | 0.28 | ns    |
| t <sub>SRR</sub>      | Asynchronous Reset or Set Recovery Delay                               | —    | 1.80 | —    | 1.80 | —    | 1.67 | ns    |
| Control Delays        |                                                                        |      |      |      |      |      |      |       |
| t <sub>BCLK</sub>     | GLB PT Clock Delay                                                     | —    | 1.55 | —    | 1.55 | —    | 1.25 | ns    |
| t <sub>PTCLK</sub>    | Macrocell PT Clock Delay                                               | —    | 1.55 | —    | 1.55 | —    | 1.25 | ns    |
| t <sub>BSR</sub>      | GLB PT Set/Reset Delay                                                 | —    | 1.83 | —    | 1.83 | —    | 1.83 | ns    |
| t <sub>PTSR</sub>     | Macrocell PT Set/Reset Delay                                           | —    | 1.83 | —    | 1.83 | —    | 2.72 | ns    |
| t <sub>GPTOE</sub>    | Global PT OE Delay                                                     | —    | 4.30 | —    | 4.20 | —    | 3.50 | ns    |

---

**ispMACH 4000Z Internal Timing Parameters (Cont.)****Over Recommended Operating Conditions**

| Parameter                    | Description           | -45  |      | -5   |      | -75  |      | Units |
|------------------------------|-----------------------|------|------|------|------|------|------|-------|
|                              |                       | Min. | Max. | Min. | Max. | Min. | Max. |       |
| t <sub>P<sub>TOE</sub></sub> | Macrocell PT OE Delay | —    | 2.50 | —    | 2.70 | —    | 2.00 | ns    |

Note: Internal Timing Parameters are not tested and are for reference only. Refer to the timing model in this data sheet for further details.

Timing v.2.2

**ispMACH 4000Z Timing Adders (Cont.)<sup>1</sup>**

| Adder Type                        | Base Parameter                                            | Description                                | -45  |      | -5   |      | -75  |      | Units |
|-----------------------------------|-----------------------------------------------------------|--------------------------------------------|------|------|------|------|------|------|-------|
|                                   |                                                           |                                            | Min. | Max. | Min. | Max. | Min. | Max. |       |
| Optional Delay Adders             |                                                           |                                            |      |      |      |      |      |      |       |
| t <sub>INDIO</sub>                | t <sub>INREG</sub>                                        | Input register delay                       | —    | 1.30 | —    | 1.30 | —    | 1.30 | ns    |
| t <sub>EXP</sub>                  | t <sub>MCELL</sub>                                        | Product term expander delay                | —    | 0.45 | —    | 0.45 | —    | 0.50 | ns    |
| t <sub>ORP</sub>                  | —                                                         | Output routing pool delay                  | —    | 0.40 | —    | 0.40 | —    | 0.40 | ns    |
| t <sub>BLA</sub>                  | t <sub>ROUTE</sub>                                        | Additional block load-ing adder            | —    | 0.05 | —    | 0.05 | —    | 0.05 | ns    |
| t <sub>IOI</sub> Input Adjusters  |                                                           |                                            |      |      |      |      |      |      |       |
| LVTTTL_in                         | t <sub>IN</sub> , t <sub>GCLK_IN</sub> , t <sub>GOE</sub> | Using LVTTTL standard                      | —    | 0.60 | —    | 0.60 | —    | 0.60 | ns    |
| LVC MOS33_in                      | t <sub>IN</sub> , t <sub>GCLK_IN</sub> , t <sub>GOE</sub> | Using LVC MOS 3.3 standard                 | —    | 0.60 | —    | 0.60 | —    | 0.60 | ns    |
| LVC MOS25_in                      | t <sub>IN</sub> , t <sub>GCLK_IN</sub> , t <sub>GOE</sub> | Using LVC MOS 2.5 standard                 | —    | 0.60 | —    | 0.60 | —    | 0.60 | ns    |
| LVC MOS18_in                      | t <sub>IN</sub> , t <sub>GCLK_IN</sub> , t <sub>GOE</sub> | Using LVC MOS 1.8 standard                 | —    | 0.00 | —    | 0.00 | —    | 0.00 | ns    |
| PCI_in                            | t <sub>IN</sub> , t <sub>GCLK_IN</sub> , t <sub>GOE</sub> | Using PCI compatible input                 | —    | 0.60 | —    | 0.60 | —    | 0.60 | ns    |
| t <sub>IOO</sub> Output Adjusters |                                                           |                                            |      |      |      |      |      |      |       |
| LVTTTL_out                        | t <sub>BUF</sub> , t <sub>EN</sub> , t <sub>DIS</sub>     | Output configured as TTL buffer            | —    | 0.20 | —    | 0.20 | —    | 0.20 | ns    |
| LVC MOS33_out                     | t <sub>BUF</sub> , t <sub>EN</sub> , t <sub>DIS</sub>     | Output configured as 3.3V buffer           | —    | 0.20 | —    | 0.20 | —    | 0.20 | ns    |
| LVC MOS25_out                     | t <sub>BUF</sub> , t <sub>EN</sub> , t <sub>DIS</sub>     | Output configured as 2.5V buffer           | —    | 0.10 | —    | 0.10 | —    | 0.10 | ns    |
| LVC MOS18_out                     | t <sub>BUF</sub> , t <sub>EN</sub> , t <sub>DIS</sub>     | Output configured as 1.8V buffer           | —    | 0.00 | —    | 0.00 | —    | 0.00 | ns    |
| PCI_out                           | t <sub>BUF</sub> , t <sub>EN</sub> , t <sub>DIS</sub>     | Output configured as PCI compatible buffer | —    | 0.20 | —    | 0.20 | —    | 0.20 | ns    |
| Slow Slew                         | t <sub>BUF</sub> , t <sub>EN</sub>                        | Output configured for slow slew rate       | —    | 1.00 | —    | 1.00 | —    | 1.00 | ns    |

Note: Open drain timing is the same as corresponding LVC MOS timing.

Timing v.2.2

1. Refer to TN1004, [ispMACH 4000 Timing Model Design and Usage Guidelines](#) for information regarding use of these adders.

## Signal Descriptions

| Signal Names                          | Description                                                                                                                                                        |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TMS                                   | Input – This pin is the IEEE 1149.1 Test Mode Select input, which is used to control the state machine.                                                            |
| TCK                                   | Input – This pin is the IEEE 1149.1 Test Clock input pin, used to clock through the state machine.                                                                 |
| TDI                                   | Input – This pin is the IEEE 1149.1 Test Data In pin, used to load data.                                                                                           |
| TDO                                   | Output – This pin is the IEEE 1149.1 Test Data Out pin used to shift data out.                                                                                     |
| GOE0/IO, GOE1/IO                      | These pins are configured to be either Global Output Enable Input or as general I/O pins.                                                                          |
| GND                                   | Ground                                                                                                                                                             |
| NC                                    | Not Connected                                                                                                                                                      |
| V <sub>CC</sub>                       | The power supply pins for logic core and JTAG port.                                                                                                                |
| CLK0/I, CLK1/I, CLK2/I, CLK3/I        | These pins are configured to be either CLK input or as an input.                                                                                                   |
| V <sub>CC00</sub> , V <sub>CC01</sub> | The power supply pins for each I/O bank.                                                                                                                           |
| yzz                                   | Input/Output <sup>1</sup> – These are the general purpose I/O used by the logic array. y is GLB reference (alpha) and z is macrocell reference (numeric). z: 0-15. |
|                                       | ispMACH 4032 y: A-B                                                                                                                                                |
|                                       | ispMACH 4064 y: A-D                                                                                                                                                |
|                                       | ispMACH 4128 y: A-H                                                                                                                                                |
|                                       | ispMACH 4256 y: A-P                                                                                                                                                |
|                                       | ispMACH 4384 y: A-P, AX-HX                                                                                                                                         |
|                                       | ispMACH 4512 y: A-P, AX-PX                                                                                                                                         |

1. In some packages, certain I/Os are only available for use as inputs. See the signal connections table for details.

## ispMACH 4000V/B/C ORP Reference Table

|                      | 4032V/B/C       |    | 4064V/B/C       |    |               | 4128V/B/C    |                 |    | 4256V/B/C    |                 |              |               | 4384V/B/C    |     | 4512V/B/C    |                               |
|----------------------|-----------------|----|-----------------|----|---------------|--------------|-----------------|----|--------------|-----------------|--------------|---------------|--------------|-----|--------------|-------------------------------|
| Number of I/Os       | 30 <sup>1</sup> | 32 | 30 <sup>2</sup> | 32 | 64            | 64           | 92 <sup>3</sup> | 96 | 64           | 96 <sup>4</sup> | 128          | 160           | 128          | 192 | 128          | 208                           |
| Number of GLBs       | 2               | 2  | 4               | 4  | 4             | 8            | 8               | 8  | 16           | 16              | 16           | 16            | 16           | 16  | 16           | 16                            |
| Number of I/Os / GLB | 16              | 16 | 8               | 8  | 16            | 8            | 12              | 12 | 4            | 8               | 8            | 10            | 8            | 8   | 8            | Mixture of 8 & 4 <sup>5</sup> |
| Reference ORP Table  | 16 I/Os / GLB   |    | 8 I/Os / GLB    |    | 16 I/Os / GLB | 8 I/Os / GLB | 12 I/Os / GLB   |    | 4 I/Os / GLB | 8 I/Os / GLB    | 8 I/Os / GLB | 10 I/Os / GLB | 8 I/Os / GLB |     | 8 I/Os / GLB | 8 I/Os / GLB<br>4 I/Os / GLB  |

1. 32-macrocell device, 44 TQFP: 2 GLBs have 15 out of 16 I/Os bonded out.

2. 64-macrocells device, 44 TQFP: 2 GLBs have 7 out of 8 I/Os bonded out.

3. 128-macrocell device, 128 TQFP: 4 GLBs have 11 out of 12 I/Os

4. 256-macrocell device, 144 TQFP: 16 GLBs have 6 I/Os per

5. 512-macrocell device: 20 GLBs have 8 I/Os per, 12 GLBs have 4 I/Os per

## ispMACH 4000Z ORP Reference Table

|                      | 4032Z         | 4064Z        |               | 4128Z        |               | 4256Z        |                 |              |
|----------------------|---------------|--------------|---------------|--------------|---------------|--------------|-----------------|--------------|
| Number of I/Os       | 32            | 32           | 64            | 64           | 96            | 64           | 96 <sup>1</sup> | 128          |
| Number of GLBs       | 2             | 4            | 4             | 8            | 8             | 16           | 16              | 16           |
| Number of I/Os / GLB | 16            | 8            | 16            | 8            | 12            | 4            | 8               | 8            |
| Reference ORP Table  | 16 I/Os / GLB | 8 I/Os / GLB | 16 I/Os / GLB | 8 I/Os / GLB | 12 I/Os / GLB | 4 I/Os / GLB | 8 I/Os / GLB    | 8 I/Os / GLB |

1. 256-macrocell device, 132 csBGA: 16 GLBs have 6 I/Os per

**ispMACH 4032V/B/C/Z and 4064V/B/C/Z Logic Signal Connections:  
48-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4032V/B/C/Z |                 | ispMACH 4064V/B/C |                | ispMACH 4064Z |                |
|------------|-------------|---------------------|-----------------|-------------------|----------------|---------------|----------------|
|            |             | GLB/MC/Pad          | ORP             | GLB/MC/Pad        | ORP            | GLB/MC/Pad    | ORP            |
| 33         | 1           | B10                 | B <sup>10</sup> | D4                | D <sup>2</sup> | D10           | D <sup>5</sup> |
| 34         | 1           | B11                 | B <sup>11</sup> | D6                | D <sup>3</sup> | D8            | D <sup>4</sup> |
| 35         | -           | TDO                 | -               | TDO               | -              | TDO           | -              |
| 36         | -           | VCC                 | -               | VCC               | -              | VCC           | -              |
| 37         | -           | GND                 | -               | GND               | -              | GND           | -              |
| 38         | 1           | B12                 | B <sup>12</sup> | D8                | D <sup>4</sup> | D6            | D <sup>3</sup> |
| 39         | 1           | B13                 | B <sup>13</sup> | D10               | D <sup>5</sup> | D4            | D <sup>2</sup> |
| 40         | 1           | B14                 | B <sup>14</sup> | D12               | D <sup>6</sup> | D2            | D <sup>1</sup> |
| 41         | 1           | B15/GOE1            | B <sup>15</sup> | D14/GOE1          | D <sup>7</sup> | D0/GOE1       | D <sup>0</sup> |
| 42         | 1           | CLK3/I              | -               | CLK3/I            | -              | CLK3/I        | -              |
| 43         | 0           | CLK0/I              | -               | CLK0/I            | -              | CLK0/I        | -              |
| 44         | 0           | A0/GOE0             | A <sup>0</sup>  | A0/GOE0           | A <sup>0</sup> | A0/GOE0       | A <sup>0</sup> |
| 45         | 0           | A1                  | A <sup>1</sup>  | A2                | A <sup>1</sup> | A1            | A <sup>1</sup> |
| 46         | 0           | A2                  | A <sup>2</sup>  | A4                | A <sup>2</sup> | A2            | A <sup>2</sup> |
| 47         | 0           | A3                  | A <sup>3</sup>  | A6                | A <sup>3</sup> | A4            | A <sup>3</sup> |
| 48         | 0           | A4                  | A <sup>4</sup>  | A8                | A <sup>4</sup> | A6            | A <sup>4</sup> |

**ispMACH 4032Z and 4064Z Logic Signal Connections: 56-Ball csBGA**

| Ball Number | Bank Number | ispMACH 4032Z   |                 | ispMACH 4064Z  |                |
|-------------|-------------|-----------------|-----------------|----------------|----------------|
|             |             | GLB/MC/Pad      | ORP             | GLB/MC/Pad     | ORP            |
| B1          | -           | TDI             | -               | TDI            | -              |
| C3          | 0           | A5              | A <sup>5</sup>  | A8             | A <sup>5</sup> |
| C1          | 0           | A6              | A <sup>6</sup>  | A10            | A <sup>6</sup> |
| D1          | 0           | A7              | A <sup>7</sup>  | A11            | A <sup>7</sup> |
| D3          | 0           | GND (Bank 0)    | -               | GND (Bank 0)   | -              |
| E3          | 0           | NC <sup>1</sup> | -               | I <sup>1</sup> | -              |
| E1          | 0           | NC <sup>1</sup> | -               | I <sup>1</sup> | -              |
| F3          | 0           | VCCO (Bank 0)   | -               | VCCO (Bank 0)  | -              |
| F1          | 0           | A8              | A <sup>8</sup>  | B15            | B <sup>7</sup> |
| G3          | 0           | A9              | A <sup>9</sup>  | B12            | B <sup>6</sup> |
| G1          | 0           | A10             | A <sup>10</sup> | B10            | B <sup>5</sup> |
| H1          | 0           | A11             | A <sup>11</sup> | B8             | B <sup>4</sup> |
| J1          | 0           | NC              | -               | I              | -              |
| K1          | -           | TCK             | -               | TCK            | -              |
| K2          | -           | VCC             | -               | VCC            | -              |
| H3          | -           | GND             | -               | GND            | -              |
| K3          | -           | NC <sup>1</sup> | -               | I <sup>1</sup> | -              |
| K4          | 0           | A12             | A <sup>12</sup> | B6             | B <sup>3</sup> |
| H4          | 0           | A13             | A <sup>13</sup> | B4             | B <sup>2</sup> |
| H5          | 0           | A14             | A <sup>14</sup> | B2             | B <sup>1</sup> |


**ispMACH 4064V/B/C/Z, 4128V/B/C/Z, 4256V/B/C/Z Logic Signal Connections:  
100-Pin TQFP**

| Pin Number | Bank Number | ispMACH 4064V/B/C/Z |      | ispMACH 4128V/B/C/Z |     | ispMACH 4256V/B/C/Z |     |
|------------|-------------|---------------------|------|---------------------|-----|---------------------|-----|
|            |             | GLB/MC/Pad          | ORP  | GLB/MC/Pad          | ORP | GLB/MC/Pad          | ORP |
| 1          | -           | GND                 | -    | GND                 | -   | GND                 | -   |
| 2          | -           | TDI                 | -    | TDI                 | -   | TDI                 | -   |
| 3          | 0           | A8                  | A^8  | B0                  | B^0 | C12                 | C^3 |
| 4          | 0           | A9                  | A^9  | B2                  | B^1 | C10                 | C^2 |
| 5          | 0           | A10                 | A^10 | B4                  | B^2 | C6                  | C^1 |
| 6          | 0           | A11                 | A^11 | B6                  | B^3 | C2                  | C^0 |
| 7          | 0           | GND (Bank 0)        | -    | GND (Bank 0)        | -   | GND (Bank 0)        | -   |
| 8          | 0           | A12                 | A^12 | B8                  | B^4 | D12                 | D^3 |
| 9          | 0           | A13                 | A^13 | B10                 | B^5 | D10                 | D^2 |
| 10         | 0           | A14                 | A^14 | B12                 | B^6 | D6                  | D^1 |
| 11         | 0           | A15                 | A^15 | B13                 | B^7 | D4                  | D^0 |
| 12*        | 0           | I                   | -    | I                   | -   | I                   | -   |
| 13         | 0           | VCCO (Bank 0)       | -    | VCCO (Bank 0)       | -   | VCCO (Bank 0)       | -   |
| 14         | 0           | B15                 | B^15 | C14                 | C^7 | E4                  | E^0 |
| 15         | 0           | B14                 | B^14 | C12                 | C^6 | E6                  | E^1 |
| 16         | 0           | B13                 | B^13 | C10                 | C^5 | E10                 | E^2 |
| 17         | 0           | B12                 | B^12 | C8                  | C^4 | E12                 | E^3 |
| 18         | 0           | GND (Bank 0)        | -    | GND (Bank 0)        | -   | GND (Bank 0)        | -   |
| 19         | 0           | B11                 | B^11 | C6                  | C^3 | F2                  | F^0 |
| 20         | 0           | B10                 | B^10 | C5                  | C^2 | F6                  | F^1 |
| 21         | 0           | B9                  | B^9  | C4                  | C^1 | F10                 | F^2 |
| 22         | 0           | B8                  | B^8  | C2                  | C^0 | F12                 | F^3 |
| 23*        | 0           | I                   | -    | I                   | -   | I                   | -   |
| 24         | -           | TCK                 | -    | TCK                 | -   | TCK                 | -   |
| 25         | -           | VCC                 | -    | VCC                 | -   | VCC                 | -   |
| 26         | -           | GND                 | -    | GND                 | -   | GND                 | -   |
| 27*        | 0           | I                   | -    | I                   | -   | I                   | -   |
| 28         | 0           | B7                  | B^7  | D13                 | D^7 | G12                 | G^3 |
| 29         | 0           | B6                  | B^6  | D12                 | D^6 | G10                 | G^2 |
| 30         | 0           | B5                  | B^5  | D10                 | D^5 | G6                  | G^1 |
| 31         | 0           | B4                  | B^4  | D8                  | D^4 | G2                  | G^0 |
| 32         | 0           | GND (Bank 0)        | -    | GND (Bank 0)        | -   | GND (Bank 0)        | -   |
| 33         | 0           | VCCO (Bank 0)       | -    | VCCO (Bank 0)       | -   | VCCO (Bank 0)       | -   |
| 34         | 0           | B3                  | B^3  | D6                  | D^3 | H12                 | H^3 |
| 35         | 0           | B2                  | B^2  | D4                  | D^2 | H10                 | H^2 |
| 36         | 0           | B1                  | B^1  | D2                  | D^1 | H6                  | H^1 |
| 37         | 0           | B0                  | B^0  | D0                  | D^0 | H2                  | H^0 |
| 38         | 0           | CLK1/I              | -    | CLK1/I              | -   | CLK1/I              | -   |
| 39         | 1           | CLK2/I              | -    | CLK2/I              | -   | CLK2/I              | -   |
| 40         | -           | VCC                 | -    | VCC                 | -   | VCC                 | -   |
| 41         | 1           | C0                  | C^0  | E0                  | E^0 | I2                  | I^0 |

**ispMACH 4256V/B/C/Z, 4384V/B/C, 4512V/B/C, Logic Signal Connections:  
176-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4256V/B/C/Z |                | ispMACH 4384V/B/C |                 | ispMACH 4512V/B/C |                 |
|------------|-------------|---------------------|----------------|-------------------|-----------------|-------------------|-----------------|
|            |             | GLB/MC/Pad          | ORP            | GLB/MC/Pad        | ORP             | GLB/MC/Pad        | ORP             |
| 142        | 1           | O0                  | O <sup>0</sup> | GX0               | GX <sup>0</sup> | OX0               | OX <sup>0</sup> |
| 143        | 1           | GND (Bank 1)        | -              | GND (Bank 1)      | -               | GND (Bank 1)      | -               |
| 144        | 1           | VCCO (Bank 1)       | -              | VCCO (Bank 1)     | -               | VCCO (Bank 1)     | -               |
| 145        | 1           | P14                 | P <sup>7</sup> | HX14              | HX <sup>7</sup> | PX14              | PX <sup>7</sup> |
| 146        | 1           | P12                 | P <sup>6</sup> | HX12              | HX <sup>6</sup> | PX12              | PX <sup>6</sup> |
| 147        | 1           | P10                 | P <sup>5</sup> | HX10              | HX <sup>5</sup> | PX10              | PX <sup>5</sup> |
| 148        | 1           | P8                  | P <sup>4</sup> | HX8               | HX <sup>4</sup> | PX8               | PX <sup>4</sup> |
| 149        | 1           | P6                  | P <sup>3</sup> | HX6               | HX <sup>3</sup> | PX6               | PX <sup>3</sup> |
| 150        | 1           | P4                  | P <sup>2</sup> | HX4               | HX <sup>2</sup> | PX4               | PX <sup>2</sup> |
| 151        | 1           | P2/GOE1             | P <sup>1</sup> | HX2/GOE1          | HX <sup>1</sup> | PX2/GOE1          | PX <sup>1</sup> |
| 152        | 1           | P0                  | P <sup>0</sup> | HX0               | HX <sup>0</sup> | PX0               | PX <sup>0</sup> |
| 153        | -           | GND                 | -              | GND               | -               | GND               | -               |
| 154        | 1           | CLK3/I              | -              | CLK3/I            | -               | CLK3/I            | -               |
| 155        | 0           | GND (Bank 0)        | -              | GND (Bank 0)      | -               | GND (Bank 0)      | -               |
| 156        | 0           | CLK0/I              | -              | CLK0/I            | -               | CLK0/I            | -               |
| 157        | -           | VCC                 | -              | VCC               | -               | VCC               | -               |
| 158        | 0           | A0                  | A <sup>0</sup> | A0                | A <sup>0</sup>  | A0                | A <sup>0</sup>  |
| 159        | 0           | A2/GOE0             | A <sup>1</sup> | A2/GOE0           | A <sup>1</sup>  | A2/GOE0           | A <sup>1</sup>  |
| 160        | 0           | A4                  | A <sup>2</sup> | A4                | A <sup>2</sup>  | A4                | A <sup>2</sup>  |
| 161        | 0           | A6                  | A <sup>3</sup> | A6                | A <sup>3</sup>  | A6                | A <sup>3</sup>  |
| 162        | 0           | A8                  | A <sup>4</sup> | A8                | A <sup>4</sup>  | A8                | A <sup>4</sup>  |
| 163        | 0           | A10                 | A <sup>5</sup> | A10               | A <sup>5</sup>  | A10               | A <sup>5</sup>  |
| 164        | 0           | A12                 | A <sup>6</sup> | A12               | A <sup>6</sup>  | A12               | A <sup>6</sup>  |
| 165        | 0           | A14                 | A <sup>7</sup> | A14               | A <sup>7</sup>  | A14               | A <sup>7</sup>  |
| 166        | 0           | VCCO (Bank 0)       | -              | VCCO (Bank 0)     | -               | VCCO (Bank 0)     | -               |
| 167        | 0           | GND (Bank 0)        | -              | GND (Bank 0)      | -               | GND (Bank 0)      | -               |
| 168        | 0           | B0                  | B <sup>0</sup> | B0                | B <sup>0</sup>  | B0                | B <sup>0</sup>  |
| 169        | 0           | B2                  | B <sup>1</sup> | B2                | B <sup>1</sup>  | B2                | B <sup>1</sup>  |
| 170        | 0           | B4                  | B <sup>2</sup> | B4                | B <sup>2</sup>  | B4                | B <sup>2</sup>  |
| 171        | 0           | B6                  | B <sup>3</sup> | B6                | B <sup>3</sup>  | B6                | B <sup>3</sup>  |
| 172        | 0           | B8                  | B <sup>4</sup> | B8                | B <sup>4</sup>  | B8                | B <sup>4</sup>  |
| 173        | 0           | B10                 | B <sup>5</sup> | B10               | B <sup>5</sup>  | B10               | B <sup>5</sup>  |
| 174        | 0           | B12                 | B <sup>6</sup> | B12               | B <sup>6</sup>  | B12               | B <sup>6</sup>  |
| 175        | 0           | B14                 | B <sup>7</sup> | B14               | B <sup>7</sup>  | B14               | B <sup>7</sup>  |
| 176        | -           | VCC                 | -              | VCC               | -               | VCC               | -               |

## Part Number Description

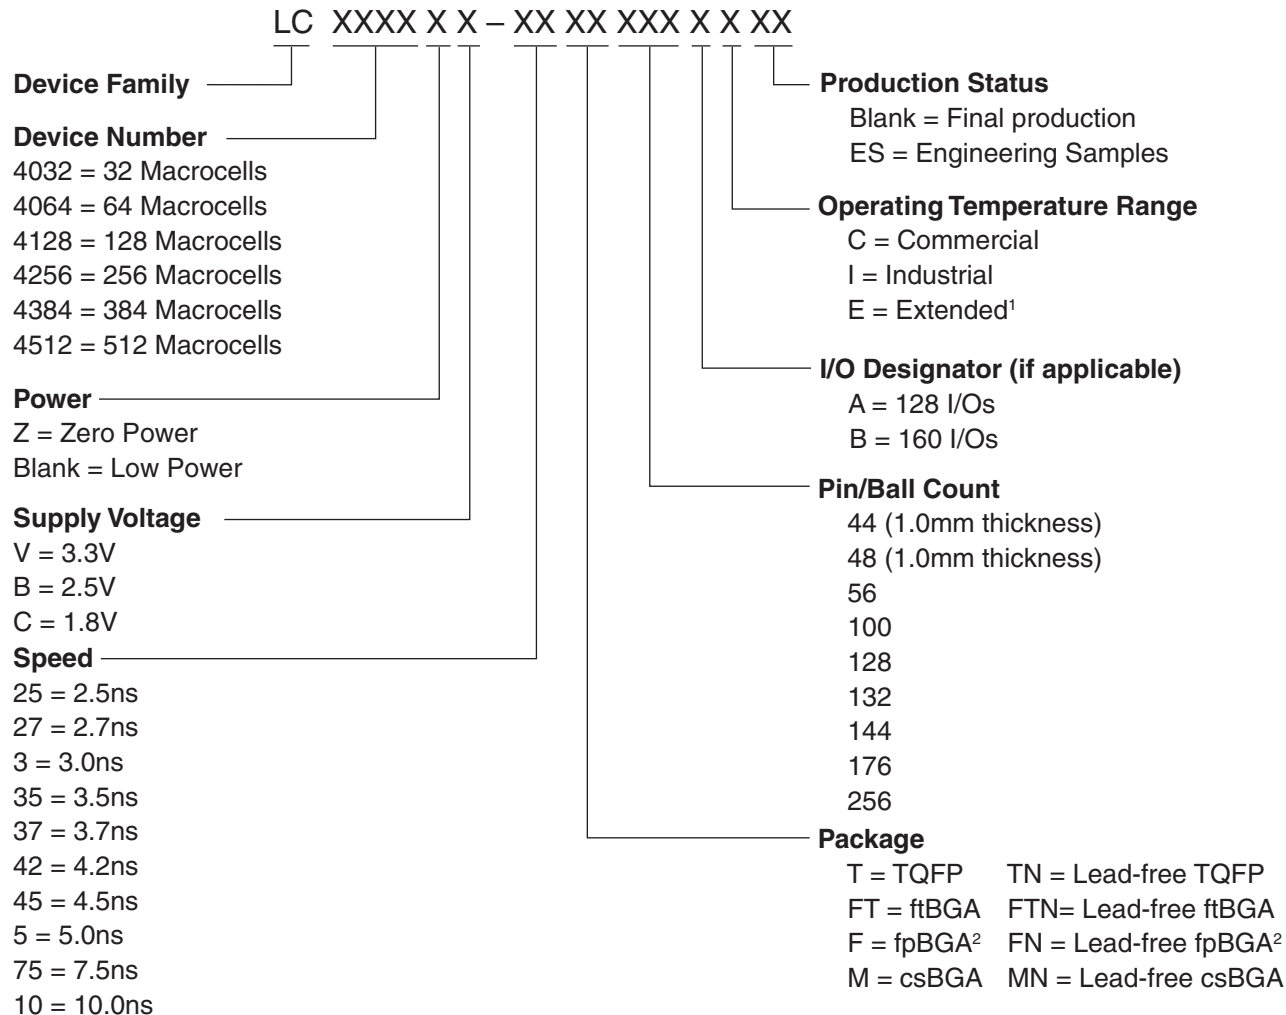

1. For automotive AEC-Q100 compliant devices, refer to the LA-ispMACH 4000V/Z Automotive Family Data Sheet (DS1017).

2. Use ftBGA package. fpBGA package devices have been discontinued via PCN#14A-07.

## ispMACH 4000 Family Speed Grade Offering

|                   | -25 | -27 | -3  | -35 | -37 | -42 | -45 | -5  |     | -75 |     |     | -10 |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                   | Com | Com | Com | Com | Com | Com | Com | Com | Ind | Com | Ind | Ext | Ind |
| ispMACH 4032V/B/C |     |     |     |     |     |     |     |     |     |     |     | 1   |     |
| ispMACH 4064V/B/C |     |     |     |     |     |     |     |     |     |     |     | 1   |     |
| ispMACH 4128V/B/C |     |     |     |     |     |     |     |     |     |     |     | 1   |     |
| ispMACH 4256V/B/C |     |     |     |     |     |     |     |     |     |     |     |     |     |
| ispMACH 4384V/B/C |     |     |     |     |     |     |     |     |     |     |     |     |     |
| ispMACH 4512V/B/C |     |     |     |     |     |     |     |     |     |     |     |     |     |
| ispMACH 4032ZC    |     |     |     |     |     |     |     |     |     |     |     | 1   |     |
| ispMACH 4064ZC    |     |     |     |     |     |     |     |     |     |     |     | 1   |     |
| ispMACH 4128ZC    |     |     |     |     |     |     |     |     |     |     |     | 1   |     |
| ispMACH 4256ZC    |     |     |     |     |     |     |     |     |     |     |     |     |     |

1. 3.3V only.

## Ordering Information

Note: ispMACH 4000 devices are all dual marked except the slowest commercial speed grade ispMACH 4000Z devices. For example, the commercial speed grade LC4128C-5T100C is also marked with the industrial grade -75I. The commercial grade is always one speed grade faster than the associated dual mark industrial grade. The slowest commercial speed grade ispMACH 4000Z devices are marked as commercial grade only.

## Conventional Packaging

### ispMACH 4000ZC (Zero Power, 1.8V) Commercial Devices

| Device   | Part Number      | Macrocells | Voltage | t <sub>PD</sub> | Package | Pin/Ball Count | I/O | Grade |
|----------|------------------|------------|---------|-----------------|---------|----------------|-----|-------|
| LC4032ZC | LC4032ZC-35M56C  | 32         | 1.8     | 3.5             | csBGA   | 56             | 32  | C     |
|          | LC4032ZC-5M56C   | 32         | 1.8     | 5               | csBGA   | 56             | 32  | C     |
|          | LC4032ZC-75M56C  | 32         | 1.8     | 7.5             | csBGA   | 56             | 32  | C     |
|          | LC4032ZC-35T48C  | 32         | 1.8     | 3.5             | TQFP    | 48             | 32  | C     |
|          | LC4032ZC-5T48C   | 32         | 1.8     | 5               | TQFP    | 48             | 32  | C     |
|          | LC4032ZC-75T48C  | 32         | 1.8     | 7.5             | TQFP    | 48             | 32  | C     |
| LC4064ZC | LC4064ZC-37M132C | 64         | 1.8     | 3.7             | csBGA   | 132            | 64  | C     |
|          | LC4064ZC-5M132C  | 64         | 1.8     | 5               | csBGA   | 132            | 64  | C     |
|          | LC4064ZC-75M132C | 64         | 1.8     | 7.5             | csBGA   | 132            | 64  | C     |
|          | LC4064ZC-37T100C | 64         | 1.8     | 3.7             | TQFP    | 100            | 64  | C     |
|          | LC4064ZC-5T100C  | 64         | 1.8     | 5               | TQFP    | 100            | 64  | C     |
|          | LC4064ZC-75T100C | 64         | 1.8     | 7.5             | TQFP    | 100            | 64  | C     |
|          | LC4064ZC-37M56C  | 64         | 1.8     | 3.7             | csBGA   | 56             | 32  | C     |
|          | LC4064ZC-5M56C   | 64         | 1.8     | 5               | csBGA   | 56             | 32  | C     |
|          | LC4064ZC-75M56C  | 64         | 1.8     | 7.5             | csBGA   | 56             | 32  | C     |
|          | LC4064ZC-37T48C  | 64         | 1.8     | 3.7             | TQFP    | 48             | 32  | C     |
|          | LC4064ZC-5T48C   | 64         | 1.8     | 5               | TQFP    | 48             | 32  | C     |
|          | LC4064ZC-75T48C  | 64         | 1.8     | 7.5             | TQFP    | 48             | 32  | C     |
| LC4128ZC | LC4128ZC-42M132C | 128        | 1.8     | 4.2             | csBGA   | 132            | 96  | C     |
|          | LC4128ZC-75M132C | 128        | 1.8     | 7.5             | csBGA   | 132            | 96  | C     |
|          | LC4128ZC-42T100C | 128        | 1.8     | 4.2             | TQFP    | 100            | 64  | C     |
|          | LC4128ZC-75T100C | 128        | 1.8     | 7.5             | TQFP    | 100            | 64  | C     |
| LC4256ZC | LC4256ZC-45T176C | 256        | 1.8     | 4.5             | TQFP    | 176            | 128 | C     |
|          | LC4256ZC-75T176C | 256        | 1.8     | 7.5             | TQFP    | 176            | 128 | C     |
|          | LC4256ZC-45M132C | 256        | 1.8     | 4.5             | csBGA   | 132            | 96  | C     |
|          | LC4256ZC-75M132C | 256        | 1.8     | 7.5             | csBGA   | 132            | 96  | C     |
|          | LC4256ZC-45T100C | 256        | 1.8     | 4.5             | TQFP    | 100            | 64  | C     |
|          | LC4256ZC-75T100C | 256        | 1.8     | 7.5             | TQFP    | 100            | 64  | C     |

### ispMACH 4000ZC (1.8V, Zero Power) Industrial Devices

| Device   | Part Number     | Macrocells | Voltage | t <sub>PD</sub> | Package | Pin/Ball Count | I/O | Grade |
|----------|-----------------|------------|---------|-----------------|---------|----------------|-----|-------|
| LC4032ZC | LC4032ZC-5M56I  | 32         | 1.8     | 5               | csBGA   | 56             | 32  | I     |
|          | LC4032ZC-75M56I | 32         | 1.8     | 7.5             | csBGA   | 56             | 32  | I     |
|          | LC4032ZC-5T48I  | 32         | 1.8     | 5               | TQFP    | 48             | 32  | I     |
|          | LC4032ZC-75T48I | 32         | 1.8     | 7.5             | TQFP    | 48             | 32  | I     |

## ispMACH 4000C (1.8V) Commercial Devices (Cont.)

| Device  | Part Number                   | Macrocells | Voltage | t <sub>PD</sub> | Package | Pin/Ball Count | I/O | Grade |
|---------|-------------------------------|------------|---------|-----------------|---------|----------------|-----|-------|
| LC4128C | LC4128C-27T128C               | 128        | 1.8     | 2.7             | TQFP    | 128            | 92  | C     |
|         | LC4128C-5T128C                | 128        | 1.8     | 5               | TQFP    | 128            | 92  | C     |
|         | LC4128C-75T128C               | 128        | 1.8     | 7.5             | TQFP    | 128            | 92  | C     |
|         | LC4128C-27T100C               | 128        | 1.8     | 2.7             | TQFP    | 100            | 64  | C     |
|         | LC4128C-5T100C                | 128        | 1.8     | 5               | TQFP    | 100            | 64  | C     |
|         | LC4128C-75T100C               | 128        | 1.8     | 7.5             | TQFP    | 100            | 64  | C     |
| LC4256C | LC4256C-3FT256AC              | 256        | 1.8     | 3               | ftBGA   | 256            | 128 | C     |
|         | LC4256C-5FT256AC              | 256        | 1.8     | 5               | ftBGA   | 256            | 128 | C     |
|         | LC4256C-75FT256AC             | 256        | 1.8     | 7.5             | ftBGA   | 256            | 128 | C     |
|         | LC4256C-3FT256BC              | 256        | 1.8     | 3               | ftBGA   | 256            | 160 | C     |
|         | LC4256C-5FT256BC              | 256        | 1.8     | 5               | ftBGA   | 256            | 160 | C     |
|         | LC4256C-75FT256BC             | 256        | 1.8     | 7.5             | ftBGA   | 256            | 160 | C     |
|         | LC4256C-3F256AC <sup>1</sup>  | 256        | 1.8     | 3               | fpBGA   | 256            | 128 | C     |
|         | LC4256C-5F256AC <sup>1</sup>  | 256        | 1.8     | 5               | fpBGA   | 256            | 128 | C     |
|         | LC4256C-75F256AC <sup>1</sup> | 256        | 1.8     | 7.5             | fpBGA   | 256            | 128 | C     |
|         | LC4256C-3F256BC <sup>1</sup>  | 256        | 1.8     | 3               | fpBGA   | 256            | 160 | C     |
|         | LC4256C-5F256BC <sup>1</sup>  | 256        | 1.8     | 5               | fpBGA   | 256            | 160 | C     |
|         | LC4256C-75F256BC <sup>1</sup> | 256        | 1.8     | 7.5             | fpBGA   | 256            | 160 | C     |
|         | LC4256C-3T176C                | 256        | 1.8     | 3               | TQFP    | 176            | 128 | C     |
|         | LC4256C-5T176C                | 256        | 1.8     | 5               | TQFP    | 176            | 128 | C     |
|         | LC4256C-75T176C               | 256        | 1.8     | 7.5             | TQFP    | 176            | 128 | C     |
|         | LC4256C-3T100C                | 256        | 1.8     | 3               | TQFP    | 100            | 64  | C     |
|         | LC4256C-5T100C                | 256        | 1.8     | 5               | TQFP    | 100            | 64  | C     |
|         | LC4256C-75T100C               | 256        | 1.8     | 7.5             | TQFP    | 100            | 64  | C     |
| LC4384C | LC4384C-35FT256C              | 384        | 1.8     | 3.5             | ftBGA   | 256            | 192 | C     |
|         | LC4384C-5FT256C               | 384        | 1.8     | 5               | ftBGA   | 256            | 192 | C     |
|         | LC4384C-75FT256C              | 384        | 1.8     | 7.5             | ftBGA   | 256            | 192 | C     |
|         | LC4384C-35F256C <sup>1</sup>  | 384        | 1.8     | 3.5             | fpBGA   | 256            | 192 | C     |
|         | LC4384C-5F256C <sup>1</sup>   | 384        | 1.8     | 5               | fpBGA   | 256            | 192 | C     |
|         | LC4384C-75F256C <sup>1</sup>  | 384        | 1.8     | 7.5             | fpBGA   | 256            | 192 | C     |
|         | LC4384C-35T176C               | 384        | 1.8     | 3.5             | TQFP    | 176            | 128 | C     |
|         | LC4384C-5T176C                | 384        | 1.8     | 5               | TQFP    | 176            | 128 | C     |
|         | LC4384C-75T176C               | 384        | 1.8     | 7.5             | TQFP    | 176            | 128 | C     |
| LC4512C | LC4512C-35FT256C              | 512        | 1.8     | 3.5             | ftBGA   | 256            | 208 | C     |
|         | LC4512C-5FT256C               | 512        | 1.8     | 5               | ftBGA   | 256            | 208 | C     |
|         | LC4512C-75FT256C              | 512        | 1.8     | 7.5             | ftBGA   | 256            | 208 | C     |
|         | LC4512C-35F256C <sup>1</sup>  | 512        | 1.8     | 3.5             | fpBGA   | 256            | 208 | C     |
|         | LC4512C-5F256C <sup>1</sup>   | 512        | 1.8     | 5               | fpBGA   | 256            | 208 | C     |
|         | LC4512C-75F256C <sup>1</sup>  | 512        | 1.8     | 7.5             | fpBGA   | 256            | 208 | C     |
|         | LC4512C-35T176C               | 512        | 1.8     | 3.5             | TQFP    | 176            | 128 | C     |
|         | LC4512C-5T176C                | 512        | 1.8     | 5               | TQFP    | 176            | 128 | C     |
|         | LC4512C-75T176C               | 512        | 1.8     | 7.5             | TQFP    | 176            | 128 | C     |

1. Use ftBGA package. fpBGA package devices have been discontinued via PCN#14A-07.

**ispMACH 4000C (1.8V) Lead-Free Commercial Devices (Cont.)**

| Device  | Part Number                   | Macrocells | Voltage | t <sub>PD</sub> | Package         | Pin/Ball Count | I/O | Grade |
|---------|-------------------------------|------------|---------|-----------------|-----------------|----------------|-----|-------|
| LC4512C | LC4512C-35FTN256C             | 512        | 1.8     | 3.5             | Lead-free ftBGA | 256            | 208 | C     |
|         | LC4512C-5FTN256C              | 512        | 1.8     | 5               | Lead-free ftBGA | 256            | 208 | C     |
|         | LC4512C-75FTN256C             | 512        | 1.8     | 7.5             | Lead-free ftBGA | 256            | 208 | C     |
|         | LC4512C-35FN256C <sup>1</sup> | 512        | 1.8     | 3.5             | Lead-free fpBGA | 256            | 208 | C     |
|         | LC4512C-5FN256C <sup>1</sup>  | 512        | 1.8     | 5               | Lead-free fpBGA | 256            | 208 | C     |
|         | LC4512C-75FN256C <sup>1</sup> | 512        | 1.8     | 7.5             | Lead-free fpBGA | 256            | 208 | C     |
|         | LC4512C-35TN176C              | 512        | 1.8     | 3.5             | Lead-free TQFP  | 176            | 128 | C     |
|         | LC4512C-5TN176C               | 512        | 1.8     | 5               | Lead-free TQFP  | 176            | 128 | C     |
|         | LC4512C-75TN176C              | 512        | 1.8     | 7.5             | Lead-free TQFP  | 176            | 128 | C     |

1. Use ftBGA package. fpBGA package devices have been discontinued via PCN#14A-07.

**ispMACH 4000C (1.8V) Lead-Free Industrial Devices**

| Device  | Part Number      | Macrocells | Voltage | t <sub>PD</sub> | Package        | Pin/Ball Count | I/O | Grade |
|---------|------------------|------------|---------|-----------------|----------------|----------------|-----|-------|
| LC4032C | LC4032C-5TN48I   | 32         | 1.8     | 5               | Lead-free TQFP | 48             | 32  | I     |
|         | LC4032C-75TN48I  | 32         | 1.8     | 7.5             | Lead-free TQFP | 48             | 32  | I     |
|         | LC4032C-10TN48I  | 32         | 1.8     | 10              | Lead-free TQFP | 48             | 32  | I     |
|         | LC4032C-5TN44I   | 32         | 1.8     | 5               | Lead-free TQFP | 44             | 30  | I     |
|         | LC4032C-75TN44I  | 32         | 1.8     | 7.5             | Lead-free TQFP | 44             | 30  | I     |
|         | LC4032C-10TN44I  | 32         | 1.8     | 10              | Lead-free TQFP | 44             | 30  | I     |
| LC4064C | LC4064C-5TN100I  | 64         | 1.8     | 5               | Lead-free TQFP | 100            | 64  | I     |
|         | LC4064C-75TN100I | 64         | 1.8     | 7.5             | Lead-free TQFP | 100            | 64  | I     |
|         | LC4064C-10TN100I | 64         | 1.8     | 10              | Lead-free TQFP | 100            | 64  | I     |
|         | LC4064C-5TN48I   | 64         | 1.8     | 5               | Lead-free TQFP | 48             | 32  | I     |
|         | LC4064C-75TN48I  | 64         | 1.8     | 7.5             | Lead-free TQFP | 48             | 32  | I     |
|         | LC4064C-10TN48I  | 64         | 1.8     | 10              | Lead-free TQFP | 48             | 32  | I     |
|         | LC4064C-5TN44I   | 64         | 1.8     | 5               | Lead-free TQFP | 44             | 30  | I     |
|         | LC4064C-75TN44I  | 64         | 1.8     | 5               | Lead-free TQFP | 44             | 30  | I     |
|         | LC4064C-10TN44I  | 64         | 1.8     | 10              | Lead-free TQFP | 44             | 30  | I     |
| LC4128C | LC4128C-5TN128I  | 128        | 1.8     | 5               | Lead-free TQFP | 128            | 92  | I     |
|         | LC4128C-75TN128I | 128        | 1.8     | 7.5             | Lead-free TQFP | 128            | 92  | I     |
|         | LC4128C-10TN128I | 128        | 1.8     | 10              | Lead-free TQFP | 128            | 92  | I     |
|         | LC4128C-5TN100I  | 128        | 1.8     | 5               | Lead-free TQFP | 100            | 64  | I     |
|         | LC4128C-75TN100I | 128        | 1.8     | 7.5             | Lead-free TQFP | 100            | 64  | I     |
|         | LC4128C-10TN100I | 128        | 1.8     | 10              | Lead-free TQFP | 100            | 64  | I     |

**ispMACH 4000B (2.5V) Lead-Free Commercial Devices (Cont.)**

| Device  | Part Number                   | Macrocells | Voltage | t <sub>PD</sub> | Package         | Pin/Ball Count | I/O | Grade |
|---------|-------------------------------|------------|---------|-----------------|-----------------|----------------|-----|-------|
| LC4384B | LC4384B-35FTN256C             | 384        | 2.5     | 3.5             | Lead-Free ftBGA | 256            | 192 | C     |
|         | LC4384B-5FTN256C              | 384        | 2.5     | 5               | Lead-Free ftBGA | 256            | 192 | C     |
|         | LC4384B-75FTN256C             | 384        | 2.5     | 7.5             | Lead-Free ftBGA | 256            | 192 | C     |
|         | LC4384B-35FN256C <sup>1</sup> | 384        | 2.5     | 3.5             | Lead-Free fpBGA | 256            | 192 | C     |
|         | LC4384B-5FN256C <sup>1</sup>  | 384        | 2.5     | 5               | Lead-Free fpBGA | 256            | 192 | C     |
|         | LC4384B-75FN256C <sup>1</sup> | 384        | 2.5     | 7.5             | Lead-Free fpBGA | 256            | 192 | C     |
|         | LC4384B-35TN176C              | 384        | 2.5     | 3.5             | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4384B-5TN176C               | 384        | 2.5     | 5               | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4384B-75TN176C              | 384        | 2.5     | 7.5             | Lead-Free TQFP  | 176            | 128 | C     |
| LC4512B | LC4512B-35FTN256C             | 512        | 2.5     | 3.5             | Lead-Free ftBGA | 256            | 208 | C     |
|         | LC4512B-5FTN256C              | 512        | 2.5     | 5               | Lead-Free ftBGA | 256            | 208 | C     |
|         | LC4512B-75FTN256C             | 512        | 2.5     | 7.5             | Lead-Free ftBGA | 256            | 208 | C     |
|         | LC4512B-35FN256C <sup>1</sup> | 512        | 2.5     | 3.5             | Lead-Free fpBGA | 256            | 208 | C     |
|         | LC4512B-5FN256C <sup>1</sup>  | 512        | 2.5     | 5               | Lead-Free fpBGA | 256            | 208 | C     |
|         | LC4512B-75FN256C <sup>1</sup> | 512        | 2.5     | 7.5             | Lead-Free fpBGA | 256            | 208 | C     |
|         | LC4512B-35TN176C              | 512        | 2.5     | 3.5             | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4512B-5TN176C               | 512        | 2.5     | 5               | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4512B-75TN176C              | 512        | 2.5     | 7.5             | Lead-Free TQFP  | 176            | 128 | C     |

1. Use ftBGA package. fpBGA package devices have been discontinued via PCN#14A-07.

**ispMACH 4000B (2.5V) Lead-Free Industrial Devices**

| Device  | Part Number      | Macrocells | Voltage | t <sub>PD</sub> | Package        | Pin/Ball Count | I/O | Grade |
|---------|------------------|------------|---------|-----------------|----------------|----------------|-----|-------|
| LC4032B | LC4032B-5TN48I   | 32         | 2.5     | 5               | Lead-Free TQFP | 48             | 32  | I     |
|         | LC4032B-75TN48I  | 32         | 2.5     | 7.5             | Lead-Free TQFP | 48             | 32  | I     |
|         | LC4032B-10TN48I  | 32         | 2.5     | 10              | Lead-Free TQFP | 48             | 32  | I     |
|         | LC4032B-5TN44I   | 32         | 2.5     | 5               | Lead-Free TQFP | 44             | 30  | I     |
|         | LC4032B-75TN44I  | 32         | 2.5     | 7.5             | Lead-Free TQFP | 44             | 30  | I     |
|         | LC4032B-10TN44I  | 32         | 2.5     | 10              | Lead-Free TQFP | 44             | 30  | I     |
| LC4064B | LC4064B-5TN100I  | 64         | 2.5     | 5               | Lead-Free TQFP | 100            | 64  | I     |
|         | LC4064B-75TN100I | 64         | 2.5     | 7.5             | Lead-Free TQFP | 100            | 64  | I     |
|         | LC4064B-10TN100I | 64         | 2.5     | 10              | Lead-Free TQFP | 100            | 64  | I     |
|         | LC4064B-5TN48I   | 64         | 2.5     | 5               | Lead-Free TQFP | 48             | 32  | I     |
|         | LC4064B-75TN48I  | 64         | 2.5     | 7.5             | Lead-Free TQFP | 48             | 32  | I     |
|         | LC4064B-10TN48I  | 64         | 2.5     | 10              | Lead-Free TQFP | 48             | 32  | I     |
|         | LC4064B-5TN44I   | 64         | 2.5     | 5               | Lead-Free TQFP | 44             | 30  | I     |
|         | LC4064B-75TN44I  | 64         | 2.5     | 7.5             | Lead-Free TQFP | 44             | 30  | I     |
|         | LC4064B-10TN44I  | 64         | 2.5     | 10              | Lead-Free TQFP | 44             | 30  | I     |

**ispMACH 4000V (3.3V) Lead-Free Extended Temperature Devices**

| Device  | Part Number      | Macrocells | Voltage | t <sub>PD</sub> | Package        | Pin/Ball Count | I/O | Grade |
|---------|------------------|------------|---------|-----------------|----------------|----------------|-----|-------|
| LC4032V | LC4032V-75TN48E  | 32         | 3.3     | 7.5             | Lead-free TQFP | 48             | 32  | E     |
|         | LC4032V-75TN44E  | 32         | 3.3     | 7.5             | Lead-free TQFP | 44             | 30  | E     |
| LC4064V | LC4064V-75TN100E | 64         | 3.3     | 7.5             | Lead-free TQFP | 100            | 64  | E     |
|         | LC4064V-75TN48E  | 64         | 3.3     | 7.5             | Lead-free TQFP | 48             | 32  | E     |
|         | LC4064V-75TN44E  | 64         | 3.3     | 7.5             | Lead-free TQFP | 44             | 30  | E     |
| LC4128V | LC4128V-75TN144E | 128        | 3.3     | 7.5             | Lead-free TQFP | 144            | 96  | E     |
|         | LC4128V-75TN128E | 128        | 3.3     | 7.5             | Lead-free TQFP | 128            | 92  | E     |
|         | LC4128V-75TN100E | 128        | 3.3     | 7.5             | Lead-free TQFP | 100            | 64  | E     |
| LC4256V | LC4256V-75TN176E | 256        | 3.3     | 7.5             | Lead-free TQFP | 176            | 128 | E     |
|         | LC4256V-75TN144E | 256        | 3.3     | 7.5             | Lead-free TQFP | 144            | 96  | E     |
|         | LC4256V-75TN100E | 256        | 3.3     | 7.5             | Lead-free TQFP | 100            | 64  | E     |

**For Further Information**

In addition to this data sheet, the following technical notes may be helpful when designing with the ispMACH 4000V/B/C/Z family:

- TN1004, [ispMACH 4000 Timing Model Design and Usage Guidelines](#)
- TN1005, [Power Estimation in ispMACH 4000V/B/C/Z Devices](#)

**Revision History**

| Date          | Version | Change Summary                                                                                                                                                                                              |
|---------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| —             | —       | Previous Lattice releases.                                                                                                                                                                                  |
| July 2003     | 17z     | Changed device status for LC4064ZC and LC4128ZC to production release and updated/added AC and DC parameters as well as ordering part numbers for LC4064ZC and LC4128ZC devices.                            |
|               |         | Improved leakage current specifications for ispMACH 4000Z. For ispMACH 4000V/B/C IIL, IIH condition now includes 0V and 3.6V end points ( $0 \leq V_{IN} \leq 3.6V$ ).                                      |
|               |         | Added 132-ball chip scale BGA power supply and NC connections.                                                                                                                                              |
|               |         | Added 132-ball chip scale BGA logic signal connections for LC4064ZC, LC4128ZC and LC4256ZC devices.                                                                                                         |
|               |         | Added lead-free package designators.                                                                                                                                                                        |
| October 2003  | 18z     | Hot socketing characteristics footnote 1. has been enhanced; Insensitive to sequence of VCC or VCCO. However, assumes monotonic rise/fall rates for Vcc and Vcco, provided $(V_{IN} - V_{CCO}) \leq 3.6V$ . |
|               |         | Improved LC4064ZC t <sub>S</sub> to 2.5ns, t <sub>ST</sub> to 2.7ns and f <sub>MAX</sub> (Ext.) to 175MHz, LC4128ZC t <sub>CO</sub> to 3.5ns and f <sub>MAX</sub> (Ext.) to 161MHz (version v.2.1).         |
|               |         | Improved associated internal timing numbers and timing adders (version v.2.1).                                                                                                                              |
|               |         | Added ispMACH 4000V/B/C/Z ORP Reference Tables.                                                                                                                                                             |
|               |         | Enhanced ORP information in device pinout tables consistent with the ORP Combinations for I/O Blocks tables (table 6, 7, 8 and 9 in page 9-11).                                                             |
|               |         | Corrected GLB/MC/Pad information in the 256-fpBGA pinouts for the LC4256V/B/C 160-I/O version.                                                                                                              |
|               |         | Added the ispMACH 4000 Family Speed Grade Offering table.                                                                                                                                                   |
|               |         | Added the ispMACH 4128ZC Industrial and Automotive Device OPNs                                                                                                                                              |
| December 2003 | 19z     | Added the ispMACH 4032ZC and 4064ZC Industrial and Automotive Device OPNs                                                                                                                                   |