


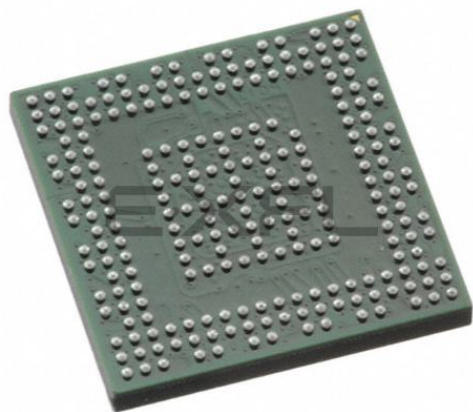

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Obsolete                                                                                                                                    |
| Core Processor             | XCore                                                                                                                                       |
| Core Size                  | 32-Bit 12-Core                                                                                                                              |
| Speed                      | 2000MIPS                                                                                                                                    |
| Connectivity               | USB                                                                                                                                         |
| Peripherals                | -                                                                                                                                           |
| Number of I/O              | 104                                                                                                                                         |
| Program Memory Size        | 2MB (2M x 8)                                                                                                                                |
| Program Memory Type        | FLASH                                                                                                                                       |
| EEPROM Size                | -                                                                                                                                           |
| RAM Size                   | 256K x 8                                                                                                                                    |
| Voltage - Supply (Vcc/Vdd) | 0.95V ~ 3.6V                                                                                                                                |
| Data Converters            | -                                                                                                                                           |
| Oscillator Type            | External                                                                                                                                    |
| Operating Temperature      | 0°C ~ 70°C (TA)                                                                                                                             |
| Mounting Type              | Surface Mount                                                                                                                               |
| Package / Case             | 236-LFBGA                                                                                                                                   |
| Supplier Device Package    | 236-FBGA (10x10)                                                                                                                            |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/xmos/xuf212-256-fb236-c20">https://www.e-xfl.com/product-detail/xmos/xuf212-256-fb236-c20</a> |



## xCORE-200 XU/XUF USB

A new generation of high performance USB-enabled multicore microcontrollers



### FEATURES

**Multicore compute** with up to 1000MIPS (8 core) and 4000MIPS (32 core) performance.

**Hardware Response™ ports** provide flexible, high-performance configurable I/O capability.

**Integrated USB 2.0 PHY** for high- and full-speed host and device operation.

**Up to 1024KB on-board memory** for demanding applications.

**Embedded flash option** – up to 2048KB on-board.

**Free software library support** to implement your exact mix of peripherals.

**Easy to use** with our free xTIMEcomposer Studio™ tools.

The xCORE-200™ USB family of devices (XU and XUF) extends the popular xCORE™ architecture to provide increased performance, memory footprint and flexibility for the most demanding applications.

xCORE-200 XU/XUF integrates up to two USB 2.0 PHYs (host or device) and implements a dual-issue processor pipeline to boost peak compute performance up to 4000MIPS and 2000MMACS.


Up to 1024KB on-chip SRAM memory is available. Each member of the xCORE-200 family has an embedded flash option for applications.

The flexible Hardware Response ports are bonded out to I/O pins as 1bit, 4bit, 8bit, 16bit and 32bit ports, and provide support for serialized and buffered data transfer. Up to 176 general purpose I/O are available for user configuration.

xCORE-200 is supported by the advanced XMOS xTIMEcomposer Studio™ development environment, and a wide range of microcontroller and application libraries are freely downloadable from [www.xmos.com](http://www.xmos.com)



Unlike conventional microcontrollers, xCORE-200 multicore microcontrollers execute multiple real-time tasks simultaneously. The xCORE-200 XU/XUF family includes devices with 8, 10, 12, 16, 24 and 32 cores. Each logical core can execute computational code, advanced DSP code, control software (including logic decisions and executing a state machine) or drive and sample data on the I/O ports.

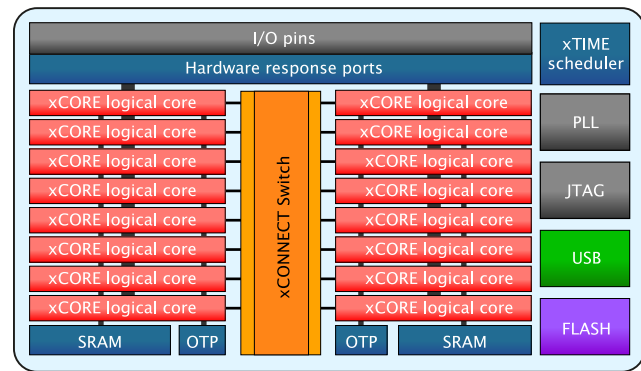

xCORE-200™ XUF216

The devices include xTIME scheduling hardware that performs functions similar to those of an RTOS, and hardware that connects the cores directly to I/O pins, ensuring fast processing and extremely low latency. The xTIME scheduler eliminates the use of interrupts and ensures deterministic operation.

The on-chip SRAM can be accessed in a single cycle, reducing shared memory requirements by passing data directly between tasks executing on logical cores. Similarly the xCONNECT switch is a high-speed network allowing all cores to communicate with each other.

xCORE-200 multicore microcontrollers include an area of one-time programmable memory with AES support to allow the implementation of secure boot functionality.

## ORDERING INFORMATION

xCORE-200 XU/XUF devices are available in a range of resource densities, packages, performance and temperature grades depending on your needs.

| Family        | Cores | RAM (KB) | Flash (KB) | USB PHYs | Package [GPIOs]      |                       |                        |                         |
|---------------|-------|----------|------------|----------|----------------------|-----------------------|------------------------|-------------------------|
|               |       |          |            |          | TQ64                 | TQ128                 | FB236                  | FB374                   |
| <b>XU208</b>  | 8     | 128      | -          | 1        | XU208-128-TQ64 [33]  | XU208-128-TQ128 [33]  |                        |                         |
|               |       | 256      |            |          | XU208-256-TQ64 [33]  | XU208-256-TQ128 [33]  |                        |                         |
| <b>XU210</b>  | 10    | 256      | -          | 1        |                      | XU210-256-TQ128 [81]  | XU210-256-FB236 [128]  |                         |
|               |       | 512      |            |          |                      | XU210-512-TQ128 [81]  | XU210-512-FB236 [128]  |                         |
| <b>XU212</b>  | 12    | 256      | -          | 1        |                      | XU212-256-TQ128 [81]  | XU212-256-FB236 [128]  |                         |
|               |       | 512      |            |          |                      | XU212-512-TQ128 [81]  | XU212-512-FB236 [128]  |                         |
| <b>XU216</b>  | 16    | 256      | -          | 1        |                      | XU216-256-TQ128 [81]  | XU216-256-FB236 [128]  |                         |
|               |       | 512      |            |          |                      | XU216-512-TQ128 [81]  | XU216-512-FB236 [128]  |                         |
| <b>XU224</b>  | 24    | 512      | -          | 2        |                      |                       |                        | XU224-512-FB374 [176]   |
|               |       | 1024     |            |          |                      |                       |                        | XU224-1024-FB374 [176]  |
| <b>XU232</b>  | 32    | 512      | -          | 2        |                      |                       |                        | XU232-512-FB374 [176]   |
|               |       | 1024     |            |          |                      |                       |                        | XU232-1024-FB374 [176]  |
| <b>XUF208</b> | 8     | 128      | 1024       | 1        | XUF208-128-TQ64 [33] | XUF208-128-TQ128 [33] |                        |                         |
|               |       | 256      |            |          | XUF208-256-TQ64 [33] | XUF208-256-TQ128 [33] |                        |                         |
| <b>XUF210</b> | 10    | 256      | 2048       | 1        |                      | XUF210-256-TQ128 [81] | XUF210-256-FB236 [128] |                         |
|               |       | 512      |            |          |                      | XUF210-512-TQ128 [81] | XUF210-512-FB236 [128] |                         |
| <b>XUF212</b> | 12    | 256      | 2048       | 1        |                      | XUF212-256-TQ128 [81] | XUF212-256-FB236 [128] |                         |
|               |       | 512      |            |          |                      | XUF212-512-TQ128 [81] | XUF212-512-FB236 [128] |                         |
| <b>XUF216</b> | 16    | 256      | 2048       | 1        |                      | XUF216-256-TQ128 [81] | XUF216-256-FB236 [128] |                         |
|               |       | 512      |            |          |                      | XUF216-512-TQ128 [81] | XUF216-512-FB236 [128] |                         |
| <b>XUF224</b> | 24    | 512      | 2048       | 2        |                      |                       |                        | XUF224-512-FB374 [176]  |
|               |       | 1024     |            |          |                      |                       |                        | XUF224-1024-FB374 [176] |
| <b>XUF232</b> | 32    | 512      | 2048       | 2        |                      |                       |                        | XUF232-512-FB374 [176]  |
|               |       | 1024     |            |          |                      |                       |                        | XUF232-1024-FB374 [176] |

For pricing and availability, please visit the XMOS website for a list of our distributors.

[www.xmos.com/distributors](http://www.xmos.com/distributors).