



Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                          |
| Core Processor             | dsPIC                                                                                                                                                                           |
| Core Size                  | 16-Bit                                                                                                                                                                          |
| Speed                      | 70 MIPS                                                                                                                                                                         |
| Connectivity               | I <sup>2</sup> C, IrDA, LINbus, QEI, SPI, UART/USART                                                                                                                            |
| Peripherals                | Brown-out Detect/Reset, DMA, Motor Control PWM, POR, PWM, WDT                                                                                                                   |
| Number of I/O              | 35                                                                                                                                                                              |
| Program Memory Size        | 64KB (22K x 24)                                                                                                                                                                 |
| Program Memory Type        | FLASH                                                                                                                                                                           |
| EEPROM Size                | -                                                                                                                                                                               |
| RAM Size                   | 4K x 16                                                                                                                                                                         |
| Voltage - Supply (Vcc/Vdd) | 3V ~ 3.6V                                                                                                                                                                       |
| Data Converters            | A/D 9x10b/12b                                                                                                                                                                   |
| Oscillator Type            | Internal                                                                                                                                                                        |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                               |
| Mounting Type              | Surface Mount                                                                                                                                                                   |
| Package / Case             | 44-TQFP                                                                                                                                                                         |
| Supplier Device Package    | 44-TQFP (10x10)                                                                                                                                                                 |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep64mc204t-i-pt">https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep64mc204t-i-pt</a> |

**TABLE 4-5: INTERRUPT CONTROLLER REGISTER MAP FOR dsPIC33EPXXXGP50X DEVICES ONLY (CONTINUED)**

| File Name | Addr. | Bit 15 | Bit 14 | Bit 13 | Bit 12  | Bit 11   | Bit 10 | Bit 9 | Bit 8 | Bit 7       | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2  | Bit 1   | Bit 0  | All Resets |
|-----------|-------|--------|--------|--------|---------|----------|--------|-------|-------|-------------|---------|---------|---------|---------|--------|---------|--------|------------|
| INTCON1   | 08C0  | NSTDIS | OVAERR | OVBERR | COVAERR | COVBERR  | OVATE  | OVBT  | COVTE | SFTACERR    | DIV0ERR | DMACERR | MATHERR | ADDRERR | STKERR | OSCFAIL | —      | 0000       |
| INTCON2   | 08C2  | GIE    | DISI   | SWTRAP | —       | —        | —      | —     | —     | —           | —       | —       | —       | —       | INT2EP | INT1EP  | INT0EP | 8000       |
| INTCON3   | 08C4  | —      | —      | —      | —       | —        | —      | —     | —     | —           | —       | DAE     | DOOVR   | —       | —      | —       | —      | 0000       |
| INTCON4   | 08C6  | —      | —      | —      | —       | —        | —      | —     | —     | —           | —       | —       | —       | —       | —      | —       | SGHT   | 0000       |
| INTTREG   | 08C8  | —      | —      | —      | —       | ILR<3:0> |        |       |       | VECNUM<7:0> |         |         |         |         |        |         |        | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-21: ECAN1 REGISTER MAP WHEN WIN (C1CTRL1<0>) = 0 OR 1 FOR dsPIC33EPXXXMC/GP50X DEVICES ONLY**

| File Name  | Addr. | Bit 15       | Bit 14  | Bit 13      | Bit 12      | Bit 11      | Bit 10      | Bit 9       | Bit 8  | Bit 7        | Bit 6      | Bit 5       | Bit 4      | Bit 3      | Bit 2      | Bit 1      | Bit 0  | All Resets |
|------------|-------|--------------|---------|-------------|-------------|-------------|-------------|-------------|--------|--------------|------------|-------------|------------|------------|------------|------------|--------|------------|
| C1CTRL1    | 0400  | —            | —       | CSIDL       | ABAT        | CANCKS      | REQOP<2:0>  |             |        | OPMODE<2:0>  |            |             | —          | CANCAP     | —          | —          | WIN    | 0480       |
| C1CTRL2    | 0402  | —            | —       | —           | —           | —           | —           | —           | —      | —            | —          | —           | DNCNT<4:0> |            |            |            |        | 0000       |
| C1VEC      | 0404  | —            | —       | —           | FILHIT<4:0> |             |             |             |        | —            | ICODE<6:0> |             |            |            |            |            |        | 0040       |
| C1FCTRL    | 0406  | DMABS<2:0>   |         |             | —           | —           | —           | —           | —      | —            | —          | —           | FSA<4:0>   |            |            |            |        | 0000       |
| C1FIFO     | 0408  | —            | —       | FBP<5:0>    |             |             |             |             |        | —            | —          | FNRB<5:0>   |            |            |            |            |        | 0000       |
| C1INTF     | 040A  | —            | —       | TXBO        | TXBP        | RXBP        | TXWAR       | RXWAR       | EWARN  | IVRIF        | WAKIF      | ERRIF       | —          | FIFOIF     | RBOVIF     | RBIF       | TBIF   | 0000       |
| C1INTE     | 040C  | —            | —       | —           | —           | —           | —           | —           | —      | IVRIE        | WAKIE      | ERRIE       | —          | FIFOIE     | RBOVIE     | RBIE       | TBIE   | 0000       |
| C1EC       | 040E  | TERRCNT<7:0> |         |             |             |             |             |             |        | RERRCNT<7:0> |            |             |            |            |            |            |        | 0000       |
| C1CFG1     | 0410  | —            | —       | —           | —           | —           | —           | —           | —      | SJW<1:0>     |            | BRP<5:0>    |            |            |            |            |        | 0000       |
| C1CFG2     | 0412  | —            | WAKFIL  | —           | —           | —           | SEG2PH<2:0> |             |        | SEG2PHTS     | SAM        | SEG1PH<2:0> |            |            | PRSEG<2:0> |            |        | 0000       |
| C1FEN1     | 0414  | FLTEN15      | FLTEN14 | FLTEN13     | FLTEN12     | FLTEN11     | FLTEN10     | FLTEN9      | FLTEN8 | FLTEN7       | FLTEN6     | FLTEN5      | FLTEN4     | FLTEN3     | FLTEN2     | FLTEN1     | FLTEN0 | FFFF       |
| C1FMSKSEL1 | 0418  | F7MSK<1:0>   |         | F6MSK<1:0>  |             | F5MSK<1:0>  |             | F4MSK<1:0>  |        | F3MSK<1:0>   |            | F2MSK<1:0>  |            | F1MSK<1:0> |            | F0MSK<1:0> |        | 0000       |
| C1FMSKSEL2 | 041A  | F15MSK<1:0>  |         | F14MSK<1:0> |             | F13MSK<1:0> |             | F12MSK<1:0> |        | F11MSK<1:0>  |            | F10MSK<1:0> |            | F9MSK<1:0> |            | F8MSK<1:0> |        | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-22: ECAN1 REGISTER MAP WHEN WIN (C1CTRL1<0>) = 0 FOR dsPIC33EPXXXMC/GP50X DEVICES ONLY**

| File Name | Addr      | Bit 15                      | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9       | Bit 8   | Bit 7   | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2   | Bit 1       | Bit 0   | All Resets |
|-----------|-----------|-----------------------------|---------|---------|---------|---------|---------|-------------|---------|---------|---------|---------|---------|---------|---------|-------------|---------|------------|
|           | 0400-041E | See definition when WIN = x |         |         |         |         |         |             |         |         |         |         |         |         |         |             |         |            |
| C1RXFUL1  | 0420      | RXFUL15                     | RXFUL14 | RXFUL13 | RXFUL12 | RXFUL11 | RXFUL10 | RXFUL9      | RXFUL8  | RXFUL7  | RXFUL6  | RXFUL5  | RXFUL4  | RXFUL3  | RXFUL2  | RXFUL1      | RXFUL0  | 0000       |
| C1RXFUL2  | 0422      | RXFUL31                     | RXFUL30 | RXFUL29 | RXFUL28 | RXFUL27 | RXFUL26 | RXFUL25     | RXFUL24 | RXFUL23 | RXFUL22 | RXFUL21 | RXFUL20 | RXFUL19 | RXFUL18 | RXFUL17     | RXFUL16 | 0000       |
| C1RXOVF1  | 0428      | RXOVF15                     | RXOVF14 | RXOVF13 | RXOVF12 | RXOVF11 | RXOVF10 | RXOVF9      | RXOVF8  | RXOVF7  | RXOVF6  | RXOVF5  | RXOVF4  | RXOVF3  | RXOVF2  | RXOVF1      | RXOVF0  | 0000       |
| C1RXOVF2  | 042A      | RXOVF31                     | RXOVF30 | RXOVF29 | RXOVF28 | RXOVF27 | RXOVF26 | RXOVF25     | RXOVF24 | RXOVF23 | RXOVF22 | RXOVF21 | RXOVF20 | RXOVF19 | RXOVF18 | RXOVF17     | RXOVF16 | 0000       |
| C1TR01CON | 0430      | TXEN1                       | TXABT1  | TXLARB1 | TXERR1  | TXREQ1  | RTREN1  | TX1PRI<1:0> |         | TXEN0   | TXABAT0 | TXLARB0 | TXERR0  | TXREQ0  | RTREN0  | TX0PRI<1:0> |         | 0000       |
| C1TR23CON | 0432      | TXEN3                       | TXABT3  | TXLARB3 | TXERR3  | TXREQ3  | RTREN3  | TX3PRI<1:0> |         | TXEN2   | TXABAT2 | TXLARB2 | TXERR2  | TXREQ2  | RTREN2  | TX2PRI<1:0> |         | 0000       |
| C1TR45CON | 0434      | TXEN5                       | TXABT5  | TXLARB5 | TXERR5  | TXREQ5  | RTREN5  | TX5PRI<1:0> |         | TXEN4   | TXABAT4 | TXLARB4 | TXERR4  | TXREQ4  | RTREN4  | TX4PRI<1:0> |         | 0000       |
| C1TR67CON | 0436      | TXEN7                       | TXABT7  | TXLARB7 | TXERR7  | TXREQ7  | RTREN7  | TX7PRI<1:0> |         | TXEN6   | TXABAT6 | TXLARB6 | TXERR6  | TXREQ6  | RTREN6  | TX6PRI<1:0> |         | xxxx       |
| C1RXD     | 0440      | ECAN1 Receive Data Word     |         |         |         |         |         |             |         |         |         |         |         |         |         |             |         | xxxx       |
| C1TXD     | 0442      | ECAN1 Transmit Data Word    |         |         |         |         |         |             |         |         |         |         |         |         |         |             |         | xxxx       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-23: ECAN1 REGISTER MAP WHEN WIN (C1CTRL1<0>) = 1 FOR dsPIC33EPXXXMC/GP50X DEVICES ONLY**

| File Name  | Addr      | Bit 15                      | Bit 14 | Bit 13 | Bit 12 | Bit 11     | Bit 10 | Bit 9 | Bit 8 | Bit 7      | Bit 6 | Bit 5 | Bit 4 | Bit 3      | Bit 2 | Bit 1      | Bit 0 | All Resets |  |
|------------|-----------|-----------------------------|--------|--------|--------|------------|--------|-------|-------|------------|-------|-------|-------|------------|-------|------------|-------|------------|--|
|            | 0400-041E | See definition when WIN = x |        |        |        |            |        |       |       |            |       |       |       |            |       |            |       |            |  |
| C1BUFPNT1  | 0420      | F3BP<3:0>                   |        |        |        | F2BP<3:0>  |        |       |       | F1BP<3:0>  |       |       |       | F0BP<3:0>  |       |            |       | 0000       |  |
| C1BUFPNT2  | 0422      | F7BP<3:0>                   |        |        |        | F6BP<3:0>  |        |       |       | F5BP<3:0>  |       |       |       | F4BP<3:0>  |       |            |       | 0000       |  |
| C1BUFPNT3  | 0424      | F11BP<3:0>                  |        |        |        | F10BP<3:0> |        |       |       | F9BP<3:0>  |       |       |       | F8BP<3:0>  |       |            |       | 0000       |  |
| C1BUFPNT4  | 0426      | F15BP<3:0>                  |        |        |        | F14BP<3:0> |        |       |       | F13BP<3:0> |       |       |       | F12BP<3:0> |       |            |       | 0000       |  |
| C1RXM0SID  | 0430      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | MIDE       | —     | EID<17:16> |       | xxxx       |  |
| C1RXM0EID  | 0432      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXM1SID  | 0434      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | MIDE       | —     | EID<17:16> |       | xxxx       |  |
| C1RXM1EID  | 0436      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXM2SID  | 0438      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | MIDE       | —     | EID<17:16> |       | xxxx       |  |
| C1RXM2EID  | 043A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF0SID  | 0440      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF0EID  | 0442      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF1SID  | 0444      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF1EID  | 0446      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF2SID  | 0448      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF2EID  | 044A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF3SID  | 044C      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF3EID  | 044E      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF4SID  | 0450      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF4EID  | 0452      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF5SID  | 0454      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF5EID  | 0456      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF6SID  | 0458      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF6EID  | 045A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF7SID  | 045C      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF7EID  | 045E      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF8SID  | 0460      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF8EID  | 0462      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF9SID  | 0464      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF9EID  | 0466      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF10SID | 0468      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF10EID | 046A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF11SID | 046C      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

#### 4.5.3 MOVE AND ACCUMULATOR INSTRUCTIONS

Move instructions, which apply to dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X devices, and the DSP accumulator class of instructions, which apply to the dsPIC33EPXXXMC20X/50X and dsPIC33EPXXXGP50X devices, provide a greater degree of addressing flexibility than other instructions. In addition to the addressing modes supported by most MCU instructions, move and accumulator instructions also support Register Indirect with Register Offset Addressing mode, also referred to as Register Indexed mode.

|                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Note:</b> For the MOV instructions, the addressing mode specified in the instruction can differ for the source and destination EA. However, the 4-bit Wb (Register Offset) field is shared by both source and destination (but typically only used by one).</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

In summary, the following addressing modes are supported by move and accumulator instructions:

- Register Direct
- Register Indirect
- Register Indirect Post-modified
- Register Indirect Pre-modified
- Register Indirect with Register Offset (Indexed)
- Register Indirect with Literal Offset
- 8-Bit Literal
- 16-Bit Literal

|                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Note:</b> Not all instructions support all the addressing modes given above. Individual instructions may support different subsets of these addressing modes.</p> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### 4.5.4 MAC INSTRUCTIONS (dsPIC33EPXXXMC20X/50X and dsPIC33EPXXXGP50X DEVICES ONLY)

The dual source operand DSP instructions (CLR, ED, EDAC, MAC, MPY, MPY.N, MOVSA and MSC), also referred to as MAC instructions, use a simplified set of addressing modes to allow the user application to effectively manipulate the Data Pointers through register indirect tables.

The Two-Source Operand Prefetch registers must be members of the set: {W8, W9, W10, W11}. For data reads, W8 and W9 are always directed to the X RAGU, and W10 and W11 are always directed to the Y AGU. The Effective Addresses generated (before and after modification) must therefore, be valid addresses within X Data Space for W8 and W9, and Y Data Space for W10 and W11.

|                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Note:</b> Register Indirect with Register Offset Addressing mode is available only for W9 (in X space) and W11 (in Y space).</p> |
|----------------------------------------------------------------------------------------------------------------------------------------|

In summary, the following addressing modes are supported by the MAC class of instructions:

- Register Indirect
- Register Indirect Post-Modified by 2
- Register Indirect Post-Modified by 4
- Register Indirect Post-Modified by 6
- Register Indirect with Register Offset (Indexed)

#### 4.5.5 OTHER INSTRUCTIONS

Besides the addressing modes outlined previously, some instructions use literal constants of various sizes. For example, BRA (branch) instructions use 16-bit signed literals to specify the branch destination directly, whereas the DISI instruction uses a 14-bit unsigned literal field. In some instructions, such as ULNK, the source of an operand or result is implied by the opcode itself. Certain operations, such as a NOP, do not have any operands.

#### 4.6.3 MODULO ADDRESSING APPLICABILITY

Modulo Addressing can be applied to the Effective Address (EA) calculation associated with any W register. Address boundaries check for addresses equal to:

- The upper boundary addresses for incrementing buffers
- The lower boundary addresses for decrementing buffers

It is important to realize that the address boundaries check for addresses less than, or greater than, the upper (for incrementing buffers) and lower (for decrementing buffers) boundary addresses (not just equal to). Address changes can, therefore, jump beyond boundaries and still be adjusted correctly.

**Note:** The modulo corrected Effective Address is written back to the register only when Pre-Modify or Post-Modify Addressing mode is used to compute the Effective Address. When an address offset (such as  $[W7 + W2]$ ) is used, Modulo Addressing correction is performed but the contents of the register remain unchanged.

#### 4.7 Bit-Reversed Addressing (dsPIC33EPXXXMC20X/50X and dsPIC33EPXXXGP50X Devices Only)

Bit-Reversed Addressing mode is intended to simplify data reordering for radix-2 FFT algorithms. It is supported by the X AGU for data writes only.

The modifier, which can be a constant value or register contents, is regarded as having its bit order reversed. The address source and destination are kept in normal order. Thus, the only operand requiring reversal is the modifier.

#### 4.7.1 BIT-REVERSED ADDRESSING IMPLEMENTATION

Bit-Reversed Addressing mode is enabled when all these conditions are met:

- BWMx bits (W register selection) in the MODCON register are any value other than '1111' (the stack cannot be accessed using Bit-Reversed Addressing)
- The BREN bit is set in the XBREV register
- The addressing mode used is Register Indirect with Pre-Increment or Post-Increment

If the length of a bit-reversed buffer is  $M = 2^N$  bytes, the last 'N' bits of the data buffer start address must be zeros.

XBREV<14:0> is the Bit-Reversed Addressing modifier, or 'pivot point', which is typically a constant. In the case of an FFT computation, its value is equal to half of the FFT data buffer size.

**Note:** All bit-reversed EA calculations assume word-sized data (LSb of every EA is always clear). The XBREVx value is scaled accordingly to generate compatible (byte) addresses.

When enabled, Bit-Reversed Addressing is executed only for Register Indirect with Pre-Increment or Post-Increment Addressing and word-sized data writes. It does not function for any other addressing mode or for byte-sized data and normal addresses are generated instead. When Bit-Reversed Addressing is active, the W Address Pointer is always added to the address modifier (XBREVx) and the offset associated with the Register Indirect Addressing mode is ignored. In addition, as word-sized data is a requirement, the LSb of the EA is ignored (and always clear).

**Note:** Modulo Addressing and Bit-Reversed Addressing can be enabled simultaneously using the same W register, but Bit-Reversed Addressing operation will always take precedence for data writes when enabled.

If Bit-Reversed Addressing has already been enabled by setting the BREN (XBREV<15>) bit, a write to the XBREV register should not be immediately followed by an indirect read operation using the W register that has been designated as the Bit-Reversed Pointer.

**REGISTER 8-9: DSADRH: DMA MOST RECENT RAM HIGH ADDRESS REGISTER**

|        |     |     |     |       |     |     |     |
|--------|-----|-----|-----|-------|-----|-----|-----|
| U-0    | U-0 | U-0 | U-0 | U-0   | U-0 | U-0 | U-0 |
| —      | —   | —   | —   | —     | —   | —   | —   |
| bit 15 |     |     |     | bit 8 |     |     |     |

|              |     |     |     |       |     |     |     |
|--------------|-----|-----|-----|-------|-----|-----|-----|
| R-0          | R-0 | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| DSADR<23:16> |     |     |     |       |     |     |     |
| bit 7        |     |     |     | bit 0 |     |     |     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-8 **Unimplemented:** Read as '0'bit 7-0 **DSADR<23:16>:** Most Recent DMA Address Accessed by DMA bits**REGISTER 8-10: DSADRL: DMA MOST RECENT RAM LOW ADDRESS REGISTER**

|             |     |     |     |       |     |     |     |
|-------------|-----|-----|-----|-------|-----|-----|-----|
| R-0         | R-0 | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| DSADR<15:8> |     |     |     |       |     |     |     |
| bit 15      |     |     |     | bit 8 |     |     |     |

|            |     |     |     |       |     |     |     |
|------------|-----|-----|-----|-------|-----|-----|-----|
| R-0        | R-0 | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| DSADR<7:0> |     |     |     |       |     |     |     |
| bit 7      |     |     |     | bit 0 |     |     |     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **DSADR<15:0>:** Most Recent DMA Address Accessed by DMA bits

**REGISTER 11-22: RPOR4: PERIPHERAL PIN SELECT OUTPUT REGISTER 4**

|        |     |            |       |       |       |       |       |
|--------|-----|------------|-------|-------|-------|-------|-------|
| U-0    | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —      | —   | RP43R<5:0> |       |       |       |       |       |
| bit 15 |     |            |       |       |       |       | bit 8 |

|       |     |            |       |       |       |       |       |
|-------|-----|------------|-------|-------|-------|-------|-------|
| U-0   | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | RP42R<5:0> |       |       |       |       |       |
| bit 7 |     |            |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 15-14                      **Unimplemented:** Read as '0'  
bit 13-8                      **RP43R<5:0>**: Peripheral Output Function is Assigned to RP43 Output Pin bits  
(see Table 11-3 for peripheral function numbers)  
bit 7-6                      **Unimplemented:** Read as '0'  
bit 5-0                      **RP42R<5:0>**: Peripheral Output Function is Assigned to RP42 Output Pin bits  
(see Table 11-3 for peripheral function numbers)

**REGISTER 11-23: RPOR5: PERIPHERAL PIN SELECT OUTPUT REGISTER 5**

|        |     |            |       |       |       |       |       |
|--------|-----|------------|-------|-------|-------|-------|-------|
| U-0    | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —      | —   | RP55R<5:0> |       |       |       |       |       |
| bit 15 |     |            |       |       |       |       | bit 8 |

|       |     |            |       |       |       |       |       |
|-------|-----|------------|-------|-------|-------|-------|-------|
| U-0   | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | RP54R<5:0> |       |       |       |       |       |
| bit 7 |     |            |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown


bit 15-14                      **Unimplemented:** Read as '0'  
bit 13-8                      **RP55R<5:0>**: Peripheral Output Function is Assigned to RP55 Output Pin bits  
(see Table 11-3 for peripheral function numbers)  
bit 7-6                      **Unimplemented:** Read as '0'  
bit 5-0                      **RP54R<5:0>**: Peripheral Output Function is Assigned to RP54 Output Pin bits  
(see Table 11-3 for peripheral function numbers)

**REGISTER 14-2: ICxCON2: INPUT CAPTURE x CONTROL REGISTER 2 (CONTINUED)**

bit 4-0 **SYNCSEL<4:0>**: Input Source Select for Synchronization and Trigger Operation bits<sup>(4)</sup>

11111 = No Sync or Trigger source for ICx  
 11110 = Reserved  
 11101 = Reserved  
 11100 = CTMU module synchronizes or triggers ICx  
 11011 = ADC1 module synchronizes or triggers ICx<sup>(5)</sup>  
 11010 = CMP3 module synchronizes or triggers ICx<sup>(5)</sup>  
 11001 = CMP2 module synchronizes or triggers ICx<sup>(5)</sup>  
 11000 = CMP1 module synchronizes or triggers ICx<sup>(5)</sup>  
 10111 = Reserved  
 10110 = Reserved  
 10101 = Reserved  
 10100 = Reserved  
 10011 = IC4 module synchronizes or triggers ICx  
 10010 = IC3 module synchronizes or triggers ICx  
 10001 = IC2 module synchronizes or triggers ICx  
 10000 = IC1 module synchronizes or triggers ICx  
 01111 = Timer5 synchronizes or triggers ICx  
 01110 = Timer4 synchronizes or triggers ICx  
 01101 = Timer3 synchronizes or triggers ICx **(default)**  
 01100 = Timer2 synchronizes or triggers ICx  
 01011 = Timer1 synchronizes or triggers ICx  
 01010 = PTGOx module synchronizes or triggers ICx<sup>(6)</sup>  
 01001 = Reserved  
 01000 = Reserved  
 00111 = Reserved  
 00110 = Reserved  
 00101 = Reserved  
 00100 = OC4 module synchronizes or triggers ICx  
 00011 = OC3 module synchronizes or triggers ICx  
 00010 = OC2 module synchronizes or triggers ICx  
 00001 = OC1 module synchronizes or triggers ICx  
 00000 = No Sync or Trigger source for ICx

- Note 1:** The IC32 bit in both the Odd and Even IC must be set to enable Cascade mode.
- 2:** The input source is selected by the SYNCSEL<4:0> bits of the ICxCON2 register.
- 3:** This bit is set by the selected input source (selected by SYNCSEL<4:0> bits). It can be read, set and cleared in software.
- 4:** Do not use the ICx module as its own Sync or Trigger source.
- 5:** This option should only be selected as a trigger source and not as a synchronization source.
- 6:** Each Input Capture x (ICx) module has one PTG input source. See **Section 24.0 “Peripheral Trigger Generator (PTG) Module”** for more information.
- PTGO8 = IC1  
 PTGO9 = IC2  
 PTGO10 = IC3  
 PTGO11 = IC4

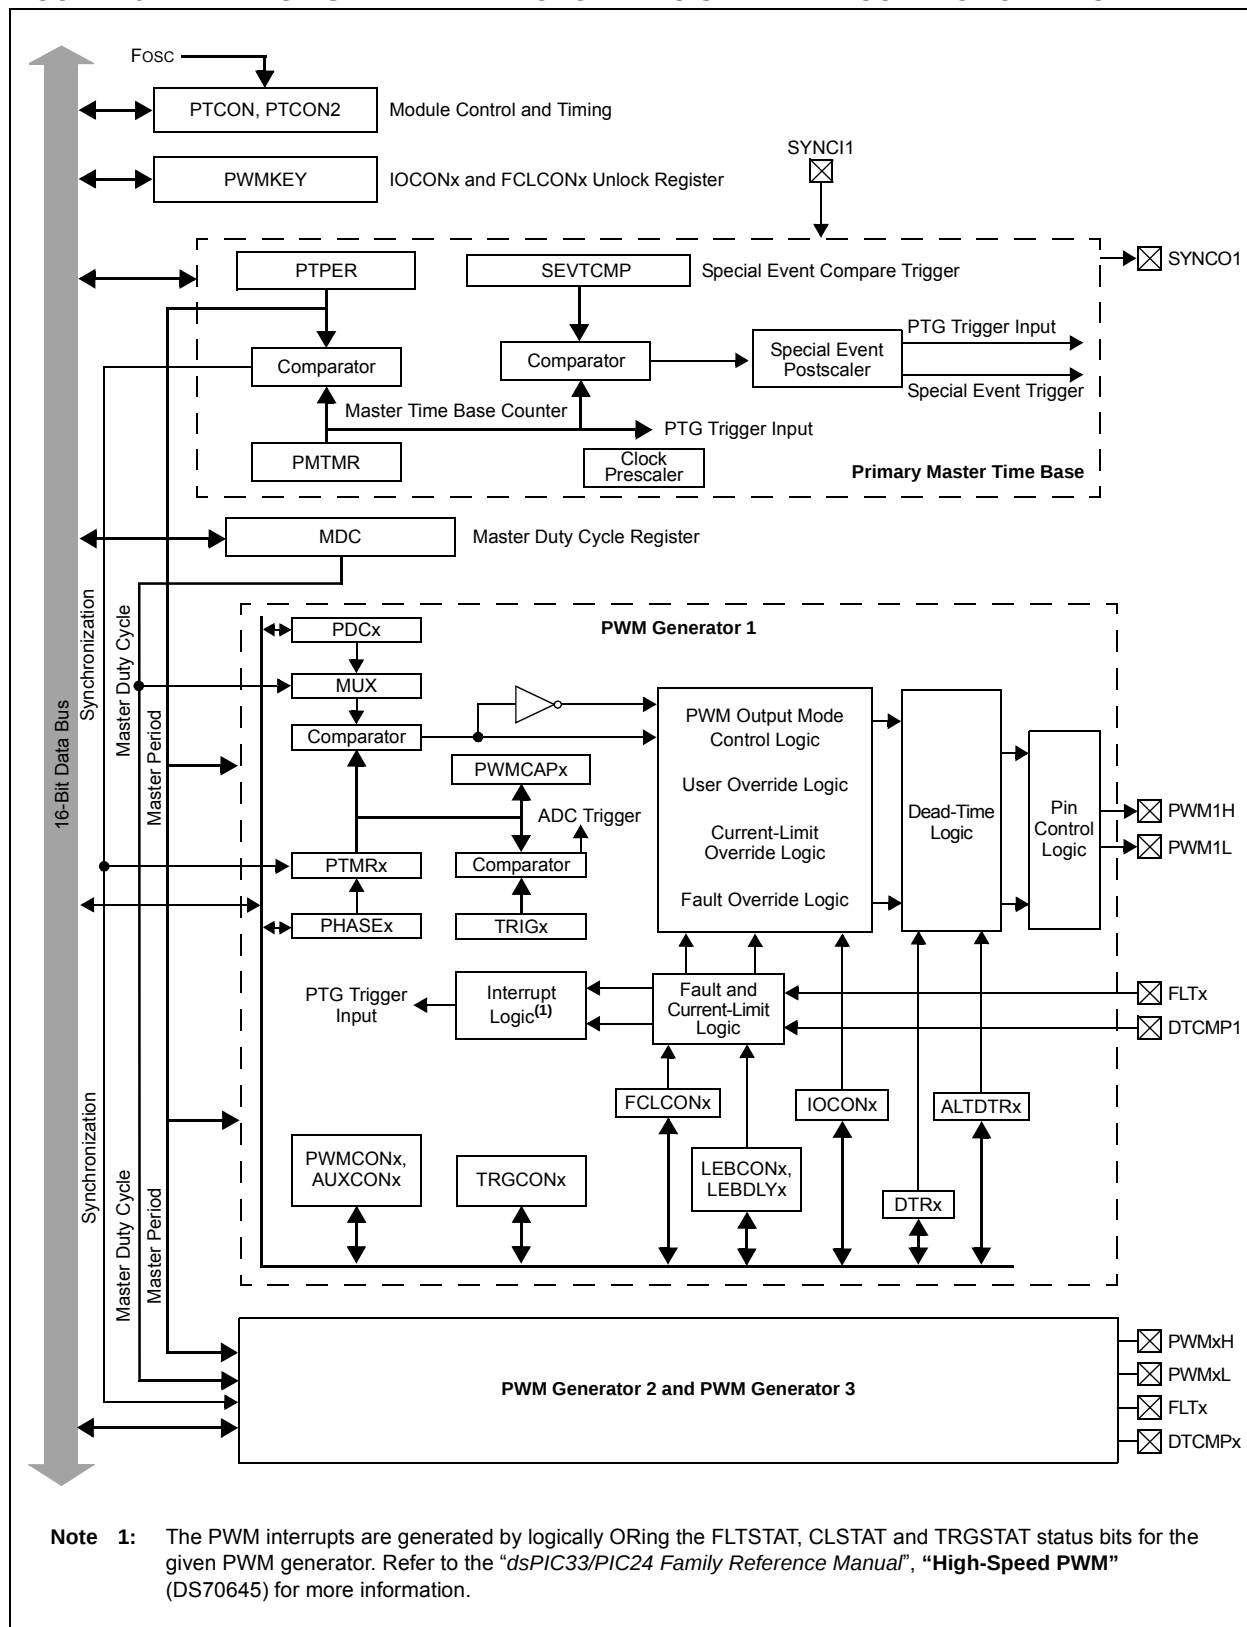**FIGURE 16-2: HIGH-SPEED PWMx MODULE REGISTER INTERCONNECTION DIAGRAM**

## 17.0 QUADRATURE ENCODER INTERFACE (QEI) MODULE (dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X DEVICES ONLY)

**Note 1:** This data sheet summarizes the features of the dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X families of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “**Quadrature Encoder Interface (QEI)**” (DS70601) in the “*dsPIC33/PIC24 Family Reference Manual*”, which is available from the Microchip web site ([www.microchip.com](http://www.microchip.com)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

This chapter describes the Quadrature Encoder Interface (QEI) module and associated operational modes. The QEI module provides the interface to incremental encoders for obtaining mechanical position data.

The operational features of the QEI module include:


- 32-Bit Position Counter
- 32-Bit Index Pulse Counter
- 32-Bit Interval Timer
- 16-Bit Velocity Counter
- 32-Bit Position Initialization/Capture/Compare High register
- 32-Bit Position Compare Low register
- x4 Quadrature Count mode
- External Up/Down Count mode
- External Gated Count mode
- External Gated Timer mode
- Internal Timer mode

Figure 17-1 illustrates the QEI block diagram.

**FIGURE 23-1: ADC MODULE BLOCK DIAGRAM WITH CONNECTION OPTIONS FOR ANx PINS AND OP AMPS**

This diagram depicts all of the available ADC connection options to the four S&H amplifiers, which are designated: CH0, CH1, CH2 and CH3.

The ANx analog pins or op amp outputs are connected to the CH0-CH3 amplifiers through the multiplexers, controlled by the SFR control bits, CH0Sx, CH0Nx, CH123Sx and CH123Nx.

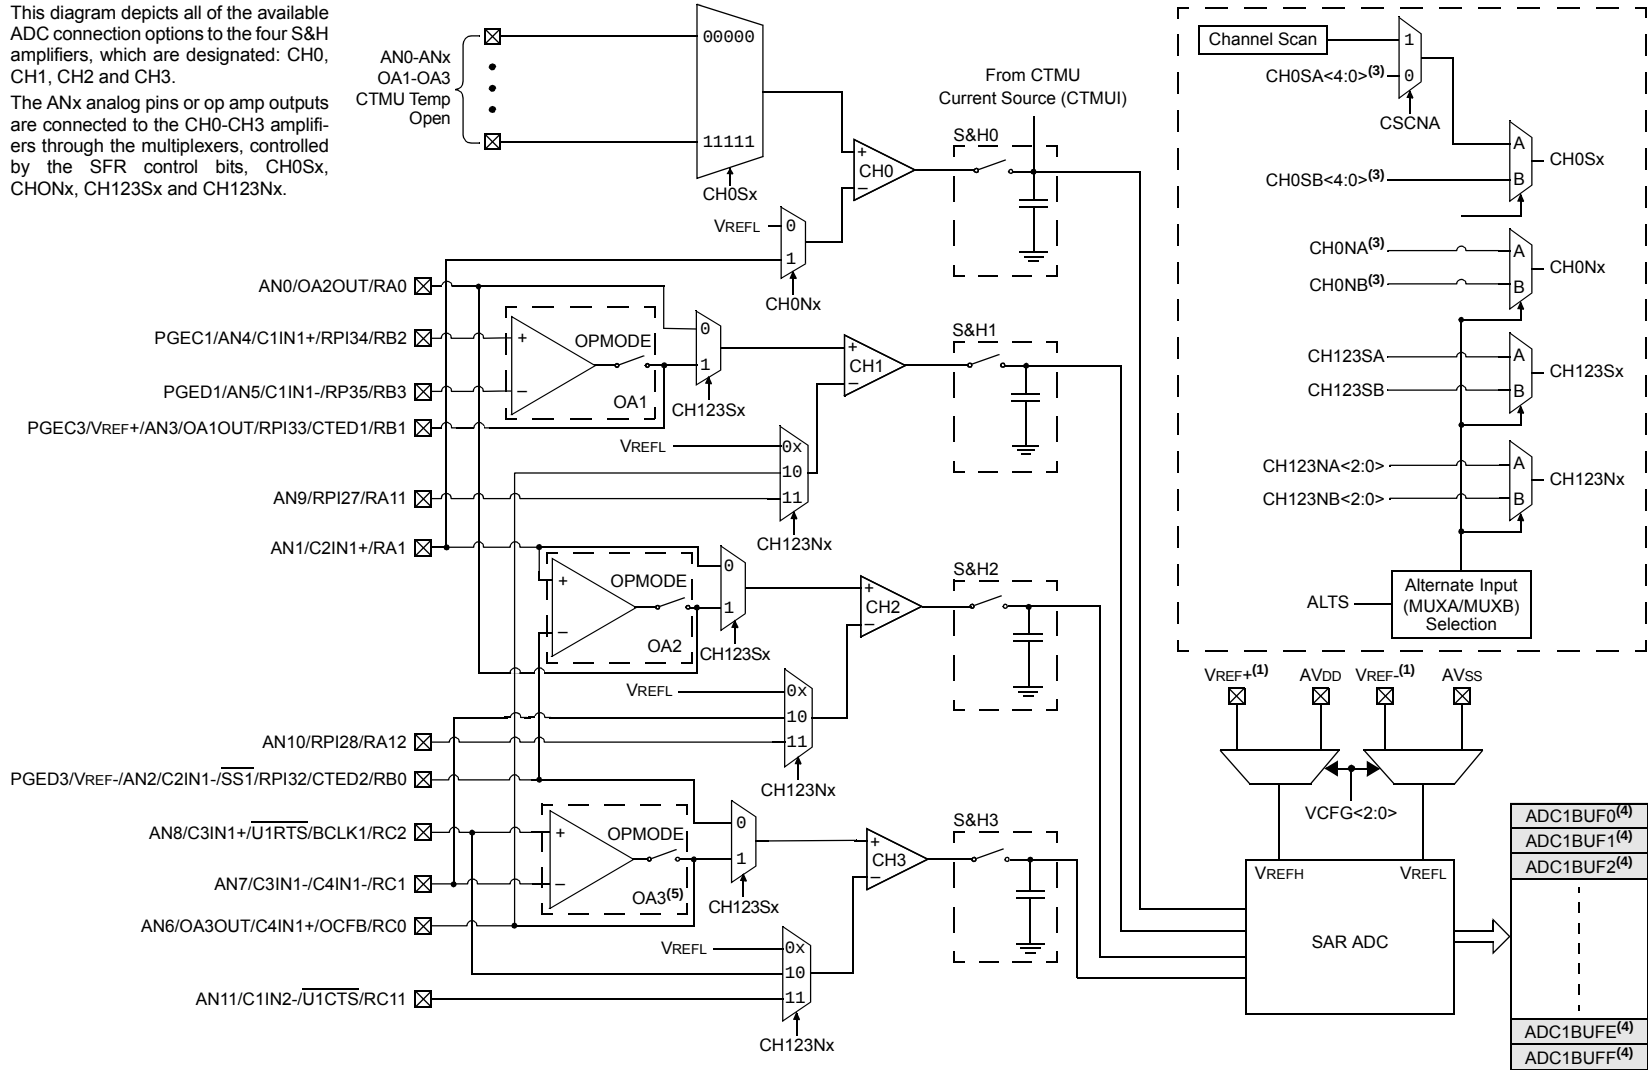

- Note**
- 1: VREF+, VREF- inputs can be multiplexed with other analog inputs.
  - 2: Channels 1, 2 and 3 are not applicable for the 12-bit mode of operation.
  - 3: These bits can be updated with Step commands from the PTG module. See Section 24.0 "Peripheral Trigger Generator (PTG) Module" for more information.
  - 4: When ADDMAEN (AD1CON4<8>) = 1, enabling DMA, only ADC1BUF0 is used.
  - 5: OA3 is not available for 28-pin devices.

**REGISTER 23-1: AD1CON1: ADC1 CONTROL REGISTER 1 (CONTINUED)**

|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 7-5 | <p><b>SSRC&lt;2:0&gt;</b>: Sample Trigger Source Select bits</p> <p><u>If SSRCG = 1:</u></p> <p>111 = Reserved</p> <p>110 = PTGO15 primary trigger compare ends sampling and starts conversion<sup>(1)</sup></p> <p>101 = PTGO14 primary trigger compare ends sampling and starts conversion<sup>(1)</sup></p> <p>100 = PTGO13 primary trigger compare ends sampling and starts conversion<sup>(1)</sup></p> <p>011 = PTGO12 primary trigger compare ends sampling and starts conversion<sup>(1)</sup></p> <p>010 = PWM Generator 3 primary trigger compare ends sampling and starts conversion<sup>(2)</sup></p> <p>001 = PWM Generator 2 primary trigger compare ends sampling and starts conversion<sup>(2)</sup></p> <p>000 = PWM Generator 1 primary trigger compare ends sampling and starts conversion<sup>(2)</sup></p> <p><u>If SSRCG = 0:</u></p> <p>111 = Internal counter ends sampling and starts conversion (auto-convert)</p> <p>110 = CTMU ends sampling and starts conversion</p> <p>101 = Reserved</p> <p>100 = Timer5 compare ends sampling and starts conversion</p> <p>011 = PWM primary Special Event Trigger ends sampling and starts conversion<sup>(2)</sup></p> <p>010 = Timer3 compare ends sampling and starts conversion</p> <p>001 = Active transition on the INT0 pin ends sampling and starts conversion</p> <p>000 = Clearing the Sample bit (SAMP) ends sampling and starts conversion (Manual mode)</p> |
| bit 4   | <p><b>SSRCG</b>: Sample Trigger Source Group bit</p> <p>See SSRC&lt;2:0&gt; for details.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| bit 3   | <p><b>SIMSAM</b>: Simultaneous Sample Select bit (only applicable when CHPS&lt;1:0&gt; = 01 or 1x)</p> <p><u>In 12-bit mode (AD21B = 1), SIMSAM is Unimplemented and is Read as '0':</u></p> <p>1 = Samples CH0, CH1, CH2, CH3 simultaneously (when CHPS&lt;1:0&gt; = 1x); or samples CH0 and CH1 simultaneously (when CHPS&lt;1:0&gt; = 01)</p> <p>0 = Samples multiple channels individually in sequence</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| bit 2   | <p><b>ASAM</b>: ADC1 Sample Auto-Start bit</p> <p>1 = Sampling begins immediately after the last conversion; SAMP bit is auto-set</p> <p>0 = Sampling begins when the SAMP bit is set</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| bit 1   | <p><b>SAMP</b>: ADC1 Sample Enable bit</p> <p>1 = ADC Sample-and-Hold amplifiers are sampling</p> <p>0 = ADC Sample-and-Hold amplifiers are holding</p> <p>If ASAM = 0, software can write '1' to begin sampling. Automatically set by hardware if ASAM = 1. If SSRC&lt;2:0&gt; = 000, software can write '0' to end sampling and start conversion. If SSRC&lt;2:0&gt; ≠ 000, automatically cleared by hardware to end sampling and start conversion.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| bit 0   | <p><b>DONE</b>: ADC1 Conversion Status bit<sup>(3)</sup></p> <p>1 = ADC conversion cycle has completed</p> <p>0 = ADC conversion has not started or is in progress</p> <p>Automatically set by hardware when the ADC conversion is complete. Software can write '0' to clear the DONE status bit (software is not allowed to write '1'). Clearing this bit does NOT affect any operation in progress. Automatically cleared by hardware at the start of a new conversion.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

**Note 1:** See Section 24.0 "Peripheral Trigger Generator (PTG) Module" for information on this selection.

**2:** This setting is available in dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X devices only.

**3:** Do not clear the DONE bit in software if Auto-Sample is enabled (ASAM = 1).

**REGISTER 23-6: AD1CHS0: ADC1 INPUT CHANNEL 0 SELECT REGISTER (CONTINUED)**

bit 4-0      **CH0SA<4:0>**: Channel 0 Positive Input Select for Sample MUXA bits<sup>(1)</sup>

- 11111 = Open; use this selection with CTMU capacitive and time measurement
- 11110 = Channel 0 positive input is connected to the CTMU temperature measurement diode (CTMU TEMP)
- 11101 = Reserved
- 11100 = Reserved
- 11011 = Reserved
- 11010 = Channel 0 positive input is the output of OA3/AN6<sup>(2,3)</sup>
- 11001 = Channel 0 positive input is the output of OA2/AN0<sup>(2)</sup>
- 11000 = Channel 0 positive input is the output of OA1/AN3<sup>(2)</sup>
- 10110 = Reserved
- 
- 
- 
- 10000 = Reserved
- 01111 = Channel 0 positive input is AN15<sup>(1,3)</sup>
- 01110 = Channel 0 positive input is AN14<sup>(1,3)</sup>
- 01101 = Channel 0 positive input is AN13<sup>(1,3)</sup>
- 
- 
- 
- 00010 = Channel 0 positive input is AN2<sup>(1,3)</sup>
- 00001 = Channel 0 positive input is AN1<sup>(1,3)</sup>
- 00000 = Channel 0 positive input is AN0<sup>(1,3)</sup>

**Note 1:** AN0 through AN7 are repurposed when comparator and op amp functionality is enabled. See Figure 23-1 to determine how enabling a particular op amp or comparator affects selection choices for Channels 1, 2 and 3.

**2:** The OAx input is used if the corresponding op amp is selected (OPMODE (CMxCON<10>) = 1); otherwise, the ANx input is used.

**3:** See the “Pin Diagrams” section for the available analog channels for each device.

TABLE 30-4: DC TEMPERATURE AND VOLTAGE SPECIFICATIONS

| DC CHARACTERISTICS       |        |                                                                         | Standard Operating Conditions (see Note 1): 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |      |      |       |                 |
|--------------------------|--------|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-----------------|
| Param No.                | Symbol | Characteristic                                                          | Min.                                                                                                                                                                                                                                                           | Typ. | Max. | Units | Conditions      |
| <b>Operating Voltage</b> |        |                                                                         |                                                                                                                                                                                                                                                                |      |      |       |                 |
| DC10                     | VDD    | <b>Supply Voltage</b>                                                   | 3.0                                                                                                                                                                                                                                                            | —    | 3.6  | V     |                 |
| DC16                     | VPOR   | <b>VDD Start Voltage</b><br>to Ensure Internal<br>Power-on Reset Signal | —                                                                                                                                                                                                                                                              | —    | VSS  | V     |                 |
| DC17                     | SVDD   | <b>VDD Rise Rate</b><br>to Ensure Internal<br>Power-on Reset Signal     | 0.03                                                                                                                                                                                                                                                           | —    | —    | V/ms  | 0V-1V in 100 ms |


**Note 1:** Device is functional at  $V_{BORMIN} < V_{DD} < V_{DDMIN}$ . Analog modules (ADC, op amp/comparator and comparator voltage reference) may have degraded performance. Device functionality is tested but not characterized. Refer to Parameter BO10 in Table 30-13 for the minimum and maximum BOR values.

TABLE 30-5: FILTER CAPACITOR (CEFC) SPECIFICATIONS


| Standard Operating Conditions (unless otherwise stated):<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |        |                                                   |      |      |      |               |                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------------------------------------------------|------|------|------|---------------|------------------------------------------------------------------|
| Param No.                                                                                                                                                                                                                         | Symbol | Characteristics                                   | Min. | Typ. | Max. | Units         | Comments                                                         |
|                                                                                                                                                                                                                                   | CEFC   | External Filter Capacitor<br>Value <sup>(1)</sup> | 4.7  | 10   | —    | $\mu\text{F}$ | Capacitor must have a low<br>series resistance ( $< 1\ \Omega$ ) |

**Note 1:** Typical VCAP voltage = 1.8 volts when  $V_{DD} \geq V_{DDMIN}$ .

**FIGURE 30-9: HIGH-SPEED PWMx MODULE FAULT TIMING CHARACTERISTICS**  
(dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X DEVICES ONLY)

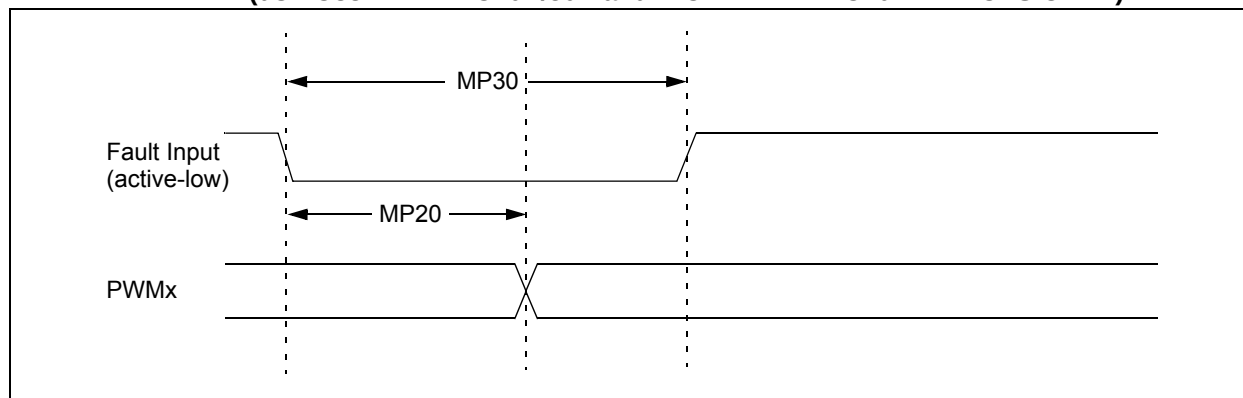

**FIGURE 30-10: HIGH-SPEED PWMx MODULE TIMING CHARACTERISTICS**  
(dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X DEVICES ONLY)

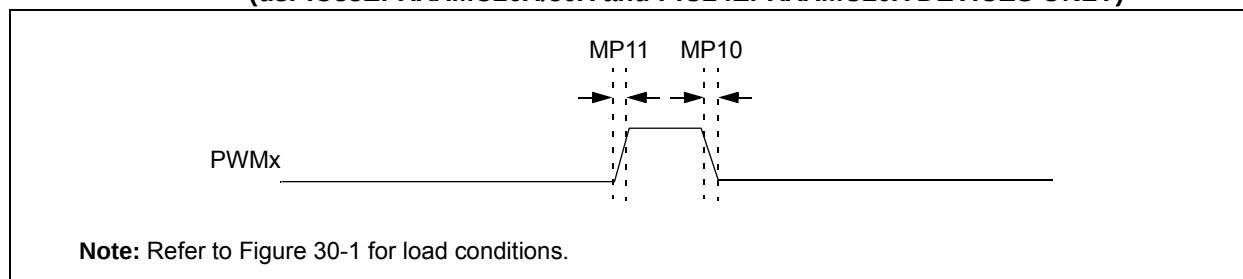

**TABLE 30-29: HIGH-SPEED PWMx MODULE TIMING REQUIREMENTS**  
(dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X DEVICES ONLY)


| AC CHARACTERISTICS |                 |                                  | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |      |      |       |                    |
|--------------------|-----------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|--------------------|
| Param No.          | Symbol          | Characteristic <sup>(1)</sup>    | Min.                                                                                                                                                                    | Typ. | Max. | Units | Conditions         |
| MP10               | TFPWM           | PWMx Output Fall Time            | —                                                                                                                                                                       | —    | —    | ns    | See Parameter DO32 |
| MP11               | TRPWM           | PWMx Output Rise Time            | —                                                                                                                                                                       | —    | —    | ns    | See Parameter DO31 |
| MP20               | T <sub>FD</sub> | Fault Input ↓ to PWMx I/O Change | —                                                                                                                                                                       | —    | 15   | ns    |                    |
| MP30               | T <sub>FH</sub> | Fault Input Pulse Width          | 15                                                                                                                                                                      | —    | —    | ns    |                    |

**Note 1:** These parameters are characterized but not tested in manufacturing.


## 32.0 DC AND AC DEVICE CHARACTERISTICS GRAPHS

**Note:** The graphs provided following this note are a statistical summary based on a limited number of samples and are provided for design guidance purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore, outside the warranted range.


**FIGURE 32-1:  $V_{OH}$  – 4x DRIVER PINS**

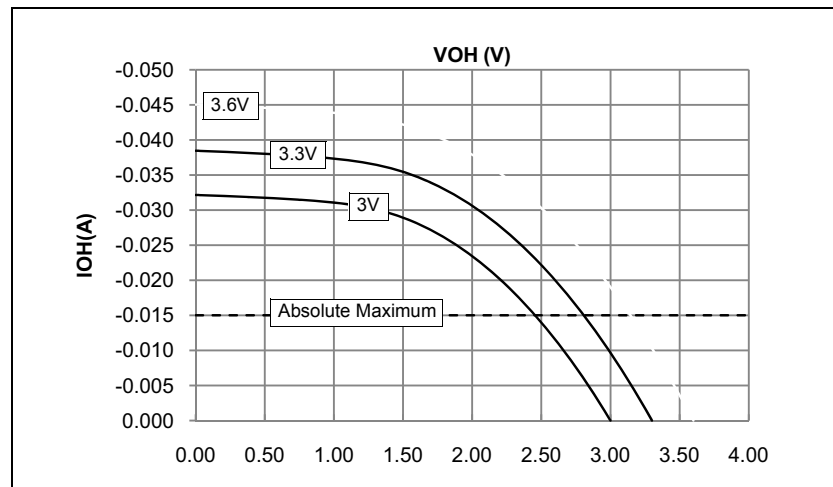

**FIGURE 32-3:  $V_{OL}$  – 4x DRIVER PINS**

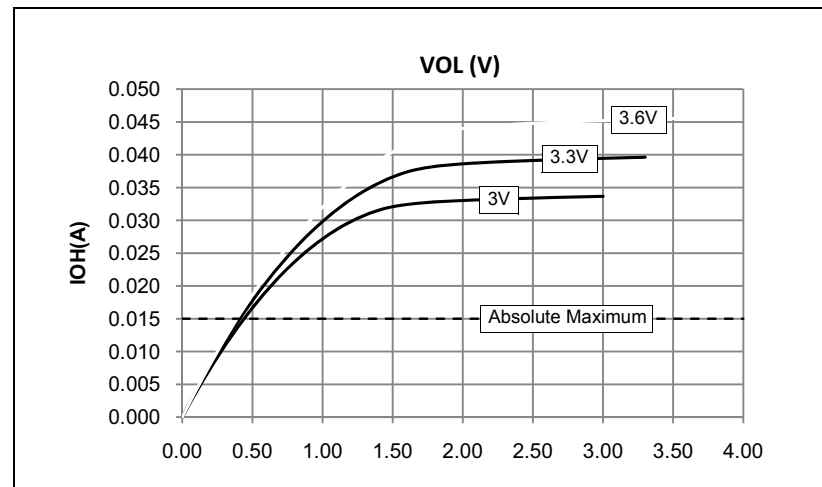

**FIGURE 32-2:  $V_{OH}$  – 8x DRIVER PINS**

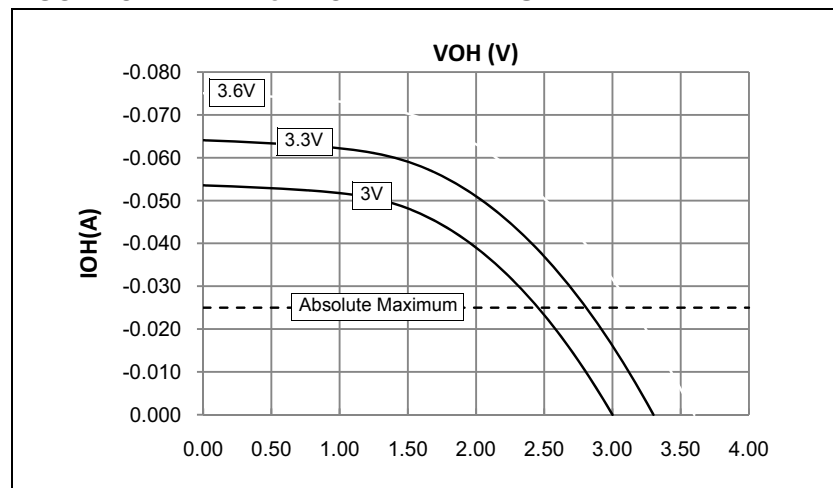

**FIGURE 32-4:  $V_{OL}$  – 8x DRIVER PINS**

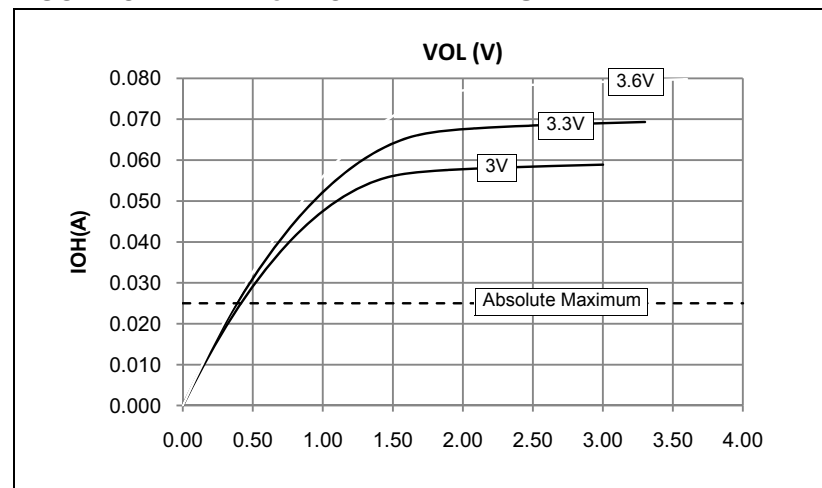


FIGURE 32-5: TYPICAL  $I_{PD}$  CURRENT @  $V_{DD} = 3.3V$

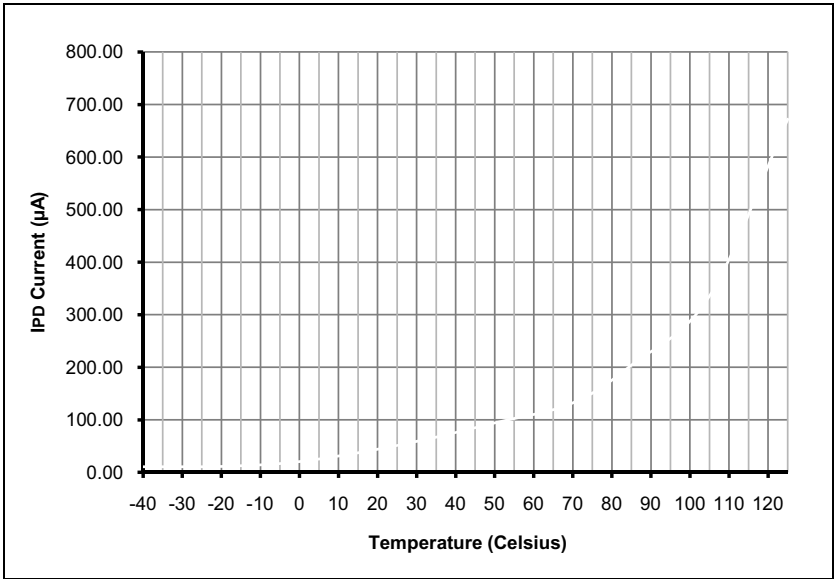


FIGURE 32-6: TYPICAL/MAXIMUM  $I_{DD}$  CURRENT @  $V_{DD} = 3.3V$

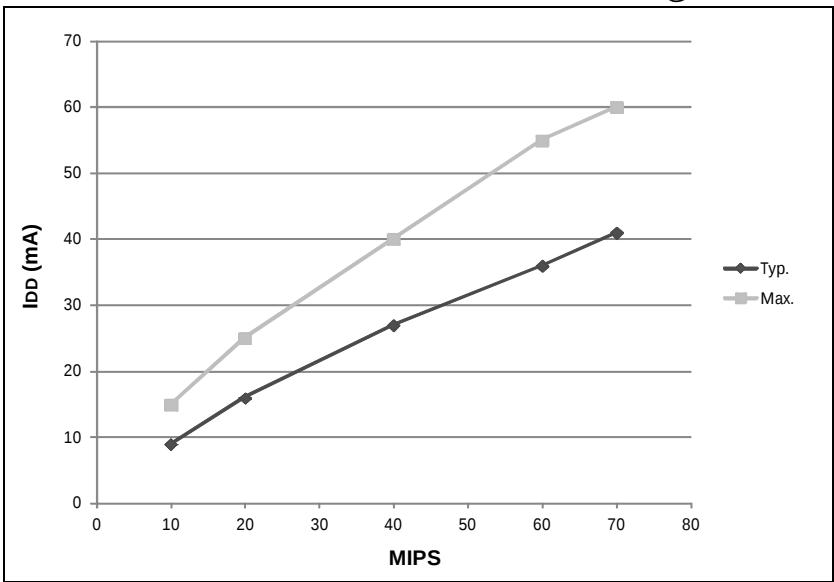


FIGURE 32-7: TYPICAL  $I_{DOZE}$  CURRENT @  $V_{DD} = 3.3V$


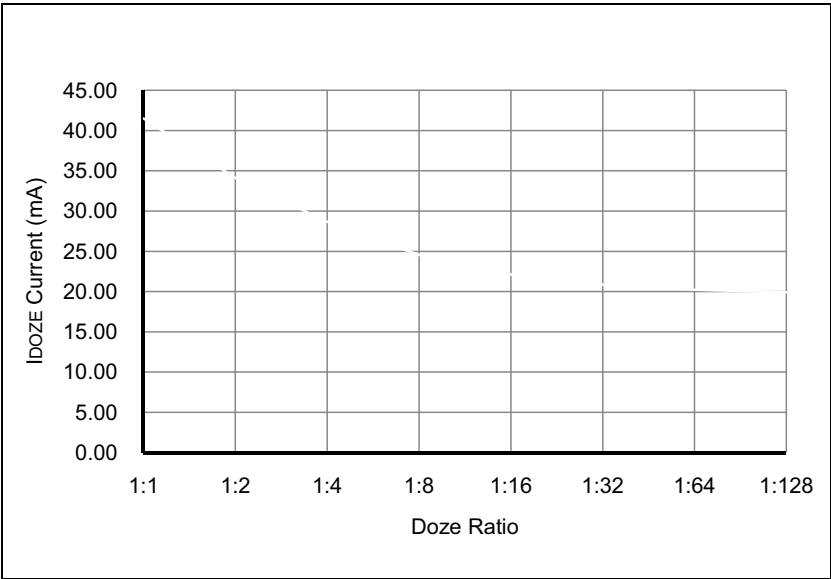


FIGURE 32-8: TYPICAL  $I_{IDLE}$  CURRENT @  $V_{DD} = 3.3V$



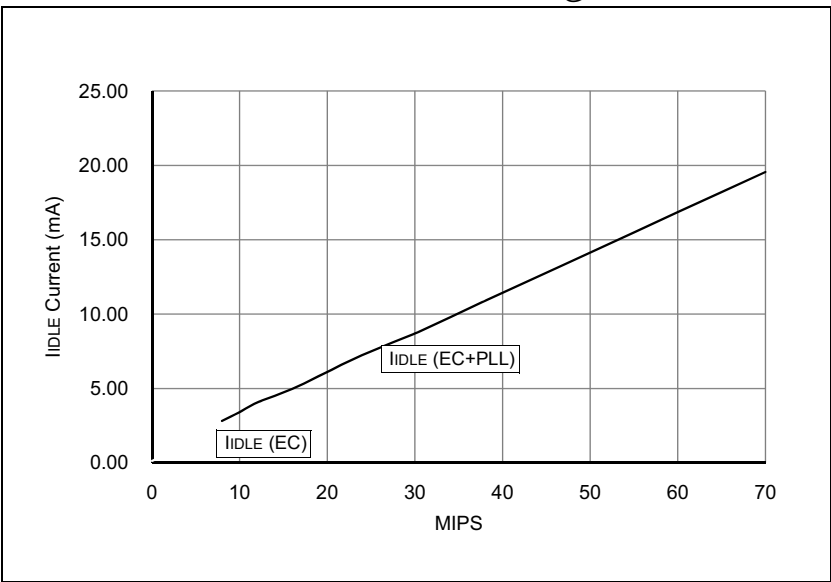

## APPENDIX A: REVISION HISTORY

### Revision A (April 2011)

This is the initial released version of the document.

### Revision B (July 2011)

This revision includes minor typographical and formatting changes throughout the data sheet text.

All other major changes are referenced by their respective section in Table A-1.

**TABLE A-1: MAJOR SECTION UPDATES**

| Section Name                                                                      | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“High-Performance, 16-bit Digital Signal Controllers and Microcontrollers”</b> | Changed all pin diagrams references of VLAP to TLA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Section 4.0 “Memory Organization”</b>                                          | Updated the All Resets values for CLKDIV and PLLFBD in the System Control Register Map (see Table 4-35).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Section 5.0 “Flash Program Memory”</b>                                         | Updated “one word” to “two words” in the first paragraph of <b>Section 5.2 “RTSP Operation”</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Section 9.0 “Oscillator Configuration”</b>                                     | <p>Updated the PLL Block Diagram (see Figure 9-2).</p> <p>Updated the Oscillator Mode, Fast RC Oscillator (FRC) with divide-by-N and PLL (FRCPLL), by changing (FRCDIVN + PLL) to (FRCPLL).</p> <p>Changed (FRCDIVN + PLL) to (FRCPLL) for COSC&lt;2:0&gt; = 001 and NOSC&lt;2:0&gt; = 001 in the Oscillator Control Register (see Register 9-1).</p> <p>Changed the POR value from 0 to 1 for the DOZE&lt;1:0&gt; bits, from 1 to 0 for the FRCDIV&lt;0&gt; bit, and from 0 to 1 for the PLLPOST&lt;0&gt; bit; Updated the default definitions for the DOZE&lt;2:0&gt; and FRCDIV&lt;2:0&gt; bits and updated all bit definitions for the PLLPOST&lt;1:0&gt; bits in the Clock Divisor Register (see Register 9-2).</p> <p>Changed the POR value from 0 to 1 for the PLLDIV&lt;5:4&gt; bits and updated the default definitions for all PLLDIV&lt;8:0&gt; bits in the PLL Feedback Division Register (see Register 9-2).</p> |
| <b>Section 22.0 “Charge Time Measurement Unit (CTMU)”</b>                         | Updated the bit definitions for the IRNG<1:0> bits in the CTMU Current Control Register (see Register 22-3).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Section 25.0 “Op amp/ Comparator Module”</b>                                   | Updated the voltage reference block diagrams (see Figure 25-1 and Figure 25-2).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Revision E (April 2012)**

This revision includes typographical and formatting changes throughout the data sheet text.

All other major changes are referenced by their respective section in Table A-3.

**TABLE A-4: MAJOR SECTION UPDATES**

| Section Name                                                                                                                                                | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“16-bit Microcontrollers and Digital Signal Controllers (up to 512-Kbyte Flash and 48-Kbyte SRAM) with High-Speed PWM, Op amps, and Advanced Analog”</b> | <p>The following 512-Kbyte devices were added to the General Purpose Families table (see Table 1):</p> <ul style="list-style-type: none"> <li>• PIC24EP512GP202</li> <li>• PIC24EP512GP204</li> <li>• PIC24EP512GP206</li> <li>• dsPIC33EP512GP502</li> <li>• dsPIC33EP512GP504</li> <li>• dsPIC33EP512GP506</li> </ul> <p>The following 512-Kbyte devices were added to the Motor Control Families table (see Table 2):</p> <ul style="list-style-type: none"> <li>• PIC24EP512MC202</li> <li>• PIC24EP512MC204</li> <li>• PIC24EP512MC206</li> <li>• dsPIC33EP512MC202</li> <li>• dsPIC33EP512MC204</li> <li>• dsPIC33EP512MC206</li> <li>• dsPIC33EP512MC502</li> <li>• dsPIC33EP512MC504</li> <li>• dsPIC33EP512MC506</li> </ul> <p>Certain Pin Diagrams were updated to include the new 512-Kbyte devices.</p> |
| <b>Section 4.0 “Memory Organization”</b>                                                                                                                    | <p>Added a Program Memory Map for the new 512-Kbyte devices (see Figure 4-4).</p> <p>Added a Data Memory Map for the new dsPIC 512-Kbyte devices (see Figure 4-11).</p> <p>Added a Data Memory Map for the new PIC24 512-Kbyte devices (see Figure 4-16).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Section 7.0 “Interrupt Controller”</b>                                                                                                                   | Updated the VECNUM bits in the INTTREG register (see Register 7-7).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Section 11.0 “I/O Ports”</b>                                                                                                                             | Added tip 6 to <b>Section 11.5 “I/O Helpful Tips”</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Section 27.0 “Special Features”</b>                                                                                                                      | <p>The following modifications were made to the Configuration Byte Register Map (see Table 27-1):</p> <ul style="list-style-type: none"> <li>• Added the column Device Memory Size (Kbytes)</li> <li>• Removed Notes 1 through 4</li> <li>• Added addresses for the new 512-Kbyte devices</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Section 30.0 “Electrical Characteristics”</b>                                                                                                            | <p>Updated the Minimum value for Parameter DC10 (see Table 30-4).</p> <p>Added Power-Down Current (I<sub>pd</sub>) parameters for the new 512-Kbyte devices (see Table 30-8).</p> <p>Updated the Minimum value for Parameter CM34 (see Table 30-53).</p> <p>Updated the Minimum and Maximum values and the Conditions for parameter SY12 (see Table 30-22).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |