


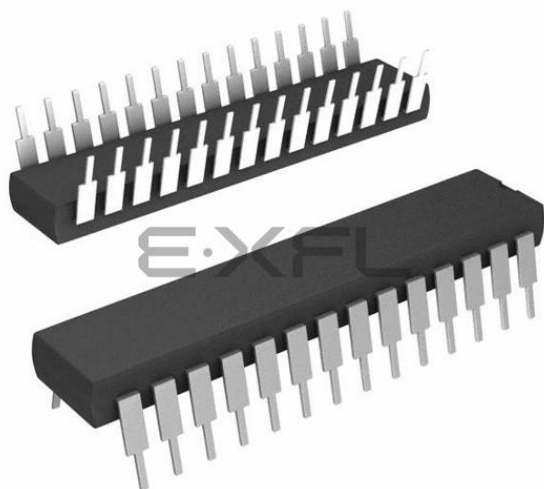

Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                               |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                        |
| Core Processor             | dsPIC                                                                                                                                                                         |
| Core Size                  | 16-Bit                                                                                                                                                                        |
| Speed                      | 60 MIPS                                                                                                                                                                       |
| Connectivity               | CANbus, I <sup>2</sup> C, IrDA, LINbus, QEI, SPI, UART/USART                                                                                                                  |
| Peripherals                | Brown-out Detect/Reset, DMA, Motor Control PWM, POR, PWM, WDT                                                                                                                 |
| Number of I/O              | 21                                                                                                                                                                            |
| Program Memory Size        | 64KB (22K x 24)                                                                                                                                                               |
| Program Memory Type        | FLASH                                                                                                                                                                         |
| EEPROM Size                | -                                                                                                                                                                             |
| RAM Size                   | 4K x 16                                                                                                                                                                       |
| Voltage - Supply (Vcc/Vdd) | 3V ~ 3.6V                                                                                                                                                                     |
| Data Converters            | A/D 6x10b/12b                                                                                                                                                                 |
| Oscillator Type            | Internal                                                                                                                                                                      |
| Operating Temperature      | -40°C ~ 125°C (TA)                                                                                                                                                            |
| Mounting Type              | Through Hole                                                                                                                                                                  |
| Package / Case             | 28-DIP (0.300", 7.62mm)                                                                                                                                                       |
| Supplier Device Package    | 28-SPDIP                                                                                                                                                                      |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep64mc502-e-sp">https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep64mc502-e-sp</a> |

**TABLE 4-4: INTERRUPT CONTROLLER REGISTER MAP FOR PIC24EPXXXMC20X DEVICES ONLY**

| File Name | Addr. | Bit 15 | Bit 14      | Bit 13 | Bit 12 | Bit 11 | Bit 10       | Bit 9   | Bit 8  | Bit 7 | Bit 6        | Bit 5  | Bit 4  | Bit 3  | Bit 2        | Bit 1     | Bit 0   | All Resets |
|-----------|-------|--------|-------------|--------|--------|--------|--------------|---------|--------|-------|--------------|--------|--------|--------|--------------|-----------|---------|------------|
| IFS0      | 0800  | —      | DMA1IF      | AD1IF  | U1TXIF | U1RXIF | SPI1IF       | SPI1EIF | T3IF   | T2IF  | OC2IF        | IC2IF  | DMA0IF | T1IF   | OC1IF        | IC1IF     | INT0IF  | 0000       |
| IFS1      | 0802  | U2TXIF | U2RXIF      | INT2IF | T5IF   | T4IF   | OC4IF        | OC3IF   | DMA2IF | —     | —            | —      | INT1IF | CNIF   | CMIF         | MI2C1IF   | SI2C1IF | 0000       |
| IFS2      | 0804  | —      | —           | —      | —      | —      | —            | —       | —      | —     | IC4IF        | IC3IF  | DMA3IF | —      | —            | SPI2IF    | SPI2EIF | 0000       |
| IFS3      | 0806  | —      | —           | —      | —      | —      | QE11IF       | PSEMIF  | —      | —     | —            | —      | —      | —      | MI2C2IF      | SI2C2IF   | —       | 0000       |
| IFS4      | 0808  | —      | —           | CTMUIF | —      | —      | —            | —       | —      | —     | —            | —      | —      | CRCIF  | U2EIF        | U1EIF     | —       | 0000       |
| IFS5      | 080A  | PWM2IF | PWM1IF      | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IFS6      | 080C  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | PWM3IF  | 0000       |
| IFS8      | 0810  | JTAGIF | ICDIF       | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IFS9      | 0812  | —      | —           | —      | —      | —      | —            | —       | —      | —     | PTG3IF       | PTG2IF | PTG1IF | PTG0IF | PTGWDTIF     | PTGSTEIF  | —       | 0000       |
| IEC0      | 0820  | —      | DMA1IE      | AD1IE  | U1TXIE | U1RXIE | SPI1IE       | SPI1EIE | T3IE   | T2IE  | OC2IE        | IC2IE  | DMA0IE | T1IE   | OC1IE        | IC1IE     | INT0IE  | 0000       |
| IEC1      | 0822  | U2TXIE | U2RXIE      | INT2IE | T5IE   | T4IE   | OC4IE        | OC3IE   | DMA2IE | —     | —            | —      | INT1IE | CNIE   | CMIE         | MI2C1IE   | SI2C1IE | 0000       |
| IEC2      | 0824  | —      | —           | —      | —      | —      | —            | —       | —      | —     | IC4IE        | IC3IE  | DMA3IE | —      | —            | SPI2IE    | SPI2EIE | 0000       |
| IEC3      | 0826  | —      | —           | —      | —      | —      | QE11IE       | PSEMIE  | —      | —     | —            | —      | —      | —      | MI2C2IE      | SI2C2IE   | —       | 0000       |
| IEC4      | 0828  | —      | —           | CTMUIE | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | CRCIE        | U2EIE     | U1EIE   | 0000       |
| IEC5      | 082A  | PWM2IE | PWM1IE      | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IEC6      | 082C  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | PWM3IE  | 0000       |
| IEC8      | 0830  | JTAGIE | ICDIE       | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IEC9      | 0832  | —      | —           | —      | —      | —      | —            | —       | —      | —     | PTG3IE       | PTG2IE | PTG1IE | PTG0IE | PTGWDTIE     | PTGSTIEIE | —       | 0000       |
| IPC0      | 0840  | —      | T1IP<2:0>   |        |        | —      | OC1IP<2:0>   |         |        | —     | IC1IP<2:0>   |        |        | —      | INT0IP<2:0>  |           |         | 4444       |
| IPC1      | 0842  | —      | T2IP<2:0>   |        |        | —      | OC2IP<2:0>   |         |        | —     | IC2IP<2:0>   |        |        | —      | DMA0IP<2:0>  |           |         | 4444       |
| IPC2      | 0844  | —      | U1RXIP<2:0> |        |        | —      | SPI1IP<2:0>  |         |        | —     | SPI1EIP<2:0> |        |        | —      | T3IP<2:0>    |           |         | 4444       |
| IPC3      | 0846  | —      | —           | —      | —      | —      | DMA1IP<2:0>  |         |        | —     | AD1IP<2:0>   |        |        | —      | U1TXIP<2:0>  |           |         | 0444       |
| IPC4      | 0848  | —      | CNIP<2:0>   |        |        | —      | CMIP<2:0>    |         |        | —     | MI2C1IP<2:0> |        |        | —      | SI2C1IP<2:0> |           |         | 4444       |
| IPC5      | 084A  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | INT1IP<2:0>  |           |         | 0004       |
| IPC6      | 084C  | —      | T4IP<2:0>   |        |        | —      | OC4IP<2:0>   |         |        | —     | OC3IP<2:0>   |        |        | —      | DMA2IP<2:0>  |           |         | 4444       |
| IPC7      | 084E  | —      | U2TXIP<2:0> |        |        | —      | U2RXIP<2:0>  |         |        | —     | INT2IP<2:0>  |        |        | —      | T5IP<2:0>    |           |         | 4444       |
| IPC8      | 0850  | —      | —           | —      | —      | —      | —            | —       | —      | —     | SPI2IP<2:0>  |        |        | —      | SPI2EIP<2:0> |           |         | 0044       |
| IPC9      | 0852  | —      | —           | —      | —      | —      | IC4IP<2:0>   |         |        | —     | IC3IP<2:0>   |        |        | —      | DMA3IP<2:0>  |           |         | 0444       |
| IPC12     | 0858  | —      | —           | —      | —      | —      | MI2C2IP<2:0> |         |        | —     | SI2C2IP<2:0> |        |        | —      | —            | —         | —       | 0440       |
| IPC14     | 085C  | —      | —           | —      | —      | —      | QE11IP<2:0>  |         |        | —     | PSEMIP<2:0>  |        |        | —      | —            | —         | —       | 0440       |
| IPC16     | 0860  | —      | CRCIP<2:0>  |        |        | —      | U2EIP<2:0>   |         |        | —     | U1EIP<2:0>   |        |        | —      | —            | —         | —       | 4440       |
| IPC19     | 0866  | —      | —           | —      | —      | —      | —            | —       | —      | —     | CTMUIP<2:0>  |        |        | —      | —            | —         | —       | 0040       |
| IPC23     | 086E  | —      | PWM2IP<2:0> |        |        | —      | PWM1IP<2:0>  |         |        | —     | —            | —      | —      | —      | —            | —         | —       | 4400       |
| IPC24     | 0870  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | PWM3IP<2:0>  |           |         | 4004       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-5: INTERRUPT CONTROLLER REGISTER MAP FOR dsPIC33EPXXXGP50X DEVICES ONLY (CONTINUED)**

| File Name | Addr. | Bit 15 | Bit 14 | Bit 13 | Bit 12  | Bit 11   | Bit 10 | Bit 9 | Bit 8 | Bit 7       | Bit 6   | Bit 5   | Bit 4   | Bit 3   | Bit 2  | Bit 1   | Bit 0  | All Resets |
|-----------|-------|--------|--------|--------|---------|----------|--------|-------|-------|-------------|---------|---------|---------|---------|--------|---------|--------|------------|
| INTCON1   | 08C0  | NSTDIS | OVAERR | OVBERR | COVAERR | COVBERR  | OVATE  | OVBT  | COVTE | SFTACERR    | DIV0ERR | DMACERR | MATHERR | ADDRERR | STKERR | OSCFAIL | —      | 0000       |
| INTCON2   | 08C2  | GIE    | DISI   | SWTRAP | —       | —        | —      | —     | —     | —           | —       | —       | —       | —       | INT2EP | INT1EP  | INT0EP | 8000       |
| INTCON3   | 08C4  | —      | —      | —      | —       | —        | —      | —     | —     | —           | —       | DAE     | DOOVR   | —       | —      | —       | —      | 0000       |
| INTCON4   | 08C6  | —      | —      | —      | —       | —        | —      | —     | —     | —           | —       | —       | —       | —       | —      | —       | SGHT   | 0000       |
| INTTREG   | 08C8  | —      | —      | —      | —       | ILR<3:0> |        |       |       | VECNUM<7:0> |         |         |         |         |        |         |        | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-23: ECAN1 REGISTER MAP WHEN WIN (C1CTRL1<0>) = 1 FOR dsPIC33EPXXXMC/GP50X DEVICES ONLY**

| File Name  | Addr      | Bit 15                      | Bit 14 | Bit 13 | Bit 12 | Bit 11     | Bit 10 | Bit 9 | Bit 8 | Bit 7      | Bit 6 | Bit 5 | Bit 4 | Bit 3      | Bit 2 | Bit 1      | Bit 0 | All Resets |  |
|------------|-----------|-----------------------------|--------|--------|--------|------------|--------|-------|-------|------------|-------|-------|-------|------------|-------|------------|-------|------------|--|
|            | 0400-041E | See definition when WIN = x |        |        |        |            |        |       |       |            |       |       |       |            |       |            |       |            |  |
| C1BUFPNT1  | 0420      | F3BP<3:0>                   |        |        |        | F2BP<3:0>  |        |       |       | F1BP<3:0>  |       |       |       | F0BP<3:0>  |       |            |       | 0000       |  |
| C1BUFPNT2  | 0422      | F7BP<3:0>                   |        |        |        | F6BP<3:0>  |        |       |       | F5BP<3:0>  |       |       |       | F4BP<3:0>  |       |            |       | 0000       |  |
| C1BUFPNT3  | 0424      | F11BP<3:0>                  |        |        |        | F10BP<3:0> |        |       |       | F9BP<3:0>  |       |       |       | F8BP<3:0>  |       |            |       | 0000       |  |
| C1BUFPNT4  | 0426      | F15BP<3:0>                  |        |        |        | F14BP<3:0> |        |       |       | F13BP<3:0> |       |       |       | F12BP<3:0> |       |            |       | 0000       |  |
| C1RXM0SID  | 0430      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | MIDE       | —     | EID<17:16> |       | xxxx       |  |
| C1RXM0EID  | 0432      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXM1SID  | 0434      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | MIDE       | —     | EID<17:16> |       | xxxx       |  |
| C1RXM1EID  | 0436      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXM2SID  | 0438      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | MIDE       | —     | EID<17:16> |       | xxxx       |  |
| C1RXM2EID  | 043A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF0SID  | 0440      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF0EID  | 0442      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF1SID  | 0444      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF1EID  | 0446      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF2SID  | 0448      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF2EID  | 044A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF3SID  | 044C      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF3EID  | 044E      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF4SID  | 0450      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF4EID  | 0452      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF5SID  | 0454      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF5EID  | 0456      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF6SID  | 0458      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF6EID  | 045A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF7SID  | 045C      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF7EID  | 045E      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF8SID  | 0460      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF8EID  | 0462      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF9SID  | 0464      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF9EID  | 0466      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF10SID | 0468      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |
| C1RXF10EID | 046A      | EID<15:8>                   |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |       |            |       | xxxx       |  |
| C1RXF11SID | 046C      | SID<10:3>                   |        |        |        |            |        |       |       | SID<2:0>   |       |       | —     | EXIDE      | —     | EID<17:16> |       | xxxx       |  |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-33: PERIPHERAL PIN SELECT INPUT REGISTER MAP FOR dsPIC33EPXXXMC20X DEVICES ONLY**

| File Name | Addr. | Bit 15 | Bit 14       | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6      | Bit 5        | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets |      |      |
|-----------|-------|--------|--------------|--------|--------|--------|--------|-------|-------|-------|------------|--------------|-------|-------|-------|-------|-------|------------|------|------|
| RPINR0    | 06A0  | —      | INT1R<6:0>   |        |        |        |        |       |       |       | —          | —            | —     | —     | —     | —     | —     | —          | 0000 |      |
| RPINR1    | 06A2  | —      | —            | —      | —      | —      | —      | —     | —     | —     | INT2R<6:0> |              |       |       |       |       |       |            | 0000 |      |
| RPINR3    | 06A6  | —      | —            | —      | —      | —      | —      | —     | —     | —     | T2CKR<6:0> |              |       |       |       |       |       |            | 0000 |      |
| RPINR7    | 06AE  | —      | IC2R<6:0>    |        |        |        |        |       |       |       | —          | IC1R<6:0>    |       |       |       |       |       |            |      | 0000 |
| RPINR8    | 06B0  | —      | IC4R<6:0>    |        |        |        |        |       |       |       | —          | IC3R<6:0>    |       |       |       |       |       |            |      | 0000 |
| RPINR11   | 06B6  | —      | —            | —      | —      | —      | —      | —     | —     | —     | OCFAR<6:0> |              |       |       |       |       |       |            | 0000 |      |
| RPINR12   | 06B8  | —      | FLT2R<6:0>   |        |        |        |        |       |       |       | —          | FLT1R<6:0>   |       |       |       |       |       |            |      | 0000 |
| RPINR14   | 06BC  | —      | QEB1R<6:0>   |        |        |        |        |       |       |       | —          | QEA1R<6:0>   |       |       |       |       |       |            |      | 0000 |
| RPINR15   | 06BE  | —      | HOME1R<6:0>  |        |        |        |        |       |       |       | —          | INDX1R<6:0>  |       |       |       |       |       |            |      | 0000 |
| RPINR18   | 06C4  | —      | —            | —      | —      | —      | —      | —     | —     | —     | U1RXR<6:0> |              |       |       |       |       |       |            | 0000 |      |
| RPINR19   | 06C6  | —      | —            | —      | —      | —      | —      | —     | —     | —     | U2RXR<6:0> |              |       |       |       |       |       |            | 0000 |      |
| RPINR22   | 06CC  | —      | SCK2INR<6:0> |        |        |        |        |       |       |       | —          | SDI2R<6:0>   |       |       |       |       |       |            |      | 0000 |
| RPINR23   | 06CE  | —      | —            | —      | —      | —      | —      | —     | —     | —     | SS2R<6:0>  |              |       |       |       |       |       |            | 0000 |      |
| RPINR37   | 06EA  | —      | SYNCI1R<6:0> |        |        |        |        |       |       |       | —          | —            | —     | —     | —     | —     | —     | —          | 0000 |      |
| RPINR38   | 06EC  | —      | DTCMP1R<6:0> |        |        |        |        |       |       |       | —          | —            | —     | —     | —     | —     | —     | —          | 0000 |      |
| RPINR39   | 06EE  | —      | DTCMP3R<6:0> |        |        |        |        |       |       |       | —          | DTCMP2R<6:0> |       |       |       |       |       |            |      | 0000 |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-59: PORTA REGISTER MAP FOR PIC24EPXXXGP/MC202 AND dsPIC33EPXXXGP/MC202/502 DEVICES ONLY**

| File Name | Addr. | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|-----------|-------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|------------|
| TRISA     | 0E00  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | TRISA4 | TRISA3 | TRISA2 | TRISA1 | TRISA0 | 001F       |
| PORTA     | 0E02  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | RA4    | RA3    | RA2    | RA1    | RA0    | 0000       |
| LATA      | 0E04  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | LATA4  | LATA3  | LATA2  | LA1TA1 | LA0TA0 | 0000       |
| ODCA      | 0E06  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | ODCA4  | ODCA3  | ODCA2  | ODCA1  | ODCA0  | 0000       |
| CNENA     | 0E08  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | CNIEA4 | CNIEA3 | CNIEA2 | CNIEA1 | CNIEA0 | 0000       |
| CNPUA     | 0E0A  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | CNPUA4 | CNPUA3 | CNPUA2 | CNPUA1 | CNPUA0 | 0000       |
| CNPDA     | 0E0C  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | CNPDA4 | CNPDA3 | CNPDA2 | CNPDA1 | CNPDA0 | 0000       |
| ANSELA    | 0E0E  | —      | —      | —      | —      | —      | —      | —     | —     | —     | —     | —     | ANSA4  | —      | —      | ANSA1  | ANSA0  | 0013       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-60: PORTB REGISTER MAP FOR PIC24EPXXXGP/MC202 AND dsPIC33EPXXXGP/MC202/502 DEVICES ONLY**

| File Name | Addr. | Bit 15  | Bit 14  | Bit 13  | Bit 12  | Bit 11  | Bit 10  | Bit 9  | Bit 8  | Bit 7  | Bit 6  | Bit 5  | Bit 4  | Bit 3  | Bit 2  | Bit 1  | Bit 0  | All Resets |
|-----------|-------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|
| TRISB     | 0E10  | TRISB15 | TRISB14 | TRISB13 | TRISB12 | TRISB11 | TRISB10 | TRISB9 | TRISB8 | TRISB7 | TRISB6 | TRISB5 | TRISB4 | TRISB3 | TRISB2 | TRISB1 | TRISB0 | FFFF       |
| PORTB     | 0E12  | RB15    | RB14    | RB13    | RB12    | RB11    | RB10    | RB9    | RB8    | RB7    | RB6    | RB5    | RB4    | RB3    | RB2    | RB1    | RB0    | xxxx       |
| LATB      | 0E14  | LATB15  | LATB14  | LATB13  | LATB12  | LATB11  | LATB10  | LATB9  | LATB8  | LATB7  | LATB6  | LATB5  | LATB4  | LATB3  | LATB2  | LATB1  | LATB0  | xxxx       |
| ODCB      | 0E16  | ODCB15  | ODCB14  | ODCB13  | ODCB12  | ODCB11  | ODCB10  | ODCB9  | ODCB8  | ODCB7  | ODCB6  | ODCB5  | ODCB4  | ODCB3  | ODCB2  | ODCB1  | ODCB0  | 0000       |
| CNENB     | 0E18  | CNIEB15 | CNIEB14 | CNIEB13 | CNIEB12 | CNIEB11 | CNIEB10 | CNIEB9 | CNIEB8 | CNIEB7 | CNIEB6 | CNIEB5 | CNIEB4 | CNIEB3 | CNIEB2 | CNIEB1 | CNIEB0 | 0000       |
| CNPUB     | 0E1A  | CNPUB15 | CNPUB14 | CNPUB13 | CNPUB12 | CNPUB11 | CNPUB10 | CNPUB9 | CNPUB8 | CNPUB7 | CNPUB6 | CNPUB5 | CNPUB4 | CNPUB3 | CNPUB2 | CNPUB1 | CNPUB0 | 0000       |
| CNPDB     | 0E1C  | CNPDB15 | CNPDB14 | CNPDB13 | CNPDB12 | CNPDB11 | CNPDB10 | CNPDB9 | CNPDB8 | CNPDB7 | CNPDB6 | CNPDB5 | CNPDB4 | CNPDB3 | CNPDB2 | CNPDB1 | CNPDB0 | 0000       |
| ANSELB    | 0E1E  | —       | —       | —       | —       | —       | —       | —      | ANSB8  | —      | —      | —      | —      | ANSB3  | ANSB2  | ANSB1  | ANSB0  | 010F       |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

Allocating different Page registers for read and write access allows the architecture to support data movement between different pages in data memory. This is accomplished by setting the DSRPAG register value to the page from which you want to read, and configuring the DSWPAG register to the page to which it needs to be written. Data can also be moved from different PSV to EDS pages, by configuring the DSRPAG and DSWPAG registers to address PSV and EDS space, respectively. The data can be moved between pages by a single instruction.

When an EDS or PSV page overflow or underflow occurs, EA<15> is cleared as a result of the register indirect EA calculation. An overflow or underflow of the EA in the EDS or PSV pages can occur at the page boundaries when:

- The initial address prior to modification addresses an EDS or PSV page
- The EA calculation uses Pre-Modified or Post-Modified Register Indirect Addressing; however, this does not include Register Offset Addressing

In general, when an overflow is detected, the DSxPAG register is incremented and the EA<15> bit is set to keep the base address within the EDS or PSV window. When an underflow is detected, the DSxPAG register is decremented and the EA<15> bit is set to keep the base address within the EDS or PSV window. This creates a linear EDS and PSV address space, but only when using Register Indirect Addressing modes.

Exceptions to the operation described above arise when entering and exiting the boundaries of Page 0, EDS and PSV spaces. Table 4-61 lists the effects of overflow and underflow scenarios at different boundaries.

In the following cases, when overflow or underflow occurs, the EA<15> bit is set and the DSxPAG is not modified; therefore, the EA will wrap to the beginning of the current page:

- Register Indirect with Register Offset Addressing
- Modulo Addressing
- Bit-Reversed Addressing

**TABLE 4-61: OVERFLOW AND UNDERFLOW SCENARIOS AT PAGE 0, EDS and PSV SPACE BOUNDARIES<sup>(2,3,4)</sup>**

| O/U,<br>R/W | Operation                  | Before         |              |                     | After          |              |                     |
|-------------|----------------------------|----------------|--------------|---------------------|----------------|--------------|---------------------|
|             |                            | DSxPAG         | DS<br>EA<15> | Page<br>Description | DSxPAG         | DS<br>EA<15> | Page<br>Description |
| O,<br>Read  | [ ++Wn ]<br>or<br>[ Wn++ ] | DSRPAG = 0x1FF | 1            | EDS: Last page      | DSRPAG = 0x1FF | 0            | See <b>Note 1</b>   |
| O,<br>Read  |                            | DSRPAG = 0x2FF | 1            | PSV: Last lsw page  | DSRPAG = 0x300 | 1            | PSV: First MSB page |
| O,<br>Read  |                            | DSRPAG = 0x3FF | 1            | PSV: Last MSB page  | DSRPAG = 0x3FF | 0            | See <b>Note 1</b>   |
| O,<br>Write |                            | DSWPAG = 0x1FF | 1            | EDS: Last page      | DSWPAG = 0x1FF | 0            | See <b>Note 1</b>   |
| U,<br>Read  | [ --Wn ]<br>or<br>[ Wn-- ] | DSRPAG = 0x001 | 1            | PSV page            | DSRPAG = 0x001 | 0            | See <b>Note 1</b>   |
| U,<br>Read  |                            | DSRPAG = 0x200 | 1            | PSV: First lsw page | DSRPAG = 0x200 | 0            | See <b>Note 1</b>   |
| U,<br>Read  |                            | DSRPAG = 0x300 | 1            | PSV: First MSB page | DSRPAG = 0x2FF | 1            | PSV: Last lsw page  |

**Legend:** O = Overflow, U = Underflow, R = Read, W = Write

**Note 1:** The Register Indirect Addressing now addresses a location in the base Data Space (0x0000-0x8000).

**2:** An EDS access with DSxPAG = 0x000 will generate an address error trap.

**3:** Only reads from PS are supported using DSRPAG. An attempt to write to PS using DSWPAG will generate an address error trap.

**4:** Pseudo-Linear Addressing is not supported for large offsets.

#### 4.6.3 MODULO ADDRESSING APPLICABILITY

Modulo Addressing can be applied to the Effective Address (EA) calculation associated with any W register. Address boundaries check for addresses equal to:

- The upper boundary addresses for incrementing buffers
- The lower boundary addresses for decrementing buffers

It is important to realize that the address boundaries check for addresses less than, or greater than, the upper (for incrementing buffers) and lower (for decrementing buffers) boundary addresses (not just equal to). Address changes can, therefore, jump beyond boundaries and still be adjusted correctly.

**Note:** The modulo corrected Effective Address is written back to the register only when Pre-Modify or Post-Modify Addressing mode is used to compute the Effective Address. When an address offset (such as  $[W7 + W2]$ ) is used, Modulo Addressing correction is performed but the contents of the register remain unchanged.

#### 4.7 Bit-Reversed Addressing (dsPIC33EPXXXMC20X/50X and dsPIC33EPXXXGP50X Devices Only)

Bit-Reversed Addressing mode is intended to simplify data reordering for radix-2 FFT algorithms. It is supported by the X AGU for data writes only.

The modifier, which can be a constant value or register contents, is regarded as having its bit order reversed. The address source and destination are kept in normal order. Thus, the only operand requiring reversal is the modifier.

#### 4.7.1 BIT-REVERSED ADDRESSING IMPLEMENTATION

Bit-Reversed Addressing mode is enabled when all these conditions are met:

- BWMx bits (W register selection) in the MODCON register are any value other than '1111' (the stack cannot be accessed using Bit-Reversed Addressing)
- The BREN bit is set in the XBREV register
- The addressing mode used is Register Indirect with Pre-Increment or Post-Increment

If the length of a bit-reversed buffer is  $M = 2^N$  bytes, the last 'N' bits of the data buffer start address must be zeros.

XBREV<14:0> is the Bit-Reversed Addressing modifier, or 'pivot point', which is typically a constant. In the case of an FFT computation, its value is equal to half of the FFT data buffer size.

**Note:** All bit-reversed EA calculations assume word-sized data (LSb of every EA is always clear). The XBREVx value is scaled accordingly to generate compatible (byte) addresses.

When enabled, Bit-Reversed Addressing is executed only for Register Indirect with Pre-Increment or Post-Increment Addressing and word-sized data writes. It does not function for any other addressing mode or for byte-sized data and normal addresses are generated instead. When Bit-Reversed Addressing is active, the W Address Pointer is always added to the address modifier (XBREVx) and the offset associated with the Register Indirect Addressing mode is ignored. In addition, as word-sized data is a requirement, the LSb of the EA is ignored (and always clear).

**Note:** Modulo Addressing and Bit-Reversed Addressing can be enabled simultaneously using the same W register, but Bit-Reversed Addressing operation will always take precedence for data writes when enabled.

If Bit-Reversed Addressing has already been enabled by setting the BREN (XBREV<15>) bit, a write to the XBREV register should not be immediately followed by an indirect read operation using the W register that has been designated as the Bit-Reversed Pointer.



**REGISTER 10-5: PMD6: PERIPHERAL MODULE DISABLE CONTROL REGISTER 6**

|        |     |     |     |     |                       |                       |                       |
|--------|-----|-----|-----|-----|-----------------------|-----------------------|-----------------------|
| U-0    | U-0 | U-0 | U-0 | U-0 | R/W-0                 | R/W-0                 | R/W-0                 |
| —      | —   | —   | —   | —   | PWM3MD <sup>(1)</sup> | PWM2MD <sup>(1)</sup> | PWM1MD <sup>(1)</sup> |
| bit 15 |     |     |     |     | bit 8                 |                       |                       |

|       |     |     |     |     |       |     |     |
|-------|-----|-----|-----|-----|-------|-----|-----|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0   | U-0 | U-0 |
| —     | —   | —   | —   | —   | —     | —   | —   |
| bit 7 |     |     |     |     | bit 0 |     |     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-11 **Unimplemented:** Read as '0'

bit 10 **PWM3MD:** PWM3 Module Disable bit<sup>(1)</sup>

1 = PWM3 module is disabled

0 = PWM3 module is enabled

bit 9 **PWM2MD:** PWM2 Module Disable bit<sup>(1)</sup>

1 = PWM2 module is disabled

0 = PWM2 module is enabled

bit 8 **PWM1MD:** PWM1 Module Disable bit<sup>(1)</sup>

1 = PWM1 module is disabled

0 = PWM1 module is enabled

bit 7-0 **Unimplemented:** Read as '0'

**Note 1:** This bit is available on dsPIC33EPXXXMC50X/20X and PIC24EPXXXMC20X devices only.

**REGISTER 11-24: RPOR6: PERIPHERAL PIN SELECT OUTPUT REGISTER 6**

|        |     |            |       |       |       |       |       |
|--------|-----|------------|-------|-------|-------|-------|-------|
| U-0    | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —      | —   | RP57R<5:0> |       |       |       |       |       |
| bit 15 |     |            |       |       |       |       | bit 8 |

|       |     |            |       |       |       |       |       |
|-------|-----|------------|-------|-------|-------|-------|-------|
| U-0   | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | RP56R<5:0> |       |       |       |       |       |
| bit 7 |     |            |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 15-14      **Unimplemented:** Read as '0'
- bit 13-8      **RP57R<5:0>:** Peripheral Output Function is Assigned to RP57 Output Pin bits  
(see Table 11-3 for peripheral function numbers)
- bit 7-6      **Unimplemented:** Read as '0'
- bit 5-0      **RP56R<5:0>:** Peripheral Output Function is Assigned to RP56 Output Pin bits  
(see Table 11-3 for peripheral function numbers)

**REGISTER 11-25: RPOR7: PERIPHERAL PIN SELECT OUTPUT REGISTER 7**

|        |     |            |       |       |       |       |       |
|--------|-----|------------|-------|-------|-------|-------|-------|
| U-0    | U-0 | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —      | —   | RP97R<5:0> |       |       |       |       |       |
| bit 15 |     |            |       |       |       |       | bit 8 |

|       |     |     |     |     |     |     |       |
|-------|-----|-----|-----|-----|-----|-----|-------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —     | —   | —   | —   | —   | —   | —   | —     |
| bit 7 |     |     |     |     |     |     | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 15-14      **Unimplemented:** Read as '0'
- bit 13-8      **RP97R<5:0>:** Peripheral Output Function is Assigned to RP97 Output Pin bits  
(see Table 11-3 for peripheral function numbers)
- bit 7-0      **Unimplemented:** Read as '0'

**REGISTER 15-2: OCxCON2: OUTPUT COMPARE x CONTROL REGISTER 2**

|        |        |          |       |     |     |     |       |
|--------|--------|----------|-------|-----|-----|-----|-------|
| R/W-0  | R/W-0  | R/W-0    | R/W-0 | U-0 | U-0 | U-0 | R/W-0 |
| FLTMD  | FLTOUT | FLTTRIEN | OCINV | —   | —   | —   | OC32  |
| bit 15 |        |          |       |     |     |     | bit 8 |

|        |           |         |          |          |          |          |          |
|--------|-----------|---------|----------|----------|----------|----------|----------|
| R/W-0  | R/W-0, HS | R/W-0   | R/W-0    | R/W-1    | R/W-1    | R/W-0    | R/W-0    |
| OCTRIG | TRIGSTAT  | OCTRIIS | SYNCSEL4 | SYNCSEL3 | SYNCSEL2 | SYNCSEL1 | SYNCSEL0 |
| bit 7  |           |         |          |          |          |          | bit 0    |

|                   |                            |                                    |                    |
|-------------------|----------------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | HS = Hardware Settable bit |                                    |                    |
| R = Readable bit  | W = Writable bit           | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set           | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15      **FLTMD:** Fault Mode Select bit  
1 = Fault mode is maintained until the Fault source is removed; the corresponding OCFLTx bit is cleared in software and a new PWM period starts  
0 = Fault mode is maintained until the Fault source is removed and a new PWM period starts
- bit 14      **FLTOUT:** Fault Out bit  
1 = PWM output is driven high on a Fault  
0 = PWM output is driven low on a Fault
- bit 13      **FLTTRIEN:** Fault Output State Select bit  
1 = OCx pin is tri-stated on a Fault condition  
0 = OCx pin I/O state is defined by the FLTOUT bit on a Fault condition
- bit 12      **OCINV:** Output Compare x Invert bit  
1 = OCx output is inverted  
0 = OCx output is not inverted
- bit 11-9    **Unimplemented:** Read as '0'
- bit 8        **OC32:** Cascade Two OCx Modules Enable bit (32-bit operation)  
1 = Cascade module operation is enabled  
0 = Cascade module operation is disabled
- bit 7        **OCTRIG:** Output Compare x Trigger/Sync Select bit  
1 = Triggers OCx from the source designated by the SYNCSELx bits  
0 = Synchronizes OCx with the source designated by the SYNCSELx bits
- bit 6        **TRIGSTAT:** Timer Trigger Status bit  
1 = Timer source has been triggered and is running  
0 = Timer source has not been triggered and is being held clear
- bit 5        **OCTRIIS:** Output Compare x Output Pin Direction Select bit  
1 = OCx is tri-stated  
0 = Output Compare x module drives the OCx pin

- Note 1:** Do not use the OCx module as its own Synchronization or Trigger source.
- 2:** When the OCy module is turned OFF, it sends a trigger out signal. If the OCx module uses the OCy module as a Trigger source, the OCy module must be unselected as a Trigger source prior to disabling it.
- 3:** Each Output Compare x module (OCx) has one PTG Trigger/Synchronization source. See **Section 24.0 “Peripheral Trigger Generator (PTG) Module”** for more information.  
PTGO0 = OC1  
PTGO1 = OC2  
PTGO2 = OC3  
PTGO3 = OC4

**REGISTER 16-16: LEBCONx: PWMx LEADING-EDGE BLANKING CONTROL REGISTER**

|        |       |                    |                    |          |         |       |       |
|--------|-------|--------------------|--------------------|----------|---------|-------|-------|
| R/W-0  | R/W-0 | R/W-0              | R/W-0              | R/W-0    | R/W-0   | U-0   | U-0   |
| PHR    | PHF   | PLR                | PLF                | FLTLEBEN | CLLEBEN | —     | —     |
| bit 15 |       |                    |                    |          |         | bit 8 |       |
| U-0    | U-0   | R/W-0              | R/W-0              | R/W-0    | R/W-0   | R/W-0 | R/W-0 |
| —      | —     | BCH <sup>(1)</sup> | BCL <sup>(1)</sup> | BPHH     | BPHL    | BPLH  | BPLL  |
| bit 7  |       |                    |                    |          |         | bit 0 |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15 **PHR:** PWMxH Rising Edge Trigger Enable bit  
1 = Rising edge of PWMxH will trigger Leading-Edge Blanking counter  
0 = Leading-Edge Blanking ignores rising edge of PWMxH
- bit 14 **PHF:** PWMxH Falling Edge Trigger Enable bit  
1 = Falling edge of PWMxH will trigger Leading-Edge Blanking counter  
0 = Leading-Edge Blanking ignores falling edge of PWMxH
- bit 13 **PLR:** PWMxL Rising Edge Trigger Enable bit  
1 = Rising edge of PWMxL will trigger Leading-Edge Blanking counter  
0 = Leading-Edge Blanking ignores rising edge of PWMxL
- bit 12 **PLF:** PWMxL Falling Edge Trigger Enable bit  
1 = Falling edge of PWMxL will trigger Leading-Edge Blanking counter  
0 = Leading-Edge Blanking ignores falling edge of PWMxL
- bit 11 **FLTLEBEN:** Fault Input Leading-Edge Blanking Enable bit  
1 = Leading-Edge Blanking is applied to selected Fault input  
0 = Leading-Edge Blanking is not applied to selected Fault input
- bit 10 **CLLEBEN:** Current-Limit Leading-Edge Blanking Enable bit  
1 = Leading-Edge Blanking is applied to selected current-limit input  
0 = Leading-Edge Blanking is not applied to selected current-limit input
- bit 9-6 **Unimplemented:** Read as '0'
- bit 5 **BCH:** Blanking in Selected Blanking Signal High Enable bit<sup>(1)</sup>  
1 = State blanking (of current-limit and/or Fault input signals) when selected blanking signal is high  
0 = No blanking when selected blanking signal is high
- bit 4 **BCL:** Blanking in Selected Blanking Signal Low Enable bit<sup>(1)</sup>  
1 = State blanking (of current-limit and/or Fault input signals) when selected blanking signal is low  
0 = No blanking when selected blanking signal is low
- bit 3 **BPHH:** Blanking in PWMxH High Enable bit  
1 = State blanking (of current-limit and/or Fault input signals) when PWMxH output is high  
0 = No blanking when PWMxH output is high
- bit 2 **BPHL:** Blanking in PWMxH Low Enable bit  
1 = State blanking (of current-limit and/or Fault input signals) when PWMxH output is low  
0 = No blanking when PWMxH output is low
- bit 1 **BPLH:** Blanking in PWMxL High Enable bit  
1 = State blanking (of current-limit and/or Fault input signals) when PWMxL output is high  
0 = No blanking when PWMxL output is high
- bit 0 **BPLL:** Blanking in PWMxL Low Enable bit  
1 = State blanking (of current-limit and/or Fault input signals) when PWMxL output is low  
0 = No blanking when PWMxL output is low

**Note 1:** The blanking signal is selected via the BLANKSELx bits in the AUXCONx register.

**REGISTER 17-10: INDX1HLD: INDEX COUNTER 1 HOLD REGISTER**

|               |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0         | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| INDXHLD<15:8> |       |       |       |       |       |       |       |
| bit 15        |       |       |       | bit 8 |       |       |       |

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| INDXHLD<7:0> |       |       |       |       |       |       |       |
| bit 7        |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **INDXHLD<15:0>**: Hold Register for Reading and Writing INDX1CNTH bits

**REGISTER 17-11: QE11ICH: QE11 INITIALIZATION/CAPTURE HIGH WORD REGISTER**

|               |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0         | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| QE11IC<31:24> |       |       |       |       |       |       |       |
| bit 15        |       |       |       | bit 8 |       |       |       |

|               |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0         | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| QE11IC<23:16> |       |       |       |       |       |       |       |
| bit 7         |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **QE11IC<31:16>**: High Word Used to Form 32-Bit Initialization/Capture Register (QE11IC) bits

**REGISTER 17-12: QE11ICL: QE11 INITIALIZATION/CAPTURE LOW WORD REGISTER**

|               |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0         | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| QE11ICL<15:8> |       |       |       |       |       |       |       |
| bit 15        |       |       |       | bit 8 |       |       |       |

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| QE11ICL<7:0> |       |       |       |       |       |       |       |
| bit 7        |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **QE11ICL<15:0>**: Low Word Used to Form 32-Bit Initialization/Capture Register (QE11IC) bits

**REGISTER 22-2: CTMUCON2: CTMU CONTROL REGISTER 2**

|         |         |          |          |          |          |          |          |
|---------|---------|----------|----------|----------|----------|----------|----------|
| R/W-0   | R/W-0   | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    |
| EDG1MOD | EDG1POL | EDG1SEL3 | EDG1SEL2 | EDG1SEL1 | EDG1SEL0 | EDG2STAT | EDG1STAT |
| bit 15  |         |          |          |          |          |          | bit 8    |

|         |         |          |          |          |          |     |       |
|---------|---------|----------|----------|----------|----------|-----|-------|
| R/W-0   | R/W-0   | R/W-0    | R/W-0    | R/W-0    | R/W-0    | U-0 | U-0   |
| EDG2MOD | EDG2POL | EDG2SEL3 | EDG2SEL2 | EDG2SEL1 | EDG2SEL0 | —   | —     |
| bit 7   |         |          |          |          |          |     | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **EDG1MOD:** Edge 1 Edge Sampling Mode Selection bit

1 = Edge 1 is edge-sensitive

0 = Edge 1 is level-sensitive

bit 14 **EDG1POL:** Edge 1 Polarity Select bit

1 = Edge 1 is programmed for a positive edge response

0 = Edge 1 is programmed for a negative edge response

bit 13-10 **EDG1SEL<3:0>:** Edge 1 Source Select bits

1xxx = Reserved

01xx = Reserved

0011 = CTED1 pin

0010 = CTED2 pin

0001 = OC1 module

0000 = Timer1 module

bit 9 **EDG2STAT:** Edge 2 Status bit

Indicates the status of Edge 2 and can be written to control the edge source.

1 = Edge 2 has occurred

0 = Edge 2 has not occurred

bit 8 **EDG1STAT:** Edge 1 Status bit

Indicates the status of Edge 1 and can be written to control the edge source.

1 = Edge 1 has occurred

0 = Edge 1 has not occurred

bit 7 **EDG2MOD:** Edge 2 Edge Sampling Mode Selection bit

1 = Edge 2 is edge-sensitive

0 = Edge 2 is level-sensitive

bit 6 **EDG2POL:** Edge 2 Polarity Select bit

1 = Edge 2 is programmed for a positive edge response

0 = Edge 2 is programmed for a negative edge response

bit 5-2 **EDG2SEL<3:0>:** Edge 2 Source Select bits

1111 = Reserved

01xx = Reserved

0100 = CMP1 module

0011 = CTED2 pin

0010 = CTED1 pin

0001 = OC1 module

0000 = IC1 module

bit 1-0 **Unimplemented:** Read as '0'

NOTES:

**REGISTER 24-10: PTGADJ: PTG ADJUST REGISTER<sup>(1)</sup>**

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGADJ<15:8> |       |       |       |       |       |       |       |
| bit 15       |       |       |       | bit 8 |       |       |       |

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGADJ<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **PTGADJ<15:0>**: PTG Adjust Register bits

This register holds user-supplied data to be added to the PTGTxLIM, PTGCxLIM, PTGSDLIM or PTGL0 registers with the PTGADD command.

**Note 1:** This register is read-only when the PTG module is executing Step commands (PTGEN = 1 and PTGSTRT = 1).

**REGISTER 24-11: PTGL0: PTG LITERAL 0 REGISTER<sup>(1)</sup>**

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGL0<15:8> |       |       |       |       |       |       |       |
| bit 15      |       |       |       | bit 8 |       |       |       |

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGL0<7:0> |       |       |       |       |       |       |       |
| bit 7      |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **PTGL0<15:0>**: PTG Literal 0 Register bits

This register holds the 16-bit value to be written to the AD1CHS0 register with the PTGCTRL Step command.

**Note 1:** This register is read-only when the PTG module is executing Step commands (PTGEN = 1 and PTGSTRT = 1).



**REGISTER 25-7: CVRCON: COMPARATOR VOLTAGE REFERENCE CONTROL REGISTER**

|        |                       |     |     |     |         |       |     |
|--------|-----------------------|-----|-----|-----|---------|-------|-----|
| U-0    | R/W-0                 | U-0 | U-0 | U-0 | R/W-0   | U-0   | U-0 |
| —      | CVR2OE <sup>(1)</sup> | —   | —   | —   | VREFSEL | —     | —   |
| bit 15 |                       |     |     |     |         | bit 8 |     |

|       |                       |       |                      |       |       |       |       |
|-------|-----------------------|-------|----------------------|-------|-------|-------|-------|
| R/W-0 | R/W-0                 | R/W-0 | R/W-0                | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| CVREN | CVR1OE <sup>(1)</sup> | CVRR  | CVRSS <sup>(2)</sup> | CVR3  | CVR2  | CVR1  | CVR0  |
| bit 7 |                       |       |                      |       |       | bit 0 |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14 **CVR2OE:** Comparator Voltage Reference 2 Output Enable bit<sup>(1)</sup>

1 = (AVDD – AVSS)/2 is connected to the CVREF2O pin

0 = (AVDD – AVSS)/2 is disconnected from the CVREF2O pin

bit 13-11 **Unimplemented:** Read as '0'

bit 10 **VREFSEL:** Comparator Voltage Reference Select bit

1 = CVREFIN = VREF+

0 = CVREFIN is generated by the resistor network

bit 9-8 **Unimplemented:** Read as '0'

bit 7 **CVREN:** Comparator Voltage Reference Enable bit

1 = Comparator voltage reference circuit is powered on

0 = Comparator voltage reference circuit is powered down

bit 6 **CVR1OE:** Comparator Voltage Reference 1 Output Enable bit<sup>(1)</sup>

1 = Voltage level is output on the CVREF1O pin

0 = Voltage level is disconnected from then CVREF1O pin

bit 5 **CVRR:** Comparator Voltage Reference Range Selection bit

1 = CVRSRC/24 step-size

0 = CVRSRC/32 step-size

bit 4 **CVRSS:** Comparator Voltage Reference Source Selection bit<sup>(2)</sup>

1 = Comparator voltage reference source, CVRSRC = (VREF+) – (AVSS)

0 = Comparator voltage reference source, CVRSRC = AVDD – AVSS

bit 3-0 **CVR<3:0>** Comparator Voltage Reference Value Selection  $0 \leq \text{CVR<3:0>} \leq 15$  bits

When CVRR = 1:

$\text{CVREFIN} = (\text{CVR<3:0>}/24) \cdot (\text{CVRSRC})$

When CVRR = 0:

$\text{CVREFIN} = (\text{CVRSRC}/4) + (\text{CVR<3:0>}/32) \cdot (\text{CVRSRC})$

**Note 1:** CVR<sub>x</sub>OE overrides the TRIS<sub>x</sub> and the ANSEL<sub>x</sub> bit settings.

**2:** In order to operate with CVRSS = 1, at least one of the comparator modules must be enabled.

**TABLE 30-22: RESET, WATCHDOG TIMER, OSCILLATOR START-UP TIMER, POWER-UP TIMER  
TIMING REQUIREMENTS**

| AC CHARACTERISTICS |           |                                                          | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |                     |      |       |                                                                                                    |
|--------------------|-----------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|-------|----------------------------------------------------------------------------------------------------|
| Param No.          | Symbol    | Characteristic <sup>(1)</sup>                            | Min.                                                                                                                                                                    | Typ. <sup>(2)</sup> | Max. | Units | Conditions                                                                                         |
| SY00               | TPU       | Power-up Period                                          | —                                                                                                                                                                       | 400                 | 600  | μs    |                                                                                                    |
| SY10               | TOST      | Oscillator Start-up Time                                 | —                                                                                                                                                                       | 1024 TOSC           | —    | —     | TOSC = OSC1 period                                                                                 |
| SY12               | TWDT      | Watchdog Timer Time-out Period                           | 0.81                                                                                                                                                                    | 0.98                | 1.22 | ms    | WDTPRE = 0, WDTPOST<3:0> = 0000, using LPRC tolerances indicated in F21 (see Table 30-20) at +85°C |
|                    |           |                                                          | 3.26                                                                                                                                                                    | 3.91                | 4.88 | ms    | WDTPRE = 1, WDTPOST<3:0> = 0000, using LPRC tolerances indicated in F21 (see Table 30-20) at +85°C |
| SY13               | TIOZ      | I/O High-Impedance from MCLR Low or Watchdog Timer Reset | 0.68                                                                                                                                                                    | 0.72                | 1.2  | μs    |                                                                                                    |
| SY20               | TMCLR     | MCLR Pulse Width (low)                                   | 2                                                                                                                                                                       | —                   | —    | μs    |                                                                                                    |
| SY30               | TBOR      | BOR Pulse Width (low)                                    | 1                                                                                                                                                                       | —                   | —    | μs    |                                                                                                    |
| SY35               | TFSCM     | Fail-Safe Clock Monitor Delay                            | —                                                                                                                                                                       | 500                 | 900  | μs    | -40°C to +85°C                                                                                     |
| SY36               | TVREG     | Voltage Regulator Standby-to-Active mode Transition Time | —                                                                                                                                                                       | —                   | 30   | μs    |                                                                                                    |
| SY37               | TOSCDFRC  | FRC Oscillator Start-up Delay                            | 46                                                                                                                                                                      | 48                  | 54   | μs    |                                                                                                    |
| SY38               | TOSCDLPRC | LPRC Oscillator Start-up Delay                           | —                                                                                                                                                                       | —                   | 70   | μs    |                                                                                                    |

**Note 1:** These parameters are characterized but not tested in manufacturing.**2:** Data in "Typical" column is at 3.3V, +25°C unless otherwise stated.

**FIGURE 30-19: SPI2 SLAVE MODE (FULL-DUPLEX, CKE = 1, CKP = 1, SMP = 0)**  
**TIMING CHARACTERISTICS**

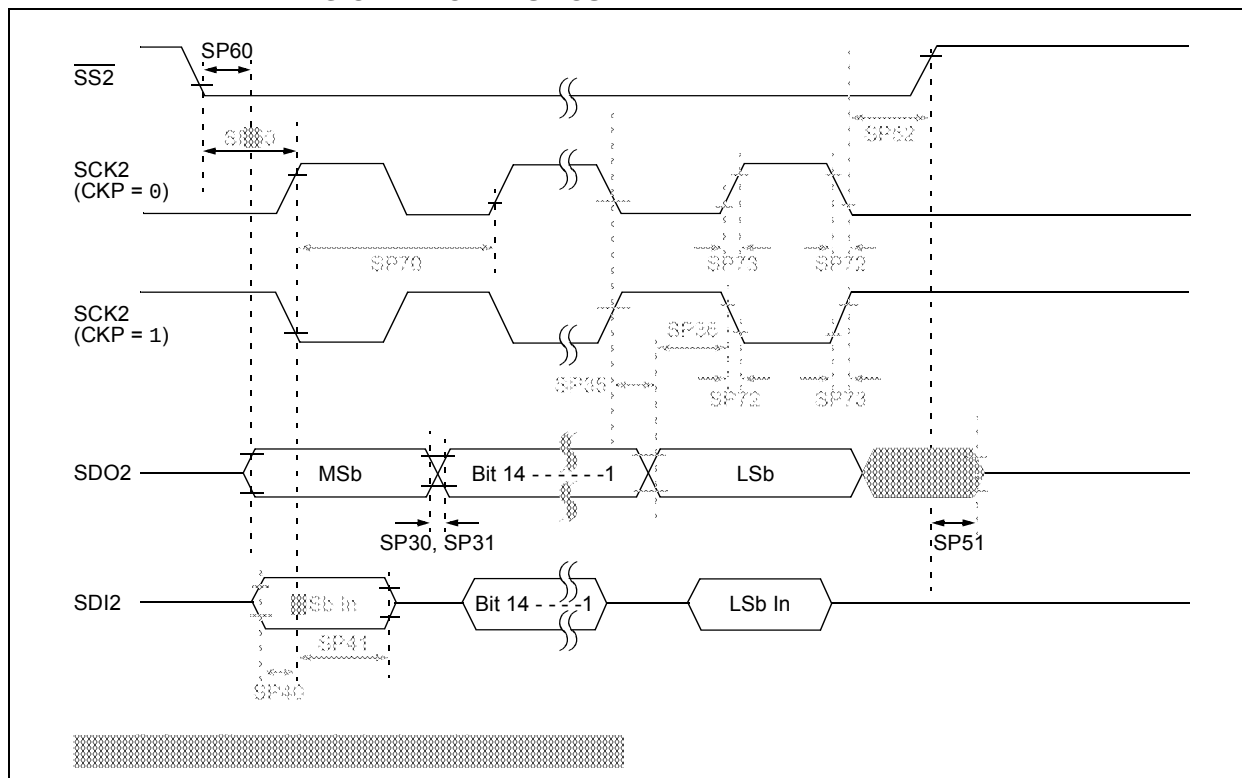


FIGURE 30-30: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (MASTER MODE)


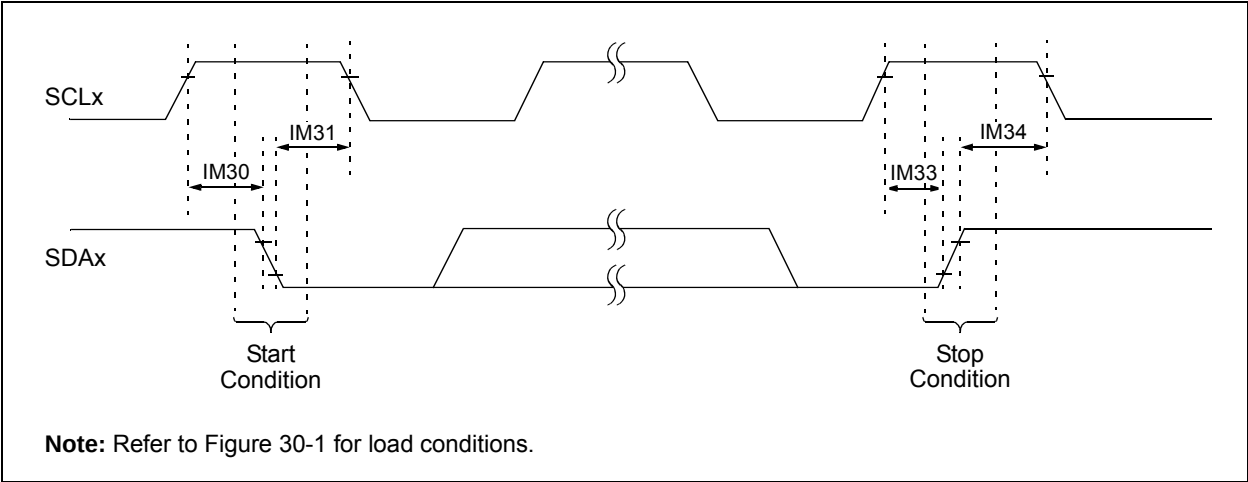


FIGURE 30-31: I2Cx BUS DATA TIMING CHARACTERISTICS (MASTER MODE)

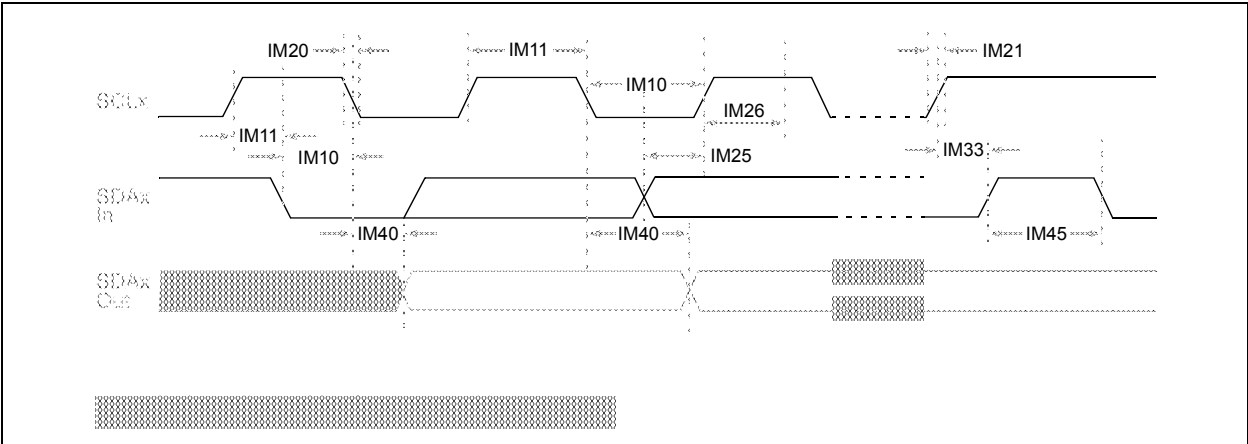

|                                                                               |     |                                                                         |         |
|-------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------|---------|
| DMAxSTA <sub>H</sub> (DMA Channel x<br>Start Address A, High) .....           | 144 | PTGCST (PTG Control/Status).....                                        | 340     |
| DMAxSTAL (DMA Channel x<br>Start Address A, Low) .....                        | 144 | PTGHOLD (PTG Hold) .....                                                | 347     |
| DMAxSTBH (DMA Channel x<br>Start Address B, High) .....                       | 145 | PTGL0 (PTG Literal 0).....                                              | 348     |
| DMAxSTBL (DMA Channel x<br>Start Address B, Low) .....                        | 145 | PTGQPTR (PTG Step Queue Pointer) .....                                  | 349     |
| DSADRH (DMA Most Recent RAM<br>High Address) .....                            | 147 | PTGQUE <sub>x</sub> (PTG Step Queue x) .....                            | 349     |
| DSADRL (DMA Most Recent RAM<br>Low Address) .....                             | 147 | PTGSDLIM (PTG Step Delay Limit) .....                                   | 346     |
| DTR <sub>x</sub> (PWM <sub>x</sub> Dead-Time) .....                           | 238 | PTGT0LIM (PTG Timer0 Limit).....                                        | 345     |
| FCLCON <sub>x</sub> (PWM <sub>x</sub> Fault Current-Limit Control) .....      | 243 | PTGT1LIM (PTG Timer1 Limit).....                                        | 345     |
| I2CxCON (I2Cx Control) .....                                                  | 276 | PTPER (PWM <sub>x</sub> Primary Master Time<br>Base Period).....        | 233     |
| I2CxMSK (I2Cx Slave Mode Address Mask) .....                                  | 280 | PWMCON <sub>x</sub> (PWM <sub>x</sub> Control).....                     | 235     |
| I2CxSTAT (I2Cx Status) .....                                                  | 278 | QE1CON (QE1 Control) .....                                              | 252     |
| ICxCON1 (Input Capture x Control 1) .....                                     | 215 | QE1GECH (QE1 Greater Than or Equal<br>Compare High Word).....           | 262     |
| ICxCON2 (Input Capture x Control 2) .....                                     | 216 | QE1GECL (QE1 Greater Than or Equal<br>Compare Low Word) .....           | 262     |
| INDX1CNTH (Index Counter 1 High Word) .....                                   | 259 | QE1ICH (QE1 Initialization/Capture<br>High Word) .....                  | 260     |
| INDX1CNTL (Index Counter 1 Low Word) .....                                    | 259 | QE1ICL (QE1 Initialization/Capture<br>Low Word) .....                   | 260     |
| INDX1HLD (Index Counter 1 Hold) .....                                         | 260 | QE1IIOC (QE1 I/O Control) .....                                         | 254     |
| INT1HLDH (Interval 1 Timer Hold High Word).....                               | 264 | QE1LECH (QE1 Less Than or Equal<br>Compare High Word).....              | 261     |
| INT1HLDL (Interval 1 Timer Hold Low Word) .....                               | 264 | QE1LECL (QE1 Less Than or Equal<br>Compare Low Word) .....              | 261     |
| INT1TMRH (Interval 1 Timer High Word).....                                    | 263 | QE1STAT (QE1 Status).....                                               | 256     |
| INT1TMRL (Interval 1 Timer Low Word).....                                     | 263 | RCON (Reset Control).....                                               | 125     |
| INTCON1 (Interrupt Control 1) .....                                           | 134 | REFOCON (Reference Oscillator Control) .....                            | 162     |
| INTCON2 (Interrupt Control 2) .....                                           | 136 | RPINR0 (Peripheral Pin Select Input 0).....                             | 183     |
| INTCON2 (Interrupt Control 3).....                                            | 137 | RPINR1 (Peripheral Pin Select Input 1).....                             | 184     |
| INTCON4 (Interrupt Control 4) .....                                           | 137 | RPINR11 (Peripheral Pin Select Input 11).....                           | 187     |
| INTTREG (Interrupt Control and Status).....                                   | 138 | RPINR12 (Peripheral Pin Select Input 12).....                           | 188     |
| IOCON <sub>x</sub> (PWM <sub>x</sub> I/O Control) .....                       | 240 | RPINR14 (Peripheral Pin Select Input 14).....                           | 189     |
| LEBCON <sub>x</sub> (PWM <sub>x</sub> Leading-Edge<br>Blanking Control) ..... | 245 | RPINR15 (Peripheral Pin Select Input 15).....                           | 190     |
| LEBDLY <sub>x</sub> (PWM <sub>x</sub> Leading-Edge<br>Blanking Delay) .....   | 246 | RPINR18 (Peripheral Pin Select Input 18).....                           | 191     |
| MDC (PWM <sub>x</sub> Master Duty Cycle).....                                 | 234 | RPINR19 (Peripheral Pin Select Input 19).....                           | 191     |
| NVMADRH (Nonvolatile Memory Address High) .....                               | 122 | RPINR22 (Peripheral Pin Select Input 22).....                           | 192     |
| NVMADRL (Nonvolatile Memory Address Low).....                                 | 122 | RPINR23 (Peripheral Pin Select Input 23).....                           | 193     |
| NVMCON (Nonvolatile Memory (NVM) Control) .....                               | 121 | RPINR26 (Peripheral Pin Select Input 26).....                           | 193     |
| NVMKEY (Nonvolatile Memory Key) .....                                         | 122 | RPINR3 (Peripheral Pin Select Input 3).....                             | 184     |
| OCxCON1 (Output Compare x Control 1) .....                                    | 221 | RPINR37 (Peripheral Pin Select Input 37).....                           | 194     |
| OCxCON2 (Output Compare x Control 2) .....                                    | 223 | RPINR38 (Peripheral Pin Select Input 38).....                           | 195     |
| OSCCON (Oscillator Control) .....                                             | 156 | RPINR39 (Peripheral Pin Select Input 39).....                           | 196     |
| OSCTUN (FRC Oscillator Tuning) .....                                          | 161 | RPINR7 (Peripheral Pin Select Input 7).....                             | 185     |
| PDC <sub>x</sub> (PWM <sub>x</sub> Generator Duty Cycle) .....                | 237 | RPINR8 (Peripheral Pin Select Input 8).....                             | 186     |
| PHASE <sub>x</sub> (PWM <sub>x</sub> Primary Phase-Shift) .....               | 237 | RPOR0 (Peripheral Pin Select Output 0).....                             | 197     |
| PLLFB <sub>D</sub> (PLL Feedback Divisor) .....                               | 160 | RPOR1 (Peripheral Pin Select Output 1).....                             | 197     |
| PMD1 (Peripheral Module Disable Control 1) .....                              | 166 | RPOR2 (Peripheral Pin Select Output 2).....                             | 198     |
| PMD2 (Peripheral Module Disable Control 2).....                               | 168 | RPOR3 (Peripheral Pin Select Output 3).....                             | 198     |
| PMD3 (Peripheral Module Disable Control 3).....                               | 169 | RPOR4 (Peripheral Pin Select Output 4).....                             | 199     |
| PMD4 (Peripheral Module Disable Control 4).....                               | 169 | RPOR5 (Peripheral Pin Select Output 5).....                             | 199     |
| PMD6 (Peripheral Module Disable Control 6).....                               | 170 | RPOR6 (Peripheral Pin Select Output 6).....                             | 200     |
| PMD7 (Peripheral Module Disable Control 7).....                               | 171 | RPOR7 (Peripheral Pin Select Output 7).....                             | 200     |
| POS1CNTH (Position Counter 1 High Word) .....                                 | 258 | RPOR8 (Peripheral Pin Select Output 8).....                             | 201     |
| POS1CNTL (Position Counter1 Low Word) .....                                   | 258 | RPOR9 (Peripheral Pin Select Output 9).....                             | 201     |
| POS1HLD (Position Counter 1 Hold) .....                                       | 258 | SEVTCMP (PWM <sub>x</sub> Primary Special<br>Event Compare) .....       | 233     |
| PTCON (PWM <sub>x</sub> Time Base Control) .....                              | 230 | SPIxCON1 (SPI <sub>x</sub> Control 1).....                              | 270     |
| PTCON2 (PWM <sub>x</sub> Primary Master Clock<br>Divider Select 2).....       | 232 | SPIxCON2 (SPI <sub>x</sub> Control 2).....                              | 272     |
| PTGADJ (PTG Adjust) .....                                                     | 348 | SPIxSTAT (SPI <sub>x</sub> Status and Control) .....                    | 268     |
| PTGBTE (PTG Broadcast Trigger Enable) .....                                   | 343 | SR (CPU STATUS).....                                                    | 40, 132 |
| PTGC0LIM (PTG Counter 0 Limit) .....                                          | 346 | T1CON (Timer1 Control) .....                                            | 205     |
| PTGC1LIM (PTG Counter 1 Limit) .....                                          | 347 | TRGCON <sub>x</sub> (PWM <sub>x</sub> Trigger Control) .....            | 239     |
| PTGCON (PTG Control) .....                                                    | 342 | TRIG <sub>x</sub> (PWM <sub>x</sub> Primary Trigger Compare Value)..... | 242     |
|                                                                               |     | TxCON (Timer2 and Timer4 Control) .....                                 | 210     |