


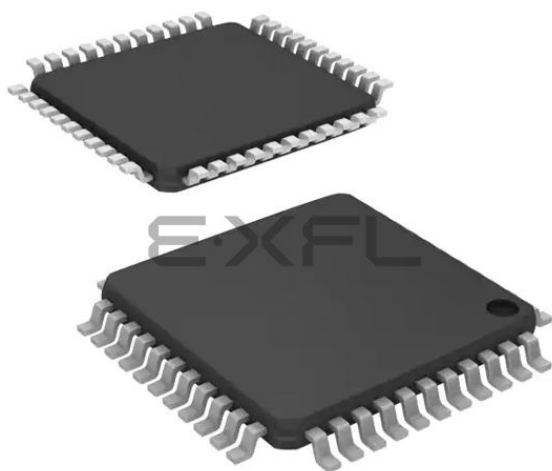

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"


#### Details

|                            |                                                                                                                                                                           |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                    |
| Core Processor             | PIC                                                                                                                                                                       |
| Core Size                  | 16-Bit                                                                                                                                                                    |
| Speed                      | 60 MIPS                                                                                                                                                                   |
| Connectivity               | I <sup>2</sup> C, IrDA, LINbus, SPI, UART/USART                                                                                                                           |
| Peripherals                | Brown-out Detect/Reset, DMA, POR, PWM, WDT                                                                                                                                |
| Number of I/O              | 35                                                                                                                                                                        |
| Program Memory Size        | 64KB (22K x 24)                                                                                                                                                           |
| Program Memory Type        | FLASH                                                                                                                                                                     |
| EEPROM Size                | -                                                                                                                                                                         |
| RAM Size                   | 4K x 16                                                                                                                                                                   |
| Voltage - Supply (Vcc/Vdd) | 3V ~ 3.6V                                                                                                                                                                 |
| Data Converters            | A/D 9x10b/12b                                                                                                                                                             |
| Oscillator Type            | Internal                                                                                                                                                                  |
| Operating Temperature      | -40°C ~ 125°C (TA)                                                                                                                                                        |
| Mounting Type              | Surface Mount                                                                                                                                                             |
| Package / Case             | 44-TQFP                                                                                                                                                                   |
| Supplier Device Package    | 44-TQFP (10x10)                                                                                                                                                           |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic24ep64gp204-e-pt">https://www.e-xfl.com/product-detail/microchip-technology/pic24ep64gp204-e-pt</a> |

## Pin Diagrams (Continued)

28-Pin QFN-S<sup>(1,2,3)</sup>

■ = Pins are up to 5V tolerant

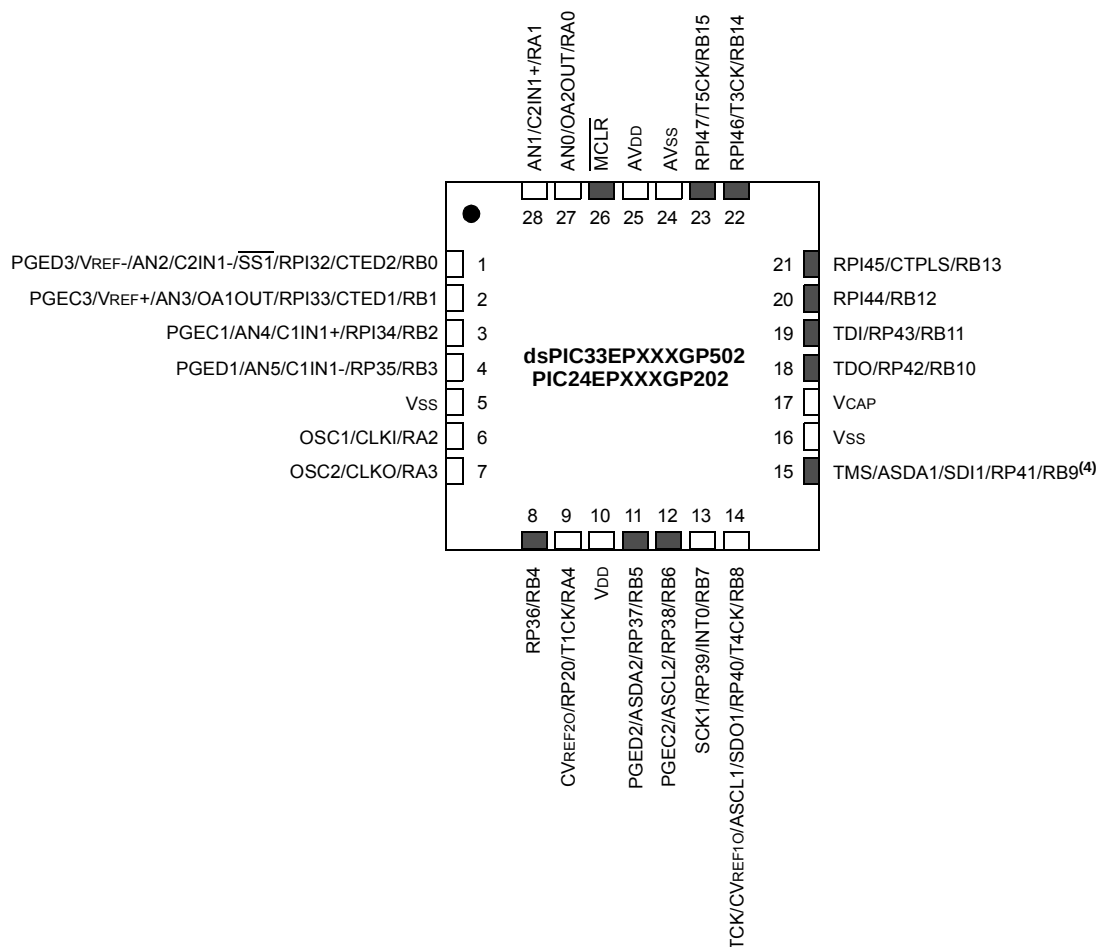

- Note 1:** The RPN/RPIN pins can be used by any remappable peripheral with some limitation. See **Section 11.4 “Peripheral Pin Select (PPS)”** for available peripherals and for information on limitations.
- Note 2:** Every I/O port pin (RAX-RGx) can be used as a Change Notification pin (CNAX-CNGx). See **Section 11.0 “I/O Ports”** for more information.
- Note 3:** The metal pad at the bottom of the device is not connected to any pins and is recommended to be connected to Vss externally.
- Note 4:** There is an internal pull-up resistor connected to the TMS pin when the JTAG interface is active. See the JTAGEN bit field in Table 27-2.

### 3.6 CPU Resources

Many useful resources are provided on the main product page of the Microchip web site for the devices listed in this data sheet. This product page, which can be accessed using this link, contains the latest updates and additional information.

|              |                                                                                                                                                                                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Note:</b> | In the event you are not able to access the product page using the link above, enter this URL in your browser:<br><a href="http://www.microchip.com/wwwproducts/Devices.aspx?dDocName=en555464">http://www.microchip.com/wwwproducts/Devices.aspx?dDocName=en555464</a> |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### 3.6.1 KEY RESOURCES

- “**CPU**” (DS70359) in the “*dsPIC33/PIC24 Family Reference Manual*”
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All related “*dsPIC33/PIC24 Family Reference Manual*” Sections
- Development Tools

**REGISTER 3-2: CORCON: CORE CONTROL REGISTER**

|        |     |                    |                    |                      |                    |                    |                    |
|--------|-----|--------------------|--------------------|----------------------|--------------------|--------------------|--------------------|
| R/W-0  | U-0 | R/W-0              | R/W-0              | R/W-0                | R-0                | R-0                | R-0                |
| VAR    | —   | US1 <sup>(1)</sup> | US0 <sup>(1)</sup> | EDT <sup>(1,2)</sup> | DL2 <sup>(1)</sup> | DL1 <sup>(1)</sup> | DL0 <sup>(1)</sup> |
| bit 15 |     |                    |                    |                      |                    |                    | bit 8              |

|                     |                     |                      |                       |                     |     |                    |                   |
|---------------------|---------------------|----------------------|-----------------------|---------------------|-----|--------------------|-------------------|
| R/W-0               | R/W-0               | R/W-1                | R/W-0                 | R/C-0               | R-0 | R/W-0              | R/W-0             |
| SATA <sup>(1)</sup> | SATB <sup>(1)</sup> | SATDW <sup>(1)</sup> | ACCSAT <sup>(1)</sup> | IPL3 <sup>(3)</sup> | SFA | RND <sup>(1)</sup> | IF <sup>(1)</sup> |
| bit 7               |                     |                      |                       |                     |     |                    | bit 0             |

|                   |                   |                                    |                    |
|-------------------|-------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | C = Clearable bit |                                    |                    |
| R = Readable bit  | W = Writable bit  | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set  | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15      **VAR:** Variable Exception Processing Latency Control bit  
             1 = Variable exception processing latency is enabled  
             0 = Fixed exception processing latency is enabled
- bit 14      **Unimplemented:** Read as '0'
- bit 13-12   **US<1:0>:** DSP Multiply Unsigned/Signed Control bits<sup>(1)</sup>  
             11 = Reserved  
             10 = DSP engine multiplies are mixed-sign  
             01 = DSP engine multiplies are unsigned  
             00 = DSP engine multiplies are signed
- bit 11      **EDT:** Early D0 Loop Termination Control bit<sup>(1,2)</sup>  
             1 = Terminates executing D0 loop at end of current loop iteration  
             0 = No effect
- bit 10-8    **DL<2:0>:** D0 Loop Nesting Level Status bits<sup>(1)</sup>  
             111 = 7 D0 loops are active  
             •  
             •  
             •  
             001 = 1 D0 loop is active  
             000 = 0 D0 loops are active
- bit 7        **SATA:** ACCA Saturation Enable bit<sup>(1)</sup>  
             1 = Accumulator A saturation is enabled  
             0 = Accumulator A saturation is disabled
- bit 6        **SATB:** ACCB Saturation Enable bit<sup>(1)</sup>  
             1 = Accumulator B saturation is enabled  
             0 = Accumulator B saturation is disabled
- bit 5        **SATDW:** Data Space Write from DSP Engine Saturation Enable bit<sup>(1)</sup>  
             1 = Data Space write saturation is enabled  
             0 = Data Space write saturation is disabled
- bit 4        **ACCSAT:** Accumulator Saturation Mode Select bit<sup>(1)</sup>  
             1 = 9.31 saturation (super saturation)  
             0 = 1.31 saturation (normal saturation)
- bit 3        **IPL3:** CPU Interrupt Priority Level Status bit<sup>(3)</sup>  
             1 = CPU Interrupt Priority Level is greater than 7  
             0 = CPU Interrupt Priority Level is 7 or less

- Note 1:** This bit is available on dsPIC33EPXXXMC20X/50X and dsPIC33EPXXXGP50X devices only.  
**2:** This bit is always read as '0'.  
**3:** The IPL3 bit is concatenated with the IPL<2:0> bits (SR<7:5>) to form the CPU Interrupt Priority Level.

**TABLE 4-7: INTERRUPT CONTROLLER REGISTER MAP FOR dsPIC33EPXXXMC50X DEVICES ONLY (CONTINUED)**

| File Name | Addr. | Bit 15 | Bit 14      | Bit 13 | Bit 12  | Bit 11   | Bit 10        | Bit 9 | Bit 8 | Bit 7       | Bit 6          | Bit 5   | Bit 4   | Bit 3   | Bit 2       | Bit 1   | Bit 0  | All Resets |
|-----------|-------|--------|-------------|--------|---------|----------|---------------|-------|-------|-------------|----------------|---------|---------|---------|-------------|---------|--------|------------|
| IPC23     | 086E  | —      | PWM2IP<2:0> |        |         | —        | PWM1IP<2:0>   |       |       | —           | —              | —       | —       | —       | —           | —       | —      | 4400       |
| IPC24     | 0870  | —      | —           | —      | —       | —        | —             | —     | —     | —           | —              | —       | —       | —       | PWM3IP<2:0> |         |        | 0004       |
| IPC35     | 0886  | —      | JTAGIP<2:0> |        |         | —        | ICDIP<2:0>    |       |       | —           | —              | —       | —       | —       | —           | —       | —      | 4400       |
| IPC36     | 0888  | —      | PTG0IP<2:0> |        |         | —        | PTGWDTIP<2:0> |       |       | —           | PTGSTEPIP<2:0> |         |         | —       | —           | —       | —      | 4440       |
| IPC37     | 088A  | —      | —           | —      | —       | —        | PTG3IP<2:0>   |       |       | —           | PTG2IP<2:0>    |         |         | —       | PTG1IP<2:0> |         |        | 0444       |
| INTCON1   | 08C0  | NSTDIS | OVAERR      | OVERR  | COVAERR | COVBERR  | OVATE         | OVATE | OVATE | SFTACERR    | DIV0ERR        | DMACERR | MATHERR | ADDRERR | STKERR      | OSCFail | —      | 0000       |
| INTCON2   | 08C2  | GIE    | DISI        | SWTRAP | —       | —        | —             | —     | —     | —           | —              | —       | —       | —       | INT2EP      | INT1EP  | INT0EP | 8000       |
| INTCON3   | 08C4  | —      | —           | —      | —       | —        | —             | —     | —     | —           | —              | DAE     | DOOVR   | —       | —           | —       | —      | 0000       |
| INTCON4   | 08C6  | —      | —           | —      | —       | —        | —             | —     | —     | —           | —              | —       | —       | —       | —           | —       | SGHT   | 0000       |
| INTTREG   | 08C8  | —      | —           | —      | —       | ILR<3:0> |               |       |       | VECNUM<7:0> |                |         |         |         |             |         |        | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

## 6.1 Reset Resources

Many useful resources are provided on the main product page of the Microchip web site for the devices listed in this data sheet. This product page, which can be accessed using this link, contains the latest updates and additional information.

|              |                                                                                                                                                                                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Note:</b> | In the event you are not able to access the product page using the link above, enter this URL in your browser:<br><a href="http://www.microchip.com/wwwproducts/Devices.aspx?dDocName=en555464">http://www.microchip.com/wwwproducts/Devices.aspx?dDocName=en555464</a> |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 6.1.1 KEY RESOURCES

- “Reset” (DS70602) in the “dsPIC33/PIC24 Family Reference Manual”
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related “dsPIC33/PIC24 Family Reference Manual” Sections
- Development Tools

**FIGURE 7-1: dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X AND PIC24EPXXXGP/MC20X INTERRUPT VECTOR TABLE**

|                             |          |
|-----------------------------|----------|
| Reset – GOTO Instruction    | 0x000000 |
| Reset – GOTO Address        | 0x000002 |
| Oscillator Fail Trap Vector | 0x000004 |
| Address Error Trap Vector   | 0x000006 |
| Generic Hard Trap Vector    | 0x000008 |
| Stack Error Trap Vector     | 0x00000A |
| Math Error Trap Vector      | 0x00000C |
| DMAC Error Trap Vector      | 0x00000E |
| Generic Soft Trap Vector    | 0x000010 |
| Reserved                    | 0x000012 |
| Interrupt Vector 0          | 0x000014 |
| Interrupt Vector 1          | 0x000016 |
| :                           | :        |
| :                           | :        |
| :                           | :        |
| Interrupt Vector 52         | 0x00007C |
| Interrupt Vector 53         | 0x00007E |
| Interrupt Vector 54         | 0x000080 |
| :                           | :        |
| :                           | :        |
| :                           | :        |
| Interrupt Vector 116        | 0x0000FC |
| Interrupt Vector 117        | 0x0000FE |
| Interrupt Vector 118        | 0x000100 |
| Interrupt Vector 119        | 0x000102 |
| Interrupt Vector 120        | 0x000104 |
| :                           | :        |
| :                           | :        |
| :                           | :        |
| Interrupt Vector 244        | 0x0001FC |
| Interrupt Vector 245        | 0x0001FE |
| START OF CODE               | 0x000200 |

See Table 7-1 for Interrupt Vector Details

## **11.4 Peripheral Pin Select (PPS)**

A major challenge in general purpose devices is providing the largest possible set of peripheral features while minimizing the conflict of features on I/O pins. The challenge is even greater on low pin count devices. In an application where more than one peripheral needs to be assigned to a single pin, inconvenient work-arounds in application code, or a complete redesign, may be the only option.

Peripheral Pin Select configuration provides an alternative to these choices by enabling peripheral set selection and their placement on a wide range of I/O pins. By increasing the pinout options available on a particular device, users can better tailor the device to their entire application, rather than trimming the application to fit the device.

The Peripheral Pin Select configuration feature operates over a fixed subset of digital I/O pins. Users may independently map the input and/or output of most digital peripherals to any one of these I/O pins. Hardware safeguards are included that prevent accidental or spurious changes to the peripheral mapping once it has been established.

### **11.4.1 AVAILABLE PINS**

The number of available pins is dependent on the particular device and its pin count. Pins that support the Peripheral Pin Select feature include the label, “RPn” or “RPI n”, in their full pin designation, where “n” is the remappable pin number. “RP” is used to designate pins that support both remappable input and output functions, while “RPI” indicates pins that support remappable input functions only.

### **11.4.2 AVAILABLE PERIPHERALS**

The peripherals managed by the Peripheral Pin Select are all digital-only peripherals. These include general serial communications (UART and SPI), general purpose timer clock inputs, timer-related peripherals (input capture and output compare) and interrupt-on-change inputs.

In comparison, some digital-only peripheral modules are never included in the Peripheral Pin Select feature. This is because the peripheral's function requires special I/O circuitry on a specific port and cannot be easily connected to multiple pins. These modules include I<sup>2</sup>C™ and the PWM. A similar requirement excludes all modules with analog inputs, such as the ADC Converter.

A key difference between remappable and non-remappable peripherals is that remappable peripherals are not associated with a default I/O pin. The peripheral must always be assigned to a specific I/O pin before it can be used. In contrast, non-remappable peripherals are always available on a default pin, assuming that the peripheral is active and not conflicting with another peripheral.

When a remappable peripheral is active on a given I/O pin, it takes priority over all other digital I/O and digital communication peripherals associated with the pin. Priority is given regardless of the type of peripheral that is mapped. Remappable peripherals never take priority over any analog functions associated with the pin.

### **11.4.3 CONTROLLING PERIPHERAL PIN SELECT**

Peripheral Pin Select features are controlled through two sets of SFRs: one to map peripheral inputs and one to map outputs. Because they are separately controlled, a particular peripheral's input and output (if the peripheral has both) can be placed on any selectable function pin without constraint.

The association of a peripheral to a peripheral-selectable pin is handled in two different ways, depending on whether an input or output is being mapped.




#### 11.4.4 INPUT MAPPING

The inputs of the Peripheral Pin Select options are mapped on the basis of the peripheral. That is, a control register associated with a peripheral dictates the pin it will be mapped to. The RPINRx registers are used to configure peripheral input mapping (see Register 11-1 through Register 11-17). Each register contains sets of 7-bit fields, with each set associated with one of the remappable peripherals. Programming a given peripheral's bit field with an appropriate 7-bit value maps the RPn pin with the corresponding value to that peripheral. For any given device, the valid range of values for any bit field corresponds to the maximum number of Peripheral Pin Selections supported by the device.

For example, Figure 11-2 illustrates remappable pin selection for the U1RX input.

**FIGURE 11-2: REMAPPABLE INPUT FOR U1RX**

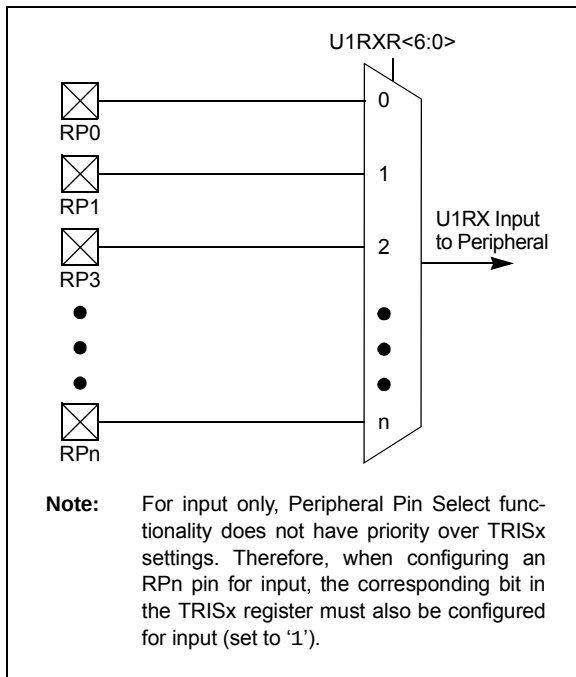

##### 11.4.4.1 Virtual Connections

dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X devices support virtual (internal) connections to the output of the op amp/comparator module (see Figure 25-1 in **Section 25.0 “Op Amp/Comparator Module”**), and the PTG module (see **Section 24.0 “Peripheral Trigger Generator (PTG) Module”**).

In addition, dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X devices support virtual connections to the filtered QE1 module inputs: FINDX1, FHOME1, FINDX2 and FHOME2 (see Figure 17-1 in **Section 17.0 “Quadrature Encoder Interface (QE1) Module (dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X Devices Only)”**).

Virtual connections provide a simple way of inter-peripheral connection without utilizing a physical pin. For example, by setting the FLT1R<6:0> bits of the RPINR12 register to the value of 'b00000001, the output of the analog comparator, C1OUT, will be connected to the PWM Fault 1 input, which allows the analog comparator to trigger PWM Faults without the use of an actual physical pin on the device.

Virtual connection to the QE1 module allows peripherals to be connected to the QE1 digital filter input. To utilize this filter, the QE1 module must be enabled and its inputs must be connected to a physical RPn pin. Example 11-2 illustrates how the input capture module can be connected to the QE1 digital filter.

**EXAMPLE 11-2: CONNECTING IC1 TO THE HOME1 QE1 DIGITAL FILTER INPUT ON PIN 43 OF THE dsPIC33EPXXXMC206 DEVICE**

```
RPINR15 = 0x2500;    /* Connect the QE1 HOME1 input to RP37 (pin 43) */
RPINR7  = 0x009;    /* Connect the IC1 input to the digital filter on the FHOME1 input */

QE1IIOC = 0x4000;    /* Enable the QE1 digital filter */
QE1ICON = 0x8000;    /* Enable the QE1 module */
```

**REGISTER 11-5: RPINR8: PERIPHERAL PIN SELECT INPUT REGISTER 8**

|        |           |       |       |       |       |       |       |
|--------|-----------|-------|-------|-------|-------|-------|-------|
| U-0    | R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —      | IC4R<6:0> |       |       |       |       |       |       |
| bit 15 |           |       |       |       |       |       | bit 8 |

|       |           |       |       |       |       |       |       |
|-------|-----------|-------|-------|-------|-------|-------|-------|
| U-0   | R/W-0     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | IC3R<6:0> |       |       |       |       |       |       |
| bit 7 |           |       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **IC4R<6:0>:** Assign Input Capture 4 (IC4) to the Corresponding RPn Pin bits  
(see Table 11-2 for input pin selection numbers)

1111001 = Input tied to RPI121

.

.

.

0000001 = Input tied to CMP1

0000000 = Input tied to Vss

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **IC3R<6:0>:** Assign Input Capture 3 (IC3) to the Corresponding RPn Pin bits  
(see Table 11-2 for input pin selection numbers)

1111001 = Input tied to RPI121

.

.

.

0000001 = Input tied to CMP1

0000000 = Input tied to Vss

## 17.1 QEI Resources

Many useful resources are provided on the main product page of the Microchip web site for the devices listed in this data sheet. This product page, which can be accessed using this link, contains the latest updates and additional information.

|                                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Note:</b> In the event you are not able to access the product page using the link above, enter this URL in your browser:<br/><a href="http://www.microchip.com/wwwproducts/Devices.aspx?dDocName=en555464">http://www.microchip.com/wwwproducts/Devices.aspx?dDocName=en555464</a></p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 17.1.1 KEY RESOURCES

- **“Quadrature Encoder Interface”** (DS70601) in the *“dsPIC33/PIC24 Family Reference Manual”*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related *“dsPIC33/PIC24 Family Reference Manual”* Sections
- Development Tools

**REGISTER 18-2: SPIxCON1: SPIx CONTROL REGISTER 1 (CONTINUED)**

bit 4-2      **SPRE<2:0>**: Secondary Prescale bits (Master mode)<sup>(3)</sup>

111 = Secondary prescale 1:1

110 = Secondary prescale 2:1

•

•

•

000 = Secondary prescale 8:1

bit 1-0      **PPRE<1:0>**: Primary Prescale bits (Master mode)<sup>(3)</sup>

11 = Primary prescale 1:1

10 = Primary prescale 4:1

01 = Primary prescale 16:1

00 = Primary prescale 64:1

- Note 1:** The CKE bit is not used in Framed SPI modes. Program this bit to '0' for Framed SPI modes (FRMEN = 1).
- 2:** This bit must be cleared when FRMEN = 1.
- 3:** Do not set both primary and secondary prescalers to the value of 1:1.

## 21.0 ENHANCED CAN (ECAN™) MODULE (dsPIC33EPXXXGP/ MC50X DEVICES ONLY)

**Note 1:** This data sheet summarizes the features of the dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X families of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “**Enhanced Controller Area Network (ECAN™)**” (DS70353) in the “*dsPIC33/PIC24 Family Reference Manual*”, which is available from the Microchip web site ([www.microchip.com](http://www.microchip.com)).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 “Memory Organization”** in this data sheet for device-specific register and bit information.

### 21.1 Overview

The Enhanced Controller Area Network (ECAN) module is a serial interface, useful for communicating with other CAN modules or microcontroller devices. This interface/protocol was designed to allow communications within noisy environments. The dsPIC33EPXXXGP/MC50X devices contain one ECAN module.

The ECAN module is a communication controller implementing the CAN 2.0 A/B protocol, as defined in the BOSCH CAN specification. The module supports CAN 1.2, CAN 2.0A, CAN 2.0B Passive and CAN 2.0B Active versions of the protocol. The module implementation is a full CAN system. The CAN specification is not covered within this data sheet. The reader can refer to the BOSCH CAN specification for further details.

The ECAN module features are as follows:

- Implementation of the CAN protocol, CAN 1.2, CAN 2.0A and CAN 2.0B
- Standard and extended data frames
- 0-8 bytes data length
- Programmable bit rate up to 1 Mbit/sec
- Automatic response to remote transmission requests
- Up to eight transmit buffers with application specified prioritization and abort capability (each buffer can contain up to 8 bytes of data)
- Up to 32 receive buffers (each buffer can contain up to 8 bytes of data)
- Up to 16 full (Standard/Extended Identifier) acceptance filters
- Three full acceptance filter masks
- DeviceNet™ addressing support
- Programmable wake-up functionality with integrated low-pass filter
- Programmable Loopback mode supports self-test operation
- Signaling via interrupt capabilities for all CAN receiver and transmitter error states
- Programmable clock source
- Programmable link to Input Capture (IC2) module for time-stamping and network synchronization
- Low-power Sleep and Idle mode

The CAN bus module consists of a protocol engine and message buffering/control. The CAN protocol engine handles all functions for receiving and transmitting messages on the CAN bus. Messages are transmitted by first loading the appropriate data registers. Status and errors can be checked by reading the appropriate registers. Any message detected on the CAN bus is checked for errors and then matched against filters to see if it should be received and stored in one of the receive registers.

NOTES:

**REGISTER 23-3: AD1CON3: ADC1 CONTROL REGISTER 3**

|        |     |     |                      |                      |                      |                      |                      |
|--------|-----|-----|----------------------|----------------------|----------------------|----------------------|----------------------|
| R/W-0  | U-0 | U-0 | R/W-0                | R/W-0                | R/W-0                | R/W-0                | R/W-0                |
| ADRC   | —   | —   | SAMC4 <sup>(1)</sup> | SAMC3 <sup>(1)</sup> | SAMC2 <sup>(1)</sup> | SAMC1 <sup>(1)</sup> | SAMC0 <sup>(1)</sup> |
| bit 15 |     |     |                      |                      |                      |                      | bit 8                |

|                      |                      |                      |                      |                      |                      |                      |                      |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| R/W-0                | R/W-0                | R/W-0                | R/W-0                | R/W-0                | R/W-0                | R/W-0                | R/W-0                |
| ADCS7 <sup>(2)</sup> | ADCS6 <sup>(2)</sup> | ADCS5 <sup>(2)</sup> | ADCS4 <sup>(2)</sup> | ADCS3 <sup>(2)</sup> | ADCS2 <sup>(2)</sup> | ADCS1 <sup>(2)</sup> | ADCS0 <sup>(2)</sup> |
| bit 7                |                      |                      |                      |                      |                      |                      | bit 0                |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **ADRC:** ADC1 Conversion Clock Source bit

1 = ADC internal RC clock

0 = Clock derived from system clock

bit 14-13 **Unimplemented:** Read as '0'

bit 12-8 **SAMC<4:0>:** Auto-Sample Time bits<sup>(1)</sup>

11111 = 31 TAD

•

•

•

00001 = 1 TAD

00000 = 0 TAD

bit 7-0 **ADCS<7:0>:** ADC1 Conversion Clock Select bits<sup>(2)</sup>

11111111 =  $T_P \cdot (ADCS<7:0> + 1) = T_P \cdot 256 = T_{AD}$

•

•

•

00000010 =  $T_P \cdot (ADCS<7:0> + 1) = T_P \cdot 3 = T_{AD}$

00000001 =  $T_P \cdot (ADCS<7:0> + 1) = T_P \cdot 2 = T_{AD}$

00000000 =  $T_P \cdot (ADCS<7:0> + 1) = T_P \cdot 1 = T_{AD}$

**Note 1:** This bit is only used if SSRC<2:0> (AD1CON1<7:5>) = 111 and SSRCG (AD1CON1<4>) = 0.

**2:** This bit is not used if ADRC (AD1CON3<15>) = 1.

**REGISTER 24-1: PTGCST: PTG CONTROL/STATUS REGISTER (CONTINUED)**

bit 1-0      **PTGITM<1:0>**: PTG Input Trigger Command Operating Mode bits<sup>(1)</sup>  
11 = Single level detect with Step delay not executed on exit of command (regardless of the PTGCTRL command)  
10 = Single level detect with Step delay executed on exit of command  
01 = Continuous edge detect with Step delay not executed on exit of command (regardless of the PTGCTRL command)  
00 = Continuous edge detect with Step delay executed on exit of command

- Note 1:** These bits apply to the PTGWHI and PTGWLO commands only.  
**2:** This bit is only used with the PTGCTRL step command software trigger option.  
**3:** Use of the PTG Single-Step mode is reserved for debugging tools only.



FIGURE 25-2: COMPARATOR MODULE BLOCK DIAGRAM (MODULE 4)


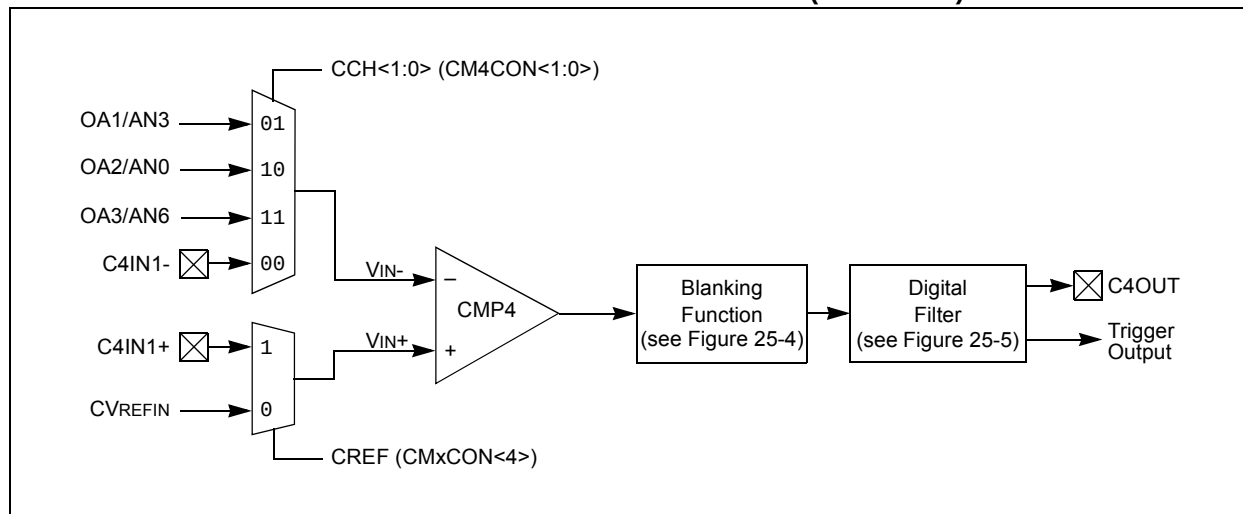


FIGURE 25-3: OP AMP/COMPARATOR VOLTAGE REFERENCE BLOCK DIAGRAM

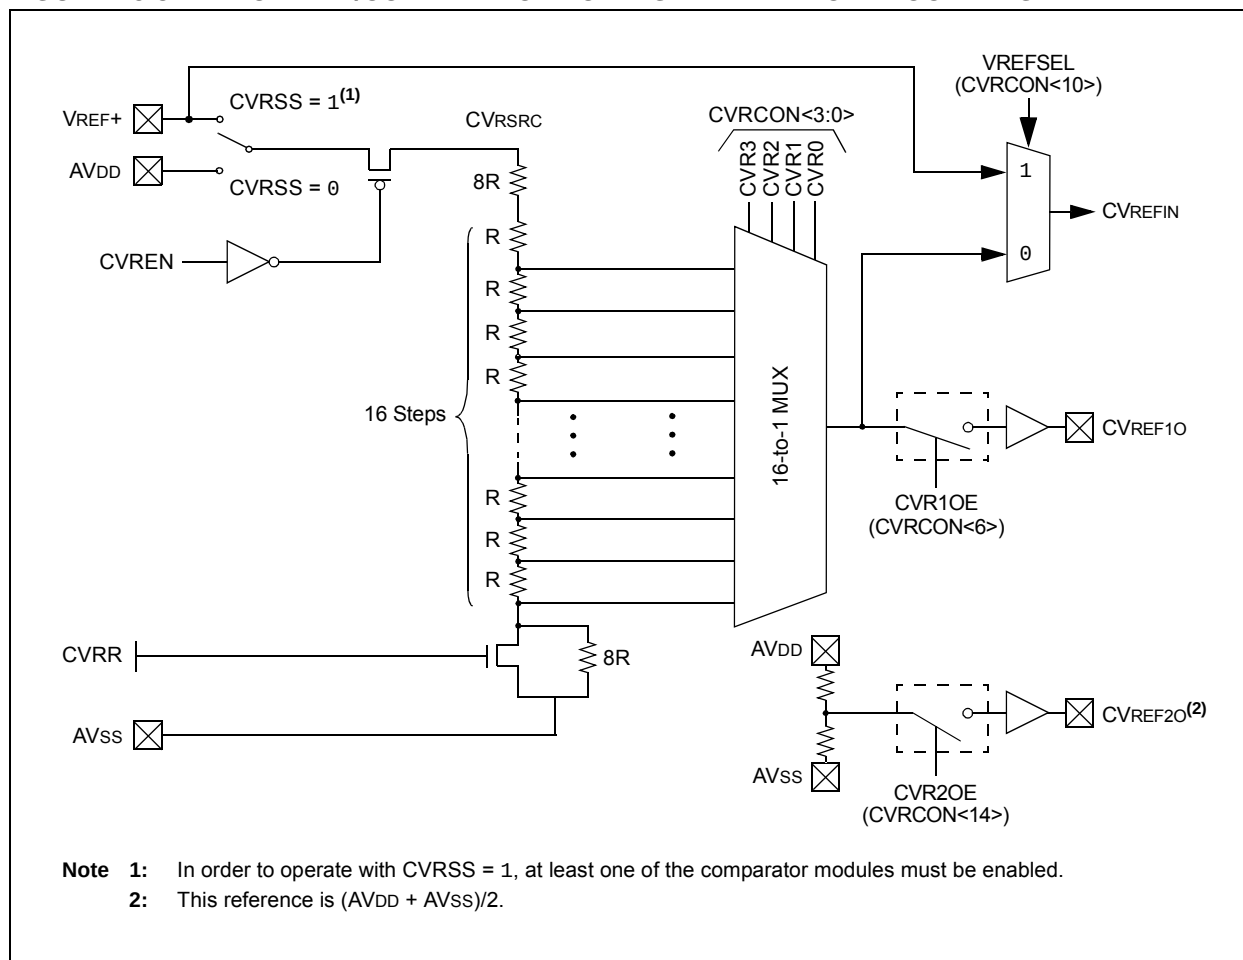

## 27.2 User ID Words

dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X devices contain four User ID Words, located at addresses, 0x800FF8 through 0x800FFE. The User ID Words can be used for storing product information such as serial numbers, system manufacturing dates, manufacturing lot numbers and other application-specific information.

The User ID Words register map is shown in Table 27-3.

**TABLE 27-3: USER ID WORDS REGISTER MAP**

| File Name | Address  | Bits 23-16 | Bits 15-0 |
|-----------|----------|------------|-----------|
| FUID0     | 0x800FF8 | —          | UID0      |
| FUID1     | 0x800FFA | —          | UID1      |
| FUID2     | 0x800FFC | —          | UID2      |
| FUID3     | 0x800FFE | —          | UID3      |

**Legend:** — = unimplemented, read as '1'.


## 27.3 On-Chip Voltage Regulator

All of the dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X devices power their core digital logic at a nominal 1.8V. This can create a conflict for designs that are required to operate at a higher typical voltage, such as 3.3V. To simplify system design, all devices in the dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X family incorporate an on-chip regulator that allows the device to run its core logic from VDD.

The regulator provides power to the core from the other VDD pins. A low-ESR (less than 1 Ohm) capacitor (such as tantalum or ceramic) must be connected to the VCAP pin (Figure 27-1). This helps to maintain the stability of the regulator. The recommended value for the filter capacitor is provided in Table 30-5 located in Section 30.0 "Electrical Characteristics".

**Note:** It is important for the low-ESR capacitor to be placed as close as possible to the VCAP pin.

**FIGURE 27-1: CONNECTIONS FOR THE ON-CHIP VOLTAGE REGULATOR<sup>(1,2,3)</sup>**

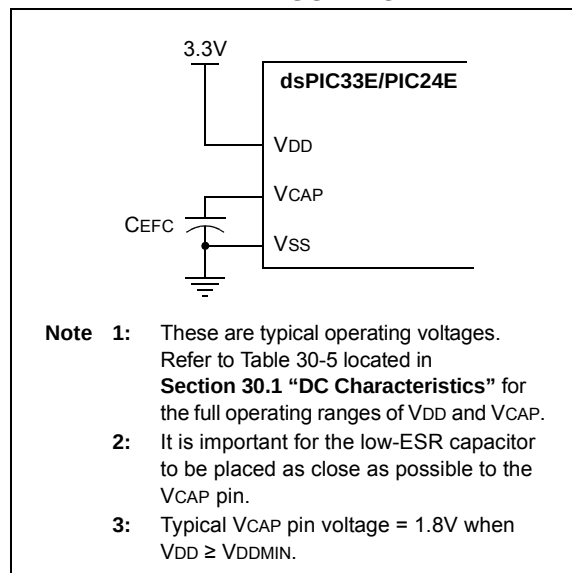

## 27.4 Brown-out Reset (BOR)

The Brown-out Reset (BOR) module is based on an internal voltage reference circuit that monitors the regulated supply voltage, VCAP. The main purpose of the BOR module is to generate a device Reset when a brown-out condition occurs. Brown-out conditions are generally caused by glitches on the AC mains (for example, missing portions of the AC cycle waveform due to bad power transmission lines or voltage sags due to excessive current draw when a large inductive load is turned on).

A BOR generates a Reset pulse, which resets the device. The BOR selects the clock source, based on the device Configuration bit values (FNOSC<2:0> and POSCMD<1:0>).

If an oscillator mode is selected, the BOR activates the Oscillator Start-up Timer (OST). The system clock is held until OST expires. If the PLL is used, the clock is held until the LOCK bit (OSCCON<5>) is '1'.

Concurrently, the PWRT Time-out (TPWRT) is applied before the internal Reset is released. If TPWRT = 0 and a crystal oscillator is being used, then a nominal delay of TFSCM is applied. The total delay in this case is TFSCM. Refer to Parameter SY35 in Table 30-22 of Section 30.0 "Electrical Characteristics" for specific TFSCM values.

The BOR status bit (RCON<1>) is set to indicate that a BOR has occurred. The BOR circuit continues to operate while in Sleep or Idle modes and resets the device should VDD fall below the BOR threshold voltage.

TABLE 28-1: SYMBOLS USED IN OPCODE DESCRIPTIONS (CONTINUED)

| Field | Description                                                                                                                                                                                                                                                                 |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wm,Wn | Dividend, Divisor working register pair (direct addressing)                                                                                                                                                                                                                 |
| Wm*Wm | Multiplicand and Multiplier working register pair for Square instructions $\in \{W4 * W4, W5 * W5, W6 * W6, W7 * W7\}$                                                                                                                                                      |
| Wm*Wn | Multiplicand and Multiplier working register pair for DSP instructions $\in \{W4 * W5, W4 * W6, W4 * W7, W5 * W6, W5 * W7, W6 * W7\}$                                                                                                                                       |
| Wn    | One of 16 working registers $\in \{W0...W15\}$                                                                                                                                                                                                                              |
| Wnd   | One of 16 destination working registers $\in \{W0...W15\}$                                                                                                                                                                                                                  |
| Wns   | One of 16 source working registers $\in \{W0...W15\}$                                                                                                                                                                                                                       |
| WREG  | W0 (working register used in file register instructions)                                                                                                                                                                                                                    |
| Ws    | Source W register $\in \{Ws, [Ws], [Ws++] , [Ws--], [++Ws], [--Ws] \}$                                                                                                                                                                                                      |
| Wso   | Source W register $\in \{Wns, [Wns], [Wns++] , [Wns--], [++Wns], [--Wns], [Wns+Wb] \}$                                                                                                                                                                                      |
| Wx    | X Data Space Prefetch Address register for DSP instructions<br>$\in \{[W8] + = 6, [W8] + = 4, [W8] + = 2, [W8], [W8] - = 6, [W8] - = 4, [W8] - = 2, [W9] + = 6, [W9] + = 4, [W9] + = 2, [W9], [W9] - = 6, [W9] - = 4, [W9] - = 2, [W9 + W12], \text{none}\}$                |
| Wxd   | X Data Space Prefetch Destination register for DSP instructions $\in \{W4...W7\}$                                                                                                                                                                                           |
| Wy    | Y Data Space Prefetch Address register for DSP instructions<br>$\in \{[W10] + = 6, [W10] + = 4, [W10] + = 2, [W10], [W10] - = 6, [W10] - = 4, [W10] - = 2, [W11] + = 6, [W11] + = 4, [W11] + = 2, [W11], [W11] - = 6, [W11] - = 4, [W11] - = 2, [W11 + W12], \text{none}\}$ |
| Wyd   | Y Data Space Prefetch Destination register for DSP instructions $\in \{W4...W7\}$                                                                                                                                                                                           |

TABLE 30-56: CTMU CURRENT SOURCE SPECIFICATIONS

| DC CHARACTERISTICS         |        |                                                     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |       |      |       |                                               |
|----------------------------|--------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-------|-----------------------------------------------|
| Param No.                  | Symbol | Characteristic                                      | Min.                                                                                                                                                                                                                                              | Typ.  | Max. | Units | Conditions                                    |
| <b>CTMU Current Source</b> |        |                                                     |                                                                                                                                                                                                                                                   |       |      |       |                                               |
| CTMUI1                     | IOUT1  | Base Range <sup>(1)</sup>                           | 0.29                                                                                                                                                                                                                                              | —     | 0.77 | μA    | CTMUICON<9:8> = 01                            |
| CTMUI2                     | IOUT2  | 10x Range <sup>(1)</sup>                            | 3.85                                                                                                                                                                                                                                              | —     | 7.7  | μA    | CTMUICON<9:8> = 10                            |
| CTMUI3                     | IOUT3  | 100x Range <sup>(1)</sup>                           | 38.5                                                                                                                                                                                                                                              | —     | 77   | μA    | CTMUICON<9:8> = 11                            |
| CTMUI4                     | IOUT4  | 1000x Range <sup>(1)</sup>                          | 385                                                                                                                                                                                                                                               | —     | 770  | μA    | CTMUICON<9:8> = 00                            |
| CTMUFV1                    | VF     | Temperature Diode Forward Voltage <sup>(1,2)</sup>  | —                                                                                                                                                                                                                                                 | 0.598 | —    | V     | T <sub>A</sub> = +25°C,<br>CTMUICON<9:8> = 01 |
|                            |        |                                                     | —                                                                                                                                                                                                                                                 | 0.658 | —    | V     | T <sub>A</sub> = +25°C,<br>CTMUICON<9:8> = 10 |
|                            |        |                                                     | —                                                                                                                                                                                                                                                 | 0.721 | —    | V     | T <sub>A</sub> = +25°C,<br>CTMUICON<9:8> = 11 |
| CTMUFV2                    | VFVR   | Temperature Diode Rate of Change <sup>(1,2,3)</sup> | —                                                                                                                                                                                                                                                 | -1.92 | —    | mV/°C | CTMUICON<9:8> = 01                            |
|                            |        |                                                     | —                                                                                                                                                                                                                                                 | -1.74 | —    | mV/°C | CTMUICON<9:8> = 10                            |
|                            |        |                                                     | —                                                                                                                                                                                                                                                 | -1.56 | —    | mV/°C | CTMUICON<9:8> = 11                            |

**Note 1:** Nominal value at center point of current trim range (CTMUICON<15:10> = 000000).

**2:** Parameters are characterized but not tested in manufacturing.

**3:** Measurements taken with the following conditions:

- VREF+ = AVDD = 3.3V
- ADC configured for 10-bit mode
- ADC module configured for conversion speed of 500 ksp/s
- All PMDx bits are cleared (PMDx = 0)
- Executing a while(1) statement
- Device operating from the FRC with no PLL

## INDEX

## A

|                                                      |          |                                                  |     |
|------------------------------------------------------|----------|--------------------------------------------------|-----|
| Absolute Maximum Ratings .....                       | 401      | Timer1 External Clock Requirements .....         | 418 |
| AC Characteristics .....                             | 413, 471 | Timer2/Timer4 External Clock Requirements .....  | 419 |
| 10-Bit ADC Conversion Requirements .....             | 465      | Timer3/Timer5 External Clock Requirements .....  | 419 |
| 12-Bit ADC Conversion Requirements .....             | 463      | UARTx I/O Requirements .....                     | 454 |
| ADC Module .....                                     | 459      | ADC                                              |     |
| ADC Module (10-Bit Mode) .....                       | 461, 473 | Control Registers .....                          | 325 |
| ADC Module (12-Bit Mode) .....                       | 460, 473 | Helpful Tips .....                               | 324 |
| Capacitive Loading Requirements on                   |          | Key Features .....                               | 321 |
| Output Pins .....                                    | 413      | Resources .....                                  | 324 |
| DMA Module Requirements .....                        | 465      | Arithmetic Logic Unit (ALU) .....                | 44  |
| ECANx I/O Requirements .....                         | 454      | Assembler                                        |     |
| External Clock .....                                 | 414      | MPASM Assembler .....                            | 398 |
| High-Speed PWMx Requirements .....                   | 422      | B                                                |     |
| I/O Timing Requirements .....                        | 416      | Bit-Reversed Addressing .....                    | 115 |
| I2Cx Bus Data Requirements (Master Mode) .....       | 451      | Example .....                                    | 116 |
| I2Cx Bus Data Requirements (Slave Mode) .....        | 453      | Implementation .....                             | 115 |
| Input Capture x Requirements .....                   | 420      | Sequence Table (16-Entry) .....                  | 116 |
| Internal FRC Accuracy .....                          | 415      | Block Diagrams                                   |     |
| Internal LPRC Accuracy .....                         | 415      | Data Access from Program Space                   |     |
| Internal RC Accuracy .....                           | 472      | Address Generation .....                         | 117 |
| Load Conditions .....                                | 413, 471 | 16-Bit Timer1 Module .....                       | 203 |
| OCx/PWMx Mode Requirements .....                     | 421      | ADC Conversion Clock Period .....                | 323 |
| Op Amp/Comparator Voltage Reference                  |          | ADC with Connection Options for ANx Pins         |     |
| Settling Time Specifications .....                   | 457      | and Op Amps .....                                | 322 |
| Output Compare x Requirements .....                  | 421      | Arbiter Architecture .....                       | 110 |
| PLL Clock .....                                      | 415, 471 | BEMF Voltage Measurement Using ADC .....         | 34  |
| QE1 External Clock Requirements .....                | 423      | Boost Converter Implementation .....             | 32  |
| QE1 Index Pulse Requirements .....                   | 425      | CALL Stack Frame .....                           | 111 |
| Quadrature Decoder Requirements .....                | 424      | Comparator (Module 4) .....                      | 356 |
| Reset, Watchdog Timer, Oscillator Start-up Timer,    |          | Connections for On-Chip Voltage Regulator .....  | 384 |
| Power-up Timer Requirements .....                    | 417      | CPU Core .....                                   | 36  |
| SPI1 Master Mode (Full-Duplex, CKE = 0, CKP = x,     |          | CRC Module .....                                 | 373 |
| SMP = 1) Requirements .....                          | 441      | CRC Shift Engine .....                           | 374 |
| SPI1 Master Mode (Full-Duplex, CKE = 1, CKP = x,     |          | CTMU Module .....                                | 316 |
| SMP = 1) Requirements .....                          | 440      | Digital Filter Interconnect .....                | 357 |
| SPI1 Master Mode (Half-Duplex, Transmit Only)        |          | DMA Controller .....                             | 141 |
| Requirements .....                                   | 439      | DMA Controller Module .....                      | 139 |
| SPI1 Maximum Data/Clock Rate Summary .....           | 438      | dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X         |     |
| SPI1 Slave Mode (Full-Duplex, CKE = 0,               |          | and PIC24EPXXXGP/MC20X .....                     | 25  |
| CKP = 0, SMP = 0) Requirements .....                 | 449      | ECAN Module .....                                | 288 |
| SPI1 Slave Mode (Full-Duplex, CKE = 0,               |          | EDS Read Address Generation .....                | 105 |
| CKP = 1, SMP = 0) Requirements .....                 | 447      | EDS Write Address Generation .....               | 106 |
| SPI1 Slave Mode (Full-Duplex, CKE = 1,               |          | Example of MCLR Pin Connections .....            | 30  |
| CKP = 0, SMP = 0) Requirements .....                 | 443      | High-Speed PWMx Architectural Overview .....     | 227 |
| SPI1 Slave Mode (Full-Duplex, CKE = 1,               |          | High-Speed PWMx Register Interconnection .....   | 228 |
| CKP = 1, SMP = 0) Requirements .....                 | 445      | I2Cx Module .....                                | 274 |
| SPI2 Master Mode (Full-Duplex, CKE = 0, CKP = x, SMP |          | Input Capture x .....                            | 213 |
| = 1) Requirements .....                              | 429      | Interleaved PFC .....                            | 34  |
| SPI2 Master Mode (Full-Duplex, CKE = 1,              |          | Multiphase Synchronous Buck Converter .....      | 33  |
| CKP = x, SMP = 1) Requirements .....                 | 428      | Multiplexing Remappable Output for RPN .....     | 180 |
| SPI2 Master Mode (Half-Duplex, Transmit Only)        |          | Op Amp Configuration A .....                     | 358 |
| Requirements .....                                   | 427      | Op Amp Configuration B .....                     | 359 |
| SPI2 Maximum Data/Clock Rate Summary .....           | 426      | Op Amp/Comparator Voltage Reference Module ..... | 356 |
| SPI2 Slave Mode (Full-Duplex, CKE = 0,               |          | Op Amp/Comparator x (Modules 1, 2, 3) .....      | 355 |
| CKP = 0, SMP = 0) Requirements .....                 | 437      | Oscillator System .....                          | 153 |
| SPI2 Slave Mode (Full-Duplex, CKE = 0, CKP = 1, SMP  |          | Output Compare x Module .....                    | 219 |
| = 0) Requirements .....                              | 435      | PLL .....                                        | 154 |
| SPI2 Slave Mode (Full-Duplex, CKE = 1,               |          | Programmer's Model .....                         | 38  |
| CKP = 0, SMP = 0) Requirements .....                 | 431      | PTG Module .....                                 | 338 |
| SPI2 Slave Mode (Full-Duplex, CKE = 1,               |          | Quadrature Encoder Interface .....               | 250 |
| CKP = 1, SMP = 0) Requirements .....                 | 433      | Recommended Minimum Connection .....             | 30  |