



Welcome to E-XFL.COM

Understanding [Embedded - Microcontroller, Microprocessor, FPGA Modules](#)

Embedded - Microcontroller, Microprocessor, and FPGA Modules are fundamental components in modern electronic systems, offering a wide range of functionalities and capabilities. Microcontrollers are compact integrated circuits designed to execute specific control tasks within an embedded system. They typically include a processor, memory, and input/output peripherals on a single chip. Microprocessors, on the other hand, are more powerful processing units used in complex computing tasks, often requiring external memory and peripherals. FPGAs (Field Programmable Gate Arrays) are highly flexible devices that can be configured by the user to perform specific logic functions, making them invaluable in applications requiring customization and adaptability.

Applications of [Embedded - Microcontroller,](#)

Details

Product Status	Not For New Designs
Module/Board Type	MPU Core
Core Processor	Rabbit 3000
Co-Processor	-
Speed	29.4MHz
Flash Size	512KB
RAM Size	512KB
Connector Type	2 IDC Headers 2x17
Size / Dimension	1.85" x 1.65" (47mm x 42mm)
Operating Temperature	-40°C ~ 85°C
Purchase URL	https://www.e-xfl.com/product-detail/digi-international/20-101-0517



MICROPROCESSOR
CORE MODULE



RABBITCORE® RCM3100 SERIES

A cost-effective solution that allows embedded engineers to add intelligence and I/O control to a wide variety of peripheral devices

Powered by the Rabbit® 3000 microprocessor, the compact RCM3100 series boasts powerful features and a small footprint (47 mm × 42 mm) to simplify integration. Its small size and ease of use when paired with Dynamic C® allow engineers to add device intelligence and I/O control for many of today's embedded applications. The RCM3100 series is ideal for applications requiring M2M connectivity and is pin-compatible with the RCM3000 series for cost-effective Ethernet and non-Ethernet systems.

Rabbit hardware and Dynamic C are designed in a complementary fashion for maximum performance and ease of use in embedded systems. The additional software components in Dynamic C allow you to add functionality for embedded application customization.

BENEFITS

- Rabbit 3000 microprocessor at 30 MHz
- Up to 512K Flash/512K SRAM
- 54 digital I/O and 6 serial ports (IrDA, HDLC, asynch, SPI)
- 3.3V operation, low power “sleepy” modes (< 2mA)
- Compact size simplifies integration
- Ready-made platform for fast time-to-market, up to 3 months of design integration time savings
- Low-cost embedded microprocessor module
- Easily links to multiple serial devices

RELATED PRODUCTS



RabbitCore®
RCM3000
Series



RabbitCore®
RCM3400
Series



RabbitCore®
RCM3600
Series




RabbitCore®
RCM4100
Series



Dynamic C®

APPLICATION EXAMPLE

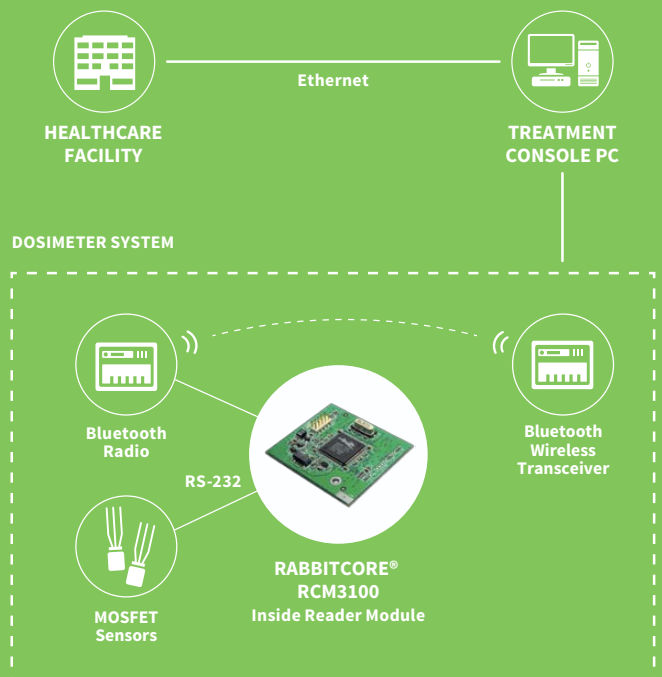



SPECIFICATIONS

RCM3100

RCM3110

FEATURE

MICROPROCESSOR	Rabbit 3000® at 30 MHz	
EMI REDUCTION	Spectrum spreader for reduced EMI (radiated emissions)	
FLASH MEMORY	512K (2 × 256K)	256K
SRAM	512K	128K
BACKUP BATTERY	Connection for user-supplied backup battery to support RTC and SRAM	
GENERAL-PURPOSE I/O	54 parallel digital I/O lines: <ul style="list-style-type: none">• 46 configurable I/O• 4 fixed inputs• 4 fixed outputs	
ADDITIONAL DIGITAL INPUTS	2 startup mode, reset in	
ADDITIONAL DIGITAL OUTPUTS	Status, reset out	
AUXILIARY I/O BUS	8 data lines and 6 address lines (shared with I/O) plus I/O read/write	
SERIAL PORTS	6 shared high-speed, CMOS-compatible ports: <ul style="list-style-type: none">• 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC (with IrDA)• 1 asynchronous clocked serial port dedicated for programming• Support for MIR/SIR IrDA transceiver	
SERIAL RATE	Max. asynchronous baud rate = CLK/8	
SLAVE INTERFACE	A slave port allows the RCM3100 to be used as a master or as an intelligent peripheral device with Rabbit-based or any other type of processor	
REAL-TIME CLOCK	Yes	
TIMERS	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers	
WATCHDOG/SUPERVISOR	Yes	
PULSE-WIDTH MODULATORS	10-bit free-running counter and four pulse-width registers	
INPUT CAPTURE	2-channel input capture can be used to time input signals from various port pins	
QUADRATURE DECODER	2-channel quadrature decoder accepts inputs from external incremental encoder modules	
POWER	3.15V to 3.45 VDC 75 mA @ 3.3V	
OPERATING TEMPERATURE	-40° C to +85° C	
HUMIDITY	5% to 95%, non-condensing	
BOARD SIZE	1.850" × 1.650" × 0.55" (47 mm × 42 mm × 14 mm)	

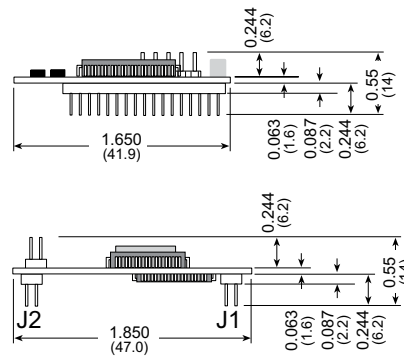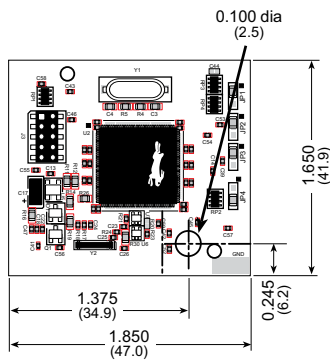

PART NUMBERS

DESCRIPTION

20-101-0517	RCM3100. 512K Flash, 512K SRAM
20-101-0518	RCM3110. 256K Flash, 128K SRAM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2016 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001603
C2/816

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

