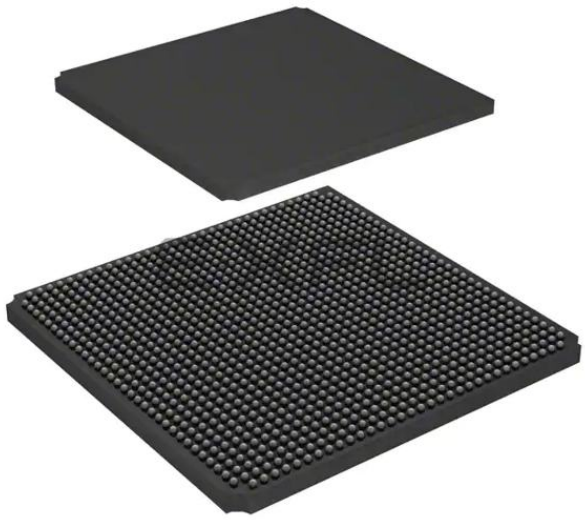

Welcome to E-XFL.COM

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details	
Product Status	Active
Number of LABs/CLBs	-
Number of Logic Elements/Cells	300000
Total RAM Bits	21094400
Number of I/O	512
Number of Gates	-
Voltage - Supply	0.97V ~ 1.08V
Mounting Type	Surface Mount
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	1152-BBGA, FCBGA
Supplier Device Package	1152-FCBGA (35x35)
Purchase URL	https://www.e-xfl.com/product-detail/microchip-technology/mpf300t-fcg1152i

Contents

1 Revision History 1
1.1 Revision 1.3 1
1.2 Revision 1.2 1
1.3 Revision 1.1 1
1.4 Revision 1.0 1
2 Overview 2
3 References 3
4 Device Offering 4
5 Silicon Status 5
6 DC Characteristics 6
6.1 Absolute Maximum Rating 6
6.2 Recommended Operating Conditions 6
6.2.1 DC Characteristics over Recommended Operating Conditions 8
6.2.2 Maximum Allowed Overshoot and Undershoot 8
6.3 Input and Output 12
6.3.1 DC Input and Output Levels 12
6.3.2 Differential DC Input and Output Levels 15
6.3.3 Complementary Differential DC Input and Output Levels 18
6.3.4 HSIO On-Die Termination 19
6.3.5 GPIO On-Die Termination 20
7 AC Switching Characteristics 22
7.1 I/O Standards Specifications 22
7.1.1 Input Delay Measurement Methodology Maximum PHY Rate for Memory Interface IP 22
7.1.2 Output Delay Measurement Methodology 25
7.1.3 Input Buffer Speed 27
7.1.4 Output Buffer Speed 29
7.1.5 Maximum PHY Rate for Memory Interface IP 31
7.1.6 User I/O Switching Characteristics 32
7.2 Clocking Specifications 35
7.2.1 Clocking 35
7.2.2 PLL 36
7.2.3 DLL 37
7.2.4 RC Oscillators 38
7.3 Fabric Specifications 40
7.3.1 Math Blocks 40

2 Overview

This datasheet describes PolarFire® FPGA device characteristics with industrial temperature range (–40 °C to 100 °C T_J) and extended commercial temperature range (0 °C to 100 °C T_J). The devices are provided with a standard speed grade (STD) and a –1 speed grade with higher performance. The FPGA core supply V_{DD} can operate at 1.0 V for lower-power or 1.05 V for higher performance. Similarly, the transceiver core supply V_{DDA} can also operate at 1.0 V or 1.05 V. Users select the core operating voltage while creating the Libero project.