



Welcome to [E-XFL.COM](https://www.e-xfl.com)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

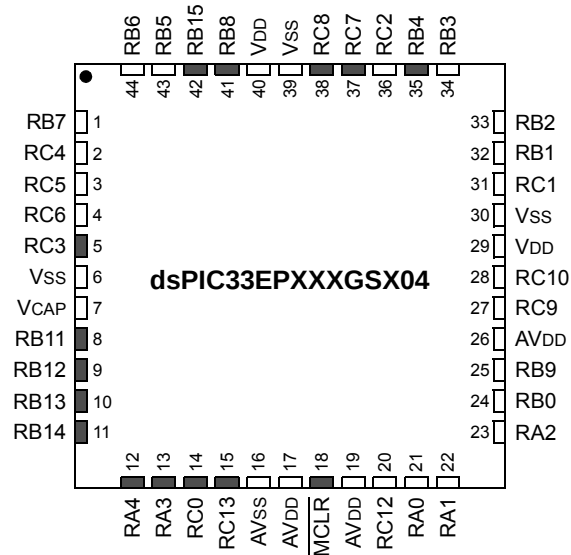
Details

Product Status	Active
Core Processor	dsPIC
Core Size	16-Bit
Speed	70 MIPS
Connectivity	I ² C, IrDA, LINbus, SPI, UART/USART
Peripherals	Brown-out Detect/Reset, DMA, I ² S, POR, PWM, WDT
Number of I/O	33
Program Memory Size	64KB (64K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	8K x 8
Voltage - Supply (Vcc/Vdd)	3V ~ 3.6V
Data Converters	A/D 17x12b; D/A 1x12b
Oscillator Type	Internal
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	48-TQFP
Supplier Device Package	48-TQFP (7x7)
Purchase URL	https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep64gs805-i-pt

dsPIC33EPXXXGS70X/80X FAMILY

Pin Diagrams (Continued)

44-Pin QFN, TQFP



Pin	Pin Function	Pin	Pin Function
1	PGEC1/AN21/SDA1/ RP39 /RB7	23	AN2/CMP1C/CMP2A/PGA1P3/PGA2P2/ RP18 /RA2
2	AN1ALT/ RP52 /RC4	24	AN3/CMP1D/CMP2B/PGA2P3/ RP32 /RB0
3	AN0ALT/ RP53 /RC5	25	AN4/CMP2C/CMP3A/ISRC4/ RP41 /RB9
4	AN17/ RP54 /RC6	26	AVDD
5	RP51 /RC3	27	AN11/PGA1N3/ RP57 /RC9
6	VSS	28	EXTREF2/AN10/PGA1P4/ RP58 /RC10
7	VCAP	29	VDD
8	TMS/PWM3H/ RP43 /RB11	30	VSS
9	TCK/PWM3L/ RP44 /RB12	31	AN8/CMP4C/PGA2P4/ RP49 /RC1
10	PWM2H/ RP45 /RB13	32	OSCI/CLKI/AN6/CMP3C/CMP4A/ISRC2/ RP33 /RB1
11	PWM2L/ RP46 /RB14	33	OSC2/CLKO/AN7/CMP3D/CMP4B/PGA1N2/ RP34 /RB2
12	PWM1H/ RP20 /RA4	34	PGED2/DACOUT1/AN18/INT0/ RP35 /RB3
13	PWM1L/ RP19 /RA3	35	PGEC2/ADTRG31/ RP36 /RB4
14	FLT12/ RP48 /RC0	36	EXTREF1/AN9/CMP4D/ RP50 /RC2
15	FLT11/ RP61 /RC13	37	ASDA1/ RP55 /RC7
16	AVSS	38	ASCL1/ RP56 /RC8
17	AVDD	39	VSS
18	MCLR	40	VDD
19	AVDD	41	PGED3/SDA2/FLT31/ RP40 /RB8
20	AN14/PGA2N3/ RP60 /RC12	42	PGEC3/SCL2/ RP47 /RB15
21	AN0/CMP1A/PGA1P1/ RP16 /RA0	43	TDO/AN19/PGA2N2/ RP37 /RB5
22	AN1/CMP1B/PGA1P2/PGA2P1/ RP17 /RA1	44	PGED1/TDI/AN20/SCL1/ RP38 /RB6

Legend: Shaded pins are up to 5 VDC tolerant.

RPn represents remappable peripheral functions. See Table 11-12 and Table 11-13 for the complete list of remappable sources.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 3-1: SR: CPU STATUS REGISTER (CONTINUED)

bit 7-5	IPL<2:0> : CPU Interrupt Priority Level Status bits ^(1,2) 111 = CPU Interrupt Priority Level is 7 (15); user interrupts are disabled 110 = CPU Interrupt Priority Level is 6 (14) 101 = CPU Interrupt Priority Level is 5 (13) 100 = CPU Interrupt Priority Level is 4 (12) 011 = CPU Interrupt Priority Level is 3 (11) 010 = CPU Interrupt Priority Level is 2 (10) 001 = CPU Interrupt Priority Level is 1 (9) 000 = CPU Interrupt Priority Level is 0 (8)
bit 4	RA : REPEAT Loop Active bit 1 = REPEAT loop is in progress 0 = REPEAT loop is not in progress
bit 3	N : MCU ALU Negative bit 1 = Result was negative 0 = Result was non-negative (zero or positive)
bit 2	OV : MCU ALU Overflow bit This bit is used for signed arithmetic (2's complement). It indicates an overflow of the magnitude that causes the sign bit to change state. 1 = Overflow occurred for signed arithmetic (in this arithmetic operation) 0 = No overflow occurred
bit 1	Z : MCU ALU Zero bit 1 = An operation that affects the Z bit has set it at some time in the past 0 = The most recent operation that affects the Z bit has cleared it (i.e., a non-zero result)
bit 0	C : MCU ALU Carry/Borrow bit 1 = A carry-out from the Most Significant bit of the result occurred 0 = No carry-out from the Most Significant bit of the result occurred

- Note 1:** The IPL<2:0> bits are concatenated with the IPL<3> bit (CORCON<3>) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL, if IPL<3> = 1. User interrupts are disabled when IPL<3> = 1.
- 2:** The IPL<2:0> Status bits are read-only when the NSTDIS bit (INTCON1<15>) = 1.
- 3:** A data write to the SR register can modify the SA and SB bits by either a data write to SA and SB or by clearing the SAB bit. To avoid a possible SA or SB bit write race condition, the SA and SB bits should not be modified using bit operations.

dsPIC33EPXXXGS70X/80X FAMILY

TABLE 4-14: SFR BLOCK C00h-D00h

Register	Address	All Resets	Register	Address	All Resets	Register	Address	All Resets
PWM			FCLCON3	C64	0000000000000000	IOCON6	CC2	1100000000000000
PTCON	C00	0000000000000000	PDC3	C66	0000000000000000	FCLCON6	CC4	0000000000000000
PTCON2	C02	0000000000000000	PHASE3	C68	0000000000000000	PDC6	CC6	0000000000000000
PTPER	C04	1111111111111000	DTR3	C6A	0000000000000000	PHASE6	CC8	0000000000000000
SEVTCMP	C06	0000000000000000	ALTDTR3	C6C	0000000000000000	DTR6	CCA	0000000000000000
MDC	C0A	0000000000000000	SDC3	C6E	0000000000000000	ALTDTR6	CCC	0000000000000000
STCON	C0E	0000000000000000	SPHASE3	C70	0000000000000000	SDC6	CCE	0000000000000000
STCON2	C10	0000000000000000	TRIG3	C72	0000000000000000	SPHASE6	CD0	0000000000000000
STPER	C12	1111111111111000	TRGCON3	C74	0000000000000000	TRIG6	CD2	0000000000000000
SSEVTCMP	C14	0000000000000000	STRIG3	C76	0000000000000000	TRGCON6	CD4	0000000000000000
CHOP	C1A	0000000000000000	PWMCAP3	C78	0000000000000000	STRIG6	CD6	0000000000000000
PWMKEY	C1E	xxxxxxxxxxxxxxxx	LEBCON3	C7A	0000000000000000	PWMCAP6	CD8	0000000000000000
PWM Generator			LEBDLY3	C7C	0000000000000000	LEBCON6	CDA	0000000000000000
PWMCON1	C20	0000000000000000	AUXCON3	C7E	0000000000000000	LEBDLY6	CDC	0000000000000000
IOCON1	C22	1100000000000000	PWMCON4	C80	0000000000000000	AUXCON6	CDE	0000000000000000
FCLCON1	C24	0000000000000000	IOCON4	C82	1100000000000000	PWMCON7	CE0	0000000000000000
PDC1	C26	0000000000000000	FCLCON4	C84	0000000000000000	IOCON7	CE2	1100000000000000
PHASE1	C28	0000000000000000	PDC4	C86	0000000000000000	FCLCON7	CE4	0000000000000000
DTR1	C2A	0000000000000000	PHASE4	C88	0000000000000000	PDC7	CE6	0000000000000000
ALTDTR1	C2C	0000000000000000	DTR4	C8A	0000000000000000	PHASE7	CE8	0000000000000000
SDC1	C2E	0000000000000000	ALTDTR4	C8C	0000000000000000	DTR7	CEA	0000000000000000
SPHASE1	C30	0000000000000000	SDC4	C8E	0000000000000000	ALTDTR7	CEC	0000000000000000
TRIG1	C32	0000000000000000	SPHASE4	C90	0000000000000000	SDC7	CEE	0000000000000000
TRGCON1	C34	0000000000000000	TRIG4	C92	0000000000000000	SPHASE7	CF0	0000000000000000
STRIG1	C36	0000000000000000	TRGCON4	C94	0000000000000000	TRIG7	CF2	0000000000000000
PWMCAP1	C38	0000000000000000	STRIG4	C96	0000000000000000	TRGCON7	CF4	0000000000000000
LEBCON1	C3A	0000000000000000	PWMCAP4	C98	0000000000000000	STRIG7	CF6	0000000000000000
LEBDLY1	C3C	0000000000000000	LEBCON4	C9A	0000000000000000	PWMCAP7	CF8	0000000000000000
AUXCON1	C3E	0000000000000000	LEBDLY4	C9C	0000000000000000	LEBCON7	CFA	0000000000000000
PWMCON2	C40	0000000000000000	AUXCON4	C9E	0000000000000000	LEBDLY7	CFC	0000000000000000
IOCON2	C42	1100000000000000	PWMCON5	CA0	0000000000000000	AUXCON7	CFE	0000000000000000
FCLCON2	C44	0000000000000000	IOCON5	CA2	1100000000000000	PWMCON8	D00	0000000000000000
PDC2	C46	0000000000000000	FCLCON5	CA4	0000000000000000	IOCON8	D02	1100000000000000
PHASE2	C48	0000000000000000	PDC5	CA6	0000000000000000	FCLCON8	D04	0000000000000000
DTR2	C4A	0000000000000000	PHASE5	CA8	0000000000000000	PDC8	D06	0000000000000000
ALTDTR2	C4C	0000000000000000	DTR5	CAA	0000000000000000	PHASE8	D08	0000000000000000
SDC2	C4E	0000000000000000	ALTDTR5	CAC	0000000000000000	ALTDTR8	D0C	0000000000000000
SPHASE2	C50	0000000000000000	SDC5	CAE	0000000000000000	SDC8	D0E	0000000000000000
TRIG2	C52	0000000000000000	SPHASE5	CB0	0000000000000000	SPHASE8	D10	0000000000000000
TRGCON2	C54	0000000000000000	TRIG5	CB2	0000000000000000	TRIG8	D12	0000000000000000
STRIG2	C56	0000000000000000	TRGCON5	CB4	0000000000000000	TRGCON8	D14	0000000000000000
PWMCAP2	C58	0000000000000000	STRIG5	CB6	0000000000000000	STRIG8	D16	0000000000000000
LEBCON2	C5A	0000000000000000	PWMCAP5	CB8	0000000000000000	PWMCAP8	D18	0000000000000000
LEBDLY2	C5C	0000000000000000	LEBCON5	CBA	0000000000000000	LEBCON8	D1A	0000000000000000
AUXCON2	C5E	0000000000000000	LEBDLY5	CBC	0000000000000000	LEBDLY8	D1C	0000000000000000
PWMCON3	C60	0000000000000000	AUXCON5	CBE	0000000000000000	AUXCON8	D1E	0000000000000000
IOCON3	C62	1100000000000000	PWMCON6	CC0	0000000000000000			

Legend: x = unknown or indeterminate value. Address values are in hexadecimal. Reset values are in binary.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 8-2: DMAxREQ: DMA CHANNEL x IRQ SELECT REGISTER

R/S-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
FORCE ⁽¹⁾	—	—	—	—	—	—	—
bit 15							bit 8

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
IRQSEL7	IRQSEL6	IRQSEL5	IRQSEL4	IRQSEL3	IRQSEL2	IRQSEL1	IRQSEL0
bit 7							bit 0

Legend:	S = Settable bit
R = Readable bit	W = Writable bit
-n = Value at POR	'1' = Bit is set
	'0' = Bit is cleared
	x = Bit is unknown

bit 15	FORCE: Force DMA Transfer bit ⁽¹⁾ 1 = Forces a single DMA transfer (Manual mode) 0 = Automatic DMA transfer initiation by DMA request
bit 14-8	Unimplemented: Read as '0'
bit 7-0	IRQSEL<7:0>: DMA Peripheral IRQ Number Select bits 01000111 = CAN2 – TX data request 01000110 = CAN1 – TX data request 00110111 = CAN2 – RX data ready 00100110 = IC4 – Input Capture 4 00100101 = IC3 – Input Capture 3 00100010 = CAN1 – RX data ready 00011111 = UART2TX – UART2 transmitter 00011110 = UART2RX – UART2 receiver 00011100 = TMR5 – Timer5 00011011 = TMR4 – Timer4 00011010 = OC4 – Output Compare 4 00011001 = OC3 – Output Compare 3 00001100 = UART1TX – UART1 transmitter 00001011 = UART1RX – UART1 receiver 00001000 = TMR3 – Timer3 00000111 = TMR2 – Timer2 00000110 = OC2 – Output Compare 2 00000101 = IC2 – Input Capture 2 00000010 = OC1 – Output Compare 1 00000001 = IC1 – Input Capture 1 00000000 = INT0 – External Interrupt 0

Note 1: The FORCE bit cannot be cleared by user software. The FORCE bit is cleared by hardware when the forced DMA transfer is complete or the channel is disabled (CHEN = 0).

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 9-5: ACLKCON: AUXILIARY CLOCK DIVISOR CONTROL REGISTER

R/W-0	R-0	R/W-1	U-0	U-0	R/W-1	R/W-1	R/W-1
ENAPLL	APLLCK	SELACLK	—	—	APSTSCLR2	APSTSCLR1	APSTSCLR0
bit 15							bit 8

R/W-0	R/W-0	U-0	U-0	U-0	U-0	U-0	U-0
ASRCSEL	FRCSEL	—	—	—	—	—	—
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15 **ENAPLL:** Auxiliary PLL Enable bit
1 = APLL is enabled
0 = APLL is disabled
- bit 14 **APLLCK:** APLL Locked Status bit (read-only)
1 = Indicates that Auxiliary PLL is in lock
0 = Indicates that Auxiliary PLL is not in lock
- bit 13 **SELACLK:** Select Auxiliary Clock Source for Auxiliary Clock Divider bit
1 = Auxiliary oscillators provide the source clock for the auxiliary clock divider
0 = Primary PLL (Fvco) provides the source clock for the auxiliary clock divider
- bit 12-11 **Unimplemented:** Read as '0'
- bit 10-8 **APSTSCLR<2:0>:** Auxiliary Clock Output Divider bits
111 = Divided by 1
110 = Divided by 2
101 = Divided by 4
100 = Divided by 8
011 = Divided by 16
010 = Divided by 32
001 = Divided by 64
000 = Divided by 256
- bit 7 **ASRCSEL:** Select Reference Clock Source for Auxiliary Clock bit
1 = Primary oscillator is the clock source
0 = No clock input is selected
- bit 6 **FRCSEL:** Select Reference Clock Source for Auxiliary PLL bit
1 = Selects the FRC clock for Auxiliary PLL
0 = Input clock source is determined by the ASRCSEL bit setting
- bit 5-0 **Unimplemented:** Read as '0'

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 9-6: REFOCON: REFERENCE OSCILLATOR CONTROL REGISTER

R/W-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
ROON	—	ROSSLP	ROSEL	RODIV3 ⁽¹⁾	RODIV2 ⁽¹⁾	RODIV1 ⁽¹⁾	RODIV0 ⁽¹⁾
bit 15							bit 8

U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
—	—	—	—	—	—	—	—
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15 **ROON:** Reference Oscillator Output Enable bit
 1 = Reference oscillator output is enabled on the RPN pin⁽²⁾
 0 = Reference oscillator output is disabled
- bit 14 **Unimplemented:** Read as '0'
- bit 13 **ROSSLP:** Reference Oscillator Run in Sleep bit
 1 = Reference oscillator output continues to run in Sleep
 0 = Reference oscillator output is disabled in Sleep
- bit 12 **ROSEL:** Reference Oscillator Source Select bit
 1 = Oscillator crystal is used as the reference clock
 0 = System clock is used as the reference clock
- bit 11-8 **RODIV<3:0>:** Reference Oscillator Divider bits⁽¹⁾
 1111 = Reference clock divided by 32,768
 1110 = Reference clock divided by 16,384
 1101 = Reference clock divided by 8,192
 1100 = Reference clock divided by 4,096
 1011 = Reference clock divided by 2,048
 1010 = Reference clock divided by 1,024
 1001 = Reference clock divided by 512
 1000 = Reference clock divided by 256
 0111 = Reference clock divided by 128
 0110 = Reference clock divided by 64
 0101 = Reference clock divided by 32
 0100 = Reference clock divided by 16
 0011 = Reference clock divided by 8
 0010 = Reference clock divided by 4
 0001 = Reference clock divided by 2
 0000 = Reference clock
- bit 7-0 **Unimplemented:** Read as '0'

Note 1: The reference oscillator output must be disabled (ROON = 0) before writing to these bits.

2: This pin is remappable. See **Section 11.6 “Peripheral Pin Select (PPS)”** for more information.

dsPIC33EPXXXGS70X/80X FAMILY

TABLE 11-12: SELECTABLE INPUT SOURCES (MAPS INPUT TO FUNCTION)

Input Name ⁽¹⁾	Function Name	Register	Configuration Bits
External Interrupt 1	INT1	RPINR0	INT1R<7:0>
External Interrupt 2	INT2	RPINR1	INT2R<7:0>
Timer1 External Clock	T1CK	RPINR2	T1CKR<7:0>
Timer2 External Clock	T2CK	RPINR3	T2CKR<7:0>
Timer3 External Clock	T3CK	RPINR3	T3CKR<7:0>
Input Capture 1	IC1	RPINR7	IC1R<7:0>
Input Capture 2	IC2	RPINR7	IC2R<7:0>
Input Capture 3	IC3	RPINR8	IC3R<7:0>
Input Capture 4	IC4	RPINR8	IC4R<7:0>
Output Compare Fault A	OCFA	RPINR11	OCFAR<7:0>
PWM Fault 1	FLT1	RPINR12	FLT1R<7:0>
PWM Fault 2	FLT2	RPINR12	FLT2R<7:0>
PWM Fault 3	FLT3	RPINR13	FLT3R<7:0>
PWM Fault 4	FLT4	RPINR13	FLT4R<7:0>
UART1 Receive	U1RX	RPINR18	U1RXR<7:0>
UART1 Clear-to-Send	$\overline{\text{U1CTS}}$	RPINR18	U1CTSR<7:0>
UART2 Receive	U2RX	RPINR19	U2RXR<7:0>
UART2 Clear-to-Send	$\overline{\text{U2CTS}}$	RPINR19	U2CTSR<7:0>
SPI1 Data Input	SDI1	RPINR20	SDI1R<7:0>
SPI1 Clock Input	SCK1	RPINR20	SCK1R<7:0>
SPI1 Slave Select	$\overline{\text{SS1}}$	RPINR21	SS1R<7:0>
CAN1 Receive	C1RX	PRINR26	C1RXR<7:0>
CAN2 Receive	C2RX	PRINR26	C2RXR<7:0>
SPI3 Data Input	SDI3	RPINR29	SDI3R<7:0>
SPI3 Clock Input	SCK3	RPINR29	SCK3R<7:0>
SPI3 Slave Select	$\overline{\text{SS3}}$	RPINR30	SS3R<7:0>
SPI2 Data Input	SDI2	RPINR22	SDI2R<7:0>
SPI2 Clock Input	SCK2	RPINR22	SCK2R<7:0>
SPI2 Slave Select	$\overline{\text{SS2}}$	RPINR23	SS2R<7:0>
PWM Synchronous Input 1	SYNCI1	RPINR37	SYNCI1R<7:0>
PWM Synchronous Input 2	SYNCI2	RPINR38	SYNCI2R<7:0>
PWM Fault 5	FLT5	RPINR42	FLT5R<7:0>
PWM Fault 6	FLT6	RPINR42	FLT6R<7:0>
PWM Fault 7	FLT7	RPINR43	FLT7R<7:0>
PWM Fault 8	FLT8	RPINR43	FLT8R<7:0>
CLC Input A	CLCINA	RPINR45	CLCINAR<7:0>
CLC Input B	CLCINB	RPINR46	CLCINBR<7:0>

Note 1: Unless otherwise noted, all inputs use the Schmitt Trigger input buffers.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 11-41: RPOR8: PERIPHERAL PIN SELECT OUTPUT REGISTER 8

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP45R6	RP45R5	RP45R4	RP45R3	RP45R2	RP45R1	RP45R0
bit 15							bit 8

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP44R6	RP44R5	RP44R4	RP44R3	RP44R2	RP44R1	RP44R0
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **RP45R<6:0>:** Peripheral Output Function is Assigned to RP45 Output Pin bits
(see Table 11-13 for peripheral function numbers)

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **RP44R<6:0>:** Peripheral Output Function is Assigned to RP44 Output Pin bits
(see Table 11-13 for peripheral function numbers)

REGISTER 11-42: RPOR9: PERIPHERAL PIN SELECT OUTPUT REGISTER 9

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP47R6	RP47R5	RP47R4	RP47R3	RP47R2	RP47R1	RP47R0
bit 15							bit 8

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	RP46R6	RP46R5	RP46R4	RP46R3	RP46R2	RP46R1	RP46R0
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **RP47R<6:0>:** Peripheral Output Function is Assigned to RP47 Output Pin bits
(see Table 11-13 for peripheral function numbers)

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **RP46R<6:0>:** Peripheral Output Function is Assigned to RP46 Output Pin bits
(see Table 11-13 for peripheral function numbers)

dsPIC33EPXXXGS70X/80X FAMILY

NOTES:

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 16-1: PTCON: PWMx TIME BASE CONTROL REGISTER (CONTINUED)

bit 3-0 **SEVTPS<3:0>**: PWMx Special Event Trigger Output Postscaler Select bits⁽¹⁾

1111 = 1:16 postscaler generates a Special Event Trigger on every sixteenth compare match event

•

•

•

0001 = 1:2 postscaler generates a Special Event Trigger on every second compare match event

0000 = 1:1 postscaler generates a Special Event Trigger on every compare match event

Note 1: These bits should be changed only when PTEN = 0. In addition, when using the SYNCIx feature, the user application must program the Period register with a value that is slightly larger than the expected period of the external synchronization input signal.

REGISTER 16-2: PTCON2: PWMx CLOCK DIVIDER SELECT REGISTER

U-0	U-0	U-0	U-0	U-0	U-0	U-0	U-0
—	—	—	—	—	—	—	—
bit 15							bit 8

U-0	U-0	U-0	U-0	U-0	R/W-0	R/W-0	R/W-0
—	—	—	—	—	PCLKDIV<2:0> ⁽¹⁾		
bit 7						bit 0	

Legend:

R = Readable bit
-n = Value at POR

W = Writable bit
'1' = Bit is set

U = Unimplemented bit, read as '0'
'0' = Bit is cleared

x = Bit is unknown

bit 15-3 **Unimplemented:** Read as '0'

bit 2-0 **PCLKDIV<2:0>**: PWMx Input Clock Prescaler (Divider) Select bits⁽¹⁾

111 = Reserved

110 = Divide-by-64, maximum PWM timing resolution

101 = Divide-by-32, maximum PWM timing resolution

100 = Divide-by-16, maximum PWM timing resolution

011 = Divide-by-8, maximum PWM timing resolution

010 = Divide-by-4, maximum PWM timing resolution

001 = Divide-by-2, maximum PWM timing resolution

000 = Divide-by-1, maximum PWM timing resolution (power-on default)

Note 1: These bits should be changed only when PTEN = 0. Changing the clock selection during operation will yield unpredictable results.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 17-2: PTGCON: PTG CONTROL REGISTER

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
PTGCLK2	PTGCLK1	PTGCLK0	PTGDIV4	PTGDIV3	PTGDIV2	PTGDIV1	PTGDIV0
bit 15							bit 8

R/W-0	R/W-0	R/W-0	R/W-0	U-0	R/W-0	R/W-0	R/W-0
PTGPWD3	PTGPWD2	PTGPWD1	PTGPWD0	—	PTGWDT2	PTGWDT1	PTGWDT0
bit 7							bit 0

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-13 **PTGCLK<2:0>**: Select PTG Module Clock Source bits

111 = CLC2

110 = CLC1

101 = PTG module clock source will be T3CLK

100 = PTG module clock source will be T2CLK

011 = PTG module clock source will be T1CLK

010 = PTG module clock source will be TAD

001 = PTG module clock source will be Fosc

000 = PTG module clock source will be Fp

bit 12-8 **PTGDIV<4:0>**: PTG Module Clock Prescaler (divider) bits

11111 = Divide-by-32

11110 = Divide-by-31

•

•

•

00001 = Divide-by-2

00000 = Divide-by-1

bit 7-4 **PTGPWD<3:0>**: PTG Trigger Output Pulse-Width bits

1111 = All trigger outputs are 16 PTG clock cycles wide

1110 = All trigger outputs are 15 PTG clock cycles wide

•

•

•

0001 = All trigger outputs are 2 PTG clock cycles wide

0000 = All trigger outputs are 1 PTG clock cycle wide

bit 3 **Unimplemented**: Read as '0'

bit 2-0 **PTGWDT<2:0>**: Select PTG Watchdog Timer Time-out Count Value bits

111 = Watchdog Timer will time-out after 512 PTG clocks

110 = Watchdog Timer will time-out after 256 PTG clocks

101 = Watchdog Timer will time-out after 128 PTG clocks

100 = Watchdog Timer will time-out after 64 PTG clocks

011 = Watchdog Timer will time-out after 32 PTG clocks

010 = Watchdog Timer will time-out after 16 PTG clocks

001 = Watchdog Timer will time-out after 8 PTG clocks

000 = Watchdog Timer is disabled

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 17-3: PTGBTE: PTG BROADCAST TRIGGER ENABLE REGISTER^(1,2) (CONTINUED)

bit 4	OC1CS: Clock Source for OC1 bit 1 = Generates clock pulse when the broadcast command is executed 0 = Does not generate clock pulse when the broadcast command is executed
bit 3	OC4TSS: Trigger/Synchronization Source for OC4 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed
bit 2	OC3TSS: Trigger/Synchronization Source for OC3 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed
bit 1	OC2TSS: Trigger/Synchronization Source for OC2 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed
bit 0	OC1TSS: Trigger/Synchronization Source for OC1 bit 1 = Generates trigger/synchronization when the broadcast command is executed 0 = Does not generate trigger/synchronization when the broadcast command is executed

Note 1: This register is read-only when the PTG module is executing Step commands (PTGEN = 1 and PTGSTRT = 1).

2: This register is only used with the PTGCTRL OPTION = 1111 Step command.

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 18-2: SPIxCON1H: SPIx CONTROL REGISTER 1 HIGH

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
AUDEN ⁽¹⁾	SPISGNEXT	IGNROV	IGNTUR	AUDMONO ⁽²⁾	URDTEN ⁽³⁾	AUDMOD1 ⁽⁴⁾	AUDMOD0 ⁽⁴⁾
bit 15						bit 8	

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
FRMEN	FRMSYNC	FRMPOL	MSEN	FRMSYPW	FRMCNT2	FRMCNT1	FRMCNT0
bit 7						bit 0	

Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **AUDEN:** Audio Codec Support Enable bit⁽¹⁾

1 = Audio protocol is enabled; MSTEN controls the direction of both SCKx and frame (a.k.a. LRC), and this module functions as if FRMEN = 1, FRMSYNC = MSTEN, FRMCNT<2:0> = 001 and SMP = 0, regardless of their actual values

0 = Audio protocol is disabled

bit 14 **SPISGNEXT:** SPIx Sign-Extend RX FIFO Read Data Enable bit

1 = Data from RX FIFO is sign-extended

0 = Data from RX FIFO is not sign-extended

bit 13 **IGNROV:** Ignore Receive Overflow bit

1 = A Receive Overflow (ROV) is NOT a critical error; during ROV, data in the FIFO is not overwritten by the receive data

0 = A ROV is a critical error that stops SPI operation

bit 12 **IGNTUR:** Ignore Transmit Underrun bit

1 = A Transmit Underrun (TUR) is NOT a critical error and data indicated by URDTEN is transmitted until the SPIxTXB is not empty

0 = A TUR is a critical error that stops SPI operation

bit 11 **AUDMONO:** Audio Data Format Transmit bit⁽²⁾

1 = Audio data is mono (i.e., each data word is transmitted on both left and right channels)

0 = Audio data is stereo

bit 10 **URDTEN:** Transmit Underrun Data Enable bit⁽³⁾

1 = Transmits data out of SPIxURDT register during Transmit Underrun conditions

0 = Transmits the last received data during Transmit Underrun conditions

bit 9-8 **AUDMOD<1:0>:** Audio Protocol Mode Selection bits⁽⁴⁾

11 = PCM/DSP mode

10 = Right Justified mode: This module functions as if SPIFE = 1, regardless of its actual value

01 = Left Justified mode: This module functions as if SPIFE = 1, regardless of its actual value

00 = I²S mode: This module functions as if SPIFE = 0, regardless of its actual value

bit 7 **FRMEN:** Framed SPIx Support bit

1 = Framed SPIx support is enabled ($\overline{\text{SSx}}$ pin is used as the FSYNC input/output)

0 = Framed SPIx support is disabled

Note 1: AUDEN can only be written when the SPIEN bit = 0.









Note 2: AUDMONO can only be written when the SPIEN bit = 0 and is only valid for AUDEN = 1.

Note 3: URDTEN is only valid when IGNTUR = 1.

Note 4: The AUDMOD<1:0> bits can only be written when the SPIEN bit = 0 and are only valid when AUDEN = 1. When NOT in PCM/DSP mode, this module functions as if FRMSYPW = 1, regardless of its actual value.

dsPIC33EPXXXGS70X/80X FAMILY

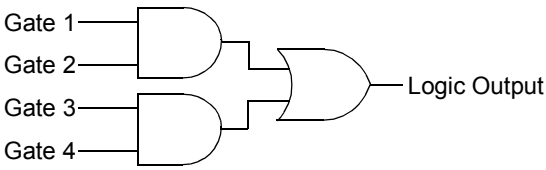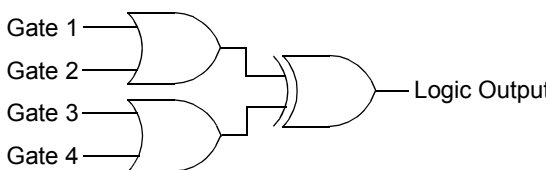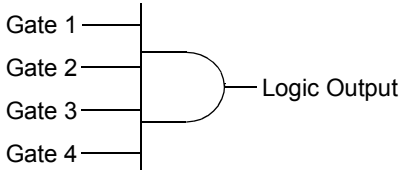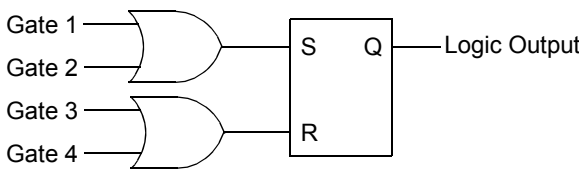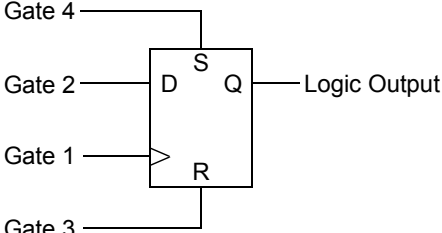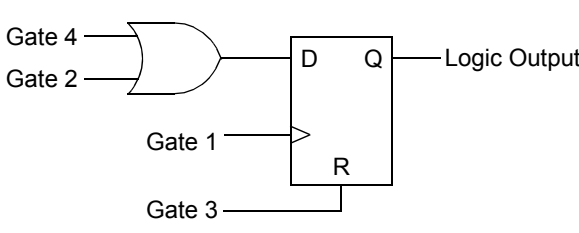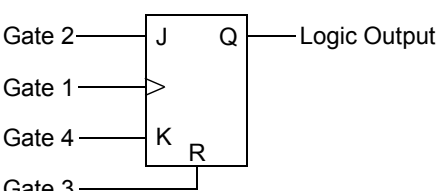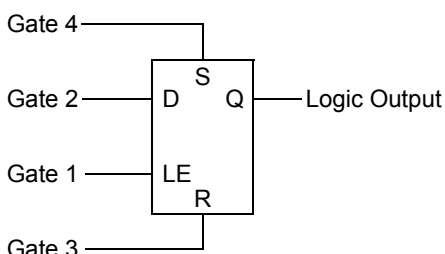FIGURE 21-2: CLCx LOGIC FUNCTION COMBINATORIAL OPTIONS

AND – OR  MODE<2:0> = 000	OR – XOR  MODE<2:0> = 001
4-Input AND  MODE<2:0> = 010	S-R Latch  MODE<2:0> = 011
1-Input D Flip-Flop with S and R  MODE<2:0> = 100	2-Input D Flip-Flop with R  MODE<2:0> = 101
J-K Flip-Flop with R  MODE<2:0> = 110	1-Input Transparent Latch with S and R  MODE<2:0> = 111

dsPIC33EPXXXGS70X/80X FAMILY

REGISTER 22-26: ADTRIGxL: ADC CHANNEL TRIGGER x SELECTION REGISTER LOW (x = 0 to 5)

U-0	U-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	—	—	TRGSRC(4x+1)<4:0>				
bit 15							bit 8

U-0	U-0	U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	—	—	TRGSRC(4x)<4:0>				
bit 7							bit 0

Legend:

R = Readable bit W = Writable bit U = Unimplemented bit, read as '0'
 -n = Value at POR '1' = Bit is set '0' = Bit is cleared x = Bit is unknown

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **TRGSRC(4x+1)<4:0>**: Trigger Source Selection for Corresponding Analog Inputs bits

11111 = ADTRG31
 11110 = PTG Trigger Output 12
 11101 = PWM Generator 6 current-limit trigger
 11100 = PWM Generator 5 current-limit trigger
 11011 = PWM Generator 4 current-limit trigger
 11010 = PWM Generator 3 current-limit trigger
 11001 = PWM Generator 2 current-limit trigger
 11000 = PWM Generator 1 current-limit trigger
 10111 = Output Compare 2 trigger
 10110 = Output Compare 1 trigger
 10101 = CLC2 output
 10100 = PWM Generator 6 secondary trigger
 10011 = PWM Generator 5 secondary trigger
 10010 = PWM Generator 4 secondary trigger
 10001 = PWM Generator 3 secondary trigger
 10000 = PWM Generator 2 secondary trigger
 01111 = PWM Generator 1 secondary trigger
 01110 = PWM secondary Special Event Trigger
 01101 = Timer2 period match
 01100 = Timer1 period match
 01011 = CLC1 output
 01010 = PWM Generator 6 primary trigger
 01001 = PWM Generator 5 primary trigger
 01000 = PWM Generator 4 primary trigger
 00111 = PWM Generator 3 primary trigger
 00110 = PWM Generator 2 primary trigger
 00101 = PWM Generator 1 primary trigger
 00100 = PWM Special Event Trigger
 00011 = Reserved
 00010 = Level software trigger
 00001 = Common software trigger
 00000 = No trigger is enabled

bit 7-5 **Unimplemented:** Read as '0'

dsPIC33EPXXXGS70X/80X FAMILY

TABLE 28-2: INSTRUCTION SET OVERVIEW (CONTINUED)

Base Instr #	Assembly Mnemonic	Assembly Syntax	Description	# of Words	# of Cycles ⁽¹⁾	Status Flags Affected
74	SL	SL f	f = Left Shift f	1	1	C,N,OV,Z
		SL f, WREG	WREG = Left Shift f	1	1	C,N,OV,Z
		SL ws, wd	Wd = Left Shift ws	1	1	C,N,OV,Z
		SL wb, wns, wnd	Wnd = Left Shift Wb by Wns	1	1	N,Z
		SL wb, #lit5, wnd	Wnd = Left Shift Wb by lit5	1	1	N,Z
75	SUB	SUB Acc	Subtract Accumulators	1	1	OA,OB,OAB,SA,SB,SAB
		SUB f	f = f – WREG	1	1	C,DC,N,OV,Z
		SUB f, WREG	WREG = f – WREG	1	1	C,DC,N,OV,Z
		SUB #lit10, wn	Wn = Wn – lit10	1	1	C,DC,N,OV,Z
		SUB wb, ws, wd	Wd = Wb – ws	1	1	C,DC,N,OV,Z
		SUB wb, #lit5, wd	Wd = Wb – lit5	1	1	C,DC,N,OV,Z
76	SUBB	SUBB f	f = f – WREG – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBB f, WREG	WREG = f – WREG – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBB #lit10, wn	Wn = Wn – lit10 – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBB wb, ws, wd	Wd = Wb – ws – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBB wb, #lit5, wd	Wd = Wb – lit5 – ($\overline{C}$)	1	1	C,DC,N,OV,Z
77	SUBR	SUBR f	f = WREG – f	1	1	C,DC,N,OV,Z
		SUBR f, WREG	WREG = WREG – f	1	1	C,DC,N,OV,Z
		SUBR wb, ws, wd	Wd = ws – Wb	1	1	C,DC,N,OV,Z
		SUBR wb, #lit5, wd	Wd = lit5 – Wb	1	1	C,DC,N,OV,Z
78	SUBBR	SUBBR f	f = WREG – f – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBBR f, WREG	WREG = WREG – f – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBBR wb, ws, wd	Wd = ws – Wb – ($\overline{C}$)	1	1	C,DC,N,OV,Z
		SUBBR wb, #lit5, wd	Wd = lit5 – Wb – ($\overline{C}$)	1	1	C,DC,N,OV,Z
79	SWAP	SWAP.b wn	Wn = nibble swap Wn	1	1	None
		SWAP wn	Wn = byte swap Wn	1	1	None
80	TBLRDH	TBLRDH ws, wd	Read Prog<23:16> to Wd<7:0>	1	5	None
81	TBLRDL	TBLRDL ws, wd	Read Prog<15:0> to Wd	1	5	None
82	TBLWTH	TBLWTH ws, wd	Write ws<7:0> to Prog<23:16>	1	2	None
83	TBLWTL	TBLWTL ws, wd	Write ws to Prog<15:0>	1	2	None
84	ULNK	ULNK	Unlink Frame Pointer	1	1	SFA
85	XOR	XOR f	f = f .XOR. WREG	1	1	N,Z
		XOR f, WREG	WREG = f .XOR. WREG	1	1	N,Z
		XOR #lit10, wn	Wd = lit10 .XOR. Wd	1	1	N,Z
		XOR wb, ws, wd	Wd = Wb .XOR. ws	1	1	N,Z
		XOR wb, #lit5, wd	Wd = Wb .XOR. lit5	1	1	N,Z
86	ZE	ZE ws, wnd	Wnd = Zero-extend ws	1	1	C,Z,N

Note 1: Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

dsPIC33EPXXXGS70X/80X FAMILY

**TABLE 30-44: SPI3 SLAVE MODE (FULL-DUPLEX, CKE = 1, CKP = 1, SMP = 0)
TIMING REQUIREMENTS⁽⁵⁾**

AC CHARACTERISTICS			Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated) Operating temperature -40°C ≤ TA ≤ +85°C for Industrial -40°C ≤ TA ≤ +125°C for Extended				
Param.	Symbol	Characteristic ⁽¹⁾	Min.	Typ. ⁽²⁾	Max.	Units	Conditions
SP70	FscP	Maximum SCK3 Input Frequency	—	—	25	MHz	(Note 3)
SP72	TscF	SCK3 Input Fall Time	—	—	—	ns	See Parameter DO32 (Note 4)
SP73	TscR	SCK3 Input Rise Time	—	—	—	ns	See Parameter DO31 (Note 4)
SP30	TdoF	SDO3 Data Output Fall Time	—	—	—	ns	See Parameter DO32 (Note 4)
SP31	TdoR	SDO3 Data Output Rise Time	—	—	—	ns	See Parameter DO31 (Note 4)
SP35	Tsch2doV, TscL2doV	SDO3 Data Output Valid after SCK3 Edge	—	6	20	ns	
SP36	TdoV2scH, TdoV2scL	SDO3 Data Output Setup to First SCK3 Edge	20	—	—	ns	
SP40	TdiV2scH, TdiV2scL	Setup Time of SDI3 Data Input to SCK3 Edge	20	—	—	ns	
SP41	Tsch2diL, TscL2diL	Hold Time of SDI3 Data Input to SCK3 Edge	15	—	—	ns	
SP50	TssL2scH, TssL2scL	$\overline{SS3} \downarrow$ to SCK3 $\uparrow$ or SCK3 $\downarrow$ Input	120	—	—	ns	
SP51	TssH2doZ	$\overline{SS3} \uparrow$ to SDO3 Output High-Impedance	10	—	50	ns	(Note 4)
SP52	Tsch2ssH, TscL2ssH	$\overline{SS3} \uparrow$ after SCK3 Edge	1.5 TCY + 40	—	—	ns	(Note 4)
SP60	TssL2doV	SDO3 Data Output Valid after $\overline{SS3}$ Edge	—	—	50	ns	

Note 1: These parameters are characterized, but are not tested in manufacturing.

2: Data in "Typical" column is at 3.3V, +25°C unless otherwise stated.

3: The minimum clock period for SCK3 is 91 ns. Therefore, the SCK3 clock generated by the master must not violate this specification.

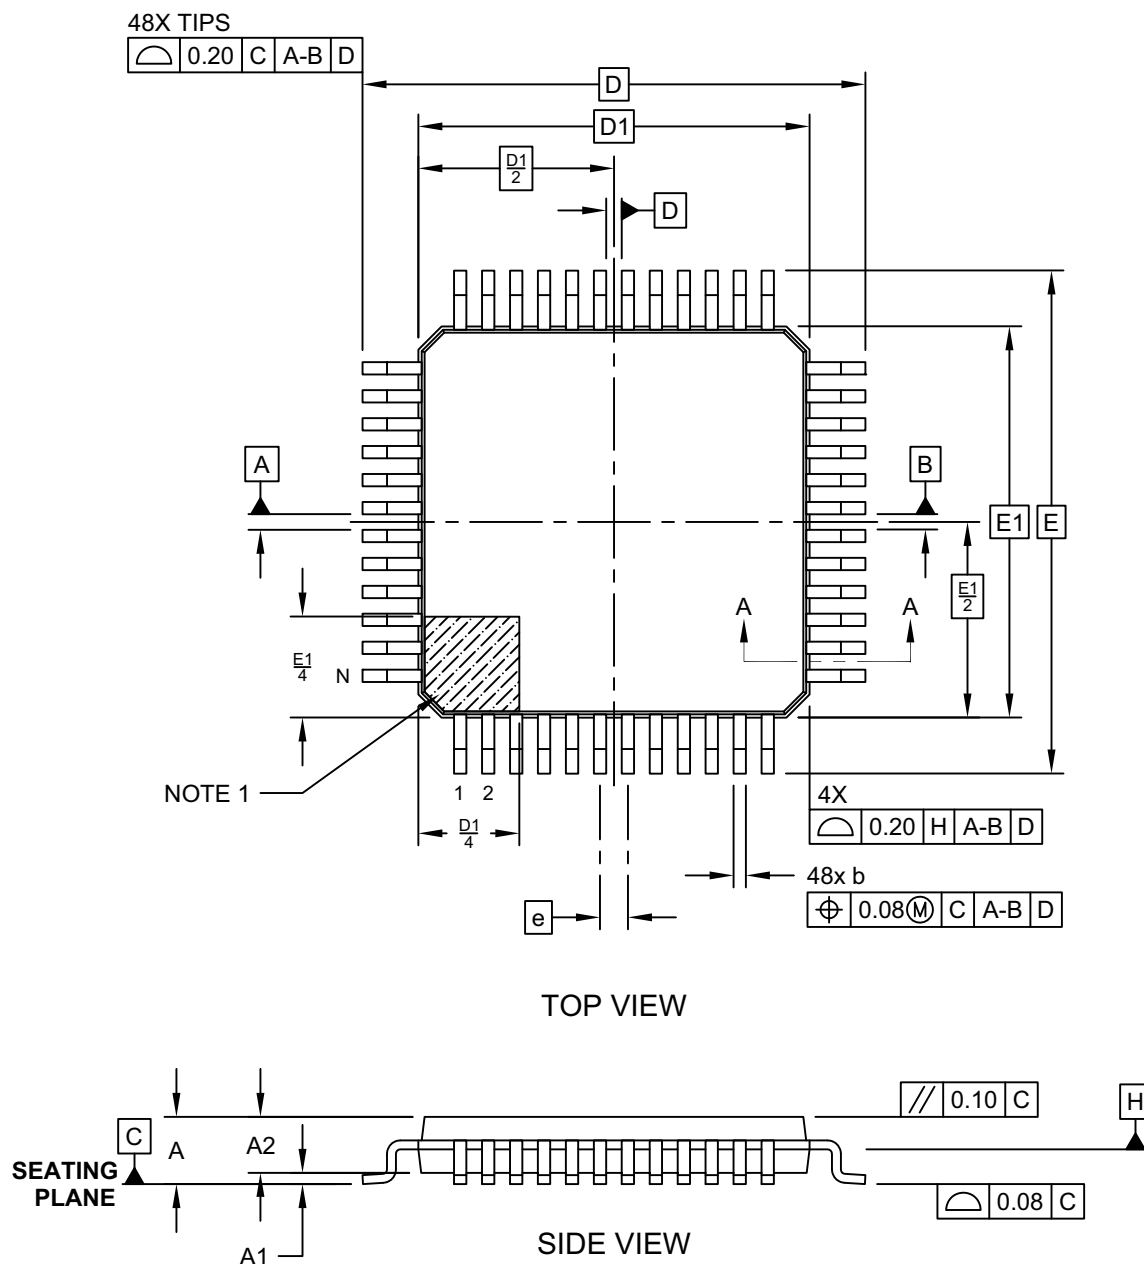
4: Assumes 50 pF load on all SPI3 pins.

5: For dsPIC33EPXXXGSX06 and dsPIC33EPXXXGSX08 devices with a fixed SCK3 pin.

dsPIC33EPXXXGS70X/80X FAMILY

48-Lead Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



Microchip Technology Drawing C04-300-PT Rev A Sheet 1 of 2

dsPIC33EPXXXGS70X/80X FAMILY

INDEX

A

Absolute Maximum Ratings	375
AC Characteristics	387
ADC Specifications	428
Analog Current Specifications	427
Analog-to-Digital Conversion Requirements	430
Auxiliary PLL Clock	389
CANx I/O Requirements	426
Capacitive Loading Requirements on Output Pins	387
DMA Module Requirements	433
External Clock Requirements	388
High-Speed PWMx Requirements	397
I/O Requirements	391
I2Cx Bus Data Requirements (Master Mode)	423
I2Cx Bus Data Requirements (Slave Mode)	425
Input Capture x Requirements	395
Internal FRC Accuracy	390
Internal LPRC Accuracy	390
Load Conditions	387
OCx/PWMx Module Requirements	396
Output Compare x Requirements	396
PLL Clock	389
Reset, WDT, OST, PWRT Requirements	392
SPI1, SPI2 and SPI3 Master Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) Requirements	401
SPI1, SPI2 and SPI3 Master Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) Requirements	400
SPI1, SPI2 and SPI3 Master Mode (Half-Duplex, Transmit Only) Requirements	399
SPI1, SPI2 and SPI3 Slave Mode (Full-Duplex, CKE = 0, CKP = 0, SMP = 0) Requirements	409
SPI1, SPI2 and SPI3 Slave Mode (Full-Duplex, CKE = 0, CKP = 1, SMP = 0) Requirements	407
SPI1, SPI2 and SPI3 Slave Mode (Full-Duplex, CKE = 1, CKP = 0, SMP = 0) Requirements	403
SPI1, SPI2 and SPI3 Slave Mode (Full-Duplex, CKE = 1, CKP = 1, SMP = 0) Requirements	405
SPI3 Master Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) Requirements	413
SPI3 Master Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) Requirements	412
SPI3 Master Mode (Half-Duplex, Transmit Only) Requirements	411
SPI3 Slave Mode (Full-Duplex, CKE = 0, CKP = 0, SMP = 0) Requirements	421
SPI3 Slave Mode (Full-Duplex, CKE = 0, CKP = 1, SMP = 0) Requirements	419
SPI3 Slave Mode (Full-Duplex, CKE = 1, CKP = 0, SMP = 0) Requirements	415
SPI3 Slave Mode (Full-Duplex, CKE = 1, CKP = 1, SMP = 0) Requirements	417
Temperature and Voltage Specifications	387
Timer1 External Clock Requirements	393
Timer2/Timer4 External Clock Requirements	394
Timer3/Timer5 External Clock Requirements	394
UARTx I/O Requirements	427
AC/DC Characteristics	
DACx Specifications	431
High-Speed Analog Comparator Specifications	430
PGAx Specifications	432
Analog-to-Digital Converter. See ADC.	
Arithmetic Logic Unit (ALU)	30

Assembler

MPASM Assembler	372
MPLAB Assembler, Linker, Librarian	372

B

Bit-Reversed Addressing	56
Example	57
Implementation	56
Sequence Table (16-Entry)	57
Block Diagrams	
16-Bit Timer1 Module	169
ADC Module	274
Addressing for Table Registers	61
CALL Stack Frame	52
CANx Module	308
CLCx Input Source Selection	261
CLCx Logic Function Combinatorial Options	260
CLCx Module	259
Connections for On-Chip Voltage Regulator	355
Constant-Current Source	345
CPU Core	22
Data Access from Program Space	
Address Generation	58
Dedicated ADC Cores 0-3	275
DMA Controller	91
dsPIC33EPXXXGS70X/80X Family	11
High-Speed Analog Comparator x	334
High-Speed PWM Architecture	189
Hysteresis Control	336
I2Cx Module	246
Input Capture x	177
Interleaved PFC	18
MCLR Pin Connections	16
Multiplexing Remappable Outputs for RPN	138
Off-Line UPS	20
Oscillator System	104
Output Compare x Module	181
Peripheral to DMA Controller	89
PGAx Functions	342
PGAx Module	341
Phase-Shifted Full-Bridge Converter	19
PLL Module	105
Programmer's Model	24
PSV Read Address Generation	49
PTG Module	214
Recommended Minimum Connection	16
Remappable Input for U1RX	136
Reset System	69
Security Segments for dsPIC33EP128GS70X/80X (Dual Partition Modes)	359
Security Segments for dsPIC33EP64GS70X/80X (Dual Partition Modes)	358
Security Segments for dsPIC33EPXXXGS70X/80X	358
Shared ADC Core	275
Shared Port Structure	125
Simplified Conceptual of High-Speed PWM	190
SPIx Master, Frame Master Connection	243
SPIx Master, Frame Slave Connection	244
SPIx Master/Slave Connection (Enhanced Buffer Modes)	243
SPIx Master/Slave Connection (Standard Mode)	242
SPIx Module (Enhanced Mode)	231
SPIx Module (Standard Mode)	230

dsPIC33EPXXXGS70X/80X FAMILY

NOTES: