


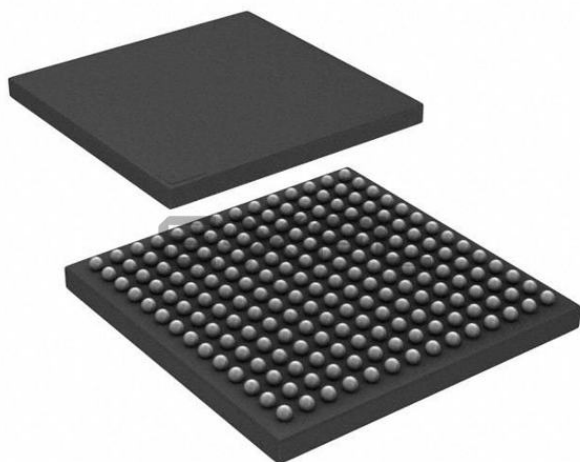

Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - Microprocessors](#)

Embedded microprocessors are specialized computing chips designed to perform specific tasks within an embedded system. Unlike general-purpose microprocessors found in personal computers, embedded microprocessors are tailored for dedicated functions within larger systems, offering optimized performance, efficiency, and reliability. These microprocessors are integral to the operation of countless electronic devices, providing the computational power necessary for controlling processes, handling data, and managing communications.

Applications of [Embedded - Microprocessors](#)

Embedded microprocessors are utilized across a broad spectrum of applications, making them indispensable in

Details

Product Status	Active
Core Processor	ARM® Cortex®-A5
Number of Cores/Bus Width	1 Core, 32-Bit
Speed	500MHz
Co-Processors/DSP	Multimedia; NEON™ MPE
RAM Controllers	LPDDR1, LPDDR2, LPDDR3, DDR2, DDR3, DDR3L, QSPI
Graphics Acceleration	Yes
Display & Interface Controllers	Keyboard, LCD, Touchscreen
Ethernet	10/100Mbps (1)
SATA	-
USB	USB 2.0 + HSIC
Voltage - I/O	3.3V
Operating Temperature	-40°C ~ 85°C (TA)
Security Features	ARM TZ, Boot Security, Cryptography, RTIC, Secure Fusebox, Secure JTAG, Secure Memory, Secure RTC
Package / Case	196-TFBGA, CSBGA
Supplier Device Package	196-TFBGA (11x11)
Purchase URL	https://www.e-xfl.com/product-detail/microchip-technology/atsama5d225c-d1m-cur

1. Features

- ARM Cortex-A5 core
 - ARMv7-A architecture
 - ARM TrustZone
 - NEON™ Media Processing Engine
 - Up to 500 MHz
 - ETM/ETB 8 Kbytes
- Memory Architecture
 - Memory Management Unit
 - 32-Kbyte L1 data cache, 32-Kbyte L1 instruction cache
 - 128-Kbyte L2 cache configurable to be used as an internal SRAM
 - DDR2-SDRAM memory up to 1 Gb
 - One 128-Kbyte scrambled internal SRAM
 - One 160-Kbyte internal ROM
 - 64-Kbyte scrambled and maskable ROM embedding boot loader/Secure boot loader
 - 96-Kbyte unscrambled, unmaskable ROM for NAND Flash BCH ECC table
 - High-bandwidth scramblable 16-bit Double Data Rate (DDR) multiport dynamic RAM controller supporting Winbond DDR2-SDRAM up to 1 Gb , including “on-the-fly” encryption/decryption path
 - 8-bit SLC/MLC NAND controller, with up to 32-bit Error Correcting Code (PMECC)
- System running up to 166 MHz
 - Reset controller, shutdown controller, periodic interval timer, independent watchdog timer and secure Real-Time Clock (RTC) with clock calibration
 - One 600 to 1200 MHz PLL for the system and one 480 MHz PLL optimized for USB high speed
 - Digital fractional PLL for audio (11.2896 MHz and 12.288 MHz)
 - Internal low-power 12 MHz RC and 32 KHz typical RC
 - Selectable 32.768-Hz low-power oscillator and 8 to 24 MHz oscillator
 - 51 DMA Channels including two 16-channel 64-bit Central DMA Controllers
 - 64-bit Advanced Interrupt Controller (AIC)
 - 64-bit Secure Advanced Interrupt Controller (SAIC)
 - Three programmable external clock signals
- Low-Power Modes
 - Ultra Low-power mode with fast wakeup capability
 - Low-power Backup mode with 5-Kbyte SRAM and SleepWalking™ features
 - Wakeup from up to nine wakeup pins, UART reception, analog comparison
 - Fast wakeup capability
 - Extended Backup mode with DDR2-SDRAM in Self-Refresh mode
- Peripherals
 - LCD TFT controller up to 1024x768, with four overlays, rotation, post-processing and alpha blending, 24-bit parallel RGB

- Up to eight tamper pins for static or dynamic intrusion detections
- Environmental monitors on specific versions: temperature, voltage, frequency and active die shield⁽¹⁾
- Secure Boot Loader⁽²⁾
- On-the-fly AES encryption/decryption on DDR2-SDRAM and QSPI memories (AESB)
- RTC including time-stamping on security intrusions
- Programmable fuse box with 544 fuse bits (including JTAG protection and BMS)
- Hardware cryptography
 - SHA (SHA1, SHA224, SHA256, SHA384, SHA512): compliant with FIPS PUB 180-2
 - AES: 256-, 192-, 128-bit key algorithm, compliant with FIPS PUB 197
 - TDES: two-key or three-key algorithms, compliant with FIPS PUB 46-3
 - True Random Number Generator (TRNG) compliant with NIST Special Publication 800-22 Test Suite and FIPS PUBs 140-2 and 140-3
- Up to 128 I/Os
 - Fully programmable through set/clear registers
 - Multiplexing of up to eight peripheral functions per I/O line
 - Each I/O line can be assigned to a peripheral or used as a general purpose I/O
 - PIO controller features a synchronous output providing up to 32 bits of data output in one write operation

Note:

1. For environmental monitors, refer to the document *SAMA5D23 and SAMA5D28 Environmental Monitors* (document no. 44036), available under Non-Disclosure Agreement (NDA). Contact a Microchip sales representative for details.
2. For secure boot strategies, refer to the document *SAMA5D2 Series Secure Boot Strategy* (document no. 44040), available under Non-Disclosure Agreement (NDA). Contact a Microchip sales representative for details.

3. Configuration Summary

Table 3-1. Configuration Summary

Feature	SAMA5D225	SAMA5D27		SAMA5D28
Package	TFBGA196	TFBGA289		
DDR2-SDRAM	128 Mb	512 Mb	1 Gb	1 Gb
SMC	Up to 16-bit			
Internal Memory Bus Width	16-bit			
PIOs	90	128		
SRAM	128 Kbytes			
QSPI	2			
LCD	24-bit RGB			
Camera Interface (ISC)	1			
EMAC	1			
PTC	4 X-lines x 8 Y-lines	8 X-lines x 8 Y-lines		
CAN	1	2		
USB	2 (2 Hosts or 1 Host/1 Device)	3 (2 Hosts/1 HSIC or 1 Host/1 Device/1 HSIC)		
UART/SPI/I ² C	9 / 7 / 7	10 / 7 / 7		
SDIO/SD/MMC	2			
I ² S/SSC/Class D/PDM	2 / 2 / 1 / 1			
ADC Inputs	5	12		
Timers	5	6		
PWM	4 (PWM) + 5 (TC)	4 (PWM) + 6 (TC)		
Tamper Pins	6	8		
AESB	Yes			
Environmental Monitors, Die Shield	–	–		Yes

4. Chip Identifier

Table 4-1. SAMA5D2 SIP Chip ID Registers

Chip Name	CHIPID_CIDR	CHIPID_EXID
SAMA5D225C-D1M	0x8A5C08C2	0x00000053
SAMA5D27C-D5M		0x00000032
SAMA5D27C-D1G		0x00000033
SAMA5D28C-D1G		0x00000013

5. Package and Ballout

The SAMA5D2 SIP is available in the packages listed below.



Important: SAMA5D2 SIP devices are not pin-to-pin compatible with SAMA5D2 devices.

For mechanical characteristics of the TFBGA196, refer to the SAMA5D2 Series Datasheet, ref. no. DS60001476, available via www.microchip.com.

For mechanical characteristics of the TFBGA289, see [Mechanical Characteristics](#).

Table 5-1. Packages

Package Name	Ball Count	Ball Pitch	Package Size
TFBGA196	196	0.75 mm	11 x 11 (mm)
TFBGA289	289	0.8 mm	14 x 14 (mm)

Table 5-2. Ball Description

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
U13	M8	VDDSDMMC	GPIO_EMMC	PA0	I/O	–	–	A	SDMMC0_CK	I/O	1	PIO, I, PU, ST
								B	QSPI0_SCK	O	1	
								F	D0	I/O	2	
N7	F7	VDDSDMMC	GPIO_EMMC	PA1	I/O	–	–	A	SDMMC0_CMD	I/O	1	PIO, I, PU, ST
								B	QSPI0_CS	O	1	
								F	D1	I/O	2	
U14	L8	VDDSDMMC	GPIO_EMMC	PA2	I/O	–	–	A	SDMMC0_DAT0	I/O	1	PIO, I, PU, ST
								B	QSPI0_IO0	I/O	1	
								F	D2	I/O	2	
T13	G8	VDDSDMMC	GPIO_EMMC	PA3	I/O	–	–	A	SDMMC0_DAT1	I/O	1	PIO, I, PU, ST
								B	QSPI0_IO1	I/O	1	
								F	D3	I/O	2	
U15	K8	VDDSDMMC	GPIO_EMMC	PA4	I/O	–	–	A	SDMMC0_DAT2	I/O	1	PIO, I, PU, ST
								B	QSPI0_IO2	I/O	1	
								F	D4	I/O	2	
U16	P9	VDDSDMMC	GPIO_EMMC	PA5	I/O	–	–	A	SDMMC0_DAT3	I/O	1	PIO, I, PU, ST
								B	QSPI0_IO3	I/O	1	
								F	D5	I/O	2	
U17	P10	VDDSDMMC	GPIO_EMMC	PA6	I/O	–	–	A	SDMMC0_DAT4	I/O	1	PIO, I, PU, ST
								B	QSPI1_SCK	O	1	
								D	TIOA5	I/O	1	
								E	FLEXCOM2_IO0	I/O	1	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
								F	D6	I/O	2	
R11	P11	VDDSDMMC	GPIO_EMMC	PA7	I/O	–	–	A	SDMMC0_DAT5	I/O	1	PIO, I, PU, ST
								B	QSPI1_IO0	I/O	1	
								D	TIOB5	I/O	1	
								E	FLEXCOM2_IO1	I/O	1	
								F	D7	I/O	2	
R9	K9	VDDSDMMC	GPIO_EMMC	PA8	I/O	–	–	A	SDMMC0_DAT6	I/O	1	PIO, I, PU, ST
								B	QSPI1_IO1	I/O	1	
								D	TCLK5	I	1	
								E	FLEXCOM2_IO2	I/O	1	
								F	NWE/NANDWE	O	2	
P8	J9	VDDSDMMC	GPIO_EMMC	PA9	I/O	–	–	A	SDMMC0_DAT7	I/O	1	PIO, I, PU, ST
								B	QSPI1_IO2	I/O	1	
								D	TIOA4	I/O	1	
								E	FLEXCOM2_IO3	O	1	
								F	NCS3	O	2	
R10	N14	VDDSDMMC	GPIO_EMMC	PA10	I/O	–	–	A	SDMMC0_RSTN	O	1	PIO, I, PU, ST
								B	QSPI1_IO3	I/O	1	
								D	TIOB4	I/O	1	
								E	FLEXCOM2_IO4	O	1	
								F	A21/NANDALE	O	2	
P15	N13	VDDIOP1	GPIO	PA11	I/O	–	–	A	SDMMC0_1V8SEL	O	1	PIO, I, PU, ST
								B	QSPI1_CS	O	1	
								D	TCLK4	I	1	
								F	A22/NANDCLE	O	2	
N17	L12	VDDIOP1	GPIO	PA12	I/O	–	–	A	SDMMC0_WP	I	1	PIO, I, PU, ST
								B	IRQ	I	1	
								F	NRD/NANDOE	O	2	
P16	M14	VDDIOP1	GPIO	PA13	I/O	–	–	A	SDMMC0_CD	I	1	PIO, I, PU, ST
								E	FLEXCOM3_IO1	I/O	1	
								F	D8	I/O	2	
M17	J10	VDDIOP1	GPIO_QSPI	PA14	I/O	–	–	A	SPI0_SPCK	I/O	1	PIO, I, PU, ST
								B	TK1	I/O	1	
								C	QSPI0_SCK	O	2	
								D	I2SC1_MCK	O	2	
								E	FLEXCOM3_IO2	I/O	1	
								F	D9	I/O	2	
N16	L14	VDDIOP1	GPIO	PA15	I/O	–	–	A	SPI0_MOSI	I/O	1	PIO, I, PU, ST
								B	TF1	I/O	1	
								C	QSPI0_CS	O	2	
								D	I2SC1_CK	I/O	2	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
								F	CLASSD_L2	O	1	
P13	M11	VDDIOP1	GPIO	PA31	I/O	–	–	B	NCS3	O	1	PIO, I, PU, ST
								C	SPI0_MISO	I/O	2	
								D	PWML0	O	1	
								F	CLASSD_L3	O	1	
F5	E6	VDDIOP0	GPIO	PB0	I/O	–	–	B	A21/NANDALE	O	1	PIO, I, PU, ST
								C	SPI0_MOSI	I/O	2	
								D	PWMH1	O	1	
C8	D6	VDDIOP0	GPIO	PB1	I/O	–	–	B	A22/NANDCLE	O	1	PIO, I, PU, ST
								C	SPI0_SPCK	I/O	2	
								D	PWML1	O	1	
								F	CLASSD_R0	O	1	
C7	C6	VDDIOP0	GPIO	PB2	I/O	–	–	B	NRD/NANDOE	O	1	PIO, I, PU, ST
								D	PWMFI0	I	1	
								F	CLASSD_R1	O	1	
B8	C5	VDDIOP0	GPIO	PB3	I/O	–	–	A	URXD4	I	1	PIO, I, PU, ST
								B	D8	I/O	1	
								C	IRQ	I	3	
								D	PWMEXTRG1	I	1	
								F	CLASSD_R2	O	1	
B7	D5	VDDIOP0	GPIO	PB4	I/O	–	–	A	UTXD4	O	1	PIO, I, PU, ST
								B	D9	I/O	1	
								C	FIQ	I	4	
								F	CLASSD_R3	O	1	
A10	D7	VDDIOP0	GPIO_QSPI	PB5	I/O	–	–	A	TCLK2	I	1	PIO, I, PU, ST
								B	D10	I/O	1	
								C	PWMH2	O	1	
								D	QSPI1_SCK	O	2	
								F	GTSUCOMP	O	3	
A9	C8	VDDIOP0	GPIO	PB6	I/O	–	–	A	TIOA2	I/O	1	PIO, I, PU, ST
								B	D11	I/O	1	
								C	PWML2	O	1	
								D	QSPI1_CS	O	2	
								F	GTXER	O	3	
D5	D9	VDDIOP0	GPIO_IO	PB7	I/O	–	–	A	TIOB2	I/O	1	PIO, I, PU, ST
								B	D12	I/O	1	
								C	PWMH3	O	1	
								D	QSPI1_IO0	I/O	2	
								F	GRXCK	I	3	
E5	C7	VDDIOP0	GPIO_IO	PB8	I/O	–	–	A	TCLK3	I	1	PIO, I, PU, ST
								B	D13	I/O	1	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
								C	PWML3	O	1	
								D	QSPI1_IO1	I/O	2	
								F	GCRS	I	3	
C6	C9	VDDIOP0	GPIO_IO	PB9	I/O	–	–	A	TIOA3	I/O	1	PIO, I, PU, ST
								B	D14	I/O	1	
								C	PWMF1	I	1	
								D	QSPI1_IO2	I/O	2	
								F	GCOL	I	3	
A8	F6	VDDIOP0	GPIO_IO	PB10	I/O	–	–	A	TIOB3	I/O	1	PIO, I, PU, ST
								B	D15	I/O	1	
								C	PWMEXTRG2	I	1	
								D	QSPI1_IO3	I/O	2	
								F	GRX2	I	3	
A7	B9	VDDIOP0	GPIO	PB11	I/O	–	–	A	LCDDAT0	O	1	PIO, I, PU, ST
								B	A0/NBS0	O	1	
								C	URXD3	I	3	
								D	PDMIC_DAT		2	
								F	GRX3	I	3	
B6	B8	VDDIOP0	GPIO	PB12	I/O	–	–	A	LCDDAT1	O	1	PIO, I, PU, ST
								B	A1	O	1	
								C	UTXD3	O	3	
								D	PDMIC_CLK		2	
								F	GTX2	O	3	
C5	B7	VDDIOP0	GPIO	PB13	I/O	–	–	A	LCDDAT2	O	1	PIO, I, PU, ST
								B	A2	O	1	
								C	PCK1	O	3	
								F	GTX3	O	3	
A6	G6	VDDIOP0	GPIO_QSPI	PB14	I/O	–	–	A	LCDDAT3	O	1	PIO, I, PU, ST
								B	A3	O	1	
								C	TK1	I/O	2	
								D	I2SC1_MCK	O	1	
								E	QSPI1_SCK	O	3	
								F	GTXCK	I/O	3	
E4	B5	VDDIOP0	GPIO	PB15	I/O	–	–	A	LCDDAT4	O	1	PIO, I, PU, ST
								B	A4	O	1	
								C	TF1	I/O	2	
								D	I2SC1_CK	I/O	1	
								E	QSPI1_CS	O	3	
								F	GTXEN	O	3	
B5	C4	VDDIOP0	GPIO_IO	PB16	I/O	–	–	A	LCDDAT5	O	1	PIO, I, PU, ST
								B	A5	O	1	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
								B	NCS1	O	1	
								C	TWD1	I/O	1	
								D	SPI1_NPCS2	O	1	
								F	ISC_HSYNC	I	3	
M15	F14	VDDIOP1	GPIO_CLK	PC7	I/O	–	–	A	LCDPCK	O	1	PIO, I, PU, ST
								B	NCS2	O	1	
								C	TWCK1	I/O	1	
								D	SPI1_NPCS3	O	1	
								E	URXD1	I	2	
								F	ISC_MCK	O	3	
M13	K13	VDDIOP1	GPIO	PC8	I/O	–	–	A	LCDDEN	O	1	PIO, I, PU, ST
								B	NANDRDY	I	1	
								C	FIQ	I	1	
								D	PCK0	O	3	
								E	UTXD1	O	2	
								F	ISC_FIELD	I	3	
B2	–	VDDISC	GPIO	PC9	I/O	–	–	A	FIQ	I	3	PIO, I, PU, ST
								B	GTSUCOMP	O	1	
								C	ISC_D0	I	1	
								D	TIOA4	I/O	2	
G4	–	VDDISC	GPIO	PC10	I/O	–	–	A	LCDDAT2	O	2	PIO, I, PU, ST
								B	GTCK	I/O	1	
								C	ISC_D1	I	1	
								D	TIOB4	I/O	2	
								E	CANTX0	O	2	
A2	–	VDDISC	GPIO	PC11	I/O	–	–	A	LCDDAT3	O	2	PIO, I, PU, ST
								B	GTEN	O	1	
								C	ISC_D2	I	1	
								D	TCLK4	I	2	
								E	CANRX0	I	2	
								F	A0/NBS0	O	2	
A1	–	VDDISC	GPIO	PC12	I/O	–	–	A	LCDDAT4	O	2	PIO, I, PU, ST
								B	GRXDV	I	1	
								C	ISC_D3	I	1	
								D	URXD3	I	1	
								E	TK0	I/O	2	
								F	A1	O	2	
B1	–	VDDISC	GPIO	PC13	I/O	–	–	A	LCDDAT5	O	2	PIO, I, PU, ST
								B	GRXER	I	1	
								C	ISC_D4	I	1	
								D	UTXD3	O	1	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
E7	–	VDDIOP2	GPIO_CLK	PD0	I/O	–	–	C	URXD3	I	2	PIO, I, PU, ST
								F	A20	O	2	
								A	LCDPCK	O	2	
								B	FLEXCOM4_IO4	O	1	
								C	UTXD3	O	2	
								D	GTSUCOMP	O	2	
C9	–	VDDIOP2	GPIO	PD1	I/O	–	–	F	A23	O	2	PIO, I, PU, ST
								A	LCDDEN	O	2	
								D	GRXCK	I	2	
D8	–	VDDIOP2	GPIO_CLK	PD2	I/O	–	–	F	A24	O	2	PIO, I, PU, ST
								A	URXD1	I	1	
								D	GTXER	O	2	
								E	ISC_MCK	O	2	
J1	–	VDDANA	GPIO_AD	PD3	I/O	–	–	F	A25	O	2	PIO, I, PU, ST
								A	UTXD1	O	1	
								B	FIQ	I	2	
								D	GCRS	I	2	
								E	ISC_D11	I	2	
H7	–	VDDANA	GPIO_AD	PD4	I/O	–	–	F	NWAIT	I	2	PIO, I, PU, ST
								A	TWD1	I/O	2	
								B	URXD2	I	1	
								D	GCOL	I	2	
								E	ISC_D10	I	2	
H1	–	VDDANA	GPIO_AD	PD5	I/O	–	–	F	NCS0	O	2	PIO, I, PU, ST
								A	TWCK1	I/O	2	
								B	UTXD2	O	1	
								D	GRX2	I	2	
								E	ISC_D9	I	2	
J2	–	VDDANA	GPIO_AD	PD6	I/O	–	–	F	NCS1	O	2	PIO, I, PU, ST
								A	TCK	I	2	
								B	PCK1	O	1	
								D	GRX3	I	2	
								E	ISC_D8	I	2	
H6	H5	VDDANA	GPIO_AD	PD7	I/O	–	–	F	NCS2	O	2	PIO, I, PU, ST
								A	TDI	I	2	
								C	UTMI_RXVAL	O	1	
								D	GTX2	O	2	
								E	ISC_D0	I	2	
K3	J2	VDDANA	GPIO_AD	PD8	I/O	–	–	F	NWR1/NBS1	O	2	PIO, I, PU, ST
								A	TDO	O	2	
								C	UTMI_RXERR	O	1	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
								D	GTX3	O	2	
								E	ISC_D1	I	2	
								F	NANDRDY	I	2	
J4	G4	VDDANA	GPIO_AD	PD9	I/O	–	–	A	TMS	I	2	PIO, I, PU, ST
								C	UTMI_RXACT	O	1	
								D	GTXCK	I/O	2	
								E	ISC_D2	I	2	
J3	C2	VDDANA	GPIO_AD	PD10	I/O	–	–	A	NTRST	I	2	PIO, I, PU, ST
								C	UTMI_HDIS	O	1	
								D	GTXEN	O	2	
								E	ISC_D3	I	2	
K2	F2	VDDANA	GPIO_AD	PD11	I/O	–	–	A	TIOA1	I/O	3	PIO, I, PU, ST
								B	PCK2	O	2	
								C	UTMI_LS0	O	1	
								D	GRXDV	I	2	
								E	ISC_D4	I	2	
								F	ISC_MCK	O	4	
K9	K4	VDDANA	GPIO_AD	PD12	I/O	–	–	A	TIOB1	I/O	3	PIO, I, PU, ST
								B	FLEXCOM4_IO0	I/O	2	
								C	UTMI_LS1	O	1	
								D	GRXER	I	2	
								E	ISC_D5	I	2	
								F	ISC_D4	I	4	
N1	C1	VDDANA	GPIO_AD	PD13	I/O	–	–	A	TCLK1	I	3	PIO, I, PU, ST
								B	FLEXCOM4_IO1	I/O	2	
								C	UTMI_CDRCPSSEL0	I	1	
								D	GRX0	I	2	
								E	ISC_D6	I	2	
								F	ISC_D5	I	4	
K5	H2	VDDANA	GPIO_AD	PD14	I/O	–	–	A	TCK	I	1	A, PU, ST
								B	FLEXCOM4_IO2	I/O	2	
								C	UTMI_CDRCPSSEL1	I	1	
								D	GRX1	I	2	
								E	ISC_D7	I	2	
								F	ISC_D6	I	4	
K8	G2	VDDANA	GPIO_AD	PD15	I/O	–	–	A	TDI	I	1	PIO, I, PU, ST
								B	FLEXCOM4_IO3	O	2	
								C	UTMI_CDRCPDIVEN	I	1	
								D	GTX0	O	2	
								E	ISC_PCK	I	2	
								F	ISC_D7	I	4	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
L1	J1	VDDANA	GPIO_AD	PD16	I/O	–	–	A	TDO	O	1	PIO, I, PU, ST
								B	FLEXCOM4_IO4	O	2	
								C	UTMI_CDRBISTEN	I	1	
								D	GTx1	O	2	
								E	ISC_VSYNC	I	2	
								F	ISC_D8	I	4	
K1	A1	VDDANA	GPIO_AD	PD17	I/O	–	–	A	TMS	I	1	A, PU, ST
								C	UTMI_CDRCPSELDIV	O	1	
								D	GMDC	O	2	
								E	ISC_HSYNC	I	2	
								F	ISC_D9	I	4	
J7	G3	VDDANA	GPIO_AD	PD18	I/O	–	–	A	NTRST	I	1	PIO, I, PU, ST
								D	GMDIO	I/O	2	
								E	ISC_FIELD	I	2	
								F	ISC_D10	I	4	
L8	K2	VDDANA	GPIO_AD	PD19	I/O	AD0	–	A	PCK0	O	1	PIO, I, PU, ST
								B	TWD1	I/O	3	
								C	URXD2	I	3	
								E	I2SC0_CK	I/O	2	
								F	ISC_D11	I	4	
L2	H1	VDDANA	GPIO_AD	PD20	I/O	AD1	–	A	TIOA2	I/O	3	PIO, I, PU, ST
								B	TWCK1	I/O	3	
								C	UTXD2	O	3	
								E	I2SC0_MCK	O	2	
								F	ISC_PCK	I	4	
P1	G1	VDDANA	GPIO_AD	PD21	I/O	AD2	–	A	TIOB2	I/O	3	PIO, I, PU, ST
								B	TWD0	I/O	4	
								C	FLEXCOM4_IO0	I/O	3	
								E	I2SC0_WS	I/O	2	
								F	ISC_VSYNC	I	4	
L6	F1	VDDANA	GPIO_AD	PD22	I/O	AD3	–	A	TCLK2	I	3	PIO, I, PU, ST
								B	TWCK0	I/O	4	
								C	FLEXCOM4_IO1	I/O	3	
								E	I2SC0_DI0	I	2	
								F	ISC_HSYNC	I	4	
T1	E1	VDDANA	GPIO_AD	PD23	I/O	AD4	–	A	URXD2	I	2	PIO, I, PU, ST
								C	FLEXCOM4_IO2	I/O	3	
								E	I2SC0_DO0	O	2	
								F	ISC_FIELD	I	4	
L4	–	VDDANA	GPIO_AD	PD24	I/O	AD5	–	A	UTXD2	O	2	PIO, I, PU, ST
								C	FLEXCOM4_IO3	O	3	

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
L5	–	VDDANA	GPIO_AD	PD25	I/O	AD6	–	A	SPI1_SPCK	I/O	3	PIO, I, PU, ST
								C	FLEXCOM4_IO4	O	3	
R1	–	VDDANA	GPIO_AD	PD26	I/O	AD7	–	A	SPI1_MOSI	I/O	3	PIO, I, PU, ST
								C	FLEXCOM2_IO0	I/O	2	
L7	–	VDDANA	GPIO_AD	PD27	I/O	AD8	–	A	SPI1_MISO	I/O	3	PIO, I, PU, ST
								B	TCK	I	3	
								C	FLEXCOM2_IO1	I/O	2	
L3	–	VDDANA	GPIO_AD	PD28	I/O	AD9	–	A	SPI1_NPCS0	I/O	3	PIO, I, PU, ST
								B	TDI	I	3	
								C	FLEXCOM2_IO2	I/O	2	
M2	–	VDDANA	GPIO_AD	PD29	I/O	AD10	–	A	SPI1_NPCS1	O	3	PIO, I, PU, ST
								B	TDO	O	3	
								C	FLEXCOM2_IO3	O	2	
								D	TIOA3	I/O	3	
								E	TWD0	I/O	3	
M9	–	VDDANA	GPIO_AD	PD30	I/O	AD11	–	A	SPI1_NPCS2	O	3	PIO, I, PU, ST
								B	TMS	I	3	
								C	FLEXCOM2_IO4	O	2	
								D	TIOB3	I/O	3	
								E	TWCK0	I/O	3	
M8	–	VDDANA	GPIO	PD31	I/O	–	–	A	ADTRG	I	1	PIO, I, PU, ST
								B	NTRST	I	3	
								C	IRQ	I	4	
								D	TCLK3	I	3	
								E	PCK0	O	2	
L9	L1	VDDANA	–	ADVREF	I	–	–	–	–	–	–	–
K4, J5	K3, L2	VDDANA	power	VDDANA	I	–	–	–	–	–	–	–
J6, M1	L3, K1	GNDANA	ground	GNDANA	I	–	–	–	–	–	–	–
J10, F11	K12, F12	VDDIODDR	DDR	DDR_VREF	–	–	–	–	–	–	–	–
L10, L14, J8, H10, G12, E11, E8	F10, E8, E9, E10, G12, H12, J12	VDDIODDR	power	VDDIODDR	I	–	–	–	–	–	–	–
K10, M14, J9, G10, H12, E10, F8	K11, J11, F9, C10, E11, F8, F11, G13, H13	GNDIODDR	ground	GNDIODDR	I	–	–	–	–	–	–	–
H2, U3, P7, L12, E9, D7	G7, H4, D14, E14, L5	VDDCORE	power	VDDCORE	I	–	–	–	–	–	–	–
E12, F12, J11, K11, K6, K7	G11, E12, E13, H3, H7, H8, J3	GNDCORE	ground	GNDCORE	I	–	–	–	–	–	–	–
D4, F3	F4, E4	VDDIOP0	power	VDDIOP0	I	–	–	–	–	–	–	–
E3, F2	E5, F5	GNDIOP0	ground	GNDIOP0	I	–	–	–	–	–	–	–
N12, P12	N9, N10	VDDIOP1	power	VDDIOP1	I	–	–	–	–	–	–	–
M12, P11	M9, M10	GNDIOP1	ground	GNDIOP1	I	–	–	–	–	–	–	–
D9	–	VDDIOP2	power	VDDIOP2	I	–	–	–	–	–	–	–

289-ball BGA	196-ball BGA	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State (Signal, Dir, PU, PD, HiZ, ST) ⁽¹⁾
				Signal	Dir	Signal	Dir	Func	Signal	Dir	IO Set	
N3	–	VDDBU	–	PIOBU7	–	–	–	–	–	–	–	–
U5	K5	VDDBU	power	VDDBU	I	–	–	–	–	–	–	–
U4	N2	GNDDBU	ground	GNDDBU	I	–	–	–	–	–	–	–
U2	M1	VDDBU	–	XIN32	–	–	–	–	–	–	–	–
U1	M2	VDDBU	–	XOUT32	–	–	–	–	–	–	–	–
U6	P2	VDDBU	–	COMP_P	I	–	–	–	–	–	–	–
U7	P3	VDDBU	–	COMP_N	I	–	–	–	–	–	–	–
D17	D12	DDRM_VDDQ ⁽²⁾	–	ODT	I	–	–	–	–	–	–	–
A16, B16, C16, D16, E15, G17, J17, L16	B10, A12, D10, D11	DDRM_VDD	power	DDRM_VDD	I	–	–	–	–	–	–	–
E16	E7	DDRM_VDDL ⁽²⁾	power	DDRM_VDDL ⁽²⁾	I	–	–	–	–	–	–	–
F15, G15, H15, J15, K15, L15	A7, A13, A9, A11, B6, C12	DDRM_VDDQ ⁽²⁾	power	DDRM_VDDQ ⁽²⁾	–	–	–	–	–	–	–	–
A17, B17, C17, D15, E14, F17, H17, L17	B14, A8, C11, C14, D8	DDRM_VSS	ground	DDRM_VSS	–	–	–	–	–	–	–	–
E17	D13	DDRM_VSSDL	ground	DDRM_VSSDL	I	–	–	–	–	–	–	–
F16, G16, H16, J16, K16, L17	A10, A14, B11, B12, B13, C13	DDRM_VSSQ	ground	DDRM_VSSQ	I	–	–	–	–	–	–	–
A12, A13, A14, A15, B11, B12, B13, B14, B15, C10, C11, C12, C13, C14, C15, D10, D11, D12, D13, D14, E13, F9, F10, F13, F14, G11, G13, G14, H11, H13, H14, J12, J13, J14, K12, K13, K14, L13, R12, T9	–	–	NC	–	–	–	–	–	–	–	–	–

Note:

- Signal = 'PIO' if GPIO; Dir = Direction; PU = Pull-up; PD = Pull-down; HiZ = High impedance; ST = Schmitt Trigger
- Refer to the DDR2-SDRAM datasheet for DDRM_VDDQ and DDRM_VDDL definitions.
DDRM_VDDQ/DDRM_VDDL = 1.8V ±0.1V.

6. DDR2-SDRAM Memory

The SAMA5D2 SIP is available with 128 Mbit, 512 Mbit or 1 Gbit DDR2-SDRAM memory options. For the features of these memories, see [DDR2-SDRAM Features](#).

For power consumption, electrical characteristics and timings of these memories, refer to the datasheets referenced below on the manufacturer's website www.winbond.com.

Table 6-1. Memory Datasheet References

Density	Winbond Packaged PN	Datasheet Reference Number
128 Mbit	W9712G6KB25I	W9712G6KB
512 Mbit	W9751G6KB25I	W9751G6KB
1 Gbit	W971GG6SB25I	W971GG6SB

8. Ordering Information

Table 8-1. Ordering Information

Ordering Code	MRL	Package	Carrier Type	Operating Temperature Range
ATSAMA5D225C-D1M-CU	C	BGA196	Tray	-40°C to +85°C
ATSAMA5D225C-D1M-CUR			Tape & Reel	
ATSAMA5D27C-D5M-CU		BGA289	Tray	
ATSAMA5D27C-D5M-CUR			Tape & Reel	
ATSAMA5D27C-D1G-CU			Tray	
ATSAMA5D27C-D1G-CUR			Tape & Reel	
ATSAMA5D28C-D1G-CU			Tray	
ATSAMA5D28C-D1G-CUR			Tape & Reel	

The Microchip Web Site

Microchip provides online support via our web site at <http://www.microchip.com/>. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Customer Change Notification Service

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at <http://www.microchip.com/>. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:


- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://www.microchip.com/support>

Product Identification System

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

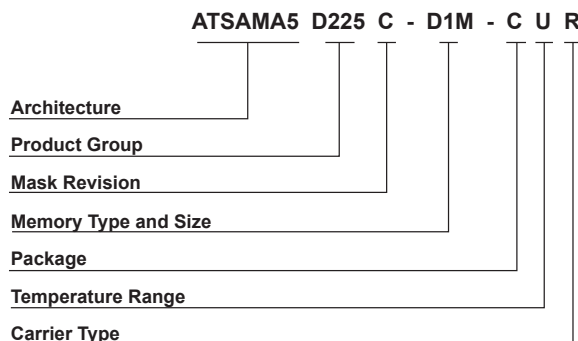

Architecture:	ATSAM5	= ARM Cortex-A5 CPU
Product Group:	D225	= 196-ball general-purpose microprocessor family
	D27	= 289-ball general-purpose microprocessor family
	D28	= 289-ball general-purpose microprocessor family
Memory Type and Size:	D1M	= 128-Mbit DDR2 SDRAM
	D5M	= 512-Mbit DDR2 SDRAM
	D1G	= 1-Gigabit DDR2 SDRAM
Mask Revision:	C	
Package:	C	= BGA
Temperature Range:	U	= -40°C to +85°C (Industrial)
Carrier Type:	Blank	= Standard packaging (tray)
	R	= Tape and Reel

Examples:

- ATSAM5D225C-D1M-CU = ARM Cortex-A5 general-purpose microprocessor, 128-Mbit DDR2 SDRAM, 196-ball, Industrial temperature, BGA Package.

Note: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the

GestlC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2017, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-1587-9

Quality Management System Certified by DNV

ISO/TS 16949

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: http://www.microchip.com/support Web Address: www.microchip.com	Asia Pacific Office Suites 3707-14, 37th Floor Tower 6, The Gateway Harbour City, Kowloon Hong Kong Tel: 852-2943-5100 Fax: 852-2401-3431 Australia - Sydney Tel: 61-2-9868-6733 Fax: 61-2-9868-6755 China - Beijing Tel: 86-10-8569-7000 Fax: 86-10-8528-2104 China - Chengdu Tel: 86-28-8665-5511 Fax: 86-28-8665-7889 China - Chongqing Tel: 86-23-8980-9588 Fax: 86-23-8980-9500 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 Fax: 86-571-8792-8116 China - Hong Kong SAR Tel: 852-2943-5100 Fax: 852-2401-3431 China - Nanjing Tel: 86-25-8473-2460 Fax: 86-25-8473-2470 China - Qingdao Tel: 86-532-8502-7355 Fax: 86-532-8502-7205 China - Shanghai Tel: 86-21-3326-8000 Fax: 86-21-3326-8021 China - Shenyang Tel: 86-24-2334-2829 Fax: 86-24-2334-2393 China - Shenzhen Tel: 86-755-8864-2200 Fax: 86-755-8203-1760 China - Wuhan Tel: 86-27-5980-5300 Fax: 86-27-5980-5118 China - Xian Tel: 86-29-8833-7252 Fax: 86-29-8833-7256	China - Xiamen Tel: 86-592-2388138 Fax: 86-592-2388130 China - Zhuhai Tel: 86-756-3210040 Fax: 86-756-3210049 India - Bangalore Tel: 91-80-3090-4444 Fax: 91-80-3090-4123 India - New Delhi Tel: 91-11-4160-8631 Fax: 91-11-4160-8632 India - Pune Tel: 91-20-3019-1500 Japan - Osaka Tel: 81-6-6152-7160 Fax: 81-6-6152-9310 Japan - Tokyo Tel: 81-3-6880-3770 Fax: 81-3-6880-3771 Korea - Daegu Tel: 82-53-744-4301 Fax: 82-53-744-4302 Korea - Seoul Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934 Malaysia - Kuala Lumpur Tel: 60-3-6201-9857 Fax: 60-3-6201-9859 Malaysia - Penang Tel: 60-4-227-8870 Fax: 60-4-227-4068 Philippines - Manila Tel: 63-2-634-9065 Fax: 63-2-634-9069 Singapore Tel: 65-6334-8870 Fax: 65-6334-8850 Taiwan - Hsin Chu Tel: 886-3-5778-366 Fax: 886-3-5770-955 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Fax: 886-2-2508-0102 Thailand - Bangkok Tel: 66-2-694-1351 Fax: 66-2-694-1350	Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4450-2828 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 France - Saint Cloud Tel: 33-1-30-60-70-00 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-67-3636 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Ra'anana Tel: 972-9-744-7705 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-7289-7561 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820