


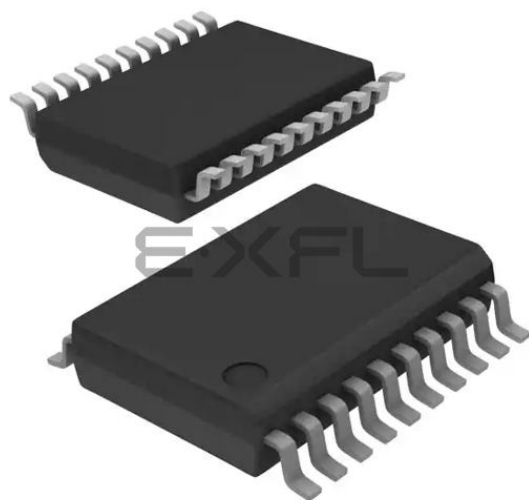

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                     |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                              |
| Core Processor             | PIC                                                                                                                                                                 |
| Core Size                  | 8-Bit                                                                                                                                                               |
| Speed                      | 32MHz                                                                                                                                                               |
| Connectivity               | I <sup>2</sup> C, SPI, UART/USART                                                                                                                                   |
| Peripherals                | Brown-out Detect/Reset, POR, PWM, WDT                                                                                                                               |
| Number of I/O              | 16                                                                                                                                                                  |
| Program Memory Size        | 3.5KB (2K x 14)                                                                                                                                                     |
| Program Memory Type        | FLASH                                                                                                                                                               |
| EEPROM Size                | 256 x 8                                                                                                                                                             |
| RAM Size                   | 256 x 8                                                                                                                                                             |
| Voltage - Supply (Vcc/Vdd) | 1.8V ~ 5.5V                                                                                                                                                         |
| Data Converters            | A/D 12x10b                                                                                                                                                          |
| Oscillator Type            | Internal                                                                                                                                                            |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                   |
| Mounting Type              | Surface Mount                                                                                                                                                       |
| Package / Case             | 20-SSOP (0.209", 5.30mm Width)                                                                                                                                      |
| Supplier Device Package    | 20-SSOP                                                                                                                                                             |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic16f1826t-i-ss">https://www.e-xfl.com/product-detail/microchip-technology/pic16f1826t-i-ss</a> |


**TABLE 1: 18/20/28-PIN SUMMARY (PIC16(L)F1826/27)**

| I/O | 18-Pin PDIP/SOIC | 20-Pin SSOP | 28-Pin QFN/UQFN | ANSEL | A/D  | Reference   | Cap Sense | Comparator         | SR Latch | Timers         | CCP                                                                       | EUSART                                                                             | MSSP                                                                | Interrupt  | Modulator | Pull-up          | Basic                  |
|-----|------------------|-------------|-----------------|-------|------|-------------|-----------|--------------------|----------|----------------|---------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------|------------|-----------|------------------|------------------------|
| RA0 | 17               | 19          | 23              | Y     | AN0  | —           | CPS0      | C12IN0-            | —        | —              | —                                                                         | —                                                                                  | SDO2 <sup>(2)</sup>                                                 | —          | —         | N                | —                      |
| RA1 | 18               | 20          | 24              | Y     | AN1  | —           | CPS1      | C12IN1-            | —        | —              | —                                                                         | —                                                                                  | SS2 <sup>(2)</sup>                                                  | —          | —         | N                | —                      |
| RA2 | 1                | 1           | 26              | Y     | AN2  | VREF-DACOUT | CPS2      | C12IN2-C12IN+      | —        | —              | —                                                                         | —                                                                                  | —                                                                   | —          | —         | N                | —                      |
| RA3 | 2                | 2           | 27              | Y     | AN3  | VREF+       | CPS3      | C12IN3-C1IN+ C1OUT | SRQ      | —              | CCP3 <sup>(2)</sup>                                                       | —                                                                                  | —                                                                   | —          | —         | N                | —                      |
| RA4 | 3                | 3           | 28              | Y     | AN4  | —           | CPS4      | C2OUT              | SRNQ     | T0CKI          | CCP4 <sup>(2)</sup>                                                       | —                                                                                  | —                                                                   | —          | —         | N                | —                      |
| RA5 | 4                | 4           | 1               | N     | —    | —           | —         | —                  | —        | —              | —                                                                         | —                                                                                  | SS1 <sup>(1)</sup>                                                  | —          | —         | Y <sup>(3)</sup> | MCLR, VPP              |
| RA6 | 15               | 17          | 20              | N     | —    | —           | —         | —                  | —        | —              | P1D <sup>(1)</sup><br>P2B <sup>(1,2)</sup>                                | —                                                                                  | SDO1 <sup>(1)</sup>                                                 | —          | —         | N                | OSC2<br>CLKOUT<br>CLKR |
| RA7 | 16               | 18          | 21              | N     | —    | —           | —         | —                  | —        | —              | P1C <sup>(1)</sup><br>CCP2 <sup>(1,2)</sup><br>P2A <sup>(1,2)</sup>       | —                                                                                  | —                                                                   | —          | —         | N                | OSC1<br>CLKIN          |
| RB0 | 6                | 7           | 7               | N     | —    | —           | —         | —                  | SRI      | T1G            | CCP1 <sup>(1)</sup><br>P1A <sup>(1)</sup><br>FLT0                         | —                                                                                  | —                                                                   | INT<br>IOC | —         | Y                | —                      |
| RB1 | 7                | 8           | 8               | Y     | AN11 | —           | CPS11     | —                  | —        | —              | —                                                                         | RX <sup>(1,4)</sup><br>DT <sup>(1,4)</sup>                                         | SDA1<br>SDI1                                                        | IOC        | —         | Y                | —                      |
| RB2 | 8                | 9           | 9               | Y     | AN10 | —           | CPS10     | —                  | —        | —              | —                                                                         | RX <sup>(1)</sup> ,DT <sup>(1)</sup><br>TX <sup>(1,4)</sup><br>CK <sup>(1,4)</sup> | SDA2 <sup>(2)</sup><br>SDI2 <sup>(2)</sup><br>SDO1 <sup>(1,4)</sup> | IOC        | MDMIN     | Y                | —                      |
| RB3 | 9                | 10          | 10              | Y     | AN9  | —           | CPS9      | —                  | —        | —              | CCP1 <sup>(1,4)</sup><br>P1A <sup>(1,4)</sup>                             | —                                                                                  | —                                                                   | IOC        | MDOUT     | Y                | —                      |
| RB4 | 10               | 11          | 12              | Y     | AN8  | —           | CPS8      | —                  | —        | —              | —                                                                         | —                                                                                  | SCL1<br>SCK1                                                        | IOC        | MDCIN2    | Y                | —                      |
| RB5 | 11               | 12          | 13              | Y     | AN7  | —           | CPS7      | —                  | —        | —              | P1B                                                                       | TX <sup>(1)</sup><br>CK <sup>(1)</sup>                                             | SCL2 <sup>(2)</sup><br>SCK2 <sup>(2)</sup><br>SS1 <sup>(1,4)</sup>  | IOC        | —         | Y                | —                      |
| RB6 | 12               | 13          | 15              | Y     | AN5  | —           | CPS5      | —                  | —        | T1CKI<br>T1OSI | P1C <sup>(1,4)</sup><br>CCP2 <sup>(1,2,4)</sup><br>P2A <sup>(1,2,4)</sup> | —                                                                                  | —                                                                   | IOC        | —         | Y                | ICSPCLK/<br>ICDCLK     |
| RB7 | 13               | 14          | 16              | Y     | AN6  | —           | CPS6      | —                  | —        | T1OSO          | P1D <sup>(1,4)</sup><br>P2B <sup>(1,2,4)</sup>                            | —                                                                                  | —                                                                   | IOC        | MDCIN1    | Y                | ICSPDAT/<br>ICDDAT     |
| VDD | 14               | 15,16       | 17,19           | —     | —    | —           | —         | —                  | —        | —              | —                                                                         | —                                                                                  | —                                                                   | —          | —         | —                | VDD                    |
| Vss | 5                | 5,6         | 3,5             | —     | —    | —           | —         | —                  | —        | —              | —                                                                         | —                                                                                  | —                                                                   | —          | —         | —                | Vss                    |

**Note** 1: Pin functions can be moved using the APFCON0 or APFCON1 register.  
2: Functions are only available on the PIC16(L)F1827.  
3: Weak pull-up always enabled when MCLR is enabled, otherwise the pull-up is under user control.  
4: Default function location.

# PIC16(L)F1826/27

**FIGURE 5-1: SIMPLIFIED PIC® MCU CLOCK SOURCE BLOCK DIAGRAM**

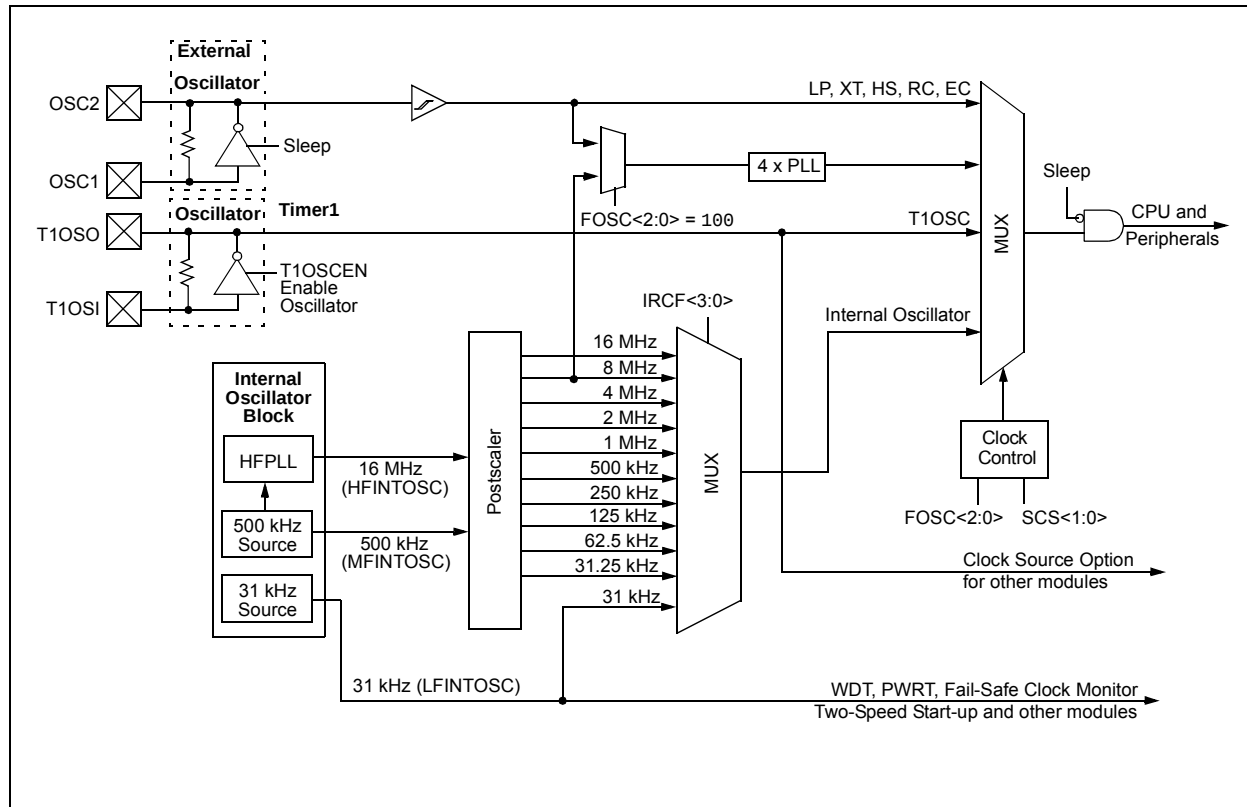

# PIC16(L)F1826/27

## 8.6.5 PIE4 REGISTER<sup>(1)</sup>

The PIE4 register contains the interrupt enable bits, as shown in Register 8-5.

**Note 1:** The PIE4 register is available only on the PIC16(L)F1827 device.

**2:** Bit PEIE of the INTCON register must be set to enable any peripheral interrupt.

### REGISTER 8-5: PIE4: PERIPHERAL INTERRUPT ENABLE REGISTER 4<sup>(1)</sup>

|       |     |     |     |     |     |         |         |
|-------|-----|-----|-----|-----|-----|---------|---------|
| U-0   | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0/0 | R/W-0/0 |
| —     | —   | —   | —   | —   | —   | BCL2IE  | SSP2IE  |
| bit 7 |     |     |     |     |     | bit 0   |         |

#### Legend:

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

u = Bit is unchanged

x = Bit is unknown

-n/n = Value at POR and BOR/Value at all other Resets

'1' = Bit is set

'0' = Bit is cleared

bit 7-2 **Unimplemented:** Read as '0'

bit 1 **BCL2IE:** MSSP2 Bus Collision Interrupt Enable bit

1 = Enables the MSSP2 Bus Collision Interrupt

0 = Disables the MSSP2 Bus Collision Interrupt

bit 0 **SSP2IE:** Master Synchronous Serial Port 2 (MSSP2) Interrupt Enable bit

1 = Enables the MSSP2 interrupt

0 = Disables the MSSP2 interrupt

**Note 1:** This register is only available on PIC16(L)F1827.

## 12.3 PORTB and TRISB Registers

PORTB is an 8-bit wide, bidirectional port. The corresponding data direction register is TRISB (Register 12-9). Setting a TRISB bit (= 1) will make the corresponding PORTB pin an input (i.e., put the corresponding output driver in a High-Impedance mode). Clearing a TRISB bit (= 0) will make the corresponding PORTB pin an output (i.e., enable the output driver and put the contents of the output latch on the selected pin). Example 12-1 shows how to initialize an I/O port.

Reading the PORTB register (Register 12-8) reads the status of the pins, whereas writing to it will write to the PORT latch. All write operations are read-modify-write operations. Therefore, a write to a port implies that the port pins are read, this value is modified and then written to the PORT data latch.

The TRISB register (Register 12-9) controls the PORTB pin output drivers, even when they are being used as analog inputs. The user should ensure the bits in the TRISB register are maintained set when using them as analog inputs. I/O pins configured as analog input always read '0'.

### 12.3.1 INTERRUPT-ON-CHANGE

All of the PORTB pins are individually configurable as an interrupt-on-change pin. Control bits IOCB<7:0> enable or disable the interrupt function for each pin. The interrupt-on-change feature is disabled on a Power-on Reset. Reference **Section 13.0 "Interrupt-On-Change"** for more information.

### 12.3.2 WEAK PULL-UPS

Each of the PORTB pins has an individually configurable internal weak pull-up. Control bits WPUB<7:0> enable or disable each pull-up (see Register 12-11). Each weak pull-up is automatically turned off when the port pin is configured as an output. All pull-ups are disabled on a Power-on Reset by the  $\overline{\text{WPUEN}}$  bit of the OPTION register.

### 12.3.3 ANSELB REGISTER

The ANSELB register (Register 12-12) is used to configure the Input mode of an I/O pin to analog. Setting the appropriate ANSELB bit high will cause all digital reads on the pin to be read as '0' and allow analog functions on the pin to operate correctly.

The state of the ANSELB bits has no effect on digital output functions. A pin with TRIS clear and ANSELB set will still operate as a digital output, but the Input mode will be analog. This can cause unexpected behavior when executing read-modify-write instructions on the affected port.

The TRISB register (Register 12-9) controls the PORTB pin output drivers, even when they are being used as analog inputs. The user should ensure the bits in the TRISB register are maintained set when using them as analog inputs. I/O pins configured as analog input always read '0'.

|                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Note:</b> The ANSELB register must be initialized to configure an analog channel as a digital input. Pins configured as analog inputs will read '0'. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|

## 14.0 FIXED VOLTAGE REFERENCE (FVR)

The Fixed Voltage Reference, or FVR, is a stable voltage reference, independent of  $V_{DD}$ , with 1.024V, 2.048V or 4.096V selectable output levels. The output of the FVR can be configured to supply a reference voltage to the following:

- ADC input channel
- ADC positive reference
- Comparator positive input
- Digital-to-Analog Converter (DAC)
- Capacitive Sensing (CPS) module

The FVR can be enabled by setting the FVREN bit of the FVRCON register.

## 14.1 Independent Gain Amplifiers

The output of the FVR supplied to the ADC, Comparators, and DAC and CPS is routed through two independent programmable gain amplifiers. Each amplifier can be configured to amplify the reference voltage by 1x, 2x or 4x, to produce the three possible voltage levels.


The ADFVR<1:0> bits of the FVRCON register are used to enable and configure the gain amplifier settings for the reference supplied to the ADC module. Reference **Section 16.0 “Analog-to-Digital Converter (ADC) Module”** for additional information.

The CDAFVR<1:0> bits of the FVRCON register are used to enable and configure the gain amplifier settings for the reference supplied to the DAC and comparator module. Reference **Section 16.0 “Digital-to-Analog Converter (DAC) Module”** and **Section 18.0 “Comparator Module”** and **Section 27.0 “Capacitive Sensing Module”** for additional information.

## 14.2 FVR Stabilization Period

When the Fixed Voltage Reference module is enabled, it requires time for the reference and amplifier circuits to stabilize. Once the circuits stabilize and are ready for use, the FVRRDY bit of the FVRCON register will be set. See **Section 30.0 “Electrical Specifications”** for the minimum delay requirement.

**FIGURE 14-1: VOLTAGE REFERENCE BLOCK DIAGRAM**

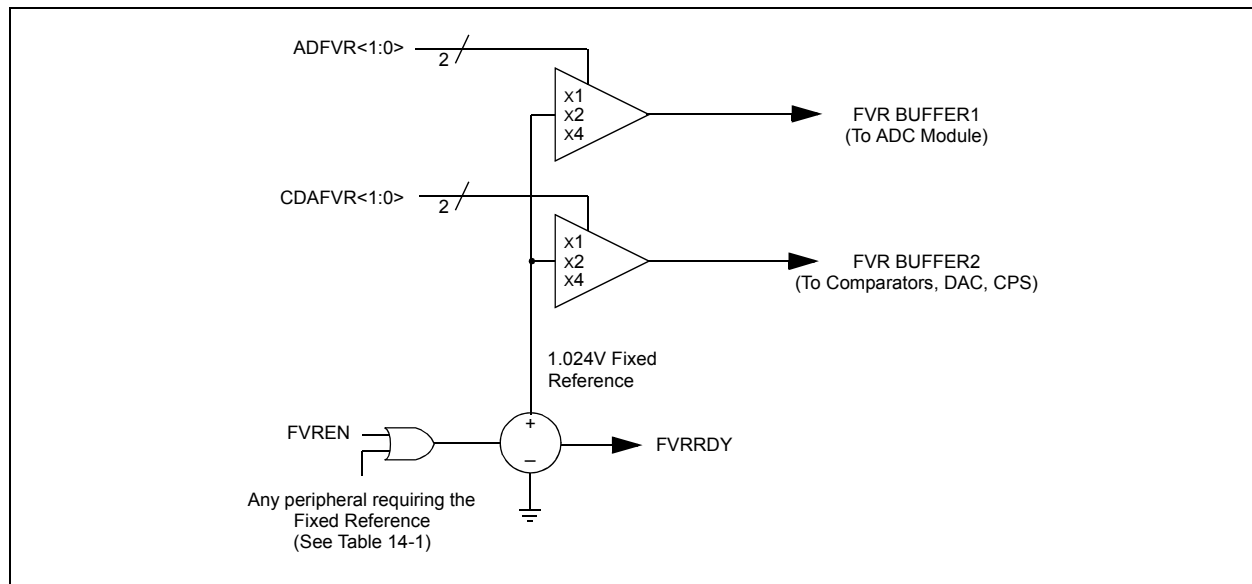


## 16.0 ANALOG-TO-DIGITAL CONVERTER (ADC) MODULE

The Analog-to-Digital Converter (ADC) allows conversion of an analog input signal to a 10-bit binary representation of that signal. This device uses analog inputs, which are multiplexed into a single sample and hold circuit. The output of the sample and hold is connected to the input of the converter. The converter generates a 10-bit binary result via successive approximation and stores the conversion result into the ADC result registers (ADRESH:ADRESL register pair). Figure 16-1 shows the block diagram of the ADC.

The ADC voltage reference is software selectable to be either internally generated or externally supplied.

The ADC can generate an interrupt upon completion of a conversion. This interrupt can be used to wake-up the device from Sleep.

**FIGURE 16-1: ADC BLOCK DIAGRAM**

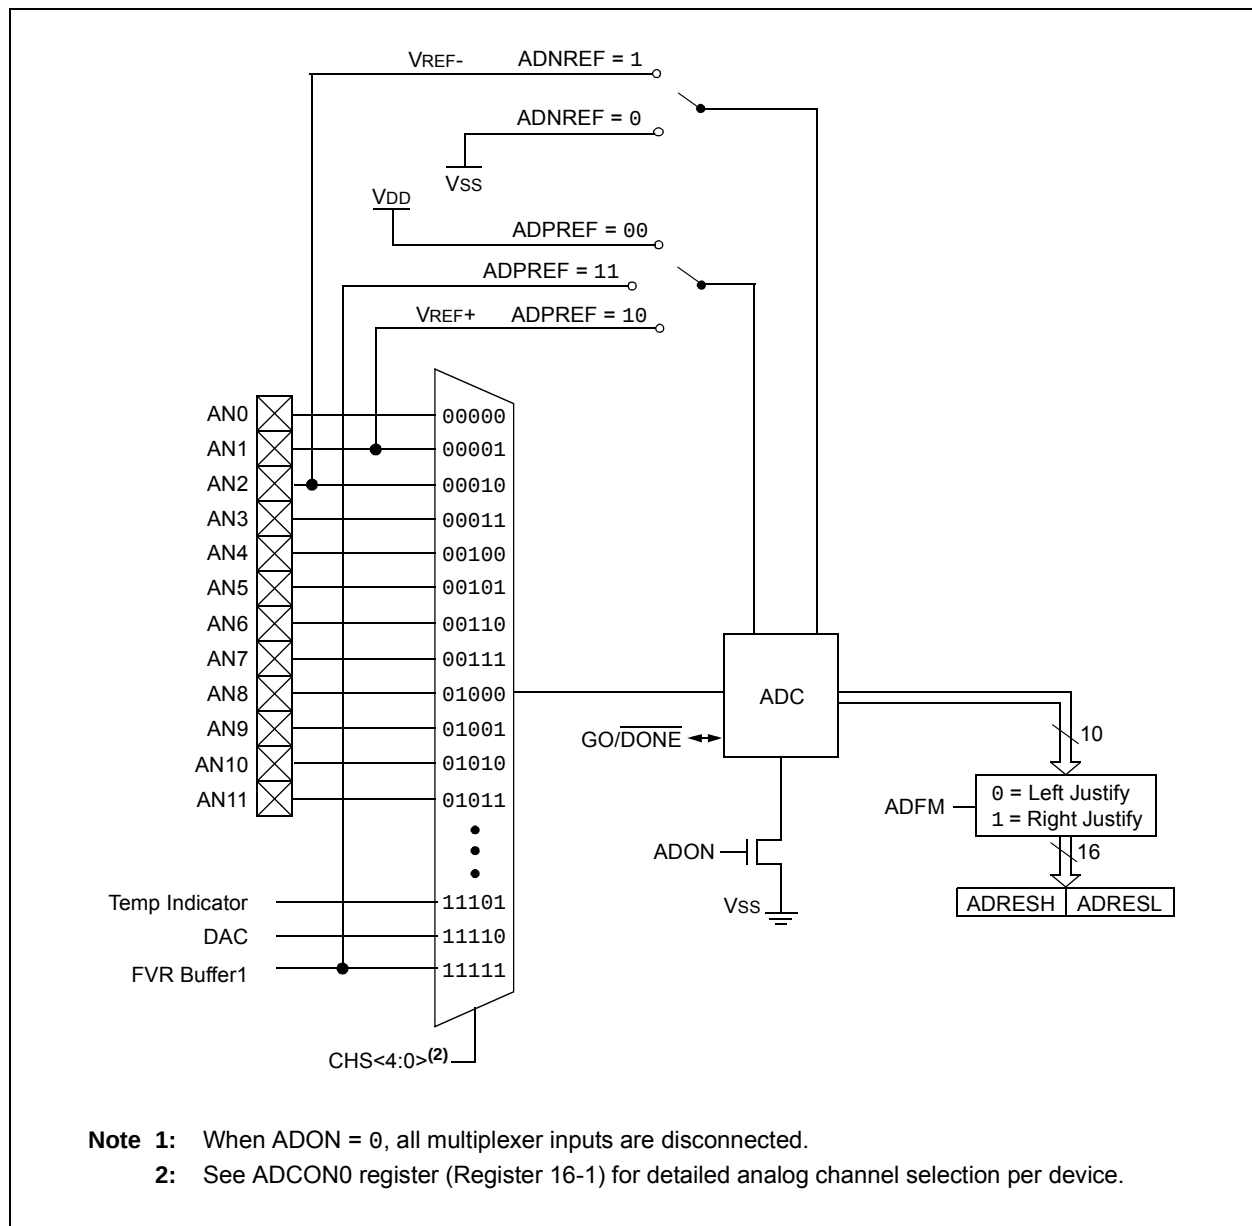

# PIC16(L)F1826/27

## 16.1.5 INTERRUPTS

The ADC module allows for the ability to generate an interrupt upon completion of an Analog-to-Digital conversion. The ADC Interrupt Flag is the ADIF bit in the PIR1 register. The ADC Interrupt Enable is the ADIE bit in the PIE1 register. The ADIF bit must be cleared in software.

- Note 1:** The ADIF bit is set at the completion of every conversion, regardless of whether or not the ADC interrupt is enabled.

**2:** The ADC operates during Sleep only when the FRC oscillator is selected.


This interrupt can be generated while the device is operating or while in Sleep. If the device is in Sleep, the interrupt will wake-up the device. Upon waking from Sleep, the next instruction following the SLEEP instruction is always executed. If the user is attempting to wake-up from Sleep and resume in-line code execution, the GIE and PEIE bits of the INTCON register must be disabled. If the GIE and PEIE bits of the INTCON register are enabled, execution will switch to the Interrupt Service Routine.

## 16.1.6 RESULT FORMATTING

The 10-bit A/D conversion result can be supplied in two formats, left justified or right justified. The ADFM bit of the ADCON1 register controls the output format.

Figure 16-3 shows the two output formats.

FIGURE 16-3: 10-BIT A/D CONVERSION RESULT FORMAT

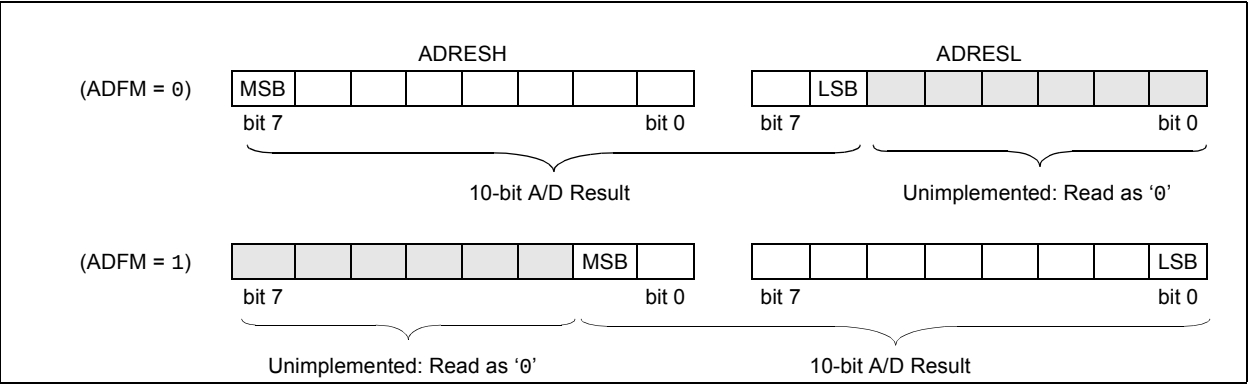

## REGISTER 16-3: ADRESH: ADC RESULT REGISTER HIGH (ADRESH) ADFM = 0

|            |         |         |         |         |         |         |         |
|------------|---------|---------|---------|---------|---------|---------|---------|
| R/W-x/u    | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u |
| ADRES<9:2> |         |         |         |         |         |         |         |
| bit 7      |         |         |         | bit 0   |         |         |         |

### Legend:

|                      |                      |                                                       |
|----------------------|----------------------|-------------------------------------------------------|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |                                                       |

bit 7-0      **ADRES<9:2>**: ADC Result Register bits  
Upper 8 bits of 10-bit conversion result

## REGISTER 16-4: ADRESL: ADC RESULT REGISTER LOW (ADRESL) ADFM = 0

|            |         |         |         |         |         |         |         |
|------------|---------|---------|---------|---------|---------|---------|---------|
| R/W-x/u    | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u | R/W-x/u |
| ADRES<1:0> |         | —       | —       | —       | —       | —       | —       |
| bit 7      |         |         |         | bit 0   |         |         |         |

### Legend:

|                      |                      |                                                       |
|----------------------|----------------------|-------------------------------------------------------|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared |                                                       |

bit 7-6      **ADRES<1:0>**: ADC Result Register bits  
Lower 2 bits of 10-bit conversion result

bit 5-0      **Reserved**: Do not use.

# PIC16(L)F1826/27

FIGURE 17-1: DIGITAL-TO-ANALOG CONVERTER BLOCK DIAGRAM


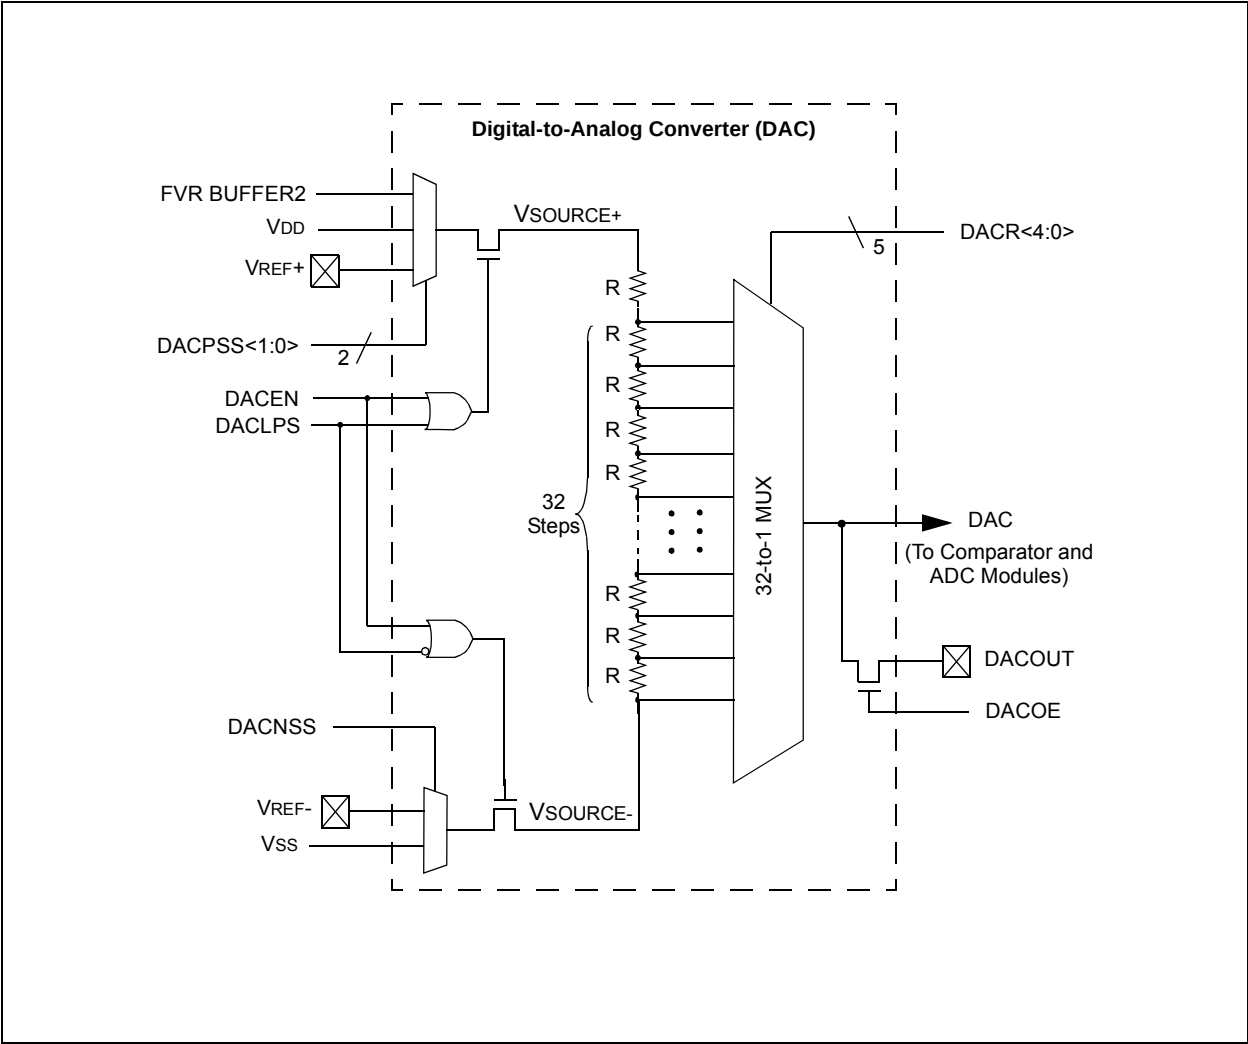


FIGURE 17-2: VOLTAGE REFERENCE OUTPUT BUFFER EXAMPLE

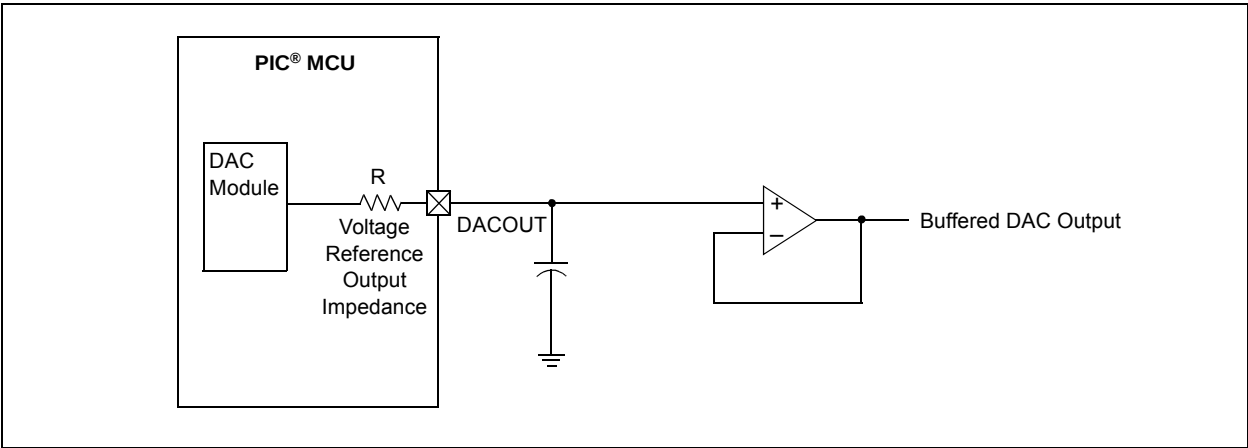

# PIC16(L)F1826/27

## 24.3.6 PWM RESOLUTION

The resolution determines the number of available duty cycles for a given period. For example, a 10-bit resolution will result in 1024 discrete duty cycles, whereas an 8-bit resolution will result in 256 discrete duty cycles.

The maximum PWM resolution is 10 bits when PRx is 255. The resolution is a function of the PRx register value as shown by Equation 24-4.

### EQUATION 24-4: PWM RESOLUTION

$$Resolution = \frac{\log[4(PRx + 1)]}{\log(2)} \text{ bits}$$

Note: If the pulse width value is greater than the period the assigned PWM pin(s) will remain unchanged.

**TABLE 24-5: EXAMPLE PWM FREQUENCIES AND RESOLUTIONS (Fosc = 32 MHz)**

| PWM Frequency             | 1.95 kHz | 7.81 kHz | 31.25 kHz | 125 kHz | 250 kHz | 333.3 kHz |
|---------------------------|----------|----------|-----------|---------|---------|-----------|
| Timer Prescale (1, 4, 16) | 16       | 4        | 1         | 1       | 1       | 1         |
| PRx Value                 | 0xFF     | 0xFF     | 0xFF      | 0x3F    | 0x1F    | 0x17      |
| Maximum Resolution (bits) | 10       | 10       | 10        | 8       | 7       | 6.6       |

**TABLE 24-6: EXAMPLE PWM FREQUENCIES AND RESOLUTIONS (Fosc = 20 MHz)**


| PWM Frequency             | 1.22 kHz | 4.88 kHz | 19.53 kHz | 78.12 kHz | 156.3 kHz | 208.3 kHz |
|---------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Timer Prescale (1, 4, 16) | 16       | 4        | 1         | 1         | 1         | 1         |
| PRx Value                 | 0xFF     | 0xFF     | 0xFF      | 0x3F      | 0x1F      | 0x17      |
| Maximum Resolution (bits) | 10       | 10       | 10        | 8         | 7         | 6.6       |

**TABLE 24-7: EXAMPLE PWM FREQUENCIES AND RESOLUTIONS (Fosc = 8 MHz)**


| PWM Frequency             | 1.22 kHz | 4.90 kHz | 19.61 kHz | 76.92 kHz | 153.85 kHz | 200.0 kHz |
|---------------------------|----------|----------|-----------|-----------|------------|-----------|
| Timer Prescale (1, 4, 16) | 16       | 4        | 1         | 1         | 1          | 1         |
| PRx Value                 | 0x65     | 0x65     | 0x65      | 0x19      | 0x0C       | 0x09      |
| Maximum Resolution (bits) | 8        | 8        | 8         | 6         | 5          | 5         |

# PIC16(L)F1826/27

FIGURE 25-21: I<sup>2</sup>C SLAVE, 10-BIT ADDRESS, RECEPTION (SEN = 0, AHEN = 1, DHEN = 0)

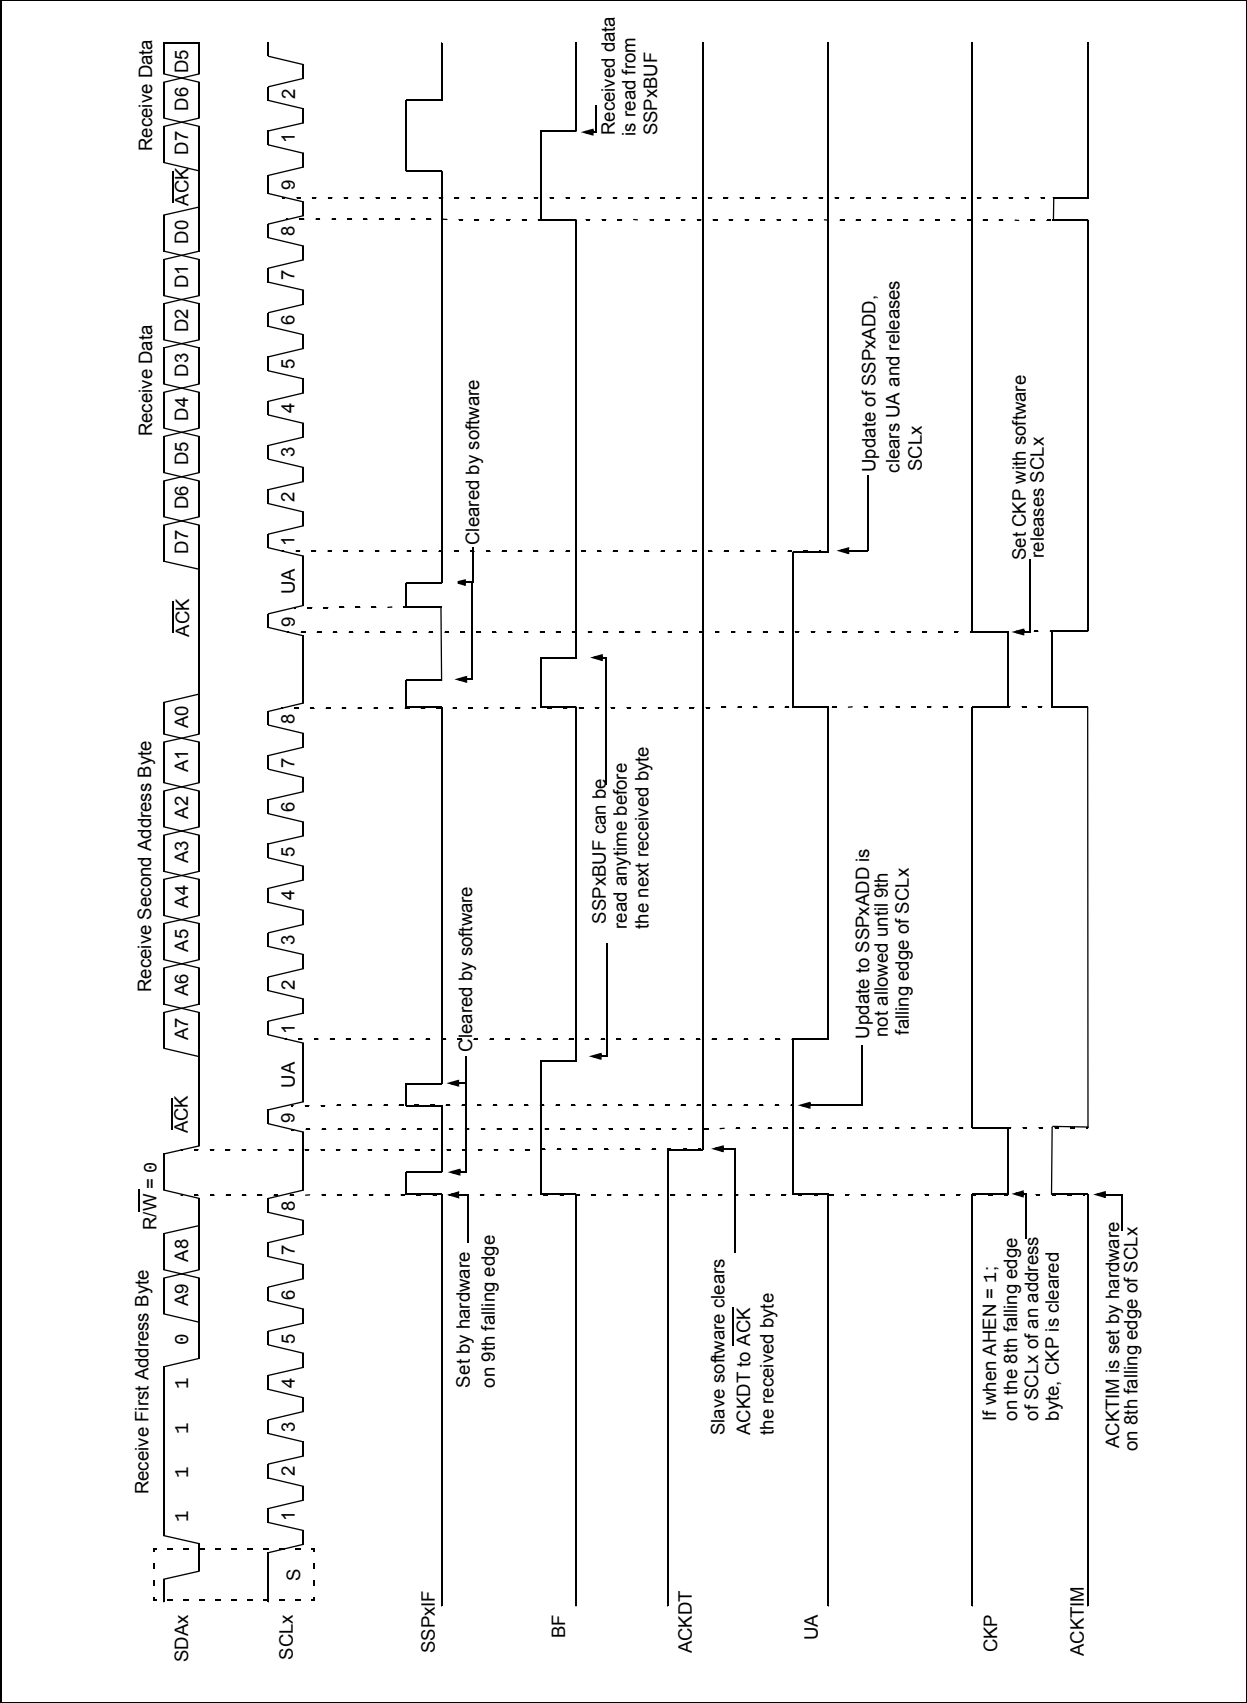

**FIGURE 25-32: BUS COLLISION TIMING FOR TRANSMIT AND ACKNOWLEDGE**

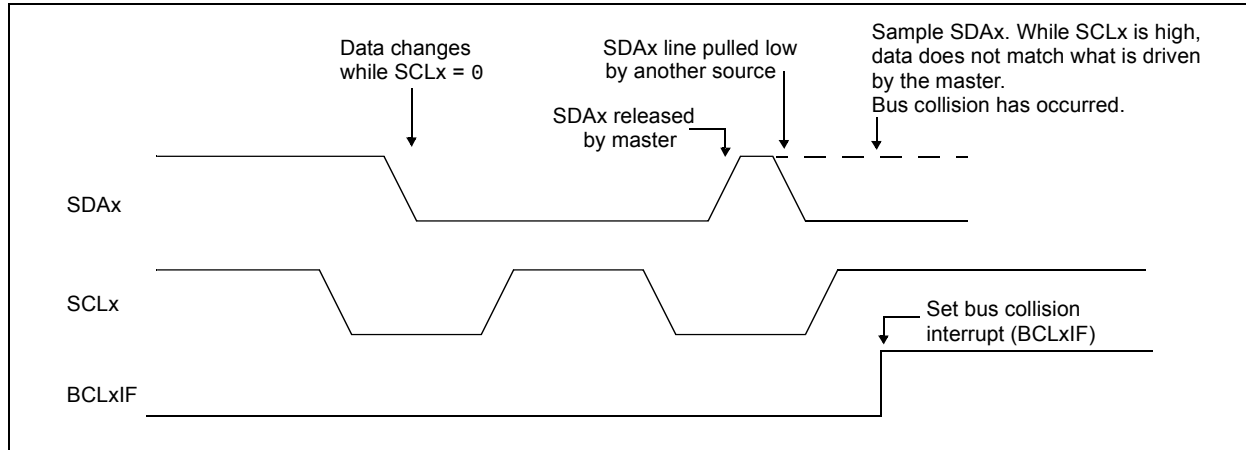

# PIC16(L)F1826/27

## REGISTER 25-2: SSPxCON1: SSPx CONTROL REGISTER 1

| R/C/HS-0/0 | R/C/HS-0/0 | R/W-0/0 | R/W-0/0 | R/W-0/0    | R/W-0/0 | R/W-0/0 | R/W-0/0 |
|------------|------------|---------|---------|------------|---------|---------|---------|
| WCOL       | SSPxOV     | SSPxEN  | CKP     | SSPxM<3:0> |         |         |         |
| bit 7      |            |         |         |            |         |         | bit 0   |

### Legend:

|                      |                      |                                                       |
|----------------------|----------------------|-------------------------------------------------------|
| R = Readable bit     | W = Writable bit     | U = Unimplemented bit, read as '0'                    |
| u = Bit is unchanged | x = Bit is unknown   | -n/n = Value at POR and BOR/Value at all other Resets |
| '1' = Bit is set     | '0' = Bit is cleared | HS = Bit is set by hardware                           |
|                      |                      | C = User cleared                                      |

- bit 7 **WCOL**: Write Collision Detect bit  
**Master mode:**  
 1 = A write to the SSPxBUF register was attempted while the I<sup>2</sup>C conditions were not valid for a transmission to be started  
 0 = No collision  
**Slave mode:**  
 1 = The SSPxBUF register is written while it is still transmitting the previous word (must be cleared in software)  
 0 = No collision
- bit 6 **SSPxOV**: Receive Overflow Indicator bit<sup>(1)</sup>  
**In SPI mode:**  
 1 = A new byte is received while the SSPxBUF register is still holding the previous data. In case of overflow, the data in SSPxSR is lost. Overflow can only occur in Slave mode. In Slave mode, the user must read the SSPxBUF, even if only transmitting data, to avoid setting overflow. In Master mode, the overflow bit is not set since each new reception (and transmission) is initiated by writing to the SSPxBUF register (must be cleared in software).  
 0 = No overflow  
**In I<sup>2</sup>C mode:**  
 1 = A byte is received while the SSPxBUF register is still holding the previous byte. SSPxOV is a "don't care" in Transmit mode (must be cleared in software).  
 0 = No overflow
- bit 5 **SSPxEN**: Synchronous Serial Port Enable bit  
 In both modes, when enabled, these pins must be properly configured as input or output  
**In SPI mode:**  
 1 = Enables serial port and configures SCKx, SDOx, SDIx and  $\overline{SSx}$  as the source of the serial port pins<sup>(2)</sup>  
 0 = Disables serial port and configures these pins as I/O port pins  
**In I<sup>2</sup>C mode:**  
 1 = Enables the serial port and configures the SDAx and SCLx pins as the source of the serial port pins<sup>(3)</sup>  
 0 = Disables serial port and configures these pins as I/O port pins
- bit 4 **CKP**: Clock Polarity Select bit  
**In SPI mode:**  
 1 = Idle state for clock is a high level  
 0 = Idle state for clock is a low level  
**In I<sup>2</sup>C Slave mode:**  
 SCLx release control  
 1 = Enable clock  
 0 = Holds clock low (clock stretch). (Used to ensure data setup time.)  
**In I<sup>2</sup>C Master mode:**  
 Unused in this mode
- bit 3-0 **SSPxM<3:0>**: Synchronous Serial Port Mode Select bits  
 0000 = SPI Master mode, clock = Fosc/4  
 0001 = SPI Master mode, clock = Fosc/16  
 0010 = SPI Master mode, clock = Fosc/64  
 0011 = SPI Master mode, clock = TMR2 output/2  
 0100 = SPI Slave mode, clock = SCKx pin,  $\overline{SSx}$  pin control enabled  
 0101 = SPI Slave mode, clock = SCKx pin,  $\overline{SSx}$  pin control disabled,  $\overline{SSx}$  can be used as I/O pin  
 0110 = I<sup>2</sup>C Slave mode, 7-bit address  
 0111 = I<sup>2</sup>C Slave mode, 10-bit address  
 1000 = I<sup>2</sup>C Master mode, clock = Fosc/(4 \* (SSPxADD+1))<sup>(4)</sup>  
 1001 = Reserved  
 1010 = SPI Master mode, clock = Fosc/(4 \* (SSPxADD+1))<sup>(5)</sup>  
 1011 = I<sup>2</sup>C firmware controlled Master mode (Slave idle)  
 1100 = Reserved  
 1101 = Reserved  
 1110 = I<sup>2</sup>C Slave mode, 7-bit address with Start and Stop bit interrupts enabled  
 1111 = I<sup>2</sup>C Slave mode, 10-bit address with Start and Stop bit interrupts enabled

- Note**
- 1: In Master mode, the overflow bit is not set since each new reception (and transmission) is initiated by writing to the SSPxBUF register.
  - 2: When enabled, these pins must be properly configured as input or output.
  - 3: When enabled, the SDAx and SCLx pins must be configured as inputs.
  - 4: SSPxADD values of 0, 1 or 2 are not supported for I<sup>2</sup>C Mode.
  - 5: SSPxADD value of '0' is not supported. Use SSPxM = 0000 instead.

FIGURE 26-7: AUTO-WAKE-UP BIT (WUE) TIMING DURING NORMAL OPERATION


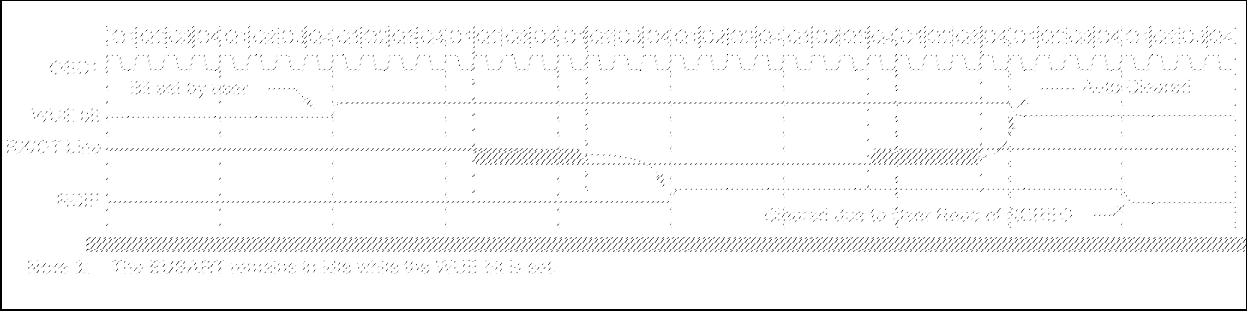


FIGURE 26-8: AUTO-WAKE-UP BIT (WUE) TIMINGS DURING SLEEP

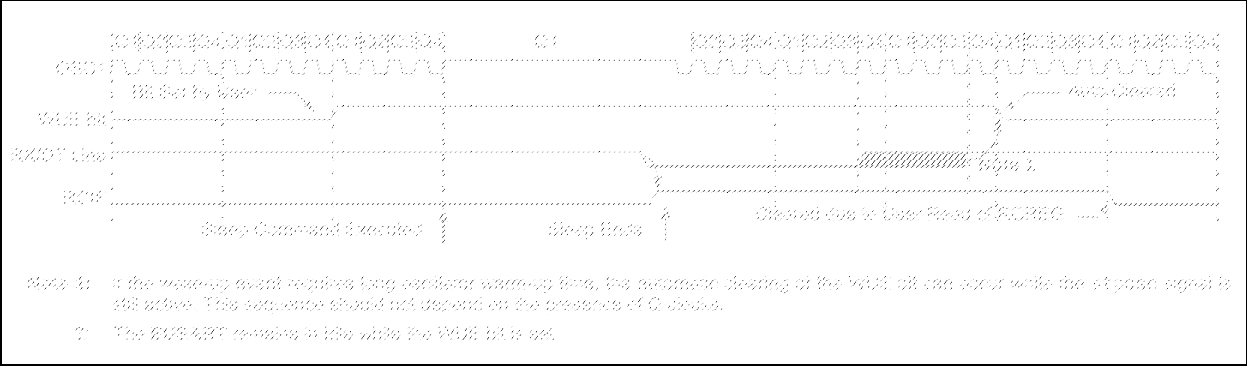

# PIC16(L)F1826/27

**TABLE 26-7: SUMMARY OF REGISTERS ASSOCIATED WITH SYNCHRONOUS MASTER TRANSMISSION**

| Name    | Bit 7                         | Bit 6   | Bit 5  | Bit 4                 | Bit 3                  | Bit 2  | Bit 1  | Bit 0   | Register on Page |
|---------|-------------------------------|---------|--------|-----------------------|------------------------|--------|--------|---------|------------------|
| APFCON0 | RXDTSEL                       | SDO1SEL | SS1SEL | P2BSEL <sup>(1)</sup> | CCP2SEL <sup>(1)</sup> | P1DSEL | P1CSEL | CCP1SEL | 119              |
| APFCON1 | —                             | —       | —      | —                     | —                      | —      | —      | TXCKSEL | 119              |
| BAUDCON | ABDOVF                        | RCIDL   | —      | SCKP                  | BRG16                  | —      | WUE    | ABDEN   | 296              |
| INTCON  | GIE                           | PEIE    | TMR0IE | INTE                  | IOCIE                  | TMR0IF | INTF   | IOCIF   | 86               |
| PIE1    | TMR1GIE                       | ADIE    | RCIE   | TXIE                  | SSPIE                  | CCP1IE | TMR2IE | TMR1IE  | 87               |
| PIR1    | TMR1GIF                       | ADIF    | RCIF   | TXIF                  | SSPIF                  | CCP1IF | TMR2IF | TMR1IF  | 91               |
| RCSTA   | SPEN                          | RX9     | SREN   | CREN                  | ADDEN                  | FERR   | OERR   | RX9D    | 295              |
| SPBRGL  | BRG<7:0>                      |         |        |                       |                        |        |        |         | 297*             |
| SPBRGH  | BRG<15:8>                     |         |        |                       |                        |        |        |         | 297*             |
| TRISB   | TRISB7                        | TRISB6  | TRISB5 | TRISB4                | TRISB3                 | TRISB2 | TRISB1 | TRISB0  | 127              |
| TXREG   | EUSART Transmit Data Register |         |        |                       |                        |        |        |         | 287*             |
| TXSTA   | CSRC                          | TX9     | TXEN   | SYNC                  | SEnDB                  | BRGH   | TRMT   | TX9D    | 294              |

**Legend:** — = unimplemented location, read as '0'. Shaded cells are not used for Synchronous Master Transmission.

\* Page provides register information.

**Note 1:** PIC16(L)F1827 only.

## 29.2 Instruction Descriptions

### ADDFSR Add Literal to FSRn

|                  |                                                                                                                                                                                                          |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ADDFSR FSRn, k                                                                                                                                                                          |
| Operands:        | $-32 \leq k \leq 31$<br>$n \in [0, 1]$                                                                                                                                                                   |
| Operation:       | $FSR(n) + k \rightarrow FSR(n)$                                                                                                                                                                          |
| Status Affected: | None                                                                                                                                                                                                     |
| Description:     | The signed 6-bit literal 'k' is added to the contents of the FSRnH:FSRnL register pair.<br><br>FSRn is limited to the range 0000h - FFFFh. Moving beyond these bounds will cause the FSR to wrap around. |

### ANDLW AND literal with W

|                  |                                                                                                               |
|------------------|---------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ANDLW k                                                                                      |
| Operands:        | $0 \leq k \leq 255$                                                                                           |
| Operation:       | $(W) .AND. (k) \rightarrow (W)$                                                                               |
| Status Affected: | Z                                                                                                             |
| Description:     | The contents of W register are AND'ed with the eight-bit literal 'k'. The result is placed in the W register. |

### ADDLW Add literal and W

|                  |                                                                                                                   |
|------------------|-------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ADDLW k                                                                                          |
| Operands:        | $0 \leq k \leq 255$                                                                                               |
| Operation:       | $(W) + k \rightarrow (W)$                                                                                         |
| Status Affected: | C, DC, Z                                                                                                          |
| Description:     | The contents of the W register are added to the eight-bit literal 'k' and the result is placed in the W register. |

### ANDWF AND W with f


|                  |                                                                                                                                                        |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ANDWF f,d                                                                                                                             |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0, 1]$                                                                                                                  |
| Operation:       | $(W) .AND. (f) \rightarrow (\text{destination})$                                                                                                       |
| Status Affected: | Z                                                                                                                                                      |
| Description:     | AND the W register with register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'. |

### ADDWF Add W and f

|                  |                                                                                                                                                                        |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ADDWF f,d                                                                                                                                             |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0, 1]$                                                                                                                                  |
| Operation:       | $(W) + (f) \rightarrow (\text{destination})$                                                                                                                           |
| Status Affected: | C, DC, Z                                                                                                                                                               |
| Description:     | Add the contents of the W register with register 'f'. If 'd' is '0', the result is stored in the W register. If 'd' is '1', the result is stored back in register 'f'. |

### ASRF Arithmetic Right Shift

|                  |                                                                                                                                                                                                                      |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ASRF f {,d}                                                                                                                                                                                         |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0, 1]$                                                                                                                                                                                |
| Operation:       | $(f < 7 >) \rightarrow \text{dest} < 7 >$<br>$(f < 7 : 1 >) \rightarrow \text{dest} < 6 : 0 >$ ,<br>$(f < 0 >) \rightarrow C$ ,                                                                                      |
| Status Affected: | C, Z                                                                                                                                                                                                                 |
| Description:     | The contents of register 'f' are shifted one bit to the right through the Carry flag. The MSb remains unchanged. If 'd' is '0', the result is placed in W. If 'd' is '1', the result is stored back in register 'f'. |



### ADDWFC ADD W and CARRY bit to f

|                  |                                                                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] ADDWFC f {,d}                                                                                                                                 |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0, 1]$                                                                                                                          |
| Operation:       | $(W) + (f) + (C) \rightarrow \text{dest}$                                                                                                                      |
| Status Affected: | C, DC, Z                                                                                                                                                       |
| Description:     | Add W, the Carry flag and data memory location 'f'. If 'd' is '0', the result is placed in W. If 'd' is '1', the result is placed in data memory location 'f'. |

# PIC16(L)F1826/27

## DECFSZ      Decrement f, Skip if 0

|                  |                                                                                                                                                                                                                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] DECFSZ f,d                                                                                                                                                                                                                                                                                      |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$                                                                                                                                                                                                                                                                             |
| Operation:       | $(f) - 1 \rightarrow (\text{destination})$ ;<br>skip if result = 0                                                                                                                                                                                                                                               |
| Status Affected: | None                                                                                                                                                                                                                                                                                                             |
| Description:     | The contents of register 'f' are decremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.<br>If the result is '1', the next instruction is executed. If the result is '0', then a NOP is executed instead, making it a 2-cycle instruction. |

## INCFSZ      Increment f, Skip if 0

|                  |                                                                                                                                                                                                                                                                                                             |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] INCFSZ f,d                                                                                                                                                                                                                                                                                 |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$                                                                                                                                                                                                                                                                        |
| Operation:       | $(f) + 1 \rightarrow (\text{destination})$ ;<br>skip if result = 0                                                                                                                                                                                                                                          |
| Status Affected: | None                                                                                                                                                                                                                                                                                                        |
| Description:     | The contents of register 'f' are incremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'.<br>If the result is '1', the next instruction is executed. If the result is '0', a NOP is executed instead, making it a 2-cycle instruction. |

## GOTO      Unconditional Branch

|                  |                                                                                                                                                                                   |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] GOTO k                                                                                                                                                           |
| Operands:        | $0 \leq k \leq 2047$                                                                                                                                                              |
| Operation:       | $k \rightarrow PC<10:0>$<br>$PCLATH<6:3> \rightarrow PC<14:11>$                                                                                                                   |
| Status Affected: | None                                                                                                                                                                              |
| Description:     | GOTO is an unconditional branch. The eleven-bit immediate value is loaded into PC bits <10:0>. The upper bits of PC are loaded from PCLATH<4:3>. GOTO is a two-cycle instruction. |

## IORLW      Inclusive OR literal with W

|                  |                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] IORLW k                                                                                         |
| Operands:        | $0 \leq k \leq 255$                                                                                              |
| Operation:       | $(W) .OR. k \rightarrow (W)$                                                                                     |
| Status Affected: | Z                                                                                                                |
| Description:     | The contents of the W register are OR'ed with the eight-bit literal 'k'. The result is placed in the W register. |

## INCF      Increment f

|                  |                                                                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] INCF f,d                                                                                                                                      |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$                                                                                                                           |
| Operation:       | $(f) + 1 \rightarrow (\text{destination})$                                                                                                                     |
| Status Affected: | Z                                                                                                                                                              |
| Description:     | The contents of register 'f' are incremented. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'. |

## IORWF      Inclusive OR W with f

|                  |                                                                                                                                                                 |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax:          | [ <i>label</i> ] IORWF f,d                                                                                                                                      |
| Operands:        | $0 \leq f \leq 127$<br>$d \in [0,1]$                                                                                                                            |
| Operation:       | $(W) .OR. (f) \rightarrow (\text{destination})$                                                                                                                 |
| Status Affected: | Z                                                                                                                                                               |
| Description:     | Inclusive OR the W register with register 'f'. If 'd' is '0', the result is placed in the W register. If 'd' is '1', the result is placed back in register 'f'. |

## 30.0 ELECTRICAL SPECIFICATIONS


### Absolute Maximum Ratings<sup>(†)</sup>

|                                                                        |                       |
|------------------------------------------------------------------------|-----------------------|
| Ambient temperature under bias .....                                   | -40°C to +125°C       |
| Storage temperature .....                                              | -65°C to +150°C       |
| Voltage on VDD with respect to VSS, PIC16F1826/27 .....                | -0.3V to +6.5V        |
| Voltage on VDD with respect to VSS, PIC16LF1826/27 .....               | -0.3V to +4.0V        |
| Voltage on MCLR with respect to VSS .....                              | -0.3V to +9.0V        |
| Voltage on all other pins with respect to VSS .....                    | -0.3V to (VDD + 0.3V) |
| Total power dissipation <sup>(1)</sup> .....                           | 800 mW                |
| Maximum current out of VSS pin, -40°C ≤ TA ≤ +85°C for industrial..... | 396 mA                |
| Maximum current out of VSS pin, -40°C ≤ TA ≤ +125°C for extended ..... | 114 mA                |
| Maximum current into VDD pin, -40°C ≤ TA ≤ +85°C for industrial.....   | 292 mA                |
| Maximum current into VDD pin, -40°C ≤ TA ≤ +125°C for extended .....   | 107 mA                |
| Clamp current, IK (VPIN < 0 or VPIN > VDD).....                        | 20 mA                 |
| Maximum output current sunk by any I/O pin.....                        | 25 mA                 |
| Maximum output current sourced by any I/O pin .....                    | 25 mA                 |


**Note 1:** Power dissipation is calculated as follows:  $P_{DIS} = V_{DD} \times \{I_{DD} - \sum I_{OH}\} + \sum \{(V_{DD} - V_{OH}) \times I_{OH}\} + \sum (V_{OL} \times I_{OL})$ .

† NOTICE: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operation listings of this specification is not implied. Exposure above maximum rating conditions for extended periods may affect device reliability.

**FIGURE 30-16: SPI MASTER MODE TIMING (CKE = 0, SMP = 0)**

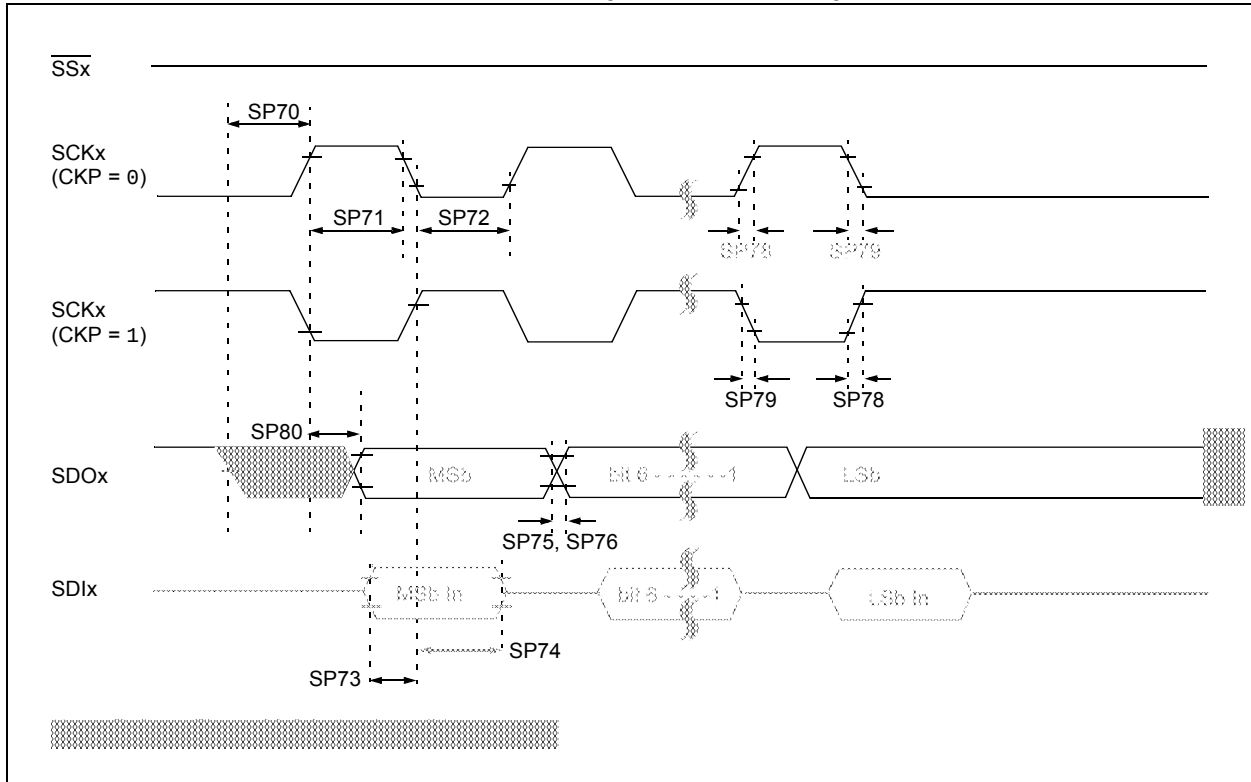

**FIGURE 30-17: SPI MASTER MODE TIMING (CKE = 1, SMP = 1)**

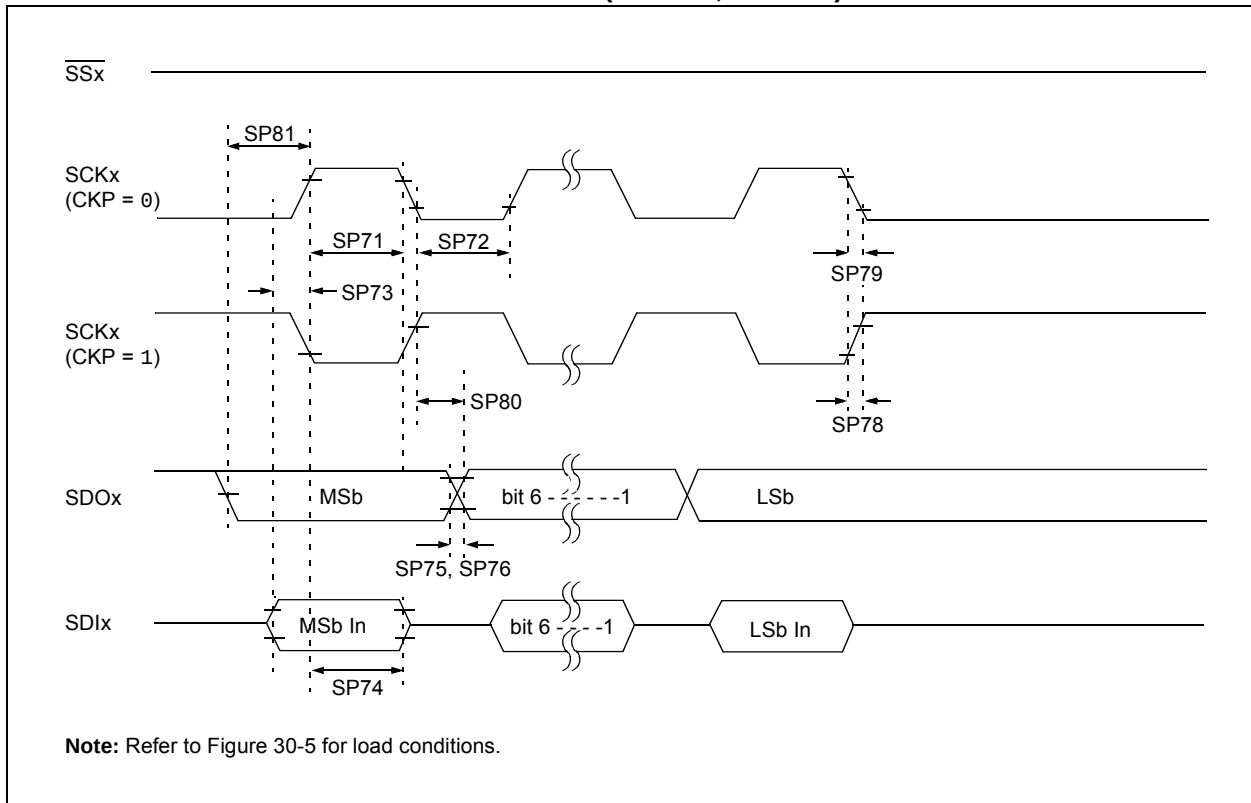

**TABLE 30-16: I<sup>2</sup>C™ BUS DATA REQUIREMENTS**

| Param. No. | Symbol  | Characteristic          |              | Min.       | Max. | Units | Conditions                                                    |
|------------|---------|-------------------------|--------------|------------|------|-------|---------------------------------------------------------------|
| SP100*     | THIGH   | Clock high time         | 100 kHz mode | 4.0        | —    | μs    | Device must operate at a minimum of 1.5 MHz                   |
|            |         |                         | 400 kHz mode | 0.6        | —    | μs    | Device must operate at a minimum of 10 MHz                    |
|            |         |                         | SSPx module  | 1.5Tcy     | —    | —     |                                                               |
| SP101*     | TLOW    | Clock low time          | 100 kHz mode | 4.7        | —    | μs    | Device must operate at a minimum of 1.5 MHz                   |
|            |         |                         | 400 kHz mode | 1.3        | —    | μs    | Device must operate at a minimum of 10 MHz                    |
|            |         |                         | SSPx module  | 1.5Tcy     | —    | —     |                                                               |
| SP102*     | TR      | SDAx and SCLx rise time | 100 kHz mode | —          | 1000 | ns    |                                                               |
|            |         |                         | 400 kHz mode | 20 + 0.1CB | 300  | ns    | CB is specified to be from 10-400 pF                          |
| SP103*     | TF      | SDAx and SCLx fall time | 100 kHz mode | —          | 250  | ns    |                                                               |
|            |         |                         | 400 kHz mode | 20 + 0.1CB | 250  | ns    | CB is specified to be from 10-400 pF                          |
| SP106*     | THD:DAT | Data input hold time    | 100 kHz mode | 0          | —    | ns    |                                                               |
|            |         |                         | 400 kHz mode | 0          | 0.9  | μs    |                                                               |
| SP107*     | TSU:DAT | Data input setup time   | 100 kHz mode | 250        | —    | ns    | (Note 2)                                                      |
|            |         |                         | 400 kHz mode | 100        | —    | ns    |                                                               |
| SP109*     | TAA     | Output valid from clock | 100 kHz mode | —          | 3500 | ns    | (Note 1)                                                      |
|            |         |                         | 400 kHz mode | —          | —    | ns    |                                                               |
| SP110*     | TBUF    | Bus free time           | 100 kHz mode | 4.7        | —    | μs    | Time the bus must be free before a new transmission can start |
|            |         |                         | 400 kHz mode | 1.3        | —    | μs    |                                                               |
| SP111      | CB      | Bus capacitive loading  |              | —          | 400  | pF    |                                                               |

\* These parameters are characterized but not tested.

- Note 1:** As a transmitter, the device must provide this internal minimum delay time to bridge the undefined region (min. 300 ns) of the falling edge of SCLx to avoid unintended generation of Start or Stop conditions.
- 2:** A Fast mode (400 kHz) I<sup>2</sup>C™ bus device can be used in a Standard mode (100 kHz) I<sup>2</sup>C bus system, but the requirement TSU:DAT ≥ 250 ns must then be met. This will automatically be the case if the device does not stretch the low period of the SCLx signal. If such a device does stretch the low period of the SCLx signal, it must output the next data bit to the SDAx line TR max. + TSU:DAT = 1000 + 250 = 1250 ns (according to the Standard mode I<sup>2</sup>C bus specification), before the SCLx line is released.