



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                          |
| Number of LABs/CLBs            | -                                                                                                                                                               |
| Number of Logic Elements/Cells | -                                                                                                                                                               |
| Total RAM Bits                 | 18432                                                                                                                                                           |
| Number of I/O                  | 91                                                                                                                                                              |
| Number of Gates                | 60000                                                                                                                                                           |
| Voltage - Supply               | 1.425V ~ 1.575V                                                                                                                                                 |
| Mounting Type                  | Surface Mount                                                                                                                                                   |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                                                 |
| Package / Case                 | 144-LQFP                                                                                                                                                        |
| Supplier Device Package        | 144-TQFP (20x20)                                                                                                                                                |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a3p060-2tqg144">https://www.e-xfl.com/product-detail/microchip-technology/a3p060-2tqg144</a> |

## ProASIC3 Device Family Overview

|                           |     |
|---------------------------|-----|
| General Description ..... | 1-1 |
|---------------------------|-----|

## ProASIC3 DC and Switching Characteristics

|                                              |       |
|----------------------------------------------|-------|
| General Specifications .....                 | 2-1   |
| Calculating Power Dissipation .....          | 2-7   |
| User I/O Characteristics .....               | 2-15  |
| VersaTile Characteristics .....              | 2-81  |
| Global Resource Characteristics .....        | 2-85  |
| Clock Conditioning Circuits .....            | 2-90  |
| Embedded SRAM and FIFO Characteristics ..... | 2-92  |
| Embedded FlashROM Characteristics .....      | 2-107 |
| JTAG 1532 Characteristics .....              | 2-108 |

## Pin Descriptions

|                             |     |
|-----------------------------|-----|
| Supply Pins .....           | 3-1 |
| User Pins .....             | 3-2 |
| JTAG Pins .....             | 3-3 |
| Special Function Pins ..... | 3-4 |
| Related Documents .....     | 3-4 |

## Package Pin Assignments

|                           |      |
|---------------------------|------|
| QN48 – Bottom View .....  | 4-1  |
| QN68 – Bottom View .....  | 4-3  |
| QN132 – Bottom View ..... | 4-6  |
| CS121 – Bottom View ..... | 4-15 |
| VQ100 – Top View .....    | 4-18 |
| TQ144 – Top View .....    | 4-23 |
| PQ208 – Top View .....    | 4-28 |
| FG144 – Bottom View ..... | 4-39 |
| FG256 – Bottom View ..... | 4-52 |
| FG484 – Bottom View ..... | 4-65 |

## Datasheet Information

|                                                                               |      |
|-------------------------------------------------------------------------------|------|
| List of Changes .....                                                         | 5-1  |
| Datasheet Categories .....                                                    | 5-15 |
| Safety Critical, Life Support, and High-Reliability Applications Policy ..... | 5-15 |

## Single-Ended I/O Characteristics

### 3.3 V LVTTTL / 3.3 V LVCMOS

Low-Voltage Transistor–Transistor Logic (LVTTTL) is a general-purpose standard (EIA/JESD) for 3.3 V applications. It uses an LVTTTL input buffer and push-pull output buffer.

**Table 2-37 • Minimum and Maximum DC Input and Output Levels**  
Applicable to Advanced I/O Banks

| 3.3 V LVTTTL /<br>3.3 V LVCMOS | VIL      |          | VIH      |          | VOL      | VOH      | IOL | IOH | IOSL                   | IOSH                   | IIL <sup>1</sup> | IIH <sup>2</sup> |
|--------------------------------|----------|----------|----------|----------|----------|----------|-----|-----|------------------------|------------------------|------------------|------------------|
| Drive Strength                 | Min<br>V | Max<br>V | Min<br>V | Max<br>V | Max<br>V | Min<br>V | mA  | mA  | Max<br>mA <sup>3</sup> | Max<br>mA <sup>3</sup> | μA <sup>4</sup>  | μA <sup>4</sup>  |
| 2 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 2   | 2   | 27                     | 25                     | 10               | 10               |
| 4 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 4   | 4   | 27                     | 25                     | 10               | 10               |
| 6 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 6   | 6   | 54                     | 51                     | 10               | 10               |
| 8 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 8   | 8   | 54                     | 51                     | 10               | 10               |
| 12 mA                          | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 12  | 12  | 109                    | 103                    | 10               | 10               |
| 16 mA                          | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 16  | 16  | 127                    | 132                    | 10               | 10               |
| 24 mA                          | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 24  | 24  | 181                    | 268                    | 10               | 10               |

Notes:

1. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3\text{ V} < V_{IN} < V_{IL}$ .
2. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges
3. Currents are measured at 100°C junction temperature and maximum voltage.
4. Currents are measured at 85°C junction temperature.
5. Software default selection highlighted in gray.

**Table 2-38 • Minimum and Maximum DC Input and Output Levels**  
Applicable to Standard Plus I/O Banks

| 3.3 V LVTTTL /<br>3.3 V LVCMOS | VIL      |          | VIH      |          | VOL      | VOH      | IOL | IOH | IOSL                   | IOSH                   | IIL <sup>1</sup> | IIH <sup>2</sup> |
|--------------------------------|----------|----------|----------|----------|----------|----------|-----|-----|------------------------|------------------------|------------------|------------------|
| Drive Strength                 | Min<br>V | Max<br>V | Min<br>V | Max<br>V | Max<br>V | Min<br>V | mA  | mA  | Max<br>mA <sup>3</sup> | Max<br>mA <sup>3</sup> | μA <sup>4</sup>  | μA <sup>4</sup>  |
| 2 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 2   | 2   | 27                     | 25                     | 10               | 10               |
| 4 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 4   | 4   | 27                     | 25                     | 10               | 10               |
| 6 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 6   | 6   | 54                     | 51                     | 10               | 10               |
| 8 mA                           | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 8   | 8   | 54                     | 51                     | 10               | 10               |
| 12 mA                          | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 12  | 12  | 109                    | 103                    | 10               | 10               |
| 16 mA                          | –0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 16  | 16  | 109                    | 103                    | 10               | 10               |

Notes:


1. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3\text{ V} < V_{IN} < V_{IL}$ .
2. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges
3. Currents are measured at 100°C junction temperature and maximum voltage.
4. Currents are measured at 85°C junction temperature.
5. Software default selection highlighted in gray.

**Table 2-39 • Minimum and Maximum DC Input and Output Levels**  
 Applicable to Standard I/O Banks

| 3.3 V LVTTTL /<br>3.3 V LVCMOS | VIL      |          | VIH      |          | VOL      | VOH      | IOL | IOH | IOSL                   | IOSH                   | IIL <sup>1</sup> | IIH <sup>2</sup> |
|--------------------------------|----------|----------|----------|----------|----------|----------|-----|-----|------------------------|------------------------|------------------|------------------|
| Drive Strength                 | Min<br>V | Max<br>V | Min<br>V | Max<br>V | Max<br>V | Min<br>V | mA  | mA  | Max<br>mA <sup>3</sup> | Max<br>mA <sup>3</sup> | μA <sup>4</sup>  | μA <sup>4</sup>  |
| 2 mA                           | -0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 2   | 2   | 25                     | 27                     | 10               | 10               |
| 4 mA                           | -0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 4   | 4   | 25                     | 27                     | 10               | 10               |
| 6 mA                           | -0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 6   | 6   | 51                     | 54                     | 10               | 10               |
| 8 mA                           | -0.3     | 0.8      | 2        | 3.6      | 0.4      | 2.4      | 8   | 8   | 51                     | 54                     | 10               | 10               |

**Notes:**

1. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3\text{ V} < V_{IN} < V_{IL}$ .
2. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges
3. Currents are measured at 100°C junction temperature and maximum voltage.
4. Currents are measured at 85°C junction temperature.
5. Software default selection highlighted in gray.

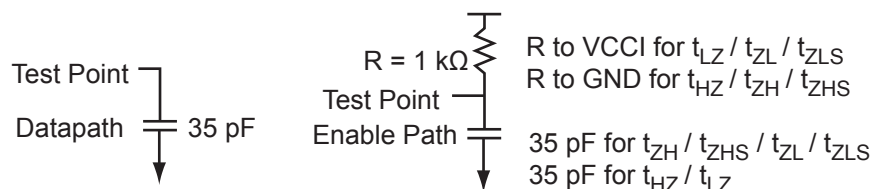

**Figure 2-7 • AC Loading**

**Table 2-40 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V) | C <sub>LOAD</sub> (pF) |
|---------------|----------------|----------------------|------------------------|
| 0             | 3.3            | 1.4                  | 35                     |

**Note:** \*Measuring point = Vtrip. See Table 2-22 on page 2-22 for a complete table of trip points.

## Timing Characteristics

**Table 2-41 • 3.3 V LVTTTL / 3.3 V LVCMOS High Slew**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 3.0\text{ V}$   
 Applicable to Advanced I/O Banks

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | $t_{ZLS}$ | $t_{ZHS}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-----------|-----------|-------|
| 2 mA           | Std.        | 0.66       | 7.66     | 0.04      | 1.02     | 0.43       | 7.80     | 6.59     | 2.65     | 2.61     | 10.03     | 8.82      | ns    |
|                | –1          | 0.56       | 6.51     | 0.04      | 0.86     | 0.36       | 6.63     | 5.60     | 2.25     | 2.22     | 8.54      | 7.51      | ns    |
|                | –2          | 0.49       | 5.72     | 0.03      | 0.76     | 0.32       | 5.82     | 4.92     | 1.98     | 1.95     | 7.49      | 6.59      | ns    |
| 4 mA           | Std.        | 0.66       | 7.66     | 0.04      | 1.02     | 0.43       | 7.80     | 6.59     | 2.65     | 2.61     | 10.03     | 8.82      | ns    |
|                | –1          | 0.56       | 6.51     | 0.04      | 0.86     | 0.36       | 6.63     | 5.60     | 2.25     | 2.22     | 8.54      | 7.51      | ns    |
|                | –2          | 0.49       | 5.72     | 0.03      | 0.76     | 0.32       | 5.82     | 4.92     | 1.98     | 1.95     | 7.49      | 6.59      | ns    |
| 6 mA           | Std.        | 0.66       | 4.91     | 0.04      | 1.02     | 0.43       | 5.00     | 4.07     | 2.99     | 3.20     | 7.23      | 6.31      | ns    |
|                | –1          | 0.56       | 4.17     | 0.04      | 0.86     | 0.36       | 4.25     | 3.46     | 2.54     | 2.73     | 6.15      | 5.36      | ns    |
|                | –2          | 0.49       | 3.66     | 0.03      | 0.76     | 0.32       | 3.73     | 3.04     | 2.23     | 2.39     | 5.40      | 4.71      | ns    |
| 8 mA           | Std.        | 0.66       | 4.91     | 0.04      | 1.02     | 0.43       | 5.00     | 4.07     | 2.99     | 3.20     | 7.23      | 6.31      | ns    |
|                | –1          | 0.56       | 4.17     | 0.04      | 0.86     | 0.36       | 4.25     | 3.46     | 2.54     | 2.73     | 6.15      | 5.36      | ns    |
|                | –2          | 0.49       | 3.66     | 0.03      | 0.76     | 0.32       | 3.73     | 3.04     | 2.23     | 2.39     | 5.40      | 4.71      | ns    |
| 12 mA          | Std.        | 0.66       | 3.53     | 0.04      | 1.02     | 0.43       | 3.60     | 2.82     | 3.21     | 3.58     | 5.83      | 5.06      | ns    |
|                | –1          | 0.56       | 3.00     | 0.04      | 0.86     | 0.36       | 3.06     | 2.40     | 2.73     | 3.05     | 4.96      | 4.30      | ns    |
|                | –2          | 0.49       | 2.64     | 0.03      | 0.76     | 0.32       | 2.69     | 2.11     | 2.40     | 2.68     | 4.36      | 3.78      | ns    |
| 16 mA          | Std.        | 0.66       | 3.33     | 0.04      | 1.02     | 0.43       | 3.39     | 2.56     | 3.26     | 3.68     | 5.63      | 4.80      | ns    |
|                | –1          | 0.56       | 2.83     | 0.04      | 0.86     | 0.36       | 2.89     | 2.18     | 2.77     | 3.13     | 4.79      | 4.08      | ns    |
|                | –2          | 0.49       | 2.49     | 0.03      | 0.76     | 0.32       | 2.53     | 1.91     | 2.44     | 2.75     | 4.20      | 3.58      | ns    |
| 24 mA          | Std.        | 0.66       | 3.08     | 0.04      | 1.02     | 0.43       | 3.13     | 2.12     | 3.32     | 4.06     | 5.37      | 4.35      | ns    |
|                | –1          | 0.56       | 2.62     | 0.04      | 0.86     | 0.36       | 2.66     | 1.80     | 2.83     | 3.45     | 4.57      | 3.70      | ns    |
|                | –2          | 0.49       | 2.30     | 0.03      | 0.76     | 0.32       | 2.34     | 1.58     | 2.48     | 3.03     | 4.01      | 3.25      | ns    |

**Notes:**


1. Software default selection highlighted in gray.
2. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-58 • Minimum and Maximum DC Input and Output Levels**  
Applicable to Standard I/O Banks

| 2.5 V LVCMOS   | VIL    |         | VIH    |        | VOL    | VOH    | IOL | IOH | IOSL                 | IOSH                 | IIL <sup>1</sup> | IIH <sup>2</sup> |
|----------------|--------|---------|--------|--------|--------|--------|-----|-----|----------------------|----------------------|------------------|------------------|
| Drive Strength | Min. V | Max., V | Min. V | Max. V | Max. V | Min. V | mA  | mA  | Max. mA <sup>3</sup> | Max. mA <sup>3</sup> | μA <sup>4</sup>  | μA <sup>4</sup>  |
| 2 mA           | −0.3   | 0.7     | 1.7    | 3.6    | 0.7    | 1.7    | 2   | 2   | 16                   | 18                   | 10               | 10               |
| 4 mA           | −0.3   | 0.7     | 1.7    | 3.6    | 0.7    | 1.7    | 4   | 4   | 16                   | 18                   | 10               | 10               |
| 6 mA           | −0.3   | 0.7     | 1.7    | 3.6    | 0.7    | 1.7    | 6   | 6   | 32                   | 37                   | 10               | 10               |
| 8 mA           | −0.3   | 0.7     | 1.7    | 3.6    | 0.7    | 1.7    | 8   | 8   | 32                   | 37                   | 10               | 10               |

**Notes:**

1. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3\text{ V} < V_{IN} < V_{IL}$ .
2. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges.
3. Currents are measured at high temperature (100°C junction temperature) and maximum voltage.
4. Currents are measured at 85°C junction temperature.
5. Software default selection highlighted in gray.

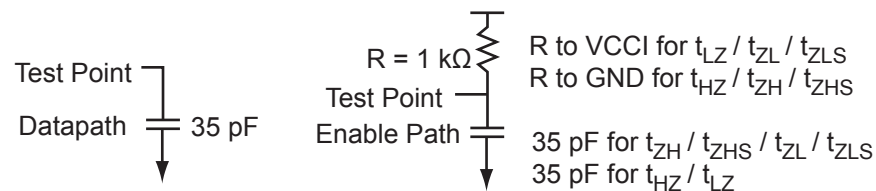

**Figure 2-8 • AC Loading**

**Table 2-59 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V) | C <sub>LOAD</sub> (pF) |
|---------------|----------------|----------------------|------------------------|
| 0             | 2.5            | 1.2                  | 35                     |

**Note:** \*Measuring point = Vtrip. See Table 2-22 on page 2-22 for a complete table of trip points.

**Table 2-61 • 2.5 V LVCMOS Low Slew**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 2.3\text{ V}$   
Applicable to Advanced I/O Banks

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | $t_{ZLS}$ | $t_{ZHS}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-----------|-----------|-------|
| 4 mA           | Std.        | 0.60       | 11.40    | 0.04      | 1.31     | 0.43       | 11.22    | 11.40    | 2.68     | 2.20     | 13.45     | 13.63     | ns    |
|                | –1          | 0.51       | 9.69     | 0.04      | 1.11     | 0.36       | 9.54     | 9.69     | 2.28     | 1.88     | 11.44     | 11.60     | ns    |
|                | –2          | 0.45       | 8.51     | 0.03      | 0.98     | 0.32       | 8.38     | 8.51     | 2.00     | 1.65     | 10.05     | 10.18     | ns    |
| 6 mA           | Std.        | 0.60       | 7.96     | 0.04      | 1.31     | 0.43       | 8.11     | 7.81     | 3.05     | 2.89     | 10.34     | 10.05     | ns    |
|                | –1          | 0.51       | 6.77     | 0.04      | 1.11     | 0.36       | 6.90     | 6.65     | 2.59     | 2.46     | 8.80      | 8.55      | ns    |
|                | –2          | 0.45       | 5.94     | 0.03      | 0.98     | 0.32       | 6.05     | 5.84     | 2.28     | 2.16     | 7.72      | 7.50      | ns    |
| 8 mA           | Std.        | 0.60       | 7.96     | 0.04      | 1.31     | 0.43       | 8.11     | 7.81     | 3.05     | 2.89     | 10.34     | 10.05     | ns    |
|                | –1          | 0.51       | 6.77     | 0.04      | 1.11     | 0.36       | 6.90     | 6.65     | 2.59     | 2.46     | 8.80      | 8.55      | ns    |
|                | –2          | 0.45       | 5.94     | 0.03      | 0.98     | 0.32       | 6.05     | 5.84     | 2.28     | 2.16     | 7.72      | 7.50      | ns    |
| 12 mA          | Std.        | 0.60       | 6.18     | 0.04      | 1.31     | 0.43       | 6.29     | 5.92     | 3.30     | 3.32     | 8.53      | 8.15      | ns    |
|                | –1          | 0.51       | 5.26     | 0.04      | 1.11     | 0.36       | 5.35     | 5.03     | 2.81     | 2.83     | 7.26      | 6.94      | ns    |
|                | –2          | 0.45       | 4.61     | 0.03      | 0.98     | 0.32       | 4.70     | 4.42     | 2.47     | 2.48     | 6.37      | 6.09      | ns    |
| 16 mA          | Std.        | 0.60       | 5.76     | 0.04      | 1.31     | 0.43       | 5.87     | 5.53     | 3.36     | 3.44     | 8.11      | 7.76      | ns    |
|                | –1          | 0.51       | 4.90     | 0.04      | 1.11     | 0.36       | 4.99     | 4.70     | 2.86     | 2.92     | 6.90      | 6.60      | ns    |
|                | –2          | 0.45       | 4.30     | 0.03      | 0.98     | 0.32       | 4.38     | 4.13     | 2.51     | 2.57     | 6.05      | 5.80      | ns    |
| 24 mA          | Std.        | 0.60       | 5.51     | 0.04      | 1.31     | 0.43       | 5.50     | 5.51     | 3.43     | 3.87     | 7.74      | 7.74      | ns    |
|                | –1          | 0.51       | 4.68     | 0.04      | 1.11     | 0.36       | 4.68     | 4.68     | 2.92     | 3.29     | 6.58      | 6.59      | ns    |
|                | –2          | 0.45       | 4.11     | 0.03      | 0.98     | 0.32       | 4.11     | 4.11     | 2.56     | 2.89     | 5.78      | 5.78      | ns    |

**Note:** For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

### 3.3 V PCI, 3.3 V PCI-X

Peripheral Component Interface for 3.3 V standard specifies support for 33 MHz and 66 MHz PCI Bus applications.


**Table 2-86 • Minimum and Maximum DC Input and Output Levels**

| 3.3 V PCI/PCI-X       | VIL            |           | VIH       |           | VOL        | VOH       | IOL | IOH | IOSL                    | IOSH                    | IIL             | IIH             |
|-----------------------|----------------|-----------|-----------|-----------|------------|-----------|-----|-----|-------------------------|-------------------------|-----------------|-----------------|
| Drive Strength        | Min.<br>V      | Max.<br>V | Min.<br>V | Max.<br>V | Max.,<br>V | Min.<br>V | mA  | mA  | Max.<br>mA <sup>1</sup> | Max.<br>mA <sup>1</sup> | μA <sup>2</sup> | μA <sup>2</sup> |
| Per PCI specification | Per PCI curves |           |           |           |            |           |     |     |                         |                         | 10              | 10              |

**Notes:**

1. Currents are measured at high temperature (100°C junction temperature) and maximum voltage.
2. Currents are measured at 85°C junction temperature.

AC loadings are defined per the PCI/PCI-X specifications for the datapath; Microsemi loadings for enable path characterization are described in [Figure 2-11](#).

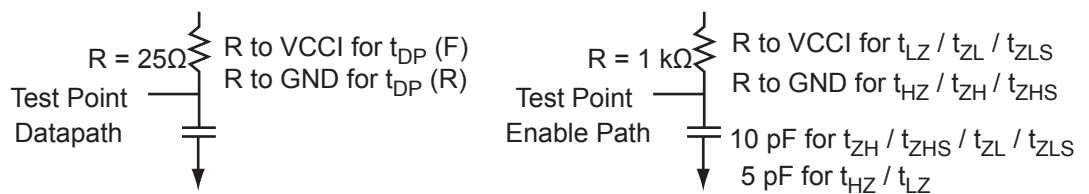

**Figure 2-11 • AC Loading**


AC loadings are defined per PCI/PCI-X specifications for the datapath; Microsemi loading for tristate is described in [Table 2-87](#).

**Table 2-87 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V)                                                   | $C_{LOAD}$ (pF) |
|---------------|----------------|------------------------------------------------------------------------|-----------------|
| 0             | 3.3            | 0.285 * $V_{CCI}$ for $t_{DP(R)}$<br>0.615 * $V_{CCI}$ for $t_{DP(F)}$ | 10              |

**Note:** \*Measuring point =  $V_{trip}$ . See [Table 2-22 on page 2-22](#) for a complete table of trip points.

## Output Register

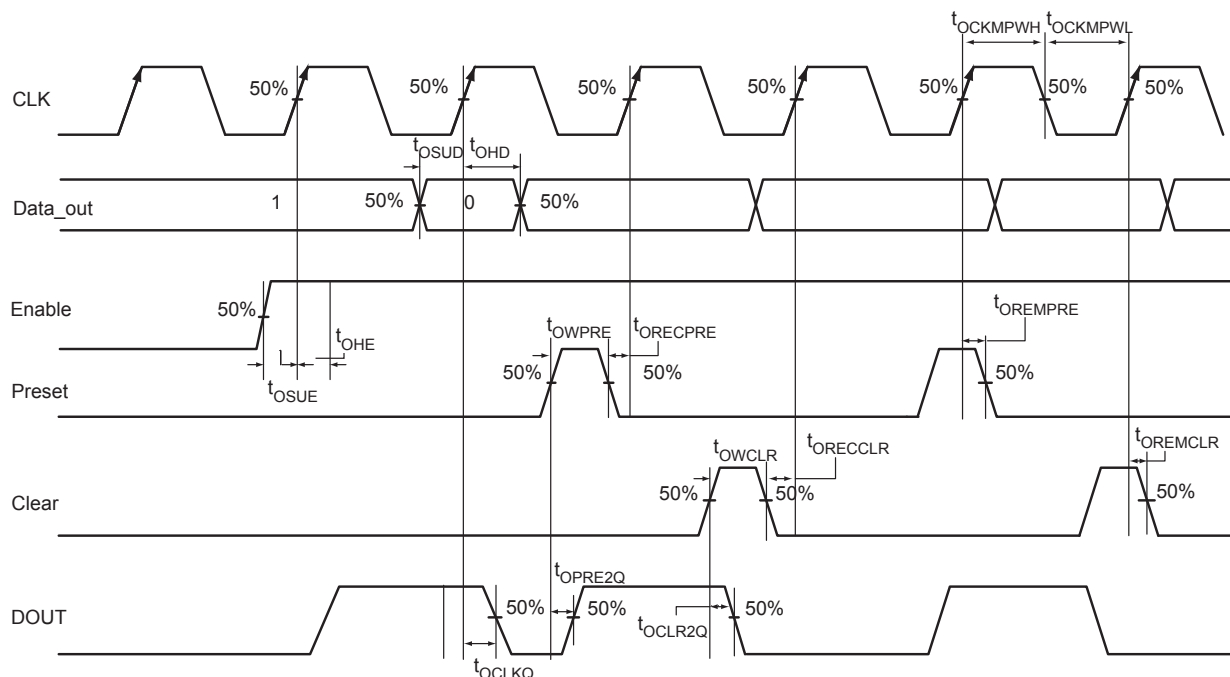

**Figure 2-18 • Output Register Timing Diagram**

### Timing Characteristics

**Table 2-99 • Output Data Register Propagation Delays**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$

| Parameter     | Description                                                          | -2   | -1   | Std. | Units |
|---------------|----------------------------------------------------------------------|------|------|------|-------|
| $t_{OCLKQ}$   | Clock-to-Q of the Output Data Register                               | 0.59 | 0.67 | 0.79 | ns    |
| $t_{OSUD}$    | Data Setup Time for the Output Data Register                         | 0.31 | 0.36 | 0.42 | ns    |
| $t_{OHD}$     | Data Hold Time for the Output Data Register                          | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OSUE}$    | Enable Setup Time for the Output Data Register                       | 0.44 | 0.50 | 0.59 | ns    |
| $t_{OHE}$     | Enable Hold Time for the Output Data Register                        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OCLR2Q}$  | Asynchronous Clear-to-Q of the Output Data Register                  | 0.80 | 0.91 | 1.07 | ns    |
| $t_{OPRE2Q}$  | Asynchronous Preset-to-Q of the Output Data Register                 | 0.80 | 0.91 | 1.07 | ns    |
| $t_{OEMCLR}$  | Asynchronous Clear Removal Time for the Output Data Register         | 0.00 | 0.00 | 0.00 | ns    |
| $t_{ORECCLR}$ | Asynchronous Clear Recovery Time for the Output Data Register        | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OREMPRE}$ | Asynchronous Preset Removal Time for the Output Data Register        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{ORECPRE}$ | Asynchronous Preset Recovery Time for the Output Data Register       | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OWCLR}$   | Asynchronous Clear Minimum Pulse Width for the Output Data Register  | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OWPRE}$   | Asynchronous Preset Minimum Pulse Width for the Output Data Register | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OCKMPWH}$ | Clock Minimum Pulse Width High for the Output Data Register          | 0.36 | 0.41 | 0.48 | ns    |
| $t_{OCKMPWL}$ | Clock Minimum Pulse Width Low for the Output Data Register           | 0.32 | 0.37 | 0.43 | ns    |


**Note:** For specific junction temperature and voltage supply levels, refer to Table 2-6 on page 2-6 for derating values.

## Timing Characteristics

**Table 2-100 • Output Enable Register Propagation Delays**  
 Commercial-Case Conditions:  $T_J = 70^{\circ}\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$

| Parameter      | Description                                                            | –2   | –1   | Std. | Units |
|----------------|------------------------------------------------------------------------|------|------|------|-------|
| $t_{OECLKQ}$   | Clock-to-Q of the Output Enable Register                               | 0.59 | 0.67 | 0.79 | ns    |
| $t_{OESUD}$    | Data Setup Time for the Output Enable Register                         | 0.31 | 0.36 | 0.42 | ns    |
| $t_{OEHD}$     | Data Hold Time for the Output Enable Register                          | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OESUE}$    | Enable Setup Time for the Output Enable Register                       | 0.44 | 0.50 | 0.58 | ns    |
| $t_{OEHE}$     | Enable Hold Time for the Output Enable Register                        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OECLR2Q}$  | Asynchronous Clear-to-Q of the Output Enable Register                  | 0.67 | 0.76 | 0.89 | ns    |
| $t_{OEPRE2Q}$  | Asynchronous Preset-to-Q of the Output Enable Register                 | 0.67 | 0.76 | 0.89 | ns    |
| $t_{OEREMCLR}$ | Asynchronous Clear Removal Time for the Output Enable Register         | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OERECCLR}$ | Asynchronous Clear Recovery Time for the Output Enable Register        | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OEREMPRE}$ | Asynchronous Preset Removal Time for the Output Enable Register        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OERECPRE}$ | Asynchronous Preset Recovery Time for the Output Enable Register       | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OEWCCLR}$  | Asynchronous Clear Minimum Pulse Width for the Output Enable Register  | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OEWPPE}$   | Asynchronous Preset Minimum Pulse Width for the Output Enable Register | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OECKMPWH}$ | Clock Minimum Pulse Width High for the Output Enable Register          | 0.36 | 0.41 | 0.48 | ns    |
| $t_{OECKMPWL}$ | Clock Minimum Pulse Width Low for the Output Enable Register           | 0.32 | 0.37 | 0.43 | ns    |

**Note:** For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

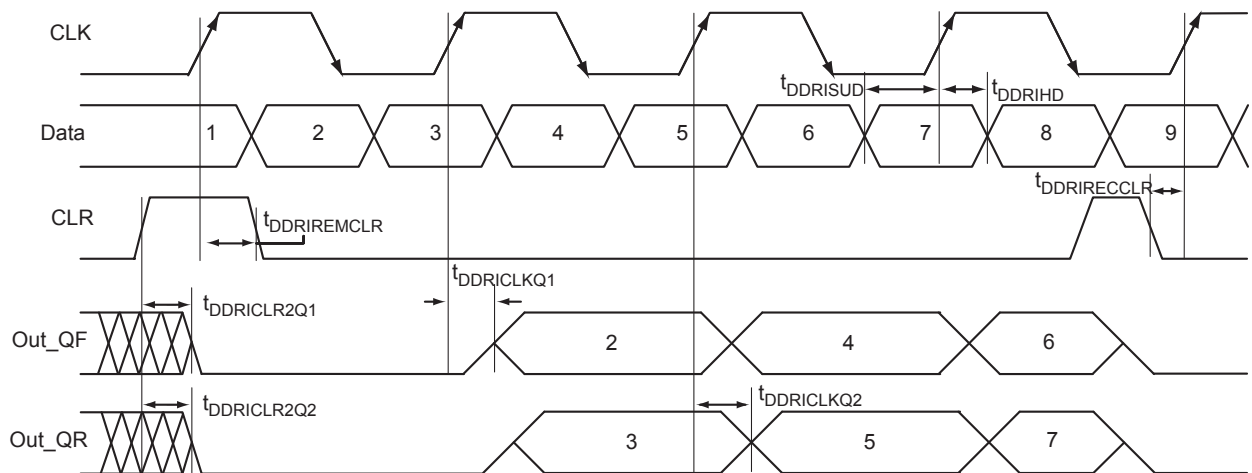

**Figure 2-21 • Input DDR Timing Diagram**


### Timing Characteristics

**Table 2-102 • Input DDR Propagation Delays**


Commercial-Case Conditions:  $T_J = 70^{\circ}\text{C}$ , Worst Case  $V_{CC} = 1.425\text{ V}$

| Parameter                | Description                                          | -2   | -1   | Std. | Units |
|--------------------------|------------------------------------------------------|------|------|------|-------|
| $t_{\text{DDRICKQ1}}$    | Clock-to-Out Out_QR for Input DDR                    | 0.27 | 0.31 | 0.37 | ns    |
| $t_{\text{DDRICKQ2}}$    | Clock-to-Out Out_QF for Input DDR                    | 0.39 | 0.44 | 0.52 | ns    |
| $t_{\text{DDRISUD}}$     | Data Setup for Input DDR (Fall)                      | 0.25 | 0.28 | 0.33 | ns    |
|                          | Data Setup for Input DDR (Rise)                      | 0.25 | 0.28 | 0.33 | ns    |
| $t_{\text{DDRIMHD}}$     | Data Hold for Input DDR (Fall)                       | 0.00 | 0.00 | 0.00 | ns    |
|                          | Data Hold for Input DDR (Rise)                       | 0.00 | 0.00 | 0.00 | ns    |
| $t_{\text{DDRICLR2Q1}}$  | Asynchronous Clear-to-Out Out_QR for Input DDR       | 0.46 | 0.53 | 0.62 | ns    |
| $t_{\text{DDRICLR2Q2}}$  | Asynchronous Clear-to-Out Out_QF for Input DDR       | 0.57 | 0.65 | 0.76 | ns    |
| $t_{\text{DDRIMCLR}}$    | Asynchronous Clear Removal time for Input DDR        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{\text{DDRIMRECCLR}}$ | Asynchronous Clear Recovery time for Input DDR       | 0.22 | 0.25 | 0.30 | ns    |
| $t_{\text{DDRIMWCLR}}$   | Asynchronous Clear Minimum Pulse Width for Input DDR | 0.22 | 0.25 | 0.30 | ns    |
| $t_{\text{DDRICKMPWH}}$  | Clock Minimum Pulse Width High for Input DDR         | 0.36 | 0.41 | 0.48 | ns    |
| $t_{\text{DDRICKMPWL}}$  | Clock Minimum Pulse Width Low for Input DDR          | 0.32 | 0.37 | 0.43 | ns    |
| $F_{\text{DDRIMAX}}$     | Maximum Frequency for Input DDR                      | 350  | 309  | 263  | MHz   |


**Note:** For specific junction temperature and voltage-supply levels, refer to Table 2-6 on page 2-6 for derating values.

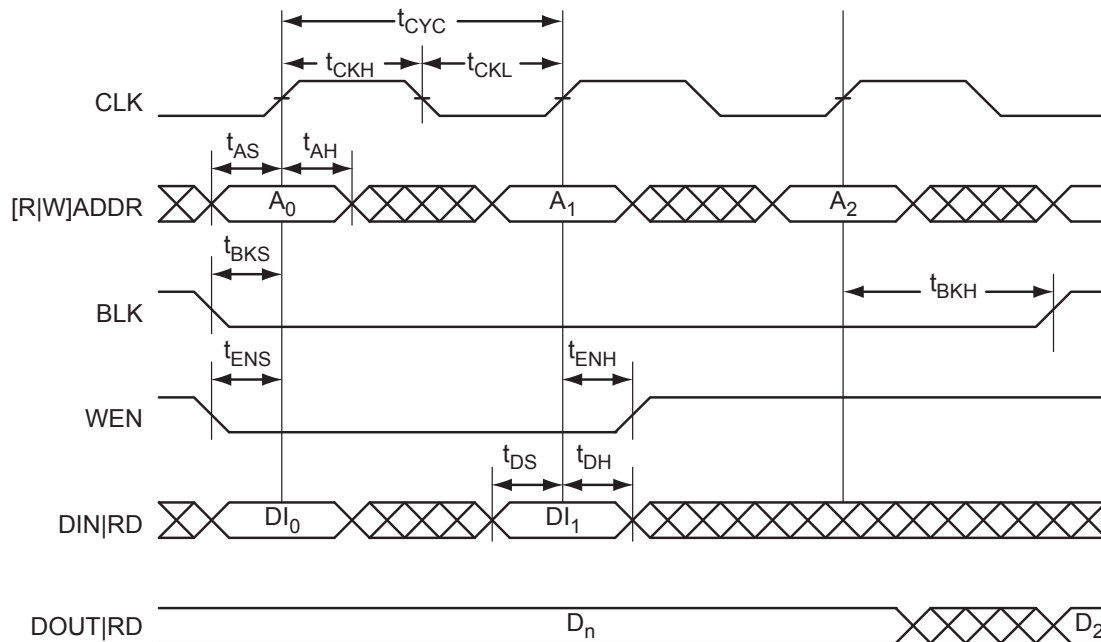

**Figure 2-33 • RAM Write, Output Retained. Applicable to Both RAM4K9 and RAM512x18.**

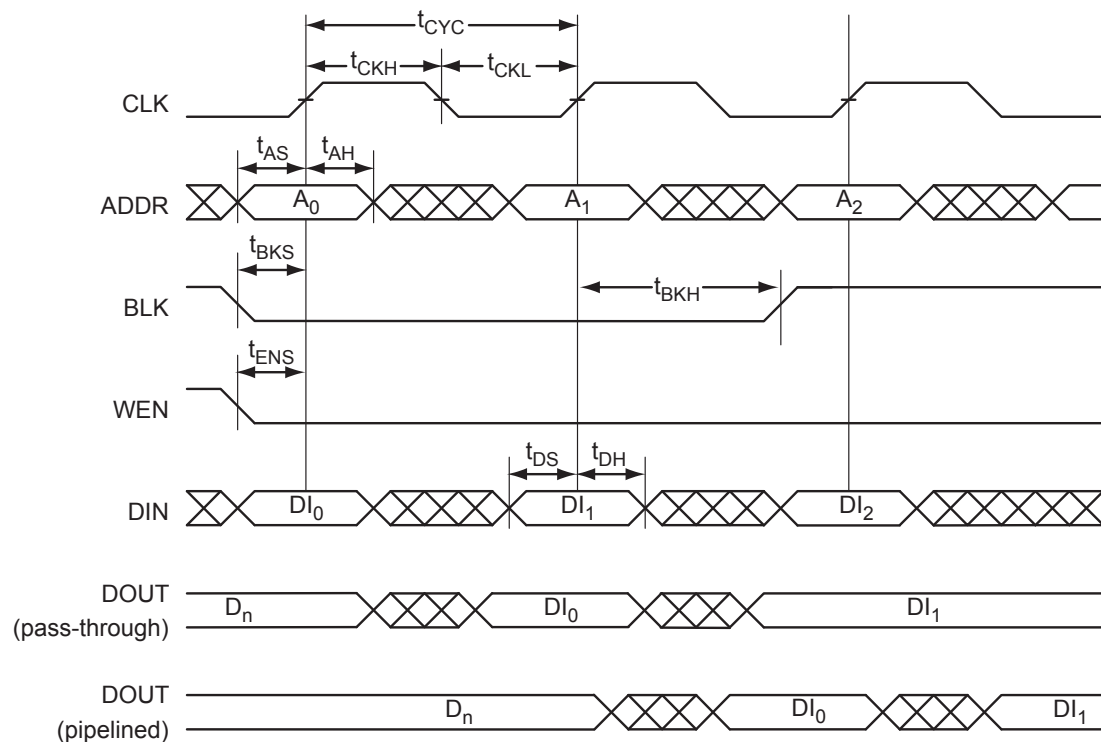

**Figure 2-34 • RAM Write, Output as Write Data (WMODE = 1). Applicable to RAM4K9 Only.**

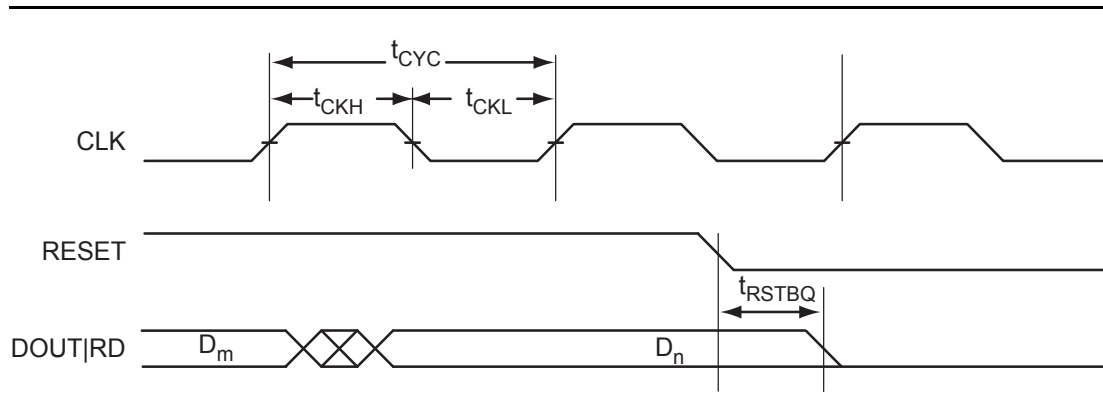

**Figure 2-35 • RAM Reset. Applicable to Both RAM4K9 and RAM512x18.**

## FIFO



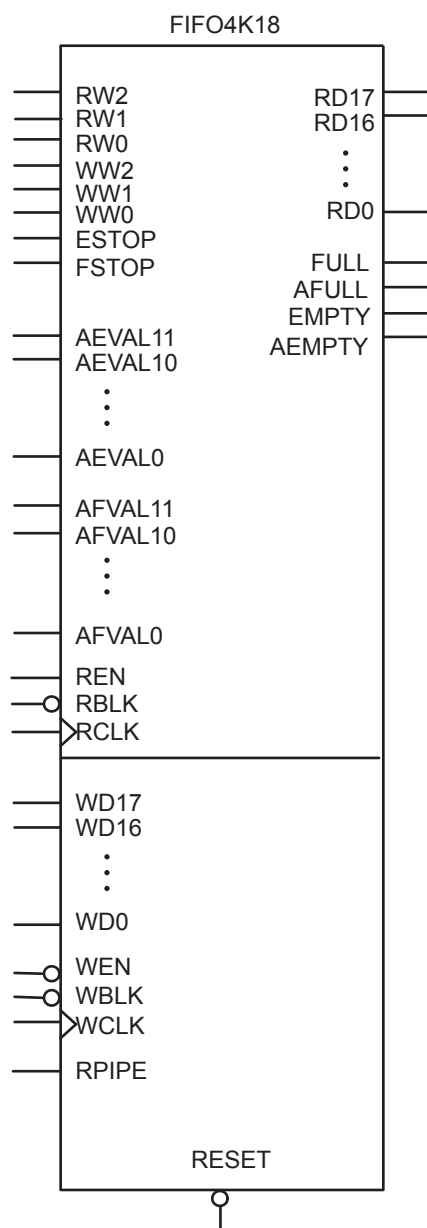


Figure 2-36 • FIFO Model

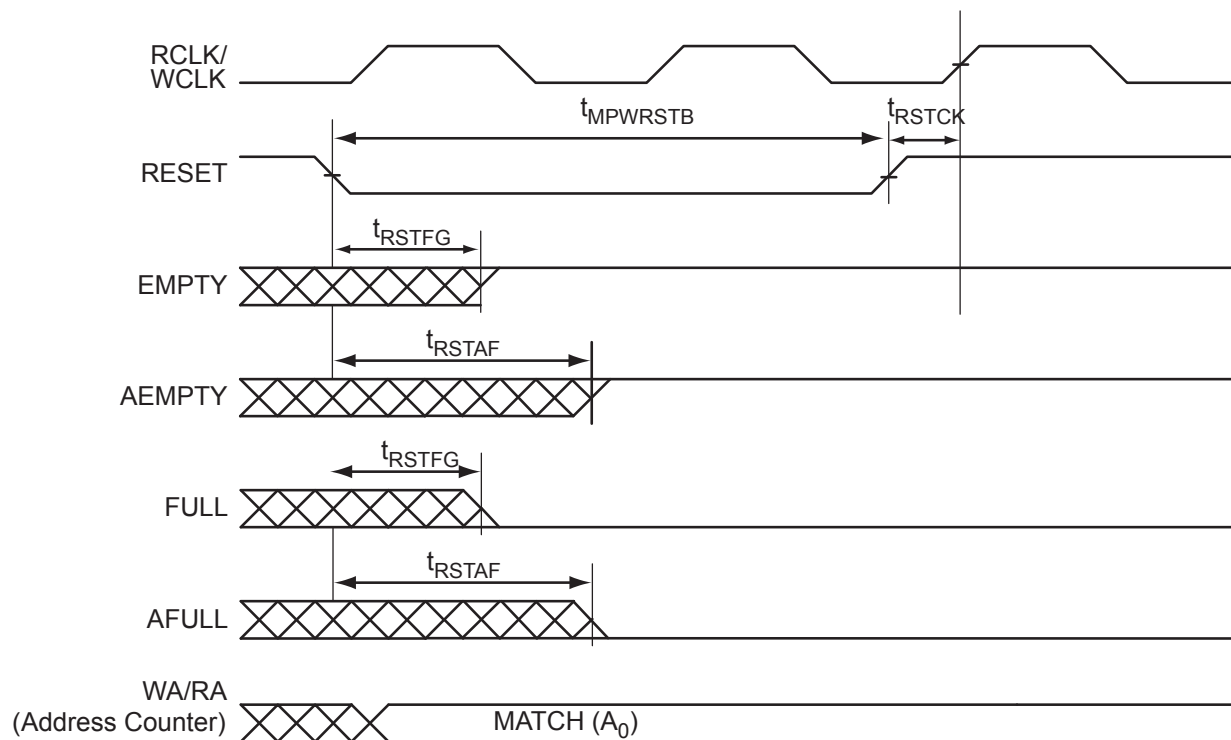

**Figure 2-39 • FIFO Reset**

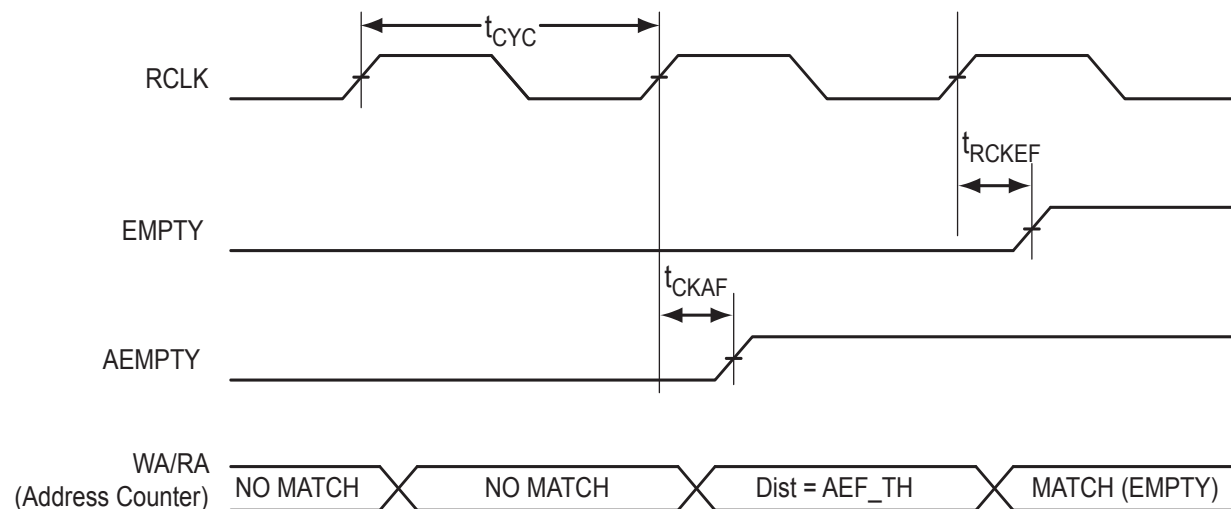

**Figure 2-40 • FIFO EMPTY Flag and AEMPTY Flag Assertion**

| PQ208      |                 |
|------------|-----------------|
| Pin Number | A3P400 Function |
| 109        | TRST            |
| 110        | VJTAG           |
| 111        | GDA0/IO79VDB1   |
| 112        | GDA1/IO79UDB1   |
| 113        | GDB0/IO78VDB1   |
| 114        | GDB1/IO78UDB1   |
| 115        | GDC0/IO77VDB1   |
| 116        | GDC1/IO77UDB1   |
| 117        | IO76VDB1        |
| 118        | IO76UDB1        |
| 119        | IO75NDB1        |
| 120        | IO75PDB1        |
| 121        | IO74RSB1        |
| 122        | GND             |
| 123        | VCCIB1          |
| 124        | NC              |
| 125        | NC              |
| 126        | VCC             |
| 127        | IO72NDB1        |
| 128        | GCC2/IO72PDB1   |
| 129        | GCB2/IO71PSB1   |
| 130        | GND             |
| 131        | GCA2/IO70PSB1   |
| 132        | GCA1/IO69PDB1   |
| 133        | GCA0/IO69NDB1   |
| 134        | GCB0/IO68NDB1   |
| 135        | GCB1/IO68PDB1   |
| 136        | GCC0/IO67NDB1   |
| 137        | GCC1/IO67PDB1   |
| 138        | IO66NDB1        |
| 139        | IO66PDB1        |
| 140        | VCCIB1          |
| 141        | GND             |
| 142        | VCC             |
| 143        | IO65RSB1        |
| 144        | IO64NDB1        |

| PQ208      |                 |
|------------|-----------------|
| Pin Number | A3P400 Function |
| 145        | IO64PDB1        |
| 146        | IO63NDB1        |
| 147        | IO63PDB1        |
| 148        | IO62NDB1        |
| 149        | GBC2/IO62PDB1   |
| 150        | IO61NDB1        |
| 151        | GBB2/IO61PDB1   |
| 152        | IO60NDB1        |
| 153        | GBA2/IO60PDB1   |
| 154        | VMV1            |
| 155        | GNDQ            |
| 156        | GND             |
| 157        | VMV0            |
| 158        | GBA1/IO59RSB0   |
| 159        | GBA0/IO58RSB0   |
| 160        | GBB1/IO57RSB0   |
| 161        | GBB0/IO56RSB0   |
| 162        | GND             |
| 163        | GBC1/IO55RSB0   |
| 164        | GBC0/IO54RSB0   |
| 165        | IO52RSB0        |
| 166        | IO49RSB0        |
| 167        | IO46RSB0        |
| 168        | IO43RSB0        |
| 169        | IO40RSB0        |
| 170        | VCCIB0          |
| 171        | VCC             |
| 172        | IO36RSB0        |
| 173        | IO35RSB0        |
| 174        | IO34RSB0        |
| 175        | IO33RSB0        |
| 176        | IO32RSB0        |
| 177        | IO31RSB0        |
| 178        | GND             |
| 179        | IO29RSB0        |
| 180        | IO28RSB0        |

| PQ208      |                 |
|------------|-----------------|
| Pin Number | A3P400 Function |
| 181        | IO27RSB0        |
| 182        | IO26RSB0        |
| 183        | IO25RSB0        |
| 184        | IO24RSB0        |
| 185        | IO23RSB0        |
| 186        | VCCIB0          |
| 187        | VCC             |
| 188        | IO21RSB0        |
| 189        | IO20RSB0        |
| 190        | IO19RSB0        |
| 191        | IO18RSB0        |
| 192        | IO17RSB0        |
| 193        | IO16RSB0        |
| 194        | IO15RSB0        |
| 195        | GND             |
| 196        | IO13RSB0        |
| 197        | IO11RSB0        |
| 198        | IO09RSB0        |
| 199        | IO07RSB0        |
| 200        | VCCIB0          |
| 201        | GAC1/IO05RSB0   |
| 202        | GAC0/IO04RSB0   |
| 203        | GAB1/IO03RSB0   |
| 204        | GAB0/IO02RSB0   |
| 205        | GAA1/IO01RSB0   |
| 206        | GAA0/IO00RSB0   |
| 207        | GNDQ            |
| 208        | VMV0            |

| FG256      |                 |
|------------|-----------------|
| Pin Number | A3P400 Function |
| A1         | GND             |
| A2         | GAA0/IO00RSB0   |
| A3         | GAA1/IO01RSB0   |
| A4         | GAB0/IO02RSB0   |
| A5         | IO16RSB0        |
| A6         | IO17RSB0        |
| A7         | IO22RSB0        |
| A8         | IO28RSB0        |
| A9         | IO34RSB0        |
| A10        | IO37RSB0        |
| A11        | IO41RSB0        |
| A12        | IO43RSB0        |
| A13        | GBB1/IO57RSB0   |
| A14        | GBA0/IO58RSB0   |
| A15        | GBA1/IO59RSB0   |
| A16        | GND             |
| B1         | GAB2/IO154UDB3  |
| B2         | GAA2/IO155UDB3  |
| B3         | IO12RSB0        |
| B4         | GAB1/IO03RSB0   |
| B5         | IO13RSB0        |
| B6         | IO14RSB0        |
| B7         | IO21RSB0        |
| B8         | IO27RSB0        |
| B9         | IO32RSB0        |
| B10        | IO38RSB0        |
| B11        | IO42RSB0        |
| B12        | GBC1/IO55RSB0   |
| B13        | GBB0/IO56RSB0   |
| B14        | IO44RSB0        |
| B15        | GBA2/IO60PDB1   |
| B16        | IO60NDB1        |
| C1         | IO154VDB3       |
| C2         | IO155VDB3       |
| C3         | IO11RSB0        |
| C4         | IO07RSB0        |

| FG256      |                 |
|------------|-----------------|
| Pin Number | A3P400 Function |
| C5         | GAC0/IO04RSB0   |
| C6         | GAC1/IO05RSB0   |
| C7         | IO20RSB0        |
| C8         | IO24RSB0        |
| C9         | IO33RSB0        |
| C10        | IO39RSB0        |
| C11        | IO45RSB0        |
| C12        | GBC0/IO54RSB0   |
| C13        | IO48RSB0        |
| C14        | VMV0            |
| C15        | IO61NPB1        |
| C16        | IO63PDB1        |
| D1         | IO151VDB3       |
| D2         | IO151UDB3       |
| D3         | GAC2/IO153UDB3  |
| D4         | IO06RSB0        |
| D5         | GNDQ            |
| D6         | IO10RSB0        |
| D7         | IO19RSB0        |
| D8         | IO26RSB0        |
| D9         | IO30RSB0        |
| D10        | IO40RSB0        |
| D11        | IO46RSB0        |
| D12        | GNDQ            |
| D13        | IO47RSB0        |
| D14        | GBB2/IO61PPB1   |
| D15        | IO53RSB0        |
| D16        | IO63NDB1        |
| E1         | IO150PDB3       |
| E2         | IO08RSB0        |
| E3         | IO153VDB3       |
| E4         | IO152VDB3       |
| E5         | VMV0            |
| E6         | VCCIB0          |
| E7         | VCCIB0          |
| E8         | IO25RSB0        |

| FG256      |                 |
|------------|-----------------|
| Pin Number | A3P400 Function |
| E9         | IO31RSB0        |
| E10        | VCCIB0          |
| E11        | VCCIB0          |
| E12        | VMV1            |
| E13        | GBC2/IO62PDB1   |
| E14        | IO65RSB1        |
| E15        | IO52RSB0        |
| E16        | IO66PDB1        |
| F1         | IO150NDB3       |
| F2         | IO149NPB3       |
| F3         | IO09RSB0        |
| F4         | IO152UDB3       |
| F5         | VCCIB3          |
| F6         | GND             |
| F7         | VCC             |
| F8         | VCC             |
| F9         | VCC             |
| F10        | VCC             |
| F11        | GND             |
| F12        | VCCIB1          |
| F13        | IO62NDB1        |
| F14        | IO49RSB0        |
| F15        | IO64PPB1        |
| F16        | IO66NDB1        |
| G1         | IO148NDB3       |
| G2         | IO148PDB3       |
| G3         | IO149PPB3       |
| G4         | GFC1/IO147PPB3  |
| G5         | VCCIB3          |
| G6         | VCC             |
| G7         | GND             |
| G8         | GND             |
| G9         | GND             |
| G10        | GND             |
| G11        | VCC             |
| G12        | VCCIB1          |

| <b>FG256</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A3P1000 Function</b> |
| R5                | IO168RSB2               |
| R6                | IO163RSB2               |
| R7                | IO157RSB2               |
| R8                | IO149RSB2               |
| R9                | IO143RSB2               |
| R10               | IO138RSB2               |
| R11               | IO131RSB2               |
| R12               | IO125RSB2               |
| R13               | GDB2/IO115RSB2          |
| R14               | TDI                     |
| R15               | GNDQ                    |
| R16               | TDO                     |
| T1                | GND                     |
| T2                | IO183RSB2               |
| T3                | GEB2/IO186RSB2          |
| T4                | IO172RSB2               |
| T5                | IO170RSB2               |
| T6                | IO164RSB2               |
| T7                | IO158RSB2               |
| T8                | IO153RSB2               |
| T9                | IO142RSB2               |
| T10               | IO135RSB2               |
| T11               | IO130RSB2               |
| T12               | GDC2/IO116RSB2          |
| T13               | IO120RSB2               |
| T14               | GDA2/IO114RSB2          |
| T15               | TMS                     |
| T16               | GND                     |

| FG484      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| E21        | NC              |
| E22        | NC              |
| F1         | NC              |
| F2         | NC              |
| F3         | NC              |
| F4         | IO173NDB3       |
| F5         | IO174NDB3       |
| F6         | VMV3            |
| F7         | IO07RSB0        |
| F8         | GAC0/IO04RSB0   |
| F9         | GAC1/IO05RSB0   |
| F10        | IO20RSB0        |
| F11        | IO24RSB0        |
| F12        | IO33RSB0        |
| F13        | IO39RSB0        |
| F14        | IO44RSB0        |
| F15        | GBC0/IO54RSB0   |
| F16        | IO51RSB0        |
| F17        | VMV0            |
| F18        | IO61NPB1        |
| F19        | IO63PDB1        |
| F20        | NC              |
| F21        | NC              |
| F22        | NC              |
| G1         | IO170NDB3       |
| G2         | IO170PDB3       |
| G3         | NC              |
| G4         | IO171NDB3       |
| G5         | IO171PDB3       |
| G6         | GAC2/IO172PDB3  |
| G7         | IO06RSB0        |
| G8         | GNDQ            |
| G9         | IO10RSB0        |
| G10        | IO19RSB0        |
| G11        | IO26RSB0        |
| G12        | IO30RSB0        |

| FG484      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| G13        | IO40RSB0        |
| G14        | IO45RSB0        |
| G15        | GNDQ            |
| G16        | IO50RSB0        |
| G17        | GBB2/IO61PPB1   |
| G18        | IO53RSB0        |
| G19        | IO63NDB1        |
| G20        | NC              |
| G21        | NC              |
| G22        | NC              |
| H1         | NC              |
| H2         | NC              |
| H3         | VCC             |
| H4         | IO166PDB3       |
| H5         | IO167NPB3       |
| H6         | IO172NDB3       |
| H7         | IO169NDB3       |
| H8         | VMV0            |
| H9         | VCCIB0          |
| H10        | VCCIB0          |
| H11        | IO25RSB0        |
| H12        | IO31RSB0        |
| H13        | VCCIB0          |
| H14        | VCCIB0          |
| H15        | VMV1            |
| H16        | GBC2/IO62PDB1   |
| H17        | IO67PPB1        |
| H18        | IO64PPB1        |
| H19        | IO66PDB1        |
| H20        | VCC             |
| H21        | NC              |
| H22        | NC              |
| J1         | NC              |
| J2         | NC              |
| J3         | NC              |
| J4         | IO166NDB3       |

| FG484      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| J5         | IO168NPB3       |
| J6         | IO167PPB3       |
| J7         | IO169PDB3       |
| J8         | VCCIB3          |
| J9         | GND             |
| J10        | VCC             |
| J11        | VCC             |
| J12        | VCC             |
| J13        | VCC             |
| J14        | GND             |
| J15        | VCCIB1          |
| J16        | IO62NDB1        |
| J17        | IO64NPB1        |
| J18        | IO65PPB1        |
| J19        | IO66NDB1        |
| J20        | NC              |
| J21        | IO68PDB1        |
| J22        | IO68NDB1        |
| K1         | IO157PDB3       |
| K2         | IO157NDB3       |
| K3         | NC              |
| K4         | IO165NDB3       |
| K5         | IO165PDB3       |
| K6         | IO168PPB3       |
| K7         | GFC1/IO164PPB3  |
| K8         | VCCIB3          |
| K9         | VCC             |
| K10        | GND             |
| K11        | GND             |
| K12        | GND             |
| K13        | GND             |
| K14        | VCC             |
| K15        | VCCIB1          |
| K16        | GCC1/IO69PPB1   |
| K17        | IO65NPB1        |
| K18        | IO75PDB1        |

| Revision                   | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Page                         |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| Revision 10<br>(continued) | "TBD" for 3.3 V LVCMOS Wide Range in <a href="#">Table 2-28 • I/O Output Buffer Maximum Resistances</a> <sup>1</sup> through <a href="#">Table 2-30 • I/O Output Buffer Maximum Resistances</a> <sup>1</sup> was replaced by "Same as regular 3.3 V" (SAR 33852).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2-26 to 2-28                 |
|                            | The equations in the notes for <a href="#">Table 2-31 • I/O Weak Pull-Up/Pull-Down Resistances</a> were corrected (SAR 32470).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2-28                         |
|                            | "TBD" for 3.3 V LVCMOS Wide Range in <a href="#">Table 2-32 • I/O Short Currents IOSH/IOSL</a> through <a href="#">Table 2-34 • I/O Short Currents IOSH/IOSL</a> was replaced by "Same as regular 3.3 V LVCMOS" (SAR 33852).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 2-29 to 2-31                 |
|                            | In the " <a href="#">3.3 V LVCMOS Wide Range</a> " section, values were added to <a href="#">Table 2-47</a> through <a href="#">Table 2-49</a> for IOSL and IOSH, replacing "TBD" (SAR 33852).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2-39 to 2-40                 |
|                            | The following sentence was deleted from the " <a href="#">2.5 V LVCMOS</a> " section (SAR 24916): "It uses a 5 V–tolerant input buffer and push-pull output buffer."                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2-47                         |
|                            | The table notes were revised for <a href="#">Table 2-90 • LVDS Minimum and Maximum DC Input and Output Levels</a> (SAR 33859).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2-66                         |
|                            | Values were added for $F_{DDRIMAX}$ and $F_{DDOMAX}$ in <a href="#">Table 2-102 • Input DDR Propagation Delays</a> and <a href="#">Table 2-104 • Output DDR Propagation Delays</a> (SAR 23919).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 2-78, 2-80                   |
|                            | <a href="#">Table 2-115 • ProASIC3 CCC/PLL Specification</a> was updated. A note was added to indicate that when the CCC/PLL core is generated by Microsemi core generator software, not all delay values of the specified delay increments are available (SAR 25705).                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 2-90                         |
|                            | The following figures were deleted (SAR 29991). Reference was made to a new application note, <i>Simultaneous Read-Write Operations in Dual-Port SRAM for Flash-Based cSoCs and FPGAs</i> , which covers these cases in detail (SAR 21770).<br>Figure 2-34 • Write Access after Write onto Same Address<br>Figure 2-35 • Read Access after Write onto Same Address<br>Figure 2-35 • Read Access after Write onto Same Address<br>The port names in the SRAM " <a href="#">Timing Waveforms</a> ", SRAM " <a href="#">Timing Characteristics</a> " tables, <a href="#">Figure 2-39 • FIFO Reset</a> , and the FIFO " <a href="#">Timing Characteristics</a> " tables were revised to ensure consistency with the software names (SARs 29991, 30510). | 2-92,<br>2-94,<br>2-99 2-102 |
| July 2010                  | The " <a href="#">Pin Descriptions</a> " chapter has been added (SAR 21642).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3-1                          |
|                            | Package names used in the " <a href="#">Package Pin Assignments</a> " section were revised to match standards given in <a href="#">Package Mechanical Drawings</a> (SAR 27395).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 4-1                          |
| July 2010                  | The versioning system for datasheets has been changed. Datasheets are assigned a revision number that increments each time the datasheet is revised. The " <a href="#">ProASIC3 Device Status</a> " table on page IV indicates the status for each device in the device family.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | N/A                          |

| Revision     | Changes                                                                                                                     | Page         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------|--------------|
| Advance v0.3 | The "PLL Macro" section was updated. EXTFB information was removed from this section.                                       | 2-15         |
|              | The CCC Output Peak-to-Peak Period Jitter $F_{CCC\_OUT}$ was updated in Table 2-11 • ProASIC3 CCC/PLL Specification         | 2-29         |
|              | EXTFB was removed from Figure 2-27 • CCC/PLL Macro.                                                                         | 2-28         |
|              | Table 2-13 • ProASIC3 I/O Features was updated.                                                                             | 2-30         |
|              | The "Hot-Swap Support" section was updated.                                                                                 | 2-33         |
|              | The "Cold-Sparing Support" section was updated.                                                                             | 2-34         |
|              | "Electrostatic Discharge (ESD) Protection" section was updated.                                                             | 2-35         |
|              | The LVPECL specification in Table 2-43 • I/O Hot-Swap and 5 V Input Tolerance Capabilities in ProASIC3 Devices was updated. | 2-64         |
|              | In the Bank 1 area of Figure 2-72, VMV2 was changed to VMV1 and VCCIB2 was changed to VCC <sub>I</sub> B1.                  | 2-97         |
|              | The VJTAG and I/O pin descriptions were updated in the "Pin Descriptions" section.                                          | 2-50         |
|              | The "JTAG Pins" section was updated.                                                                                        | 2-51         |
|              | "128-Bit AES Decryption" section was updated to include M7 device information.                                              | 2-53         |
|              | Table 3-6 was updated.                                                                                                      | 3-6          |
|              | Table 3-7 was updated.                                                                                                      | 3-6          |
|              | In Table 3-11, PAC4 was updated.                                                                                            | 3-93-8       |
|              | Table 3-20 was updated.                                                                                                     | 3-20         |
|              | The note in Table 3-32 was updated.                                                                                         | 3-27         |
|              | All Timing Characteristics tables were updated from LVTTTL to Register Delays                                               | 3-31 to 3-73 |
|              | The Timing Characteristics for RAM4K9, RAM512X18, and FIFO were updated.                                                    | 3-85 to 3-90 |
|              | $F_{TCKMAX}$ was updated in Table 3-110.                                                                                    | 3-97         |
| Advance v0.2 | Figure 2-11 was updated.                                                                                                    | 2-9          |
|              | The "Clock Resources (VersaNets)" section was updated.                                                                      | 2-9          |
|              | The "VersaNet Global Networks and Spine Access" section was updated.                                                        | 2-9          |
|              | The "PLL Macro" section was updated.                                                                                        | 2-15         |
|              | Figure 2-27 was updated.                                                                                                    | 2-28         |
|              | Figure 2-20 was updated.                                                                                                    | 2-19         |
|              | Table 2-5 was updated.                                                                                                      | 2-25         |
|              | Table 2-6 was updated.                                                                                                      | 2-25         |
|              | The "FIFO Flag Usage Considerations" section was updated.                                                                   | 2-27         |
|              | Table 2-13 was updated.                                                                                                     | 2-30         |
|              | Figure 2-24 was updated.                                                                                                    | 2-31         |
|              | The "Cold-Sparing Support" section is new.                                                                                  | 2-34         |