



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - Microprocessors](#)

Embedded microprocessors are specialized computing chips designed to perform specific tasks within an embedded system. Unlike general-purpose microprocessors found in personal computers, embedded microprocessors are tailored for dedicated functions within larger systems, offering optimized performance, efficiency, and reliability. These microprocessors are integral to the operation of countless electronic devices, providing the computational power necessary for controlling processes, handling data, and managing communications.

Applications of [Embedded - Microprocessors](#)

Embedded microprocessors are utilized across a broad spectrum of applications, making them indispensable in

Details

Product Status	Active
Core Processor	Z80
Number of Cores/Bus Width	1 Core, 8-Bit
Speed	8MHz
Co-Processors/DSP	-
RAM Controllers	-
Graphics Acceleration	No
Display & Interface Controllers	-
Ethernet	-
SATA	-
USB	-
Voltage - I/O	5.0V
Operating Temperature	-40°C ~ 100°C (TA)
Security Features	-
Package / Case	40-DIP (0.620", 15.75mm)
Supplier Device Package	40-PDIP
Purchase URL	https://www.e-xfl.com/product-detail/zilog/z84c0008peg

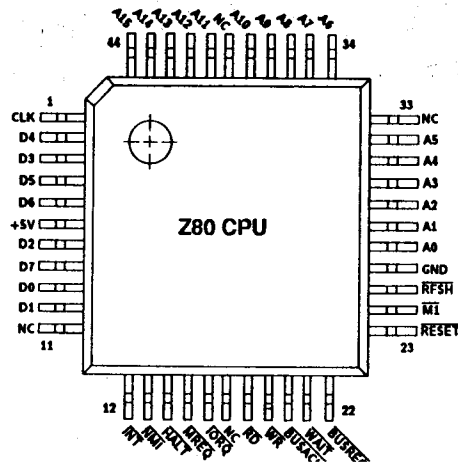


Figure 2a. 44-Pin LQFP, Pin Assignments
(Only available for 84C00)

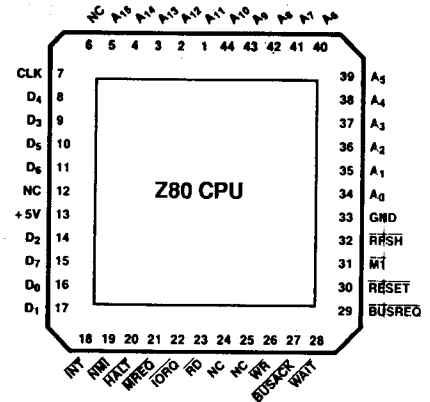


Figure 2b. 44-Pin Chip Carrier Pin Assignments

GENERAL DESCRIPTION

The CPUs are fourth-generation enhanced microprocessors with exceptional computational power. They offer higher system throughput and more efficient memory utilization than comparable second- and third-generation microprocessors. The internal registers contain 208 bits of read/write memory that are accessible to the programmer. These registers include two sets of six general-purpose registers which may be used individually as either 8-bit registers or as 16-bit register pairs. In addition, there are two sets of accumulator and flag registers. A group of "Exchange" instructions makes either set of main or alternate registers accessible to the programmer. The alternate set allows operation in foreground-background mode or it may be reserved for very fast interrupt response.

The CPU also contains a Stack Pointer, Program Counter, two index registers, a Refresh register (counter), and an Interrupt register. The CPU is easy to incorporate into a system since it requires only a single +5V power source. All output signals are fully decoded and timed to control standard memory or peripheral circuits; the CPU is supported by an extensive family of peripheral controllers. The internal block diagram (Figure 3) shows the primary functions of the processors. Subsequent text provides more detail on the I/O controller family, registers, instruction set, interrupts and daisy chaining, and CPU timing.

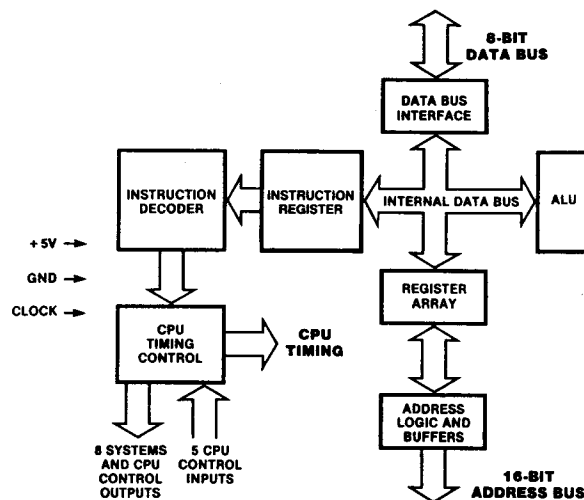


Figure 3. Z80C CPU Block Diagram

16-BIT LOAD GROUP (Continued)

Mnemonic	Symbolic Operation	S	Z	Flags	P/V	N	C	76	543	210	Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
LD IX, (nn)	$IX_H \leftarrow (nn+1)$ $IX_L \leftarrow (nn)$	•	•	X	•	X	•	•	11	011 101	DD	4	6	20	
									00	101 010	2A				
									$\leftarrow n \rightarrow$						
									$\leftarrow n \rightarrow$						
LD IY, (nn)	$IY_H \leftarrow (nn+1)$ $IY_L \leftarrow (nn)$	•	•	X	•	X	•	•	11	111 101	FD	4	6	20	
									00	101 010	2A				
									$\leftarrow n \rightarrow$						
									$\leftarrow n \rightarrow$						
LD (nn), HL	$(nn+1) \leftarrow H$ $(nn) \leftarrow L$	•	•	X	•	X	•	•	00	100 010	22	3	5	16	
									$\leftarrow n \rightarrow$						
									$\leftarrow n \rightarrow$						
LD (nn), dd	$(nn+1) \leftarrow dd_H$ $(nn) \leftarrow dd_L$	•	•	X	•	X	•	•	11	101 101	ED	4	6	20	
									01	dd0 011					
									$\leftarrow n \rightarrow$						
									$\leftarrow n \rightarrow$						
LD (nn), IX	$(nn+1) \leftarrow IX_H$ $(nn) \leftarrow IX_L$	•	•	X	•	X	•	•	11	011 101	DD	4	6	20	
									00	100 010	22				
									$\leftarrow n \rightarrow$						
									$\leftarrow n \rightarrow$						
LD (nn), IY	$(nn+1) \leftarrow IY_H$ $(nn) \leftarrow IY_L$	•	•	X	•	X	•	•	11	111 101	FD	4	6	20	
									00	100 010	22				
									$\leftarrow n \rightarrow$						
									$\leftarrow n \rightarrow$						
LD SP, HL	$SP \leftarrow HL$	•	•	X	•	X	•	•	11	111 001	F9	1	1	6	
LD SP, IX	$SP \leftarrow IX$	•	•	X	•	X	•	•	11	011 101	DD	2	2	10	
									11	111 001	F9				
LD SP, IY	$SP \leftarrow IY$	•	•	X	•	X	•	•	11	111 101	FD	2	2	10	
									11	111 001	F9				
PUSH qq	$(SP-2) \leftarrow qq_L$ $(SP-1) \leftarrow qq_H$ $SP \rightarrow SP-2$	•	•	X	•	X	•	•	11	qq0 101		1	3	11	qq BC
															01 DE
															10 HL
PUSH IX	$(SP-2) \leftarrow IX_L$ $(SP-1) \leftarrow IX_H$ $SP \rightarrow SP-2$	•	•	X	•	X	•	•	11	011 101	DD	2	4	15	11 AF
									11	100 101	E5				
PUSH IY	$(SP-2) \leftarrow IY_L$ $(SP-1) \leftarrow IY_H$ $SP \rightarrow SP-2$	•	•	X	•	X	•	•	11	111 101	FD	2	4	15	
									11	100 101	E5				
POP qq	$qq_H \leftarrow (SP+1)$ $qq_L \leftarrow (SP)$ $SP \rightarrow SP+2$	•	•	X	•	X	•	•	11	qq0 001		1	3	10	
POP IX	$IX_H \leftarrow (SP+1)$ $IX_L \leftarrow (SP)$ $SP \rightarrow SP+2$	•	•	X	•	X	•	•	11	011 101	DD	2	4	14	
									11	100 001	E1				
POP IY	$IY_H \leftarrow (SP+1)$ $IY_L \leftarrow (SP)$ $SP \rightarrow SP+2$	•	•	X	•	X	•	•	11	111 101	FD	2	4	14	
									11	100 001	E1				

NOTE: (PAIR)_H, (PAIR)_L refer to high order and low order eight bits of the register pair respectively, e.g., BC_L = C, AF_H = A.

EXCHANGE, BLOCK TRANSFER, BLOCK SEARCH GROUPS (Continued)

Mnemonic	Symbolic Operation	Flags			Opcode				No. of Bytes	No. of M Cycles	No. of T States	Comments
		S	Z	H	P/V	N	C	76 543 210 Hex				
CPIR	A ← (HL)	†	†	X	†	X	†	11 101 101 ED	2	5	21	If BC ≠ 0 and A ≠ (HL)
	HL ← HL + 1							10 110 001 B1	2	4	16	If BC = 0 or A = (HL)
	BC ← BC - 1											
	Repeat until A = (HL) or BC = 0											
CPD	A ← (HL)	†	†	X	†	X	†	11 101 101 ED	2	4	16	
	HL ← HL - 1							10 101 001 A9				
	BC ← BC - 1											
CPDR	A ← (HL)	†	†	X	†	X	†	11 101 101 ED	2	5	21	If BC ≠ 0 and A ≠ (HL)
	HL ← HL - 1							10 111 001 B9	2	4	16	If BC = 0 or A = (HL)
	BC ← BC - 1											
	Repeat until A = (HL) or BC = 0											

NOTE: ① P/V flag is 0 if the result of BC - 1 = 0, otherwise P/V = 1.
 ② P/V flag is 0 only at completion of instruction.
 ③ Z flag is 1 if A = (HL), otherwise Z = 0.

8-BIT ARITHMETIC AND LOGICAL GROUP

Mnemonic	Symbolic Operation	S			Z			Flags H			P/V			N			C			Opcode			Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
																				76	543	210					
ADD A, r	A ← A+r	†	†	X	†	X	V	0	†	10	000	r	1	1	4	r	Reg.										
ADD A, n	A ← A+n	†	†	X	†	X	V	0	†	11	000	110	2	2	7	000	B										
												← n →				001	C										
																010	D										
ADD A, (HL)	A ← A+(HL)	†	†	X	†	X	V	0	†	10	000	110	1	2	7	011	E										
ADD A, (IX+d)	A ← A+(IX+d)	†	†	X	†	X	V	0	†	11	011	101	DD	3	5	19	100	H									
										10	000	110				101	L										
												← d →				111	A										
ADD A, (IY+d)	A ← A+(IY+d)	†	†	X	†	X	V	0	†	11	111	101	FD	3	5	19											
										10	000	110															
												← d →															
ADC A, s	A ← A+s+CY	†	†	X	†	X	V	0	†		001						s is any of r, n, (HL), (IX+d), (IY+d) as shown for ADD instruction. The indicated bits replace the 000 in the ADD set above.										
SUB s	A ← A-s	†	†	X	†	X	V	1	†		010																
SBC A, s	A ← A-s-CY	†	†	X	†	X	V	1	†		011																
AND s	A ← A>s	†	†	X	1	X	P	0	0		100																
OR s	A ← A>s	†	†	X	0	X	P	0	0		110																
XOR s	A ← A⊕s	†	†	X	0	X	P	0	0		101																
CP s	A-s	†	†	X	†	X	V	1	†		111																

8-BIT ARITHMETIC AND LOGICAL GROUP (Continued)

Mnemonic	Symbolic Operation	Flags			P/V/N/C			Opcode			Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
		S	Z	H				76	543	210					
INC r	$r \leftarrow r + 1$	†	†	X	†	X	V	0	•	00 r	100	1	1	4	
INC (HL)	(HL) \leftarrow (HL) + 1	†	†	X	†	X	V	0	•	00 110	100	1	3	11	
INC (IX+d)	(IX+d) \leftarrow (IX+d) + 1	†	†	X	†	X	V	0	•	11 011 101	DD	3	6	23	
										00 110	100				
										$\leftarrow d \rightarrow$					
INC (IY+d)	(IY+d) \leftarrow (IY+d) + 1	†	†	X	†	X	V	0	•	11 111 101	FD	3	6	23	
										00 110	100				
										$\leftarrow d \rightarrow$					
DEC m	$m \leftarrow m - 1$	†	†	X	†	X	V	1	•		101				

NOTE: m is any of r, (HL), (IX+d), (IY+d) as shown for INC. DEC same format and states as INC. Replace 100 with 101 in opcode.

GENERAL-PURPOSE ARITHMETIC AND CPU CONTROL GROUPS

Mnemonic	Symbolic Operation	Flags			P/V/N/C			Opcode			Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
		S	Z	H				76	543	210					
DAA	@	†	†	X	†	X	P	•	†	00 100 111	27	1	1	4	Decimal adjust accumulator
CPL	$A \leftarrow A$	•	•	X	1	X	•	1	•	00 101 111	2F	1	1	4	Complement accumulator (one's complement)
NEG	$A \leftarrow 0 - A$	†	†	X	†	X	V	1	†	11 101 101	ED	2	2	8	Negate acc. (two's complement)
								01	000	100	44				
CCF	$CY \leftarrow CY$	•	•	X	X	X	•	0	†	00 111 111	3F	1	1	4	Complement carry flag
SCF	$CY \leftarrow 1$	•	•	X	0	X	•	0	1	00 110 111	37	1	1	4	Set carry flag
NOP	No operation	•	•	X	•	X	•	•	•	00 000 000	00	1	1	4	
HALT	CPU halted	•	•	X	•	X	•	•	•	01 110 110	76	1	1	4	
DI *	$IFF \leftarrow 0$	•	•	X	•	X	•	•	•	11 110 011	F3	1	1	4	
EI *	$IFF \leftarrow 1$	•	•	X	•	X	•	•	•	11 111 011	FB	1	1	4	
IM 0	Set interrupt mode 0	•	•	X	•	X	•	•	•	11 101 101	ED	2	2	8	
								01	000	110	46				
IM 1	Set interrupt mode 1	•	•	X	•	X	•	•	•	11 101 101	ED	2	2	8	
								01	010	110	56				
IM 2	Set interrupt mode 2	•	•	X	•	X	•	•	•	11 101 101	ED	2	2	8	
								01	011	110	5E				

NOTES: @ converts accumulator content into packed BCD following add or subtract with packed BCD operands.

IFF indicates the interrupt enable flip-flop.





CY indicates the carry flip-flop.

* indicates interrupts are not sampled at the end of EI or DI.

16-BIT ARITHMETIC GROUP

Mnemonic	Symbolic Operation	S	Z	Flags				Opcode				Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments	
				H	P/V	N	C	76	543	210							
ADD HL, ss	HL ← HL + ss	•	•	X	X	X	•	0	†	00	ssl	001		1	3	11	ss Reg. 00 BC
ADC HL, ss	HL ← HL + ss + CY	†	†	X	X	X	V	0	†	11	101	101	ED	2	4	15	01 DE 10 HL 11 SP
SBC HL, ss	HL ← HL - ss - CY	†	†	X	X	X	V	1	†	11	101	101	ED	2	4	15	01 ss0 010
ADD IX, pp	IX ← IX + pp	•	•	X	X	X	•	0	†	11	011	101	DD	2	4	15	pp Reg. 00 BC 01 DE 10 IX 11 SP
								01		pp1	001						
ADD IY, rr	IY ← IY + rr	•	•	X	X	X	•	0	†	11	111	101	FD	2	4	15	rr Reg. 00 BC
								00		rr1	001						
INC ss	ss ← ss + 1	•	•	X	•	X	•	•	•	00	ss0	011		1	1	6	01 DE
INC IX	IX ← IX + 1	•	•	X	•	X	•	•	•	11	011	101	DD	2	2	10	10 IY 11 SP
								00		100	011	23					
INC IY	IY ← IY + 1	•	•	X	•	X	•	•	•	11	111	101	FD	2	2	10	00 100 011 23
								00		100	011	23					
DEC ss	ss ← ss - 1	•	•	X	•	X	•	•	•	00	ss1	011		1	1	6	
DEC IX	IX ← IX - 1	•	•	X	•	X	•	•	•	11	011	101	DD	2	2	10	00 101 011 2B
								00		101	011	2B					
DEC IY	IY ← IY - 1	•	•	X	•	X	•	•	•	11	111	101	FD	2	2	10	00 101 011 2B
								00		101	011	2B					

ROTATE AND SHIFT GROUP

Mnemonic	Symbolic	S	Z	Flags				Opcode				No. of Bytes	No. of M Cycles	No. of T States	Comments		
	Operation			H	P/V	N	C	76	543	210	Hex						
RLCA		•	•	X	0	X	•	0	†	00	000	111	07	1	1	4	Rotate left circular accumulator.
RLA		•	•	X	0	X	•	0	†	00	010	111	17	1	1	4	Rotate left accumulator.
RRCA		•	•	X	0	X	•	0	†	00	001	111	0F	1	1	4	Rotate right circular accumulator.
RRA		•	•	X	0	X	•	0	†	00	011	111	1F	1	1	4	Rotate right accumulator.

ROTATE AND SHIFT GROUP (Continued)

Symbolic Mnemonic Operation	S	Z	Flags H	P/V	N	C	76	543	210	Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
RLC r			X	0	X	P 0	11 00	001 000	011 r	CB	2	2	8	Rotate left circular register r.
RLC (HL)			X	0	X	P 0	11 00	001 000	011 110	CB	2	4	15	r Reg.
RLC (IX+d)			X	0	X	P 0	11 11	011 001	101 011	DD CB	4	6	23	000 B 001 C 010 D 011 E 001 H 101 L 111 A
RLC (IY+d)			X	0	X	P 0	11 11	111 001	101 011	FD CB	4	6	23	
RL m			X	0	X	P 0	11 00	001 000	110 010					Instruction format and states are as shown for RLCs. To form new opcode, replace 000 or RLCs with shown code.
RRC m			X	0	X	P 0		001						
RR m			X	0	X	P 0		011						
SLA m			X	0	X	P 0		100						
SRA m			X	0	X	P 0		101						
SRL m			X	0	X	P 0		111						
RLD			X	0	X	P 0	11 01	101 101	101 111	ED 6F	2	5	18	
RRD			X	0	X	P 0	11 01	101 100	101 111	ED 67	2	5	18	The content of the upper half of the accumulator is unaffected.

BIT SET, RESET AND TEST GROUP

Mnemonic	Symbolic Operation	S	Z	Flags				Opcode			Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments	
				H	P/V	N	C	76	543	210						
BIT b, r	$Z \leftarrow r_b$	X	†	X	1	X	X	0	•	11 001 011	CB	2	2	8	r Reg.	
								01	b	r					000 B	
BIT b, (HL)	$Z \leftarrow (HL)_b$	X	†	X	1	X	X	0	•	11 001 011	CB	2	3	12	001 C	
								01	b	110					010 D	
BIT b, (IX+d) _b	$Z \leftarrow (IX+d)_b$	X	†	X	1	X	X	0	•	11 011 101	DD	4	5	20	011 E	
								11	001 011	CB					100 H	
								$\leftarrow d \rightarrow$							101 L	
								01	b	110					111 A	
								b Bit Tested								
BIT b, (IY+d) _b	$Z \leftarrow (IY+d)_b$	X	†	X	1	X	X	0	•	11 111 101	FD	4	5	20	000 0	
								11	001 011	CB					001 1	
								$\leftarrow d \rightarrow$							010 2	
								01	b	110					011 3	
SET b, r	$r_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 001 011	CB	2	2	8	100 4	
								11	b	r					101 5	
SET b, (HL)	$(HL)_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 001 011	CB	2	4	15	110 6	
								11	b	110					111 7	
SET b, (IX+d)	$(IX+d)_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 011 101	DD	4	6	23		
								11	001 011	CB						
								$\leftarrow d \rightarrow$								
								11	b	110						
SET b, (IY+d)	$(IY+d)_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 111 101	FD	4	6	23		
								11	001 011	CB						
								$\leftarrow d \rightarrow$								
								11	b	110						
RES b, m	$m_b \leftarrow 0$	•	•	X	•	X	•	•	•	11 101 101	FD	4	6	23		
	$m \leftarrow r, (HL),$							11								
	$(IX+d), (IY+d)$							10								
																To form new opcode replace
																11 of SET b, s
																with 10. Flags
																and time
																states for SET
																instruction.

To form new opcode replace **11** of SET b, s with **10**. Flags and time states for SET instruction.

NOTE: The notation m_b indicates location m, bit b (0 to 7).

JUMP GROUP

Mnemonic	Symbolic Operation	Flags					Opcode			Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments		
		S	Z	H	P/V/N	C	76	543	210							
JP nn	PC ← nn	•	•	X	•	X	•	•	•	11 000 011	C3	3	3	10	cc Condition 000 NZ (non-zero) 001 Z (zero)	
JP cc, nn	If condition cc is true PC←nn, otherwise continue	•	•	X	•	X	•	•	•	11 cc 010		3	3	10	010 NC (non-carry)	
										← n →						011 C (carry)
										← n →						100 PO (parity odd)
										← n →						101 PE (parity even)
JR e	PC ← PC+e	•	•	X	•	X	•	•	•	00 011 000	18	2	3	12	110 P (sign positive) 111 M (sign negative)	
JR C, e	If C=0, continue	•	•	X	•	X	•	•	•	00 111 000	38	2	2	7	If condition not met.	
	If C=1, PC←PC+e									←e-2→						
JR NC, e	If C=1, continue	•	•	X	•	X	•	•	•	00 110 000	30	2	2	7	If condition not met.	
	If C=0, PC←PC+e									←e-2→						
JP Z, e	If Z=0, continue	•	•	X	•	X	•	•	•	00 101 000	28	2	2	7	If condition not met.	
	If Z=1, PC←PC+e									←e-2→						
JR NZ, e	If Z=1, continue	•	•	X	•	X	•	•	•	00 100 000	20	2	2	7	If condition not met.	
	If Z=0, PC←PC+e									←e-2→						
JP (HL)	PC←HL	•	•	X	•	X	•	•	•	11 101 001	E9	1	1	4		
JP (IX)	PC←IX	•	•	X	•	X	•	•	•	11 011 101	DD	2	2	8		
JP (IY)	PC←IY	•	•	X	•	X	•	•	•	11 101 001	E9	2	2	8		
										11 111 101	FD					
DJNZ, e	B←B-1	•	•	X	•	X	•	•	•	11 101 001	E9	2	2	8	If B=0	
	If B=0, continue									←e-2→						
	If B≠0, PC←PC+e															

NOTES: e represents the extension in the relative addressing mode.

e is a signed two's complement number in the range < -126, 129 >.

e - 2 in the opcode provides an effective address of pc + e as PC is incremented by 2 prior to the addition of e.

INPUT AND OUTPUT GROUP

Mnemonic	Symbolic Operation	Flags					Opcode				No. of Bytes	No. of M Cycles	No. of T States	Comments		
		S	Z	H	P/VN	C	76	543	210	Hex						
IN A, (n)	A ← (n)	•	•	X	•	X	•	•	•	•	11 011 01	DB	2	3	11	n to A ₀ ~ A ₇ Acc. to A ₈ ~ A ₁₅
IN r, (C)	r ← (C)	†	†	X	†	X	P	0	•	•	11 101 101	ED	2	3	12	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	if r=110 only the flags will be affected										01 r 000					
INI	(HL) ← (C)	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	4	16	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	B ← B - 1										10 100 010	A2				
INIR	HL ← HL + 1	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	5	21	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	B ← B - 1										10 110 010	B2		(If B ≠ 0)		
	HL ← HL + 1												2	4	16	
	Repeat until B = 0													(If B = 0)		
IND	(HL) ← (C)	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	4	16	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	B ← B - 1										10 101 010	AA				
INDR	HL ← HL - 1	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	5	21	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	(HL) ← (C)	X	1	X	X	X	X	1	X	•	11 101 101	ED	2	(If B ≠ 0)		
	B ← B - 1										10 111 010	BA		4	16	
	HL ← HL - 1												2	(If B = 0)		
	Repeat until B = 0															
OUT (n), A	(n) ← A	•	•	X	•	X	•	•	•	•	11 010 011	D3	2	3	11	n to A ₀ ~ A ₇ Acc. to A ₈ ~ A ₁₅
OUT (C), r	(C) ← r	•	•	X	•	X	•	•	•	•	11 101 101	ED	2	3	12	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
											01 r 001					
OUTI	(C) ← (HL)	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	4	16	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	B ← B - 1										10 100 011	A3				
OTIR	HL ← HL + 1	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	5	21	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	(C) ← (HL)	X	1	X	X	X	X	1	X	•	11 101 101	ED	2	(If B ≠ 0)		
	B ← B - 1										10 110 011	B3		4	16	
	HL ← HL + 1												2	(If B = 0)		
	Repeat until B = 0															
OUTD	(C) ← (HL)	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	4	16	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	B ← B - 1										10 101 011	AB				
OTDR	HL ← HL - 1	X	†	X	X	X	X	1	X	•	11 101 101	ED	2	5	21	C to A ₀ ~ A ₇ B to A ₈ ~ A ₁₅
	(C) ← (HL)	X	1	X	X	X	X	1	X	•	11 101 101	ED	2	(If B ≠ 0)		
	B ← B - 1										10 111 011			4	16	
	HL ← HL - 1												2	(If B = 0)		
	Repeat until B = 0															

NOTES: ① If the result of B - 1 is zero, the Z flag is set; otherwise it is reset.
② Z flag is set upon instruction completion only.

SUMMARY OF FLAG OPERATION

Instructions	D ₇ S	Z	H	P/V	N	D ₀ C	Comments
ADD A, s; ADC A, s	†	†	X	†	X	V 0	8-bit add or add with carry.
SUB s; SBC A, s; CP s; NEG	†	†	X	†	X	V 1	8-bit subtract, subtract with carry, compare and negate accumulator.
AND s	†	†	X	1	X	P 0 0	Logical operation.
OR s, XOR s	†	†	X	0	X	P 0 0	Logical operation.
INC s	†	†	X	†	X	V 0 •	8-bit increment.
DEC s	†	†	X	†	X	V 1 •	8-bit decrement.
ADD DD, ss	•	•	X	X	X	• 0 †	16-bit add.
ADC HL, ss	†	†	X	X	X	V 0 †	16-bit add with carry.
SBC HL, ss	†	†	X	X	X	V 1 †	16-bit subtract with carry.
RLA; RLCA; RRA; RRCA	•	•	X	0	X	• 0 †	Rotate accumulator.
RL m; RLC m; RR m; RRC m; SLA m; SRA m; SRL m	†	†	X	0	X	P 0 †	Rotate and shift locations.
RLD; RRD	†	†	X	0	X	P 0 •	Rotate digit left and right.
DAA	†	†	X	†	X	P • †	Decimal adjust accumulator.
CPL	•	•	X	1	X	• 1 •	Complement accumulator.
SCF	•	•	X	0	X	• 0 1	Set carry.
CCF	•	•	X	X	X	• 0 †	Complement carry.
IN r (C)	†	†	X	0	X	P 0 •	Input register indirect.
INI; IND; OUTI; OUTD	X	†	X	X	X	X 1 •	Block input and output. Z = 1 if B ≠ 0, otherwise Z = 0.
INIR; INDR; OTIR; OTDR	X	1	X	X	X	X 1 •	Block input and output. Z = 1 if B ≠ 0, otherwise Z = 0.
LDI; LDD	X	X	X	0	X	† 0 •	Block transfer instructions. P/V = 1 if BC ≠ 0, otherwise P/V = 0.
LDIR; LDDR	X	X	X	0	X	0 0 •	Block transfer instructions. P/V = 1 if BC ≠ 0, otherwise P/V = 0.
CPI; CPIR; CPD; CPDR	X	†	X	X	X	† 1 •	Block search instructions. Z = 1 if A = (HL), otherwise Z = 0. P/V = 1 if BC ≠ 0, otherwise P/V = 0.
LD A, I; LD A, R	†	†	X	0	X	IFF 0 •	IFF, the content of the interrupt enable flip-flop, (IFF ₂), is copied into the P/V flag.
BIT b, s	X	†	X	1	X	X 0 •	The state of bit b of location s is copied into the Z flag.

SYMBOLIC NOTATION

Symbol	Operation	Symbol	Operation
S	Sign flag. S = 1 if the MSB of the result is 1.	†	The flag is affected according to the result of the operation.
Z	Zero flag. Z = 1 if the result of the operation is 0.	•	The flag is unchanged by the operation.
P/V	Parity or overflow flag. Parity (P) and overflow (V) share the same flag. Logical operations affect this flag with the parity of the result while arithmetic operations affect this flag with the overflow of the result. If P/V holds parity: P/V = 1 if the result of the operation is even; P/V = 0 if result is odd. If P/V holds overflow, P/V = 1 if the result of the operation produced an overflow. If P/V does not hold overflow, P/V = 0.	0	The flag is reset by the operation.
H*	Half-carry flag. H = 1 if the add or subtract operation produced a carry into, or borrow from, bit 4 of the accumulator.	1	The flag is set by the operation.
N*	Add/Subtract flag. N = 1 if the previous operation was a subtract.	X	The flag is indeterminate.
C	Carry/Link flag. C = 1 if the operation produced a carry from the MSB of the operand or result.	V	P/V flag affected according to the overflow result of the operation.
		P	P/V flag affected according to the parity result of the operation.
		r	Any one of the CPU registers A, B, C, D, E, H, L.
		s	Any 8-bit location for all the addressing modes allowed for the particular instruction.
		ss	Any 16-bit location for all the addressing modes allowed for that instruction.
		ii	Any one of the two index registers IX or IY.
		R	Refresh counter.
		n	8-bit value in range < 0, 255 >.
		nn	16-bit value in range < 0, 65535 >.

* H and N flags are used in conjunction with the decimal adjust instruction (DAA) to properly correct the result into packed BCD format following addition or subtraction using operands with packed BCD format.

CPU REGISTERS

Figure 4 shows three groups of registers within the CPU. The first group consists of duplicate sets of 8-bit registers: a principal set and an alternate set [designated by ' (prime), e.g., A']. Both sets consist of the Accumulator register, the Flag register, and six general-purpose registers. Transfer of data between these duplicate sets of registers is accomplished by use of "Exchange" instructions. The result is faster response to interrupts and easy, efficient implementation of such versatile programming techniques

as background-foreground data processing. The second set of registers consists of six registers with assigned functions. These are the I (Interrupt register), the R (Refresh register), the IX and IY (Index registers), the SP (Stack Pointer), and the PC (Program Counter). The third group consists of two interrupt status flip-flops, plus an additional pair of flip-flops which assists in identifying the interrupt mode at any particular time. Table 1 provides further information on these registers.

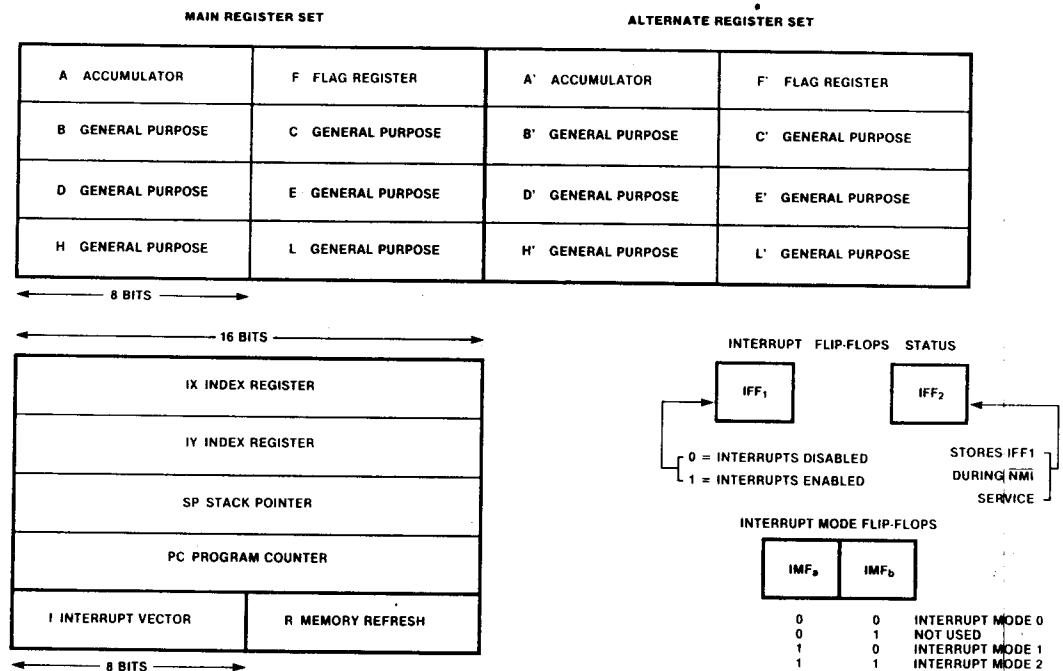


Figure 4. CPU Registers

INTERRUPTS: GENERAL OPERATION

The CPU accepts two interrupt input signals: $\overline{\text{NMI}}$ and $\overline{\text{INT}}$. The $\overline{\text{NMI}}$ is a non-maskable interrupt and has the highest priority. $\overline{\text{INT}}$ is a lower priority interrupt and it requires that interrupts be enabled in software in order to operate. $\overline{\text{INT}}$ can be connected to multiple peripheral devices in a wired-OR configuration.

The Z80 has a single response mode for interrupt service on the non-maskable interrupt. The maskable interrupt, $\overline{\text{INT}}$, has three programmable response modes available. These are:

- Mode 0 — similar to the 8080 microprocessor.
- Mode 1 — Peripheral Interrupt service, for use with non-8080/Z80 systems.

- Mode 2 — a vectored interrupt scheme, usually daisy-chained, for use with the Z80 Family and compatible peripheral devices.

The CPU services interrupts by sampling the $\overline{\text{NMI}}$ and $\overline{\text{INT}}$ signals at the rising edge of the last clock of an instruction. Further interrupt service processing depends upon the type of interrupt that was detected. Details on interrupt responses are shown in the CPU Timing Section.

Non-Maskable Interrupt ($\overline{\text{NMI}}$). The nonmaskable interrupt cannot be disabled by program control and therefore will be accepted at all times by the CPU. $\overline{\text{NMI}}$ is usually reserved for servicing only the highest priority type interrupts, such as that for orderly shutdown after power

PIN DESCRIPTIONS

A₀-A₁₅. *Address Bus* (output, active High, 3-state). A₀-A₁₅ form a 16-bit address bus. The Address Bus provides the address for memory data bus exchanges (up to 64K bytes) and for I/O device exchanges.

BUSACK. *Bus Acknowledge* (output, active Low). Bus Acknowledge indicates to the requesting device that the CPU address bus, data bus, and control signals $\overline{\text{MREQ}}$, $\overline{\text{IORQ}}$, $\overline{\text{RD}}$, and $\overline{\text{WR}}$ have entered their high-impedance states. The external circuitry can now control these lines.

BUSREQ. *Bus Request* (input, active Low). Bus Request has a higher priority than $\overline{\text{NMI}}$ and is always recognized at the end of the current machine cycle. $\overline{\text{BUSREQ}}$ forces the CPU address bus, data bus, and control signals $\overline{\text{MREQ}}$, $\overline{\text{IORQ}}$, $\overline{\text{RD}}$, and $\overline{\text{WR}}$ to go to a high-impedance state so that other devices can control these lines. $\overline{\text{BUSREQ}}$ is normally wired-OR and requires an external pullup for these applications. Extended $\overline{\text{BUSREQ}}$ periods due to extensive DMA operations can prevent the CPU from properly refreshing dynamic RAMs.

D₀-D₇. *Data Bus* (input/output, active High, 3-state). D₀-D₇ constitute an 8-bit bidirectional data bus, used for data exchanges with memory and I/O.

HALT. *Halt State* (output, active Low). $\overline{\text{HALT}}$ indicates that the CPU has executed a Halt instruction and is awaiting either a nonmaskable or a maskable interrupt (with the mask enabled) before operation can resume. While halted, the CPU executes NOPs to maintain memory refresh.

INT. *Interrupt Request* (input, active Low). Interrupt Request is generated by I/O devices. The CPU honors a request at the end of the current instruction if the internal software-controlled interrupt enable flip-flop (IFF) is enabled. $\overline{\text{INT}}$ is normally wired-OR and requires an external pullup for these applications.

IORQ. *Input/Output Request* (output, active Low, 3-state). $\overline{\text{IORQ}}$ indicates that the lower half of the address bus holds a valid I/O address for an I/O read or write operation. $\overline{\text{IORQ}}$ is also generated concurrently with $\overline{\text{M1}}$ during an interrupt acknowledge cycle to indicate that an interrupt response vector can be placed on the data bus.

M1. *Machine Cycle One* (output, active Low). $\overline{\text{M1}}$, together with $\overline{\text{MREQ}}$, indicates that the current machine cycle is the opcode fetch cycle of an instruction execution. $\overline{\text{M1}}$, together with $\overline{\text{IORQ}}$, indicates an interrupt acknowledge cycle.

MREQ. *Memory Request* (output, active Low, 3-state). $\overline{\text{MREQ}}$ indicates that the address bus holds a valid address for a memory read or memory write operation.

NMI. *Non-Maskable Interrupt* (input, negative edge-triggered). $\overline{\text{NMI}}$ has a higher priority than $\overline{\text{INT}}$. $\overline{\text{NMI}}$ is always recognized at the end of the current instruction, independent of the status of the interrupt enable flip-flop, and automatically forces the CPU to restart at location 0066H.

RD. *Read* (output, active Low, 3-state). $\overline{\text{RD}}$ indicates that the CPU wants to read data from memory or an I/O device. The addressed I/O device or memory should use this signal to gate data onto the CPU data bus.

RESET. *Reset* (input, active Low). $\overline{\text{RESET}}$ initializes the CPU as follows: it resets the interrupt enable flip-flop, clears the PC and Registers I and R, and sets the interrupt status to Mode 0. During reset time, the address and data bus go to a high-impedance state, and all control output signals go to the inactive state. Note that $\overline{\text{RESET}}$ must be active for a minimum of three full clock cycles before the reset operation is complete.


RFSH. *Refresh* (output, active Low). $\overline{\text{RFSH}}$, together with $\overline{\text{MREQ}}$, indicates that the lower seven bits of the system's address bus can be used as a refresh address to the system's dynamic memories.

WAIT. *Wait* (input, active Low). $\overline{\text{WAIT}}$ indicates to the CPU that the addressed memory or I/O devices are not ready for a data transfer. The CPU continues to enter a Wait state as long as this signal is active. Extended $\overline{\text{WAIT}}$ periods can prevent the CPU from properly refreshing dynamic memory.

WR. *Write* (output, active Low, 3-state). $\overline{\text{WR}}$ indicates that the CPU data bus holds valid data to be stored at the addressed memory or I/O location.


Interrupt Request/Acknowledge Cycle. The CPU samples the interrupt signal with the rising edge of the last clock cycle at the end of any instruction (Figure 8). When an interrupt is accepted, a special M1 cycle is generated.

During this $\overline{M1}$ cycle, \overline{IORQ} becomes active (instead of \overline{MREQ}) to indicate that the interrupting device can place an 8-bit vector on the data bus. The CPU automatically adds two Wait states to this cycle.

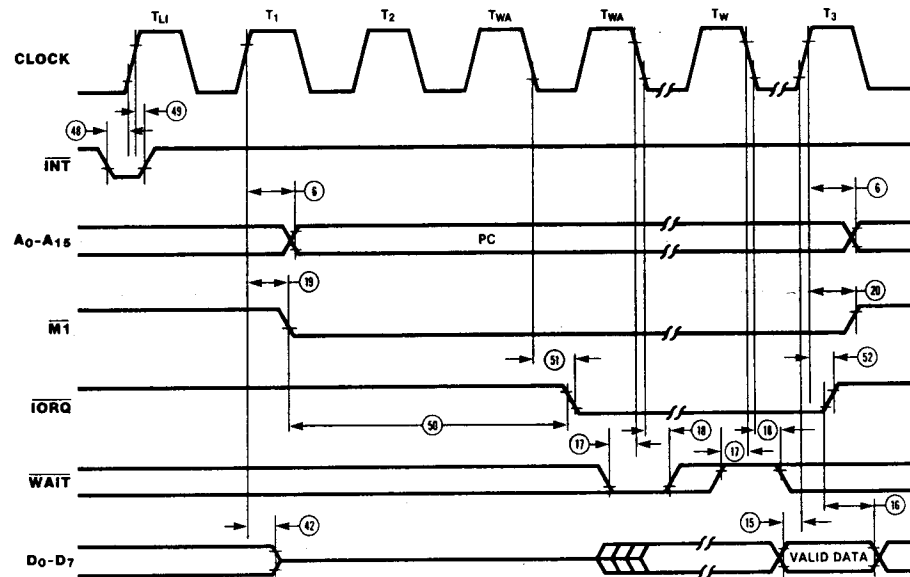

Bus Request/Acknowledge Cycle. The CPU samples $\overline{\text{BUSREQ}}$ with the rising edge of the last clock period of any machine cycle (Figure 10). If $\overline{\text{BUSREQ}}$ is active, the CPU sets its address, data, and $\overline{\text{MREQ}}$, $\overline{\text{IORQ}}$, RD , and WR lines

to a high-impedance state with the rising edge of the next clock pulse. At that time, any external device can take control of these lines, usually to transfer data between memory and I/O devices.

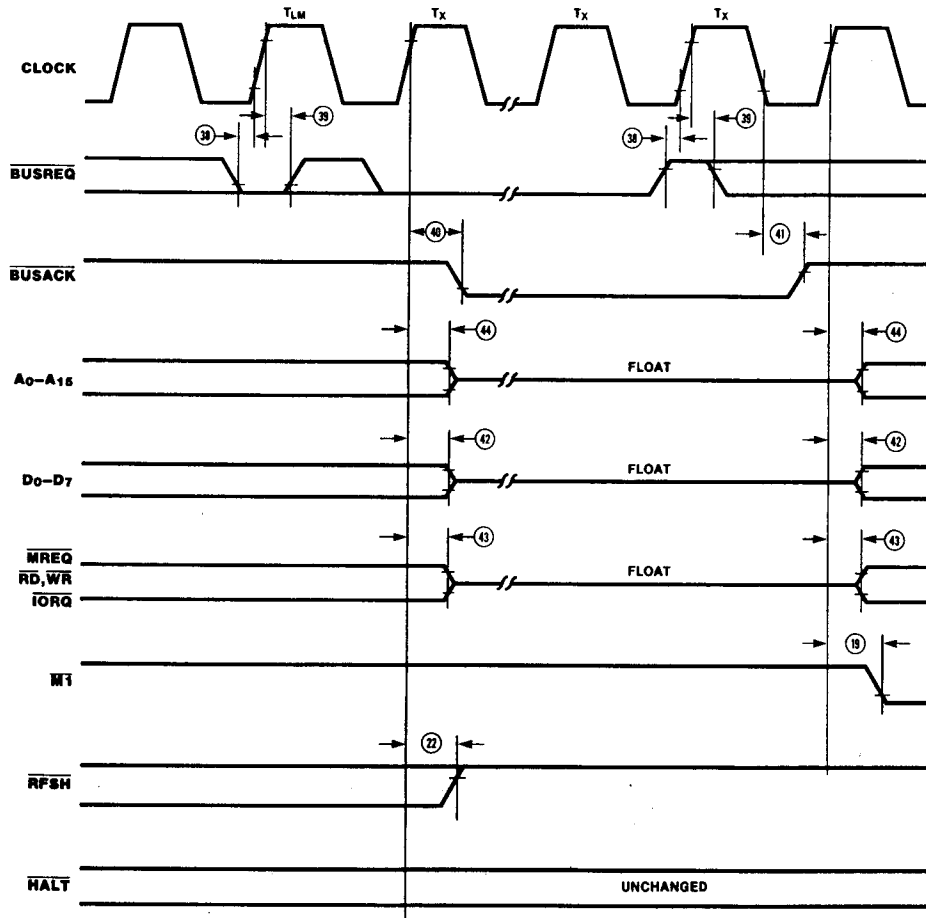


NOTES: 1) T_{LM} = Last state of any M cycle.
2) T_X = An arbitrary clock cycle used by requesting device.

Figure 10. BUS Request/Acknowledge Cycle

Halt Acknowledge Cycle. When the CPU receives a $\overline{\text{HALT}}$ instruction, it executes NOP states until either an $\overline{\text{INT}}$ or $\overline{\text{NMI}}$ input is received. When in the Halt state, the $\overline{\text{HALT}}$ output is

active and remains so until an interrupt is received (Figure 11). $\overline{\text{INT}}$ will also force a Halt exit.

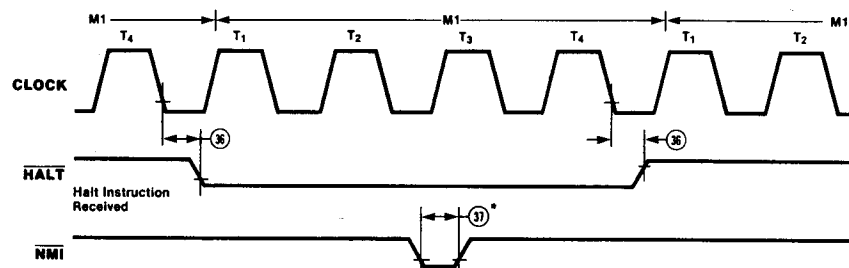

*Although $\overline{\text{NMI}}$ is an asynchronous input, to guarantee its being recognized on the following machine cycle, $\overline{\text{NMI}}$'s falling edge must occur no later than the rising edge of the clock cycle preceding the last state of any instruction cycle (T_{LJ}).

Figure 11. Halt Acknowledge

Reset Cycle. $\overline{\text{RESET}}$ must be active for at least three clock cycles for the CPU to properly accept it. As long as $\overline{\text{RESET}}$ remains active, the address and data buses float, and the control outputs are inactive. Once $\overline{\text{RESET}}$ goes inactive, two

internal T cycles are consumed before the CPU resumes normal processing operation. $\overline{\text{RESET}}$ clears the PC register, so the first opcode fetch will be to location 0000H (Figure 12).

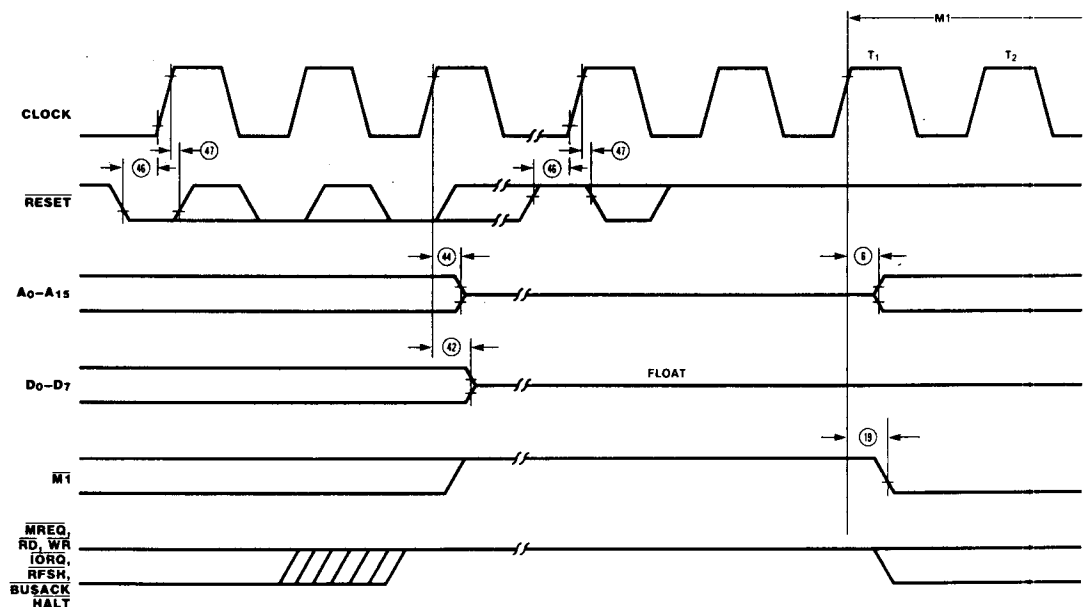


Figure 12. Reset Cycle

Power-Down mode of operation (Only applies to CMOS Z80 CPU).

CMOS Z80 CPU supports Power-Down mode of operation.

This mode is also referred to as the "standby mode", and supply current for the CPU goes down as low as 10 μA (Where specified as I_{CC2}).

Power-Down Acknowledge Cycle. When the clock input to the CPU is stopped at either a High or Low level, the CPU stops its operation and maintains all registers and control signals. However, I_{CC2} (standby supply current) is guaranteed only when the system clock is stopped at a Low

level during T_4 of the machine cycle following the execution of the HALT instruction. The timing diagram for the power-down function, when implemented with the HALT instruction, is shown in Figure 13.

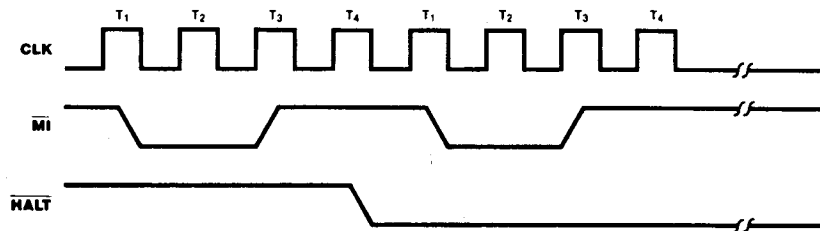


Figure 13. Power-Down Acknowledge

ABSOLUTE MAXIMUM RATINGS

Voltage on V_{CC} with respect to V_{SS} $-0.3V$ to $+7V$
Voltages on all inputs with respect
to V_{SS} $-0.3V$ to $V_{CC} + 0.3V$
Operating Ambient
Temperature See Ordering Information
Storage Temperature $-65^{\circ}C$ to $+150^{\circ}C$

Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

STANDARD TEST CONDITIONS

The DC Characteristics and capacitance sections below apply for the following standard test conditions, unless otherwise noted. All voltages are referenced to GND (0V). Positive current flows into the referenced pin.

The Ordering Information section lists temperature ranges and product numbers. Package drawings are in the Package Information section. Refer to the Literature List for additional documentation.

Available operating temperature ranges are:

■ **S = $0^{\circ}C$ to $+70^{\circ}C$**


Voltage Supply Range:

NMOS: $+4.75V \leq V_{CC} \leq +5.25V$

CMOS: $+4.50V \leq V_{CC} \leq +5.50V$

■ **E = $-40^{\circ}C$ to $100^{\circ}C$, $+4.50V \leq V_{CC} \leq +5.50V$**

All ac parameters assume a load capacitance of 100 pf. Add 10 ns delay for each 50 pf increase in load up to a maximum of 200 pf for the data bus and 100 pf for address and control lines. AC timing measurements are referenced to 1.5 volts (except for clock, which is referenced to the 10% and 90% points).



DC CHARACTERISTICS (Z84C00/CMOS Z80 CPU)

Symbol	Parameter	Min	Max	Unit	Condition
V_{ILC}	Clock Input Low Voltage	-0.3	0.45	V	
V_{IHC}	Clock Input High Voltage	$V_{CC} - .6$	$V_{CC} + .3$	V	
V_{IL}	Input Low Voltage	-0.3	0.8	V	
V_{IH}	Input High Voltage	2.2	V_{CC}	V	
V_{OL}	Output Low Voltage		0.4	V	$I_{OL} = 2.0 \text{ mA}$
V_{OH1}	Output High Voltage	2.4		V	$I_{OH} = -1.6 \text{ mA}$
V_{OH2}	Output High Voltage	$V_{CC} - 0.8$		V	$I_{OH} = -250 \mu\text{A}$
I_{CC1}	Power Supply Current	4 MHz	20	mA	$V_{CC} = 5\text{V}$
			30	mA	$V_{IH} = V_{CC} - 0.2\text{V}$
			40	mA	$V_{IL} = 0.2\text{V}$
			50	mA	$V_{CC} = 5\text{V}$
			100	mA	$V_{CC} = 5\text{V}$
I_{CC2}	Standby Supply Current		10	μA	$V_{CC} = 5\text{V}$ CLK = (0) $V_{IH} = V_{CC} - 0.2\text{V}$ $V_{IL} = 0.2\text{V}$
I_{LI}	Input Leakage Current	-10	10	μA	$V_{IN} = 0.4 \text{ to } V_{CC}$
I_{LO}	3-State Output Leakage Current in Float	-10	10^2	μA	$V_{OUT} = 0.4 \text{ to } V_{CC}$

1. Measurements made with outputs floating.

2. A_{15} - A_0 , D_7 - D_0 , $MREQ$, $IORQ$, RD , and WR .

3. I_{CC2} standby supply current is guaranteed only when the supplied clock is stopped at a low level during T_4 of the machine cycle immediately following the execution of a HALT instruction.

CAPACITANCE

Symbol	Parameter	Min	Max	Unit
C_{CLOCK}	Clock Capacitance		10	pf
C_{IN}	Input Capacitance		5	pf
C_{OUT}	Output Capacitance		15	pf

$T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$.

Unmeasured pins returned to ground.

AC CHARACTERISTICS† (Z84C00/CMOS Z80 CPU; Continued)

V_{CC}=5.0V ± 10%, unless otherwise specified

No	Symbol	Parameter	Z84C0004**		Z84C0006		Z84C0008		Z84C0010		Z84C0020[1]		Unit	Note
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
39	ThBUSREQ (Cr)	/BUSREQ hold time after Clock Rise	10		10		10		10		10		nS	
40	TdCr (BUSACKf)	Clock Rise to /BASACK Fall delay		100		90		80		75		40	nS	
41	TdCf (BUSACKr)	Clock Fall to /BASACK Rise delay		100		90		80		75		40	nS	
42	TdCr(Dz)	Clock Rise to Data float delay		90		80		70		65		40	nS	
43	TdCr(CTz)	Clock Rise to Control Outputs Float Delay (/MREQ, /IORQ, /RD and /WR)		80		70		60		65		40	nS	
44	TdCr(Az)	Clock Rise to Address float delay		90		80		70		75		40	nS	
45	TdCTr(A)	Address Hold time from /MREQ, /IORQ, /RD or /WR	80*		35*		20*		20*		0*		nS	
46	TsRESET(Cr)	/RESET to Clock Rise setup time	60		60		45		40		15		nS	
47	ThRESET(Cr)	/RESET to Clock Rise Hold time	10		10		10		10		10		nS	
48	TsINTf(Cr)	/INT Fall to Clock Rise Setup Time	80		70		55		50		15		nS	
49	ThINTr(Cr)	/INT Rise to Clock Rise Hold Time	10		10		10		10		10		nS	
50	TdM1f (IORQf)	/M1 Fall to /IORQ Fall delay	565*		359*		270*		220*		100*		nS	
51	TdCf(IORQf)	/Clock Fall to /IORQ Fall delay	85		70		60		55		45		nS	
52	TdCf(IORQr)	Clock Rise to /IORQ Rise delay	85		70		60		55		45		nS	
53	TdCf(D)	Clock Fall to Data Valid delay	150		130		115		110		75		nS	

Notes:

* For Clock periods other than the minimum shown, calculate parameters using the following table.

Calculated values above assumed TrC = TrC = maximum.

** 4 MHz CMOS Z80 is obsoleted and replaced by 6 MHz

[1] Z84C0020 parameters are guaranteed with 50pF load Capacitance.

[2] If Capacitive Load is other than 50pF, please use Figure 1. to calculate the value.

[3] Increasing delay by 10nS for each 50pF increase in loading, 200pF max for data lines, and 100pF for control lines.

FOOTNOTES TO AC CHARACTERISTICS

No	Symbol	Parameter	Z84C0004**	Z84C0006	Z84C0008	Z84C0010	Z84C0020
1	TcC	TwCh + TwCl + TrC + TrC					
7	TdA(MREQf)	TwCh + TrC	-65	-50	-45	-45	-45
10	TwMREQh	TwCh + TrC	-20	-20	-20	-20	-20
11	TwMREQf	TcC	-30	-30	-25	-25	-25
26	TdA(IORQf)	TcC	-70	-55	-50	-50	-50
29	TdD(WRf)	TcC	-170	-140	-120	-60	-60
31	TwWR	TcC	-30	-30	-25	-25	-25
33	TdD(WRf)	TwCl + TrC	-140	-140	-120	-60	-60
35	TdWRr(D)	TwCl + TrC	-70	-55	-50	-40	-25
45	TdCTr(A)	TwCl + TrC	-50	-50	-45	-30	-30
50	TdM1f(IORQf)	2TcC + TwCh + TrC	-65	-50	-45	-30	-30

AC Test Conditions: V_{IH} = 2.0 V
V_{IL} = 0.8 V

V_{OH} = 1.5 V
V_{OL} = 1.5 V

V_{IHC} = V_{CC} - 0.6 V
V_{ILC} = 0.45 V

FLOAT = ±0.5 V

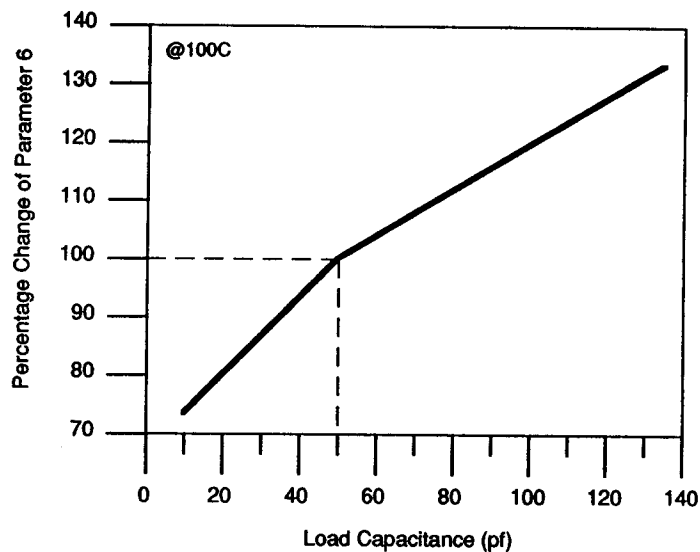


Figure 1. Address Delay Characteristics
(Parameter 6)

DC CHARACTERISTICS (Z8400/NMOS Z80 CPU)

All parameters are tested unless otherwise noted.

Symbol	Parameter	Min	Max	Unit	Test Condition
V_{ILC}	Clock Input Low Voltage	-0.3	0.45	V	
V_{IHC}	Clock Input High Voltage	$V_{CC} - .6$	$V_{CC} + .3$	V	
V_{IL}	Input Low Voltage	-0.3	0.8	V	
V_{IH}	Input High Voltage	2.0 ¹	V_{CC}	V	
V_{OL}	Output Low Voltage		0.4	V	$I_{OL} = 2.0 \text{ mA}$
V_{OH}	Output High Voltage	2.4 ¹		V	$I_{OH} = -250 \mu\text{A}$
I_{CC}	Power Supply Current		200	mA	Note 3
I_{LI}	Input Leakage Current		10	μA	$V_{IN} = 0 \text{ to } V_{CC}$
I_{LO}	3-State Output Leakage Current in Float	-10	10 ²	μA	$V_{OUT} = 0.4 \text{ to } V_{CC}$

1. For military grade parts, refer to the Z80 Military Electrical Specification.

2. A_{15} - A_0 , D_7 - D_0 , $MREQ$, $IORD$, RD , and WR .

3. Measurements made with outputs floating.

CAPACITANCE

Guaranteed by design and characterization.

Symbol	Parameter	Min	Max	Unit
C_{CLOCK}	Clock Capacitance		35	pf
C_{IN}	Input Capacitance		5	pf
C_{OUT}	Output Capacitance		15	pf

NOTES:

$T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$.

Unmeasured pins returned to ground.