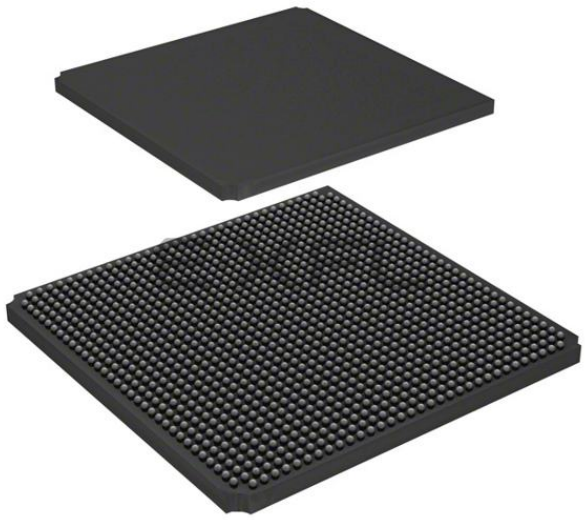

Welcome to E-XFL.COM

Embedded - System On Chip (SoC): The Heart of Modern Embedded Systems

Embedded - System On Chip (SoC) refers to an integrated circuit that consolidates all the essential components of a computer system into a single chip. This includes a microprocessor, memory, and other peripherals, all packed into one compact and efficient package. SoCs are designed to provide a complete computing solution, optimizing both space and power consumption, making them ideal for a wide range of embedded applications.

What are Embedded - System On Chip (SoC)?

System On Chip (SoC) integrates multiple functions of a computer or electronic system onto a single chip. Unlike traditional multi-chip solutions, SoCs combine a central

Details	
Product Status	Obsolete
Architecture	MCU, FPGA
Core Processor	ARM® Cortex®-M3
Flash Size	512KB
RAM Size	64KB
Peripherals	DDR, PCIe, SERDES
Connectivity	CANbus, Ethernet, I²C, SPI, UART/USART, USB
Speed	166MHz
Primary Attributes	FPGA - 100K Logic Modules
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	1152-BBGA, FCBGA
Supplier Device Package	1152-FCBGA (35x35)
Purchase URL	https://www.e-xfl.com/product-detail/microsemi/m2s100t-1fcg1152i

Contents

1 Revision History 1
1.1 Revision 11.0 1
1.2 Revision 10.0 1
1.3 Revision 9.0 1
1.4 Revision 8.0 2
1.5 Revision 7.0 2
1.6 Revision 6.0 2
1.7 Revision 5.0 2
1.8 Revision 4.0 2
1.9 Revision 3.0 3
1.10 Revision 2.0 3
1.11 Revision 1.0 3
2 IGLOO2 FPGA and SmartFusion2 SoC FPGA 4
2.1 Device Status 4
2.2 References 5
2.3 Electrical Specifications 5
2.3.1 Operating Conditions 5
2.3.2 Power Consumption 12
2.3.3 Average Fabric Temperature and Voltage Derating Factors 14
2.3.4 Timing Model 15
2.3.5 User I/O Characteristics 17
2.3.6 Logic Element Specifications 75
2.3.7 Global Resource Characteristics 78
2.3.8 FPGA Fabric SRAM 79
2.3.9 Programming Times 94
2.3.10 Math Block Timing Characteristics 103
2.3.11 Embedded NVM (eNVM) Characteristics 104
2.3.12 SRAM PUF 105
2.3.13 Non-Deterministic Random Bit Generator (NRBG) Characteristics 106
2.3.14 Cryptographic Block Characteristics 106
2.3.15 Crystal Oscillator 107
2.3.16 On-Chip Oscillator 109
2.3.17 Clock Conditioning Circuits (CCC) 110
2.3.18 JTAG 112
2.3.19 System Controller SPI Characteristics 113
2.3.20 Power-up to Functional Times 114
2.3.21 DEVRST_N Characteristics 116
2.3.22 DEVRST_N to Functional Times 116
2.3.23 Flash*Freeze Timing Characteristics 119
2.3.24 DDR Memory Interface Characteristics 120
2.3.25 SFP Transceiver Characteristics 120
2.3.26 SerDes Electrical and Timing AC and DC Characteristics 121
2.3.27 SmartFusion2 Specifications 123
2.3.28 CAN Controller Characteristics 128
2.3.29 USB Characteristics 128
2.3.30 MMUART Characteristics 129
2.3.31 IGLOO2 Specifications 129