Infineon Technologies - MB91F526LKCPMC-GTK5E2 Datasheet

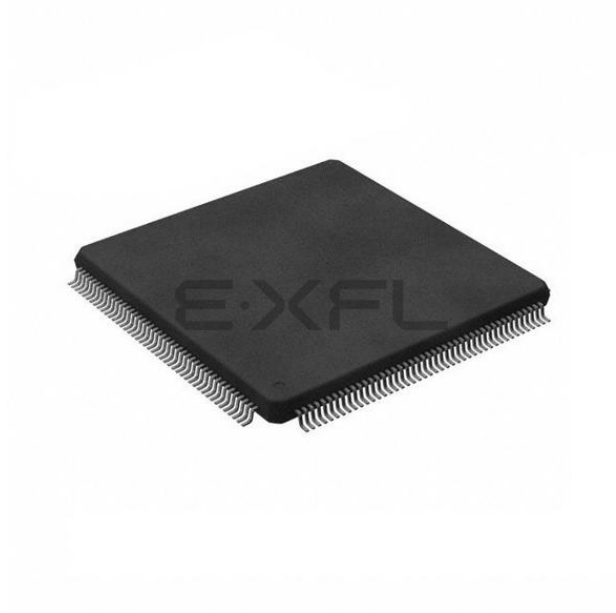

Welcome to E-XFL.COM

What is "Embedded - Microcontrollers"?

"Embedded - Microcontrollers" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "Embedded - Microcontrollers"

Details	
Product Status	Obsolete
Core Processor	FR81S
Core Size	32-Bit Single-Core
Speed	80MHz
Connectivity	CANbus, CSIO, EBI/EMI, I²C, LINbus, SPI, UART/USART
Peripherals	DMA, LVD, POR, PWM, WDT
Number of I/O	152
Program Memory Size	1.0625MB (1.0625M x 8)
Program Memory Type	FLASH
EEPROM Size	64K x 8
RAM Size	136K x 8
Voltage - Supply (Vcc/Vdd)	2.7V ~ 5.5V
Data Converters	A/D 48x12b; D/A 2x8b
Oscillator Type	External
Operating Temperature	-40°C ~ 105°C (TA)
Mounting Type	Surface Mount
Package / Case	176-LQFP
Supplier Device Package	176-LQFP (24x24)
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/mb91f526lkcpmc-gtk5e2

Product lineup comparison 120 pins

	MB91F522J	MB91F523J	MB91F524J	MB91F525J	MB91F526J
System Clock	On chip PLL Clock multiple method				
Minimum instruction execution time	12.5ns (80MHz)				
Flash Capacity (Program)	(256+64)KB	(384+64)KB	(512+64)KB	(768+64)KB	(1024+64)KB
Flash Capacity (Data)	64KB				
RAM Capacity	(48+8)KB		(64+8)KB	(96+8)KB	(128+8)KB
External BUS I/F (22address/16data/4cs)	None				
DMA Transfer	16ch				
16-bit Base Timer	2ch				
Free-run Timer	16bit×3ch, 32bit×3ch				
Input capture	16bit×4ch, 32bit×6ch				
Output Compare	16bit×6ch, 32bit×6ch				
16-bit Reload Timer	8ch				
PPG	16bit×38ch				
Up/down Counter	2ch				
Clock Supervisor	Yes				
External Interrupt	8ch×2units				
A/D converter	12bit×26ch (1unit), 12bit×16ch (1unit)				
D/A converter (8bit)	2ch				
Multi-Function Serial Interface	12ch*1				
CAN	64msg×2ch/128msg×1ch				
Hardware Watchdog Timer	Yes				
CRC Formation	Yes				
Low-voltage detection reset	Yes				
Flash Security	Yes				
ECC Flash/WorkFlash	Yes				
ECC RAM	Yes				
Memory Protection Function (MPU)	Yes				
Floating point arithmetic (FPU)	Yes				
Real Time Clock (RTC)	Yes				
General-purpose port (#GPIOs)	96 ports				
SSCG	Yes				
Sub clock	Yes				
CR oscillator	Yes				
NMI request function	Yes				
OCD (On Chip Debug)	Yes				
TPU (Timing Protection Unit)	Yes				
Key code register	Yes				
Waveform generator	6ch				
Operation guaranteed temperature (T_A)	-40°C to +125°C				
Power supply	2.7V to 5.5V *2				
Package	LQM120				

*1: Only channel 3 and channel 4 support the I^2C (fast mode/standard mode).
Only channel 5, channel 6, channel 7, channel 8 and channel 11 support the I^2C (standard mode).

*2: The initial detection voltage of the external low voltage detection is 2.8V±8% (2.576V to 3.024V). This LVD setting and internal LVD cannot be used to reliably generate a reset before voltage dips below minimum guaranteed operation voltage, as these detection levels are below the minimum guaranteed MCU operation voltage. Below the minimum guaranteed MCU operation voltage, MCU operations are not guaranteed with the exception of LVD.

MB91F52xF

MB91F522F, MB91F523F, MB91F524F, MB91F525F, MB91F526F

(TOP VIEW)

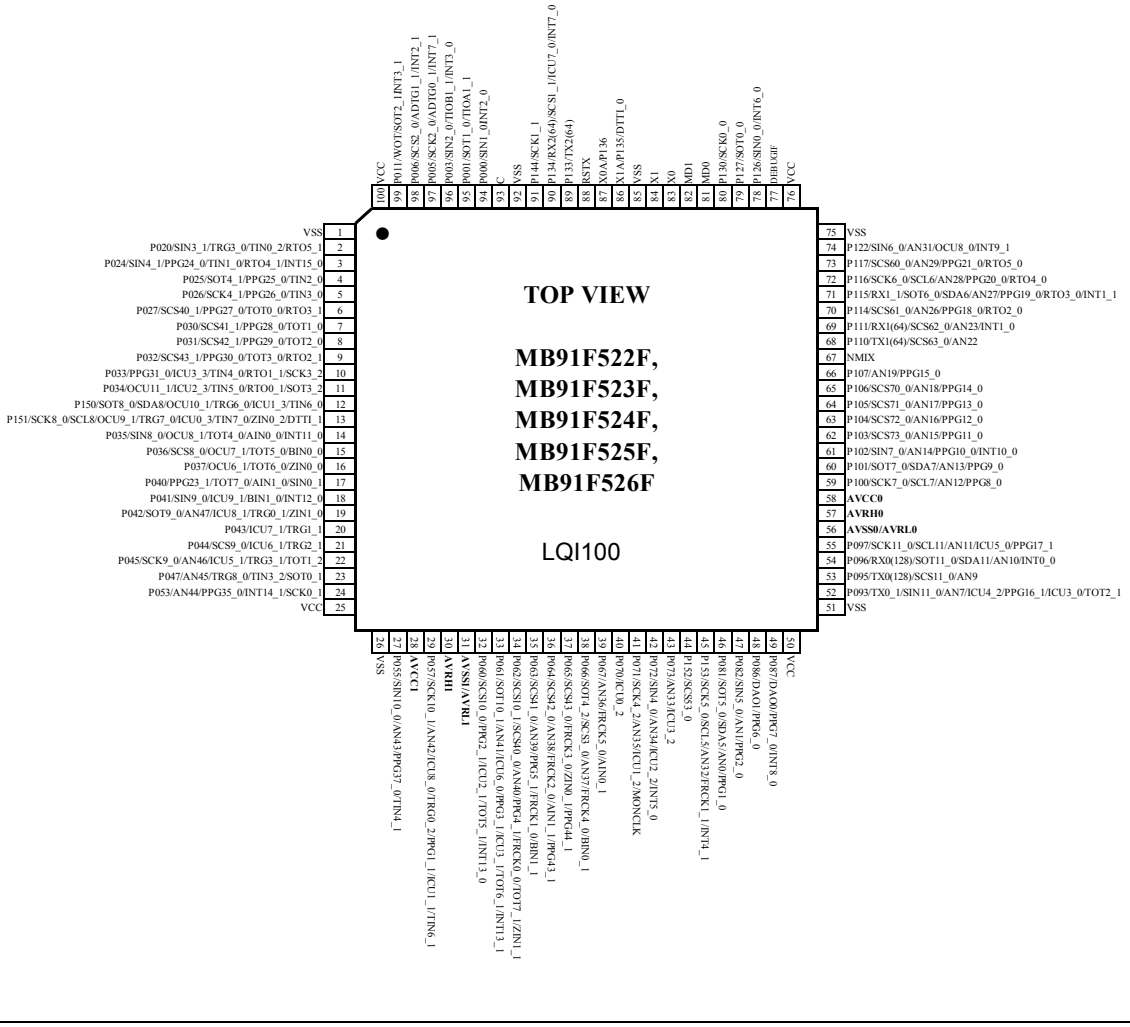

* In a single clock product, pin 86 and pin 87 are the general-purpose ports.

Pin no.						Pin Name	Polarity	I/O circuit types*8	Function*9
64	80	100	120	144	176				
63 *1	79 *1	99 *1	119 *1	140	171	P011	-	A	General-purpose I/O port
						WOT	-		RTC output signal
						D25 *2, *3, *4, *5	-		External bus data bit25 I/O
						SOT2_1 *2	-		Multi-function serial ch.2 serial data output (1)
						TIOA0_0 *2, *3, *4	-		TIOA output of Base timer ch.0 (0)
						INT3_1	-		INT3 External interrupt input (1)
-	-	-	-	141	172	P012	-	A	General-purpose I/O port
						D26	-		External bus data bit26 I/O
						TIOB0_0	-		TIOB input of Base timer ch.0 (0)
-	-	-	-	-	173	P167	-	A	General-purpose I/O port
						PPG35_1	-		PPG ch.35 output (1)
-	-	-	-	142	174	P013	-	A	General-purpose I/O port
						D27	-		External bus data bit27 I/O
						TIOA1_0	-		TIOA I/O of Base timer ch.1 (0)
-	-	-	-	143	175	P014	-	A	General-purpose I/O port
						D28	-		External bus data bit28 I/O
						TIOB1_0	-		TIOB input of Base timer ch.1 (0)
18	23	28	34	40	50	AVCC1	-	-	Analog power supply for AD/DA convertor unit1
39	47	58	68	84	103	AVCC0	-	-	Analog power supply for AD/DA convertor unit0
20	25	30	36	42	52	AVRH1	-	-	Upper limit reference voltage for AD convertor unit1
38	46	57	67	83	102	AVRH0	-	-	Upper limit reference voltage for AD convertor unit0
21	26	31	37	43	53	AVSS1/ AVRL1	-	-	GND for AD/DA convertor unit1 Lower limit reference voltage for AD convertor unit1
37	45	56	66	82	101	AVSS0/ AVRL0	-	-	GND for AD/DA convertor unit0 Lower limit reference voltage for AD convertor unit0
60	74	93	110	130	158	C	-	-	External capacity connection output
-	20	25	30	36	44	VCC	-	-	+5.0V power supply
32	40	50	60	72	88				
-	61	76	91	109	133				
64	80	100	120	144	176				
1	1	1	1	1	1	VSS	-	-	GND
-	21	26	31	37	45				
33	41	51	61	73	89				
-	60	75	90	108	132				
55	69	85	101	120	148				
59	73	92	109	129	157				

MB91F522F, MB91F523F, MB91F524F, MB91F525F, MB91F526F

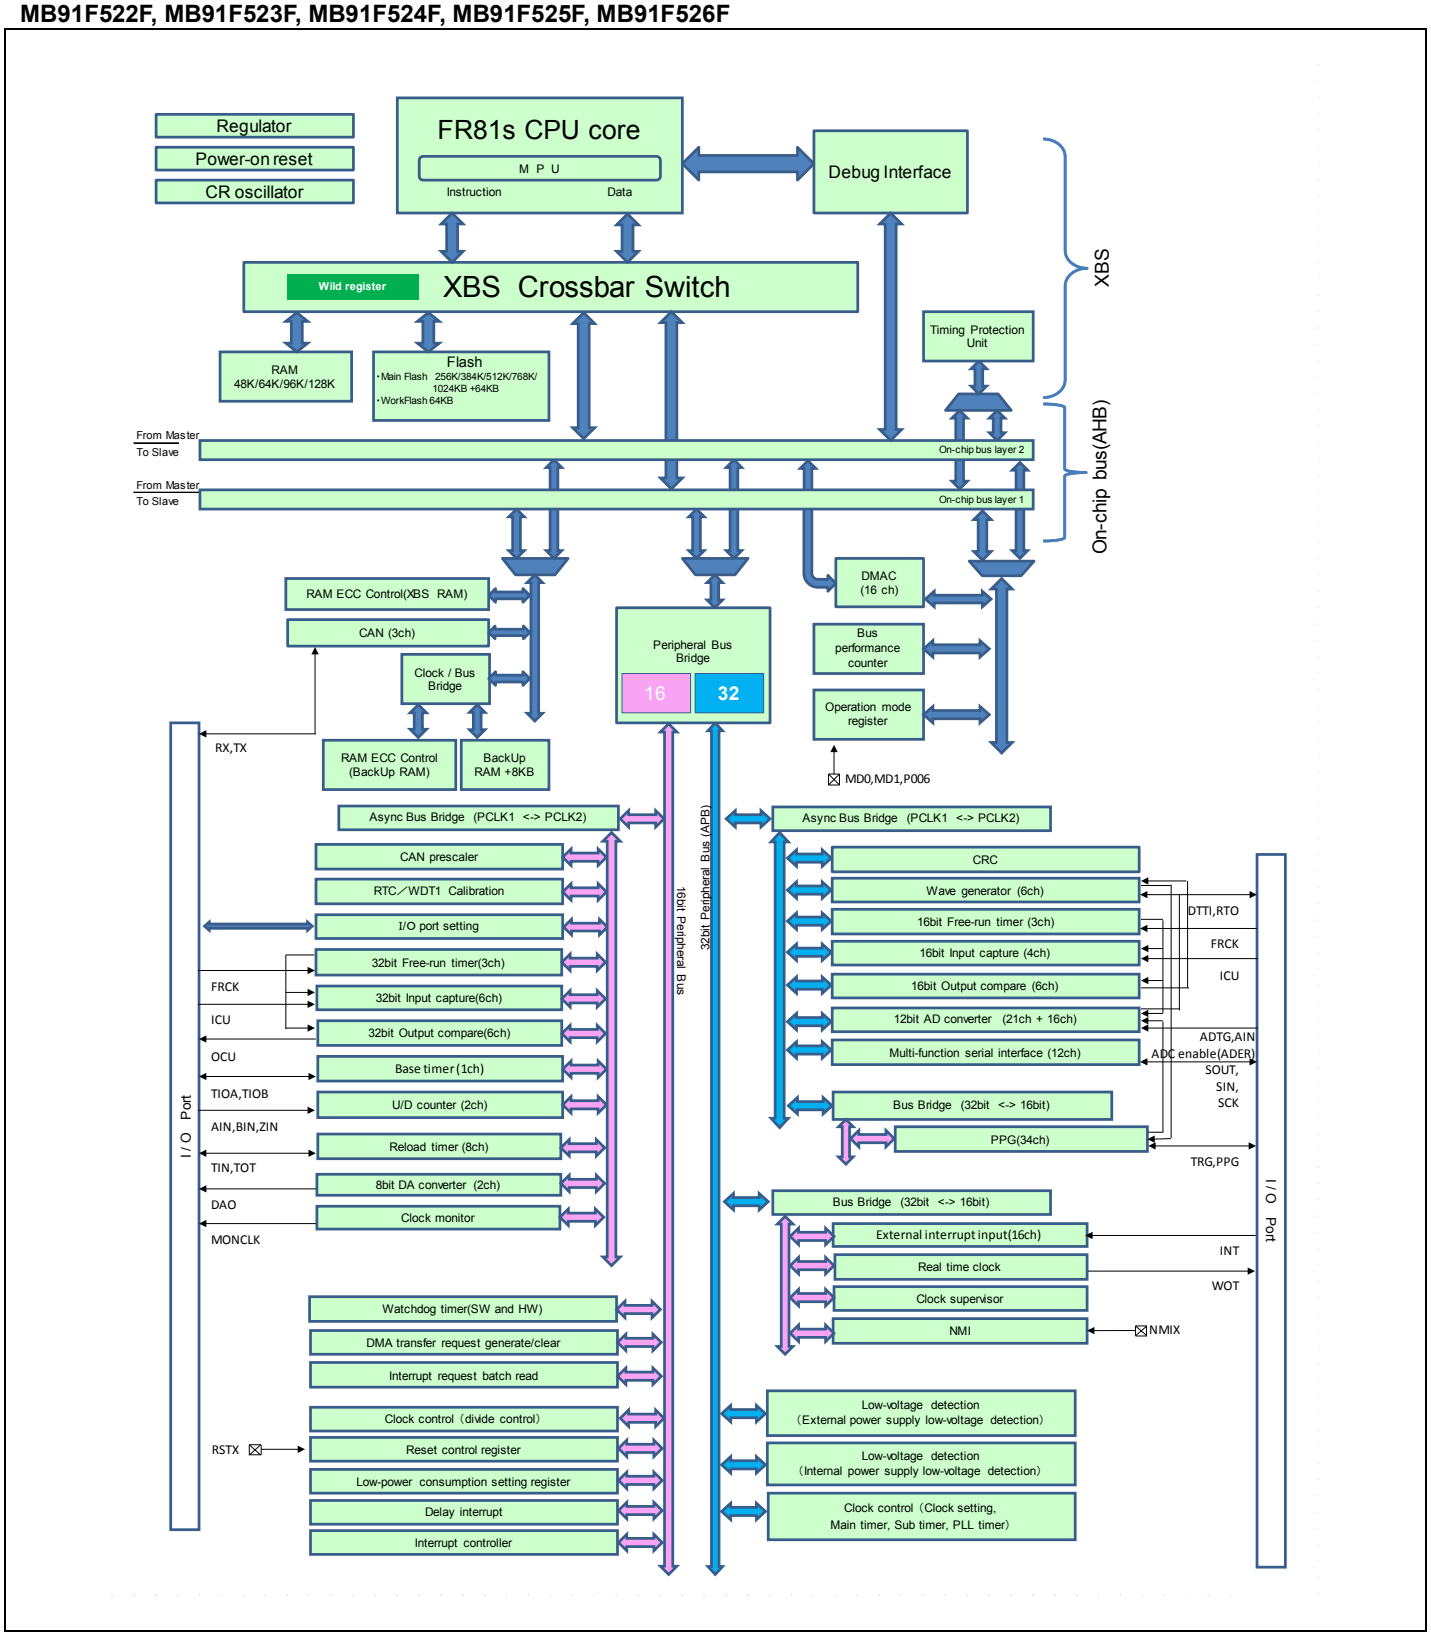

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
$000CF0_H$	DCCR15 [R/W] W 0----000 --00--00 00000000 0-000000				DMA Controller [S]
$000CF4_H$	DCSR15 [R/W] H 0------- -----000		DTCR15 [R/W] H 00000000 00000000		
$000CF8_H$	DSAR15 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
$000CFC_H$	DDAR15 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
$000D00_H$ to $000DF0_H$	—	—	—	—	Reserved [S]
$000DF4_H$	—	—	DNMIR [R/W] B 0------0	DILVR [R/W] B ---11111	DMA Controller [S]
$000DF8_H$	DMACR[R/W] W 0------- -------- 0------- --------				
$000DFC_H$	—	—	—	—	Reserved [S]
$000E00_H$	DDR00 [R/W] B,H,W 00000000	DDR01 [R/W] B,H,W 00000000	DDR02 [R/W] B,H,W 00000000	DDR03 [R/W] B,H,W 00000000	Data Direction Register
$000E04_H$	DDR04 [R/W] B,H,W 00000000	DDR05 [R/W] B,H,W 00000000	DDR06 [R/W] B,H,W 00000000	DDR07 [R/W] B,H,W 00000000	
$000E08_H$	DDR08 [R/W] B,H,W 00000000	DDR09 [R/W] B,H,W 00000000	DDR10 [R/W] B,H,W 00000000	DDR11 [R/W] B,H,W 00000000	Data Direction Register
$000E0C_H$	DDR12 [R/W] B,H,W 00000000	DDR13 [R/W] B,H,W -0000000	DDR14 [R/W] B,H,W ---000--	DDR15 [R/W] B,H,W --000000	
$000E10_H$	—	—	—	—	
$000E14_H$	—	—	—	—	
$000E18_H$	DDR16 [R/W] B,H,W 00000000	DDR17 [R/W] B,H,W 00000000	DDR18 [R/W] B,H,W 00000000	DDR19 [R/W] B,H,W 00000000	
$000E1C_H$	—	—	—	—	Reserved
$000E20_H$	PFR00 [R/W] B,H,W 00000000	PFR01 [R/W] B,H,W 00000000	PFR02 [R/W] B,H,W 00000000	PFR03 [R/W] B,H,W 00000000	Port Function Register
$000E24_H$	PFR04 [R/W] B,H,W 00000000	PFR05 [R/W] B,H,W 00000000	PFR06 [R/W] B,H,W 00000000	PFR07 [R/W] B,H,W 00000000	
$000E28_H$	PFR08 [R/W] B,H,W 00000000	PFR09 [R/W] B,H,W 00000000	PFR10 [R/W] B,H,W 00000000	PFR11 [R/W] B,H,W 00000000	
$000E2C_H$	PFR12 [R/W] B,H,W 00000000	PFR13 [R/W] B,H,W -0000000	PFR14 [R/W] B,H,W ---000--	PFR15 [R/W] B,H,W --000000	
$000E30_H$	—	—	—	—	
$000E34_H$	—	—	—	—	
$000E38_H$	PFR16 [R/W] B,H,W 00000000	PFR17 [R/W] B,H,W 00000000	PFR18 [R/W] B,H,W 00000000	PFR19 [R/W] B,H,W 00000000	

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
0012D4$_H$	FRS6 [R/W] B,H,W --00--00 --00--00 --00--00 --00--00				16-bit Free-run timer selection A/D activation compare
0012D8$_H$	FRS7 [R/W] B,H,W --00--00 --00--00 --00--00 --00--00				
0012DC$_H$ to 0012FC$_H$	—	—	—	—	Reserved
001300$_H$	—				Reserved
001304$_H$	ADTSS0[R/W] B,H,W -------0	—	—	—	12-bit A/D converter 1/2 unit
001308$_H$	ADTSE0[R/W] B,H,W 00000000 00000000 00000000 00000000				
00130C$_H$	ADCOMP0/ADCOMPB0[R/W] H,W 00000000 00000000		ADCOMP1/ADCOMPB1[R/W] H,W 00000000 00000000		12-bit A/D converter 1/2 unit
001310$_H$	ADCOMP2/ADCOMPB2[R/W] H,W 00000000 00000000		ADCOMP3/ADCOMPB3[R/W] H,W 00000000 00000000		
001314$_H$	ADCOMP4/ADCOMPB4[R/W] H,W 00000000 00000000		ADCOMP5/ADCOMPB5[R/W] H,W 00000000 00000000		
001318$_H$	ADCOMP6/ADCOMPB6[R/W] H,W 00000000 00000000		ADCOMP7/ADCOMPB7[R/W] H,W 00000000 00000000		
00131C$_H$	ADCOMP8/ADCOMPB8[R/W] H,W 00000000 00000000		ADCOMP9/ADCOMPB9[R/W] H,W 00000000 00000000		
001320$_H$	ADCOMP10/ADCOMPB10[R/W] H,W 00000000 00000000		ADCOMP11/ADCOMPB11[R/W] H,W 00000000 00000000		
001324$_H$	ADCOMP12/ADCOMPB12[R/W] H,W 00000000 00000000		ADCOMP13/ADCOMPB13[R/W] H,W 00000000 00000000		
001328$_H$	ADCOMP14/ADCOMPB14[R/W] H,W 00000000 00000000		ADCOMP15/ADCOMPB15[R/W] H,W 00000000 00000000		
00132C$_H$	ADCOMP16/ADCOMPB16[R/W] H,W 00000000 00000000		ADCOMP17/ADCOMPB17[R/W] H,W 00000000 00000000		
001330$_H$	ADCOMP18/ADCOMPB18[R/W] H,W 00000000 00000000		ADCOMP19/ADCOMPB19[R/W] H,W 00000000 00000000		
001334$_H$	ADCOMP20/ADCOMPB20[R/W] H,W 00000000 00000000		ADCOMP21/ADCOMPB21[R/W] H,W 00000000 00000000		
001338$_H$	ADCOMP22/ADCOMPB22[R/W] H,W 00000000 00000000		ADCOMP23/ADCOMPB23[R/W] H,W 00000000 00000000		
00133C$_H$	ADCOMP24/ADCOMPB24[R/W] H,W 00000000 00000000		ADCOMP25/ADCOMPB25[R/W] H,W 00000000 00000000		
001340$_H$	ADCOMP26/ADCOMPB26[R/W] H,W 00000000 00000000		ADCOMP27/ADCOMPB27[R/W] H,W 00000000 00000000		

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
$0018F0_H$	— /(SCSTR310)/ (LAMSR10) [R/W] B,H,W -------- *3	— /(SCSTR210)/ (LAMCR10) [R/W] B,H,W -------- *3	— /(SCSTR110)/ (SFLR110)[R/W] B,H,W -------- *3	— /(SCSTR010)/ (SFLR010)[R/W] B,H,W -------- *3	Multi-UART10 *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
$0018F4_H$	—	— /(SCSFR210) [R/W] B,H,W -------- *3	— /(SCSFR110) [R/W] B,H,W -------- *3	— /(SCSFR010) [R/W] B,H,W -------- *3	
$0018F8_H$	—/(TBYTE310)/ (LAMESR10) [R/W] B,H,W -------- *3	—/(TBYTE210)/ (LAMERT10) [R/W] B,H,W -------- *3	—/(TBYTE110)/ (LAMIER10) [R/W] B,H,W -------- *3	TBYTE010/(LAMRID 10)/(LAMTID10) [R/W] B,H,W 00000000	
$0018FC_H$	BGR10[R/W] H, W 00000000 00000000		— /(ISMK10)[R/W] B,H,W -------- *2	— /(ISBA10)[R/W] B,H,W -------- *2	
001900_H	FCR110[R/W] B,H,W ---00100	FCR010[R/W] B,H,W -0000000	FBYTE10[R/W] B,H,W 00000000 00000000		
001904_H	FTICR10[R/W] B,H,W 00000000 00000000		—	—	
001908_H	SCR11/(IBCR11) [R/W] B,H,W 0--00000	SMR11[R/W] B,H,W 000-00-0	SSR11[R/W] B,H,W 0-000011	ESCR11/(IBSR11) [R/W] B,H,W 00000000	Multi-UART11 *1: Byte access is possible only for access to lower 8 bits. *2: Reserved because I^2C mode is not set immediately after reset. *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
$00190C_H$	— /(RDR111/(TDR111))[R/W] B,H,W -------- -------- *3		RDR011/(TDR011)[R/W] B,H,W -------0 00000000 *1		
001910_H	SACSR11[R/W] B,H,W 0----000 00000000		STMR11[R] B,H,W 00000000 00000000		
001914_H	STMCR11[R/W] B,H,W 00000000 00000000		— /(SCSCR11/SFUR11)[R/W] B,H,W -------- -------- *3 *4		
001918_H	— /(SCSTR311)/ (LAMSR11) [R/W] B,H,W -------- *3	— /(SCSTR211)/ (LAMCR11) [R/W] B,H,W -------- *3	— /(SCSTR111)/ (SFLR111)[R/W] B,H,W -------- *3	— /(SCSTR011)/ (SFLR011)[R/W] B,H,W -------- *3	
$00191C_H$	—	— /(SCSFR211) [R/W] B,H,W -------- *3	— /(SCSFR111) [R/W] B,H,W -------- *3	— /(SCSFR011) [R/W] B,H,W -------- *3	
001920_H	—/(TBYTE311)/ (LAMESR11) [R/W] B,H,W -------- *3	—/(TBYTE211)/ (LAMERT11) [R/W] B,H,W -------- *3	—/(TBYTE111)/ (LAMIER11) [R/W] B,H,W -------- *3	TBYTE011/(LAMRID 11)/(LAMTID11) [R/W] B,H,W 00000000	
001924_H	BGR11[R/W] H, W 00000000 00000000		— /(ISMK11)[R/W] B,H,W -------- *2	— /(ISBA11)[R/W] B,H,W -------- *2	

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
$001D20_H$	PCN43 [R/W] B,H,W 00000000 000000-0		PCSR43 [W] H,W XXXXXXXX XXXXXXXX		PPG43
$001D24_H$	PDUT43 [W] H,W XXXXXXXX XXXXXXXX		PTMR43 [R] H,W 11111111 11111111		
$001D28_H$	PCN243 [R/W] B,H,W --000000 -----110		PSDR43 [R/W] H,W 00000000 00000000		
$001D2C_H$	PTPC43 [R/W] H,W 00000000 00000000		—	—	
$001D30_H$	PCN44 [R/W] B,H,W 00000000 000000-0		PCSR44 [W] H,W XXXXXXXX XXXXXXXX		PPG44
$001D34_H$	PDUT44 [W] H,W XXXXXXXX XXXXXXXX		PTMR44 [R] H,W 11111111 11111111		
$001D38_H$	PCN244 [R/W] B,H,W --000000 -----110		PSDR44 [R/W] H,W 00000000 00000000		
$001D3C_H$	PTPC44 [R/W] H,W 00000000 00000000		—	—	
$001D40_H$	PCN45 [R/W] B,H,W 00000000 000000-0		PCSR45 [W] H,W XXXXXXXX XXXXXXXX		PPG45
$001D44_H$	PDUT45 [W] H,W XXXXXXXX XXXXXXXX		PTMR45 [R] H,W 11111111 11111111		
$001D48_H$	PCN245 [R/W] B,H,W --000000 -----110		PSDR45 [R/W] H,W 00000000 00000000		
$001D4C_H$	PTPC45 [R/W] H,W 00000000 00000000		—	—	
$001D50_H$	PCN46 [R/W] B,H,W 00000000 000000-0		PCSR46 [W] H,W XXXXXXXX XXXXXXXX		PPG46
$001D54_H$	PDUT46 [W] H,W XXXXXXXX XXXXXXXX		PTMR46 [R] H,W 11111111 11111111		
$001D58_H$	PCN246 [R/W] B,H,W --000000 -----110		PSDR46 [R/W] H,W 00000000 00000000		
$001D5C_H$	PTPC46 [R/W] H,W 00000000 00000000		—	—	
$001D60_H$	PCN47 [R/W] B,H,W 00000000 000000-0		PCSR47 [W] H,W XXXXXXXX XXXXXXXX		PPG47
$001D64_H$	PDUT47 [W] H,W XXXXXXXX XXXXXXXX		PTMR47 [R] H,W 11111111 11111111		
$001D68_H$	PCN247 [R/W] B,H,W --000000 -----110		PSDR47 [R/W] H,W 00000000 00000000		
$001D6C_H$	PTPC47 [R/W] H,W 00000000 00000000		—	—	

Interrupt factor	Interrupt number		Interrupt level	Offset	Default address for TBR	RN
	Decimal	Hexa decimal				
Used with the INT instruction	66 | 255	42 | FF	-	$2F4_H$ | 000_H	$000FFEF4_H$ | $000FFC00_H$	-

Note: It does not support a DMA transfer request caused by an interrupt generated from a peripheral to which no RN (Resource Number) is assigned.

*1: It does not support a DMA transfer by the status of the multi-function serial interface and I^2C reception.

*2: Reload timer ch.4 to ch.7 do not support a DMA transfer by the interrupt.

*3: PPG ch.24 to ch.47 do not support a DMA transfer by the interrupt.

*4: The clock calibration unit does not support a DMA transfer by the interrupt.

*5: 32-bit Free-run timer ch.3, ch.4 and ch.5 do not support a DMA transfer by the interrupt.

*6: There is no resource corresponding to the interrupt level.

*7: It does not support a DMA transfer by the external low-voltage detection interrupt.

*8: REALOS is a trademark of Cypress.

Interrupt factor	Interrupt number		Interrupt level	Offset	Default address for TBR	RN
	Decimal	Hexa decimal				
Multi-function serial interface ch.3 (transmission completed)	27	1B	ICR11	390_H	$000FFF90_H$	11
Multi-function serial interface ch.4 (reception completed)	28	1C	ICR12	$38C_H$	$000FFF8C_H$	12*[1]
Multi-function serial interface ch.4 (status)						
Multi-function serial interface ch.4 (transmission completed)	29	1D	ICR13	388_H	$000FFF88_H$	13
Multi-function serial interface ch.5 (reception completed)	30	1E	ICR14	384_H	$000FFF84_H$	14*[1]
Multi-function serial interface ch.5 (status)						
Multi-function serial interface ch.5 (transmission completed)	31	1F	ICR15	380_H	$000FFF80_H$	15
Multi-function serial interface ch.6 (reception completed)	32	20	ICR16	$37C_H$	$000FFF7C_H$	16*[1]
Multi-function serial interface ch.6 (status)						
Multi-function serial interface ch.6 (transmission completed)	33	21	ICR17	378_H	$000FFF78_H$	17
CAN0	34	22	ICR18	374_H	$000FFF74_H$	-
CAN1	35	23	ICR19	370_H	$000FFF70_H$	-
RAM diagnosis end						
RAM initialization completion						
Error generation during RAM diagnosis						
Backup RAM diagnosis end						
Backup RAM initialization completion						
Error generation during Backup RAM diagnosis						
CAN2	36	24	ICR20	$36C_H$	$000FFF6C_H$	-
Up/down counter 0						
Up/down counter 1						
Real time clock	37	25	ICR21	368_H	$000FFF68_H$	-
Multi-function serial interface ch.7 (reception completed)	38	26	ICR22	364_H	$000FFF64_H$	22*[1]
Multi-function serial interface ch.7 (status)						
16-bit Free-run timer 0 (0 detection) / (compare clear)	39	27	ICR23	360_H	$000FFF60_H$	23
Multi-function serial interface ch.7 (transmission completed)						
PPG 0/1/10/11/20/21/30/31/40/41	40	28	ICR24	$35C_H$	$000FFF5C_H$	24*[3]
16-bit Free-run timer 1 (0 detection) / (compare clear)						
PPG 2/3/12/13/22/23/32/33/43	41	29	ICR25	358_H	$000FFF58_H$	25*[3]
16-bit Free-run timer 2 (0 detection) / (compare clear)						
PPG 4/5/14/15/24/25/34/35/44	42	2A	ICR26	354_H	$000FFF54_H$	26*[3]
PPG 6/7/16/17/26/27/36/37	43	2B	ICR27	350_H	$000FFF50_H$	27*[3]
PPG 8/9/18/19/28/29/38/39	44	2C	ICR28	$34C_H$	$000FFF4C_H$	28*[3]

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
SCS↑→SCK↓ setup time	t_{CSSE}	SCK1 to SCK11 SCS1 to SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11	-	$3t_{CPP}$+30	-	ns	External shift clock mode output pin: C_L=50pF
SCK↑→SCS↓ hold time	t_{CSHE}			+0	-	ns	
SCS deselect time	t_{CSDE}	SCS1 to SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		$3t_{CPP}$+30	-	ns	
SCS↑→SOT delay time	t_{DSE}	SCS1 , SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11 SOT1 , SOT2, SOT5 to SOT11		-	40	ns	
		SCS3 , SCS40 to SCS43 SOT3 , SOT4		-	300	ns	
SCS↓→SOT delay time	t_{DEE}	SCS1 to ~SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11 SOT1 to SOT11	-	+0	-	ns	External shift clock mode output pin: C_L=50pF
SCK↓→SCS↑ clock switch time	t_{SCC}	SCK1 , SCK2, SCK5 to SCK11 SCS1 , SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11	-	$3t_{CPP}$-10	$3t_{CPP}$+50	ns	Internal shift clock mode Round operation output pin: C_L=50pF
		SCK3 , SCK4 SCS3 , SCS40 to SCS43		$3t_{CPP}$-300	$3t_{CPP}$+50	ns	

*1: t_{CSSU} =SCSTR:CSSU7-0×Serial chip select timing operating clock

*2: t_{CSHD}=SCSTR:CSHD7-0×Serial chip select timing operating clock

*3: t_{CSDS}=SCSTR:CSDS15-0×Serial chip select timing operating clock

Regardless of the deselect time setting, once after the serial chip select pin becomes inactive, it will take at least five peripheral bus clock cycles to be active again

Please see the hardware manual for details of above-mentioned *1,*2, and *3.

(4-4) I^2C timing

(T_A: -40°C to +125°C, V_{CC}= AV_{CC}=5.0V ± 10%/V_{CC}=AV_{CC}=3.3V±0.3V, V_{SS}=AV_{SS}=0.0V)

Parameter	Symbol	Pin name	Conditions	Standard mode		Fast mode*3		Unit	Remarks
				Min	Max	Min	Max		
SCL clock frequency	f_{SCL}	SCK3 to SCK11	C_L=50pF R = (V_P/I_{OL}) *1	0	100	0	400	kHz	
Repeat "start" condition hold time SDA ↓ → SCL ↓	t_{HDSTA}	SOT3 to SOT11, (SDA) SCK3 to SCK11, (SCL)		4.0	–	0.6	–	µs	
Period of "L" for SCL clock	t_{LOW}	SCK3 to SCK11, (SCL)		4.7	–	1.3	–	µs	
Period of "H" for SCL clock	t_{HIGH}	SCK3 to SCK11, (SCL)		4.0	–	0.6	–	µs	
Repeat "start" condition setup time SCL ↑ → SDA ↓	t_{SUSTA}	SCK3 to SCK11, (SCL)		4.7	–	0.6	–	µs	
Data hold time SCL ↓ → SDA ↓ ↑	t_{HDDAT}	SOT3 to SOT11, (SDA) SCK3 to SCK11, (SCL)		0	3.45*2	0	0.9*3	µs	
Data setup time SDA ↓ ↑ → SCL ↑	t_{SUDAT}	SOT3 to SOT11, (SDA) SCK3 to SCK11, (SCL)		250	–	100	–	ns	
"Stop" condition setup time SCL ↑ → SDA ↑	t_{SUSTO}	SOT3 to SOT11, (SDA) SCK3 to SCK11, (SCL)		4.0	–	0.6	–	µs	
Bus-free time between "stop" condition and "start" condition	t_{BUF}	–		4.7	–	1.3	–	µs	
Noise filter	t_{SP}	–	–	$2t_{CPP}$ *4	–	$2t_{CPP}$ *4	–	ns	

Notes: Only ch.3 and ch.4 are standard mode/fast mode correspondence. In ch.5-ch.8, ch.10, and ch.11, only a standard mode is correspondences.

*1: R and C_L represent the pull-up resistance and load capacitance of the SCL and SDA output lines, respectively.
Vp shows that the power-supply voltage of the pull-up resistor and I_{OL} shows the V_{OL} guarantee current.

*2: The maximum t_{HDDAT} only has to be met if the device does not extend the "L" width (t_{LOW}) of the SCL signal.

*3: A fast mode I^2C bus device can be used on a standard mode I^2C bus system as long as the device satisfies the requirement of

(5) Timer input timing

(T_A: -40°C to +125°C, V_{CC}= AV_{CC}=5.0V ± 10%/V_{CC}=AV_{CC}=3.3V±0.3V, V_{SS}=AV_{SS}=0.0V)

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TIWH}, t_{TIWL}	TIN0 to TIN7 ICU0 to ICU9 FRCK0 to FRCK5 TIOA0, TIOA1, TIOB0, TIOB1, AIN0, AIN1, BIN0, BIN1, ZIN0, ZIN1	–	$4t_{CPP}$	–	ns	

• Timer input timing

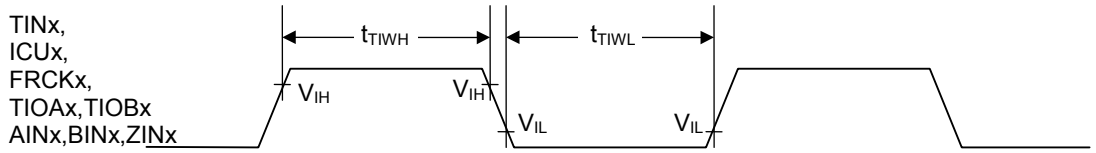

(6) Trigger input timing

(T_A: -40°C to +125°C, V_{CC}= AV_{CC}=5.0V ± 10%/V_{CC}=AV_{CC}=3.3V±0.3V, V_{SS}=AV_{SS}=0.0V)

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TRGH}, t_{TRGL}	INT0 to INT15, ADTG, RX0, RX1, RX2	–	$5t_{CPP}$	–	ns	
				1	–	µs	At stop mode

• Trigger input timing

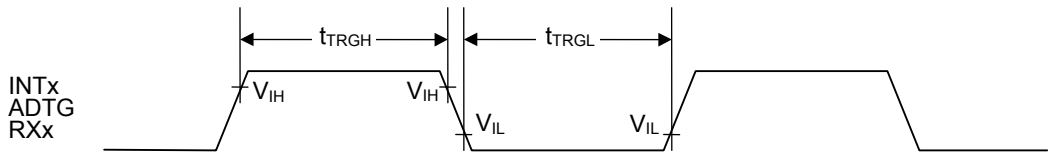

(11) External bus I/F (asynchronous mode) timing
(T_A: -40°C to +105°C, V_{CC}=AV_{CC}=5.0V±10%/V_{CC}= AV_{CC}=3.3V±0.3V, V_{SS}=AV_{SS}=0.0V)
(external load capacitance 50pF)

Parameter	Symbol	Pin name	Value		Unit	Remarks
			Min	Max		
Cycle time	t_{CYC}	SYSCLK	25	-	ns	V_{CC}=5.0V±10% *1
			31.25			V_{CC}=3.3V±0.3V
Address setup → RDX↑time	t_{ASRH}	RDX A00 to A21	2×t_{CYC} - 12	2×t_{CYC} + 12	ns	RWT=1, set RWT to 1 or more. *2
RDX↑→ Address hold	t_{RHAH}		t_{CYC} - 12	t_{CYC} + 12	ns	Set RDCS to 1 or more.
Data setup→ RDX↑time	t_{DSRH}	RDX D16 to D31	18 + t_{CYC}	-	ns	RWT=1, set RWT to 1 or more.
RDX↑→ Data hold	t_{RHDH}		0	-	ns	
Address setup→ WRnX↑time	t_{ASWH}	WR0X to WR1X A00 to A21	t_{CYC} - 12	t_{CYC} + 12	ns	WWT=0 *2
WRnX↑→ Address hold	t_{WHAH}		t_{CYC} - 12	t_{CYC} + 12	ns	Set WRCS to 1 or more.
Data setup→ WRnX↑time	t_{DSWH}	WR0X to WR1X D16 to D31	t_{CYC} - 16	t_{CYC} + 16	ns	WWT=0 *2
WRnX↑→ Data hold	t_{WHDH}		t_{CYC} - 16	t_{CYC} + 16	ns	Set WRCS to 1 or more.
Address setup → ASX↑time	t_{MASASH}	ASX D16 to D31	t_{CYC}-16	t_{CYC}+ 16	ns	ASCY=0
ASX↑→Address hold	t_{MASHAH}		t_{CYC}-16	t_{CYC} + 16	ns	In multiplex mode, set as follows: ☐Set CSWR and CSRD to 2 or more. ☐ASCY must satisfy the following conditions because of setting ADCY > ASCY and protocol violation prevention. ADCY +1 ≤ ACS + CSRD ADCY +1 ≤ ACS + CSWR ASCY + 1 ≤ ACS + CSRD ASCY + 1 ≤ ACS + CSWR See Hardware Manual for details.

*1: Please use it with external load capacity 12pF or less for VCC=3.3V±0.3V (40MHz operation).
*2: If the bus is expanded by automatic wait insertion or RDY input, add time (t_{CYC} × the number of expanded cycles) to the rated value.

Part number	Sub clock	CSV Initial value	LVD Initial value	Package*2
MB91F526KWBPMC	Yes	ON	ON	LQS・144 pin, (Lead pitch 0.5mm) Plastic
MB91F526KYBPMC			OFF	
MB91F526KJBPMC		OFF	ON	
MB91F526KLBPMC			OFF	
MB91F525KWBPMC		ON	ON	
MB91F525KYBPMC			OFF	
MB91F525KJBPMC		OFF	ON	
MB91F525KLBPMC			OFF	
MB91F524KWBPMC		ON	ON	
MB91F524KYBPMC			OFF	
MB91F524KJBPMC		OFF	ON	
MB91F524KLBPMC			OFF	
MB91F523KWBPMC		ON	ON	
MB91F523KYBPMC			OFF	
MB91F523KJBPMC		OFF	ON	
MB91F523KLBPMC			OFF	
MB91F522KWBPMC		ON	ON	
MB91F522KYBPMC			OFF	
MB91F522KJBPMC		OFF	ON	
MB91F522KLBPMC			OFF	
MB91F526KSBPMC	None	ON	ON	
MB91F526KUBPMC			OFF	
MB91F526KHBPMC		OFF	ON	
MB91F526KKBPMC			OFF	
MB91F525KSBPMC		ON	ON	
MB91F525KUBPMC			OFF	
MB91F525KHBPMC		OFF	ON	
MB91F525KKBPMC			OFF	
MB91F524KSBPMC		ON	ON	
MB91F524KUBPMC			OFF	
MB91F524KHBPMC		OFF	ON	
MB91F524KKBPMC			OFF	
MB91F523KSBPMC		ON	ON	
MB91F523KUBPMC			OFF	
MB91F523KHBPMC		OFF	ON	
MB91F523KKBPMC			OFF	
MB91F522KSBPMC		ON	ON	
MB91F522KUBPMC			OFF	
MB91F522KHBPMC		OFF	ON	
MB91F522KKBPMC			OFF	

<table>
<tr><th>Page</th><th>Section</th><th>Change Results</th></tr>
<tr><td>21, 22</td><td>■PIN Description</td><td>(Continued)
(Correct)
<table>
<tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr>
<tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr>
<tr><td rowspan="7">7 *1</td><td rowspan="7">9 *1</td><td rowspan="7">11 *1</td><td rowspan="7">14 *1</td><td rowspan="7">17</td><td rowspan="7">21</td><td>P034</td></tr>
<tr><td>A06 *2, *3, *4, *5</td></tr>
<tr><td>OCU11_1</td></tr>
<tr><td>ICU2_3</td></tr>
<tr><td>TIN5_0</td></tr>
<tr><td>RTO0_1</td></tr>
<tr><td>SOT3_2</td></tr>
<tr><td colspan="7"></td></tr>
<tr><td rowspan="8">8 *1</td><td rowspan="8">10 *1</td><td rowspan="8">13</td><td rowspan="8">16</td><td rowspan="8">19</td><td rowspan="8">23</td><td>P151</td></tr>
<tr><td>SCK8_0/ SCL8 *2, *3</td></tr>
<tr><td>OCU9_1</td></tr>
<tr><td>TRG7_0</td></tr>
<tr><td>ICU0_3</td></tr>
<tr><td>TIN7_0</td></tr>
<tr><td>ZIN0_2</td></tr>
<tr><td>DTTI_1</td></tr>
<tr><td rowspan="8">9 *1</td><td rowspan="8">11 *1</td><td rowspan="8">14 *1</td><td rowspan="8">17 *1</td><td rowspan="8">20</td><td rowspan="8">24</td><td>P035</td></tr>
<tr><td>A07 *2, *3, *4, *5</td></tr>
<tr><td>SIN8_0 *2, *3</td></tr>
<tr><td>OCU8_1</td></tr>
<tr><td>TOT4_0</td></tr>
<tr><td>AIN0_0</td></tr>
<tr><td>INT11_0</td></tr>
<tr><td rowspan="8">10 *1</td><td rowspan="8">12 *1</td><td rowspan="8">15 *1</td><td rowspan="8">18 *1</td><td rowspan="8">21</td><td rowspan="8">25</td><td>P036</td></tr>
<tr><td>A08 *2, *3, *4, *5</td></tr>
<tr><td>SCS8_0 *2, *3</td></tr>
<tr><td>OCU7_1</td></tr>
<tr><td>TOT5_0</td></tr>
<tr><td>BIN0_0</td></tr>
<tr><td colspan="7"></td></tr>
<tr><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">16 *1</td><td rowspan="5">19 *1</td><td rowspan="5">22</td><td rowspan="5">26</td><td>P037</td></tr>
<tr><td>A09 *4, *5</td></tr>
<tr><td>OCU6_1</td></tr>
<tr><td>TOT6_0</td></tr>
<tr><td>ZIN0_0</td></tr>
<tr><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">27</td><td>P174</td></tr>
<tr><td>TRG8_1</td></tr>
</table></td></tr>
</table>

<table>
<tr><th>Page</th><th>Section</th><th>Change Results</th></tr>
<tr><td>23, 24</td><td>■PIN Description</td><td>A List of "Pin Description" modified.

(Error)
<table>
<tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr>
<tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr>
<tr><td rowspan="6">15</td><td rowspan="6">18</td><td rowspan="6">23</td><td rowspan="6">27</td><td rowspan="6">30</td><td rowspan="6">37</td><td>P047</td></tr>
<tr><td>A17</td></tr>
<tr><td>AN45</td></tr>
<tr><td>TRG8_0</td></tr>
<tr><td>TIN3_2</td></tr>
<tr><td>SOT0_1</td></tr>
<tr><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">38</td><td>P177</td></tr>
<tr><td>TRG11_0</td></tr>
<tr><td rowspan="4">-</td><td rowspan="4">-</td><td rowspan="4">-</td><td rowspan="4">28</td><td rowspan="4">31</td><td rowspan="4">39</td><td>P050</td></tr>
<tr><td>A18</td></tr>
<tr><td>TRG5_1</td></tr>
<tr><td>PPG33_0</td></tr>
<tr><td rowspan="3">-</td><td rowspan="3">-</td><td rowspan="3">-</td><td rowspan="3">-</td><td rowspan="3">32</td><td rowspan="3">40</td><td>P051</td></tr>
<tr><td>A19</td></tr>
<tr><td>TRG9_0</td></tr>
<tr><td rowspan="4">-</td><td rowspan="4">-</td><td rowspan="4">-</td><td rowspan="4">-</td><td rowspan="4">33</td><td rowspan="4">41</td><td>P052</td></tr>
<tr><td>A20</td></tr>
<tr><td>PPG34_0</td></tr>
<tr><td>INT14_0</td></tr>
<tr><td rowspan="6">16</td><td rowspan="6">19</td><td rowspan="6">24</td><td rowspan="6">29</td><td rowspan="6">34</td><td rowspan="6">42</td><td>P053</td></tr>
<tr><td>A21</td></tr>
<tr><td>AN44</td></tr>
<tr><td>PPG35_0</td></tr>
<tr><td>INT14_1</td></tr>
<tr><td>SCK0_1</td></tr>
<tr><td rowspan="3">-</td><td rowspan="3">-</td><td rowspan="3">-</td><td rowspan="3">-</td><td rowspan="3">35</td><td rowspan="3">43</td><td>P054</td></tr>
<tr><td>SYSCLK</td></tr>
<tr><td>PPG36_0</td></tr>
<tr><td rowspan="6">17</td><td rowspan="6">22</td><td rowspan="6">27</td><td rowspan="6">32</td><td rowspan="6">38</td><td rowspan="6">46</td><td>P055</td></tr>
<tr><td>CS2X</td></tr>
<tr><td>SIN10_0</td></tr>
<tr><td>AN43</td></tr>
<tr><td>PPG37_0</td></tr>
<tr><td>TIN4_1</td></tr>
<tr><td colspan="6"></td><td></td></tr>
<tr><td rowspan="7">-</td><td rowspan="7">-</td><td rowspan="7">-</td><td rowspan="7">33</td><td rowspan="7">39</td><td rowspan="7">49</td><td>P056</td></tr>
<tr><td>CS3X</td></tr>
<tr><td>ICU9_0</td></tr>
<tr><td>PPG0_1</td></tr>
<tr><td>ICU0_1</td></tr>
<tr><td>TIN5_1</td></tr>
<tr><td>DTTI_2</td></tr>
</table></td></tr>
</table>

Page	Section	Change Results
23, 24	■PIN Description	(Continued) (Correct)

Pin no.						Pin Name
64	80	100	120	144	176	
15 *1	18 *1	23 *1	27 *1	30	37	P047
						A17 *2, *3, *4, *5
						AN45
						TRG8_0
						TIN3_2
						SOT0_1
-	-	-	-	-	38	P177
						TRG11_0
-	-	-	28 *1	31	39	P050
						A18 *5
						TRG5_1
						PPG33_0
-	-	-	-	32	40	P051
						A19
						TRG9_0
-	-	-	-	33	41	P052
						A20
						PPG34_0
						INT14_0
16 *1	19 *1	24 *1	29 *1	34	42	P053
						A21 *2, *3, *4, *5
						AN44
						PPG35_0
						INT14_1
						SCK0_1
-	-	-	-	35	43	P054
						SYSCLK
						PPG36_0
17 *1	22 *1	27 *1	32 *1	38	46	P055
						CS2X *2, *3, *4, *5
						SIN10_0
						AN43
						PPG37_0
						TIN4_1
-	-	-	33 *1	39	49	P056
						CS3X *5
						ICU9_0
						PPG0_1
						ICU0_1
						TIN5_1
						DTTI_2

<table>
<tr><th>Page</th><th>Section</th><th>Change Results</th></tr>
<tr><td>33</td><td>■PIN Description</td><td>
A List of "Pin Description" modified.

(Error)
<table>
<tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr>
<tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr>
<tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr>
<tr><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">94</td><td rowspan="5">111</td><td rowspan="5">131</td><td rowspan="5">159</td><td>P000</td></tr>
<tr><td>D16</td></tr>
<tr><td>SIN1_0</td></tr>
<tr><td>TIOA0_1</td></tr>
<tr><td>INT2_0</td></tr>
<tr><td rowspan="4">-</td><td rowspan="4">75</td><td rowspan="4">95</td><td rowspan="4">112</td><td rowspan="4">132</td><td rowspan="4">160</td><td>P001</td></tr>
<tr><td>D17</td></tr>
<tr><td>SOT1_0</td></tr>
<tr><td>TIOA1_1</td></tr>
</table>

(Correct)
<table>
<tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr>
<tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr>
<tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr>
<tr><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">94 *1</td><td rowspan="5">111 *1</td><td rowspan="5">131</td><td rowspan="5">159</td><td>P000</td></tr>
<tr><td>D16 *4, *5</td></tr>
<tr><td>SIN1_0</td></tr>
<tr><td>TIOA0_1 *4</td></tr>
<tr><td>INT2_0</td></tr>
<tr><td rowspan="4">-</td><td rowspan="4">75 *1</td><td rowspan="4">95 *1</td><td rowspan="4">112 *1</td><td rowspan="4">132</td><td rowspan="4">160</td><td>P001</td></tr>
<tr><td>D17 *3, *4, *5</td></tr>
<tr><td>SOT1_0 *3</td></tr>
<tr><td>TIOA1_1</td></tr>
</table>
</td></tr>
</table>

Revision	ECN	Orig. of Change	Submission Date	Description of Change
				Value: Min -30 Max 30 ↓ Pin name: SCK0 to SCK2,SCK5 to SCK11 SOT0 to SOT2,SOT5 to SOT11 Value: Min -30 Max 30 Pin name: SCK3,SCK4 SOT3,SOT4 Value: Min -300 Max 300 (4-1-1),(4-1-4)Valid SIN⇒SCK↑ setup time t_{IVSHI} (4-1-2),(4-1-3)Valid SIN⇒SCK↓ setup time t_{IVSLI} Corrected the following description. Pin name: SCK0 to SCK11 SIN0 to SIN11 Value: Min 34 Max - ↓ Pin name: SCK0 to SCK2,SCK5 to SCK11 SIN0 to SIN2,SIN5 to SIN11 Value: Min 34 Max - Pin name: SCK3,SCK4,SIN3,SIN4 Value: Min 300 Max – (4-1-1),(4-1-4)SCK↓⇒SOT delay time t_{SLOVE} (4-1-2),(4-1-3)SCK↑⇒SOT delay time t_{SHOVE} Corrected the following description. Pin name: SCK0 to SCK11 SOT0 to SOT11 Value: Min - Max 33 ↓ Pin name: SCK0 to SCK2,SCK5 to SCK11 SOT0 to SOT2,SOT5 to SOT11 Value: Min - Max 33 Pin name: SCK3,SCK4 SOT3,SOT4 Value: Min - Max 300 (4-1-1),(4-1-2),(4-1-3),(4-1-4)SCK fall time t_F Corrected the following description. Pin name: SCK0 to SCK2,SCK5 to SCK11 Value: Min - Max 5 Pin name: SCK3,SCK4 Value: Min - Max 250 ↓ Pin name: SCK0 to SCK11 Value: Min - Max 5 (4-1-5)SCS↓⇒SCK↓ setup time t_{CSSI} (4-1-6)SCS↓⇒SCK↑ setup time t_{CSSI} (4-1-7)SCS↑⇒SCK↓ setup time t_{CSSI} (4-1-8)SCS↑⇒SCK↑ setup time t_{CSSI} Corrected the following description. Pin name: SCK1 to SCK11 SCS1 to SCS3,SCS40 to SCS43,SCS50 to SCS53,SCS60 to SCS63,SCS70 to SCS73,SCS8 to SCS11 Value: Min t_{CSSU}+0 Max t_{CSSU}+50 ↓ Pin name: SCK1,SCK2,SCK5 to SCK11 SCS1,SCS2,SCS50 to SCS53,SCS60 to SCS63,SCS70 to SCS73,SCS8 to SCS11 Value: Min t_{CSSU}-50 Max t_{CSSU}+0 Pin name: SCK3,SCK4 SCS3,SCS40 to SCS43 Value: Min t_{CSSU}-50 Max t_{CSSU}+300