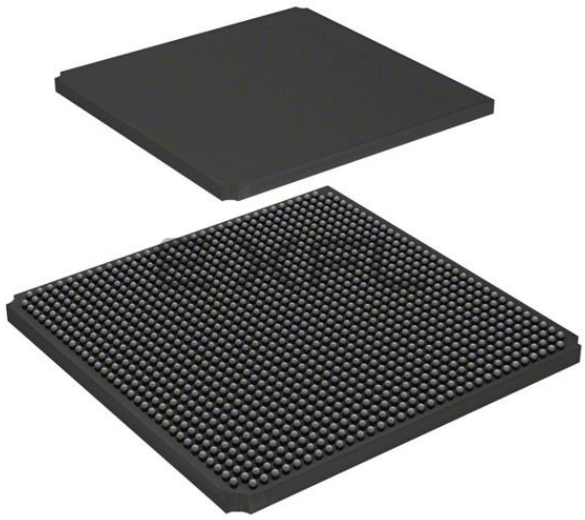

Welcome to E-XFL.COM

Embedded - System On Chip (SoC): The Heart of Modern Embedded Systems

Embedded - System On Chip (SoC) refers to an integrated circuit that consolidates all the essential components of a computer system into a single chip. This includes a microprocessor, memory, and other peripherals, all packed into one compact and efficient package. SoCs are designed to provide a complete computing solution, optimizing both space and power consumption, making them ideal for a wide range of embedded applications.

What are Embedded - System On Chip (SoC)?

System On Chip (SoC) integrates multiple functions of a computer or electronic system onto a single chip. Unlike traditional multi-chip solutions, SoCs combine a central

Details	
Product Status	Active
Architecture	MCU, FPGA
Core Processor	ARM® Cortex®-M3
Flash Size	512KB
RAM Size	64KB
Peripherals	DDR, PCIe, SERDES
Connectivity	CANbus, Ethernet, I²C, SPI, UART/USART, USB
Speed	166MHz
Primary Attributes	FPGA - 150K Logic Modules
Operating Temperature	-55°C ~ 125°C (TJ)
Package / Case	1152-BBGA, FCBGA
Supplier Device Package	1152-FCBGA (35x35)
Purchase URL	https://www.e-xfl.com/product-detail/microchip-technology/m2s150ts-1fcg1152m

8.9. I/O Register Specifications . . . 66
8.9.1 Input Register . . . 66
8.9.2 Output/Enable Register . . . 68
8.10. DDR Module Specification . . . 70
8.10.1 Input DDR Module . . . 70
8.10.2 Input DDR Timing Diagram . . . 71
8.10.3 Timing Characteristics . . . 72
8.10.4 Output DDR Module . . . 73
8.10.5 Timing Characteristics . . . 75
9. Logic Element Specifications . . . 76
9.1. 4-input LUT (LUT-4) . . . 76
9.2. Sequential Module . . . 77
9.2.1 Timing Characteristics . . . 78
10. Global Resource Characteristics . . . 78
11. FPGA Fabric SRAM . . . 80
11.1. FPGA Fabric Large SRAM (LSRAM) . . . 80
11.2. FPGA Fabric Micro SRAM (uSRAM) . . . 87
12. Embedded NVM (eNVM) Characteristics . . . 97
13. Crystal Oscillator . . . 98
14. On-Chip Oscillator . . . 99
15. Clock Conditioning Circuits (CCC) . . . 100
16. JTAG . . . 101
17. DEVRST_N Characteristics . . . 102
18. System Controller SPI Characteristics . . . 103
19. Mathblock Timing Characteristics . . . 104
20. Flash*Freeze Timing Characteristics . . . 105
21. DDR Memory Interface Characteristics . . . 107
22. SFP Transceiver Characteristics . . . 108
23. PCIe Electrical and Timing AC and DC Characteristics . . . 109
24. SmartFusion2 Specifications . . . 110
24.1. MSS Clock Frequency . . . 110
24.2. SmartFusion2 Inter-Integrated Circuit (I^2C) Characteristics . . . 110
24.3. Serial Peripheral Interface (SPI) Characteristics . . . 113
25. CAN Controller Characteristics . . . 116
26. USB Characteristics . . . 117
27. IGLOO2 Specifications . . . 118
27.1. HPMS Clock Frequency . . . 118
27.2. IGLOO2 Serial Peripheral Interface (SPI) Characteristics . . . 118
28. List of Changes . . . 121
29. Datasheet Categories . . . 122
29.1. Categories . . . 122
29.2. Product Brief . . . 122
29.3. Advance . . . 122
29.4. Preliminary . . . 122
29.5. Production . . . 122

30. Safety Critical, Life Support, and High-Reliability Applications Policy 123
31. Microsemi Corporate Headquarters 123