



Welcome to [E-XFL.COM](#)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

Details

| | |
|----------------------------|---|
| Product Status | Active |
| Core Processor | e200z4 |
| Core Size | 32-Bit Dual-Core |
| Speed | 180MHz |
| Connectivity | CANbus, Ethernet, FlexRay, LINbus, SPI, UART/USART |
| Peripherals | DMA, LVD, POR, WDT |
| Number of I/O | - |
| Program Memory Size | 1MB (1M x 8) |
| Program Memory Type | FLASH |
| EEPROM Size | - |
| RAM Size | 128K x 8 |
| Voltage - Supply (Vcc/Vdd) | 3.15V ~ 5.5V |
| Data Converters | A/D 64x12b |
| Oscillator Type | Internal |
| Operating Temperature | -40°C ~ 135°C (TA) |
| Mounting Type | Surface Mount |
| Package / Case | 144-LQFP |
| Supplier Device Package | 144-LQFP (20x20) |
| Purchase URL | https://www.e-xfl.com/product-detail/nxp-semiconductors/spc5741pk1aklq8 |

MPC574xP Microcontroller

Power Architecture®-based MCU
for Automotive and Industrial Applications

Product One-Sheet

Data Sheet

Tools

Buy

Performance—2 x e200z4 cores in delayed lockstep operating up to 200 MHz, embedded floating point unit, 32-channel eDMA in delayed lockstep

High Reliability—AEC-Q100, automotive quality, up to 135°C ambient temperature

Abundant Features—FlexCAN, LINFlexD, DSPI, SENT, LFAST SIPI support, Dual-channel FlexRay™, Ethernet

Functional Safety—Built to support functional safety (ISO 26262/ASIL D and IEC 61508 SIL3), end-to-end ECC


MPC574xP Specifications

| | | | |
|----------|----------------------|-------------|--|
| Flash | Up to 2.5 MB | Timer/PWM | 2 x FlexPWM w/ 4 x (2+1) ch. |
| RAM | Up to 384 KB | Other Timer | 2 x eTimer w/ 6-ch., 1 x PIT / STM w/ 4-ch., SWT |
| Core | 2 x e200z4 lockstep | Analog | 4 x 12 bit ADC w/ 16-ch. |
| Speed | Up to 200 MHz | Comm | SENT, ADC, FlexCAN, FlexRay, LINFlex, DSPI, FlexPWM and SIPI/LFAST 3G IF |
| Package | 144 LQFP/257 BGA | | |
| Op Range | 3.15 V to 5.5 V | Safety | Core/DMA lockstep, e2eECC, duplicate periphery, LBIST/MBIST, ADC self-test, FCCU |
| Temp | -40°C to up to 135°C | | |


Orderable Samples

| Part Number | Temp. Range | Flash | SRAM | Package |
|-------------|----------------|--------|--------|------------------|
| SPC5744P | -40°C to 125°C | 2.5 MB | 384 KB | 144 LQFP/257 BGA |
| SPC5743P | -40°C to 125°C | 2 MB | 256 KB | 144 LQFP/257 BGA |
| SPC5742P | -40°C to 125°C | 1.5 MB | 192 KB | 144 LQFP/257 BGA |
| SPC5741P | -40°C to 125°C | 1 MB | 128 KB | 144 LQFP/257 BGA |

MPC574xP Block Diagram

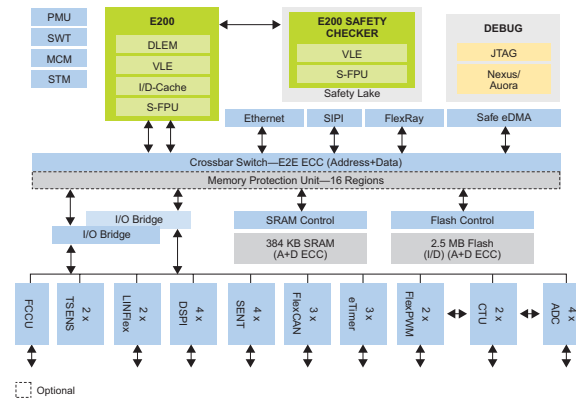

Motor Control Application

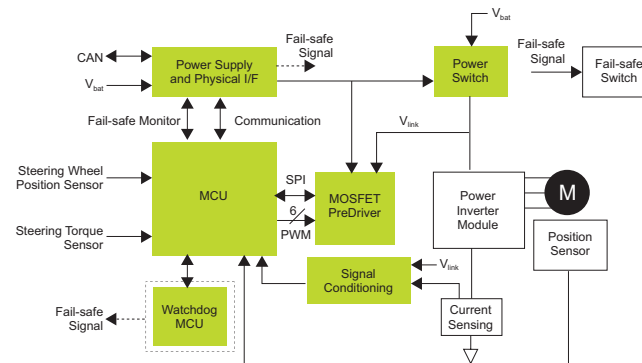

Success Stories

- ▶ Electronic power steering
- ▶ Wireless charging
- ▶ Shock controller
- ▶ DC-DC converter

Target Applications

- ▶ Electric power steering (EPS)
- ▶ Airbag system
- ▶ Safety domain control
- ▶ Safety motor controller
- ▶ Active driver assistance system
- ▶ Adaptive cruise control
- ▶ Braking and stability control
- ▶ Active suspension

Enablement Tools

- ▶ Development hardware:
 - Mother evaluation board
 - Daughter adapter boards
- ▶ Runtime software:
 - Flash and EEPROM driver
- ▶ Compiler: Green Hills, Wind River
- ▶ Debugger: Lauterbach, iSystem, PLS



www.nxp.com/MPC574xP

NXP, the NXP logo, Freescale, the Energy Efficient Solutions logo, SafeAssure and the SafeAssure logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org. © 2014–2016 NXP B.V.

Document Number: MPC574xPFS REV 3

