

Welcome to [E-XFL.COM](#)

### Understanding [Embedded - Microprocessors](#)

Embedded microprocessors are specialized computing chips designed to perform specific tasks within an embedded system. Unlike general-purpose microprocessors found in personal computers, embedded microprocessors are tailored for dedicated functions within larger systems, offering optimized performance, efficiency, and reliability. These microprocessors are integral to the operation of countless electronic devices, providing the computational power necessary for controlling processes, handling data, and managing communications.

### Applications of [Embedded - Microprocessors](#)

Embedded microprocessors are utilized across a broad spectrum of applications, making them indispensable in

#### Details

Product Status	Discontinued at Digi-Key
Core Processor	ARM® Cortex®-A53
Number of Cores/Bus Width	1 Core, 64-Bit
Speed	800MHz
Co-Processors/DSP	-
RAM Controllers	DDR3L
Graphics Acceleration	-
Display & Interface Controllers	-
Ethernet	-
SATA	SATA 6Gbps (1)
USB	USB 2.0 (1), USB 3.0 + PHY
Voltage - I/O	-
Operating Temperature	0°C ~ 105°C (TA)
Security Features	ARM TZ
Package / Case	211-VFLGA
Supplier Device Package	211-FCLGA (9.6x9.6)
Purchase URL	<a href="https://www.e-xfl.com/product-detail/nxp-semiconductors/pls1012ase7hka">https://www.e-xfl.com/product-detail/nxp-semiconductors/pls1012ase7hka</a>



Enterprise-class security and packet acceleration in a 1 W typical power processor

## QorIQ LS1012A Processor

The QorIQ LS1012A processor provides intelligent integration and extreme power efficiency in a small 9.6 x 9.6 mm package for fanless, small form factor networking and IoT applications.

### TARGET APPLICATIONS

- ▶ Trust-enabled IoT gateways
- ▶ Consumer NAS
- ▶ Mobile NAS (battery powered)
- ▶ Ethernet drives for data center center storage
- ▶ Entry-level broadband Ethernet gateways
- ▶ Building and factory automation

Incorporating a 64-bit ARM® Cortex®-A53 core, the QorIQ LS1012A processor delivers CoreMark™ performance of over 2,000 as well as hardware acceleration for packet processing and security, and the best overall performance of any 1 W typical power communications processor.

### CORE COMPLEX

The QorIQ LS1012A processor integrates a single ARM Cortex-A53 core running up to 800 MHz with ECC-protected

L1 and L2 caches and incorporates the same trust architecture and software compatibility of higher-tier QorIQ LS family devices. The LS1012A processor features 32 KB of L1 instruction and data cache and 256 KB of coherent L2 cache. In addition, the Cortex-A53 core features the NEON™ SIMD module and dual-precision floating point unit (FPU). The memory controller supports 16-bit DDR3L memory devices at 1000 MHz.

### SYSTEM INTERFACES AND NETWORKING

The QorIQ LS1012A processor features a three-lane, 6 GHz multi-protocol SerDes that provides support for high-speed interfaces, including up to two Gigabit Ethernet ports, DMA-controlled PCI Express® generation 2.0 port, and one SATA 3.0 port. The LS1012A processor also features dual USB controllers—one supporting SuperSpeed USB 3.0 with integrated PHY, the other supporting USB 2.0 functions. Additional interfaces include QuadSPI and support for SD/MMC.




The LS1012A includes a hardware packet forwarding engine (PFE) which offloads processing of IP packets from the main CPU, yielding higher performance and lower power than pure software processing can achieve. The PFE is capable of 2 Gbit/s IP forwarding even with the smallest packets, with virtually no CPU load.

COMPLETE ENABLEMENT,  
RICH ECOSYSTEM

For customer evaluation, the QorIQ LS1012A processor will be supported by an evaluation board featuring an integrated on-board probe for further cost savings, along with third-party platforms developed by NXP’s embedded board solution partners. Evaluation kits include a Linux® BSP with optimized drivers to support peripherals and a six-month evaluation license for CodeWarrior development tools.

All QorIQ LS series devices are supported by our Product Longevity Program to ensure long-term availability, as well as our extensive third-party ecosystem, the largest and most established in the communications market. In conjunction with our expertise and worldwide support infrastructure, the ecosystem helps customers accelerate their migration from both competitive solutions and from legacy Freescale devices, preserve investment costs and reduce time-to-market.

QorIQ LS1012A BLOCK DIAGRAM

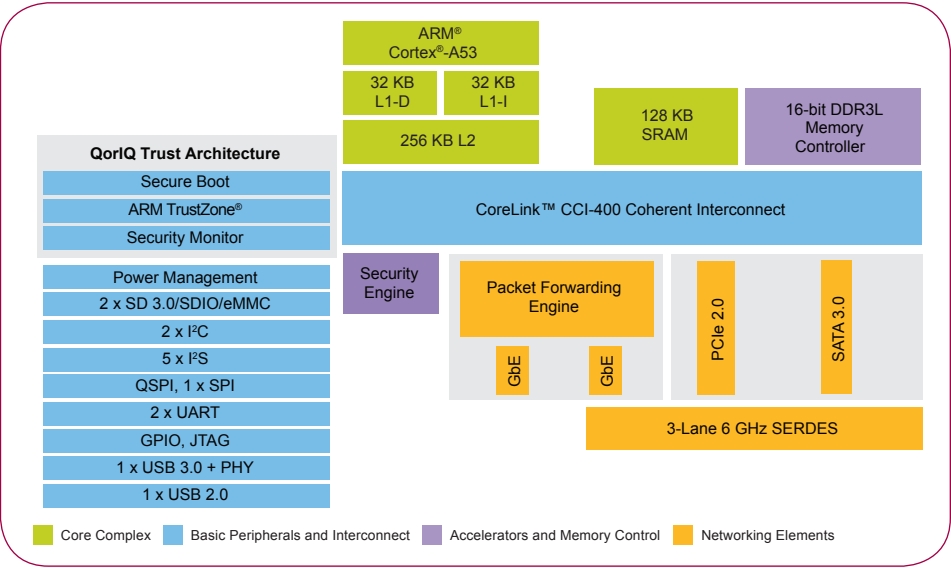

QorIQ LS1012A FEATURES

64-bit ARM® Cortex®-A53 core	Extreme power efficiency, delivering over 3,000 CoreMarks® at 1 W typical power
ECC-protected cache memories	First 1 W typical power embedded processor featuring ARM Cortex-A53 core with ECC protected caches and coherent 256 KB L2 for high reliability applications
Rich connectivity and peripheral features including PCI Express® Gen2, USB 3.0, SATA 3, QuadSPI, SDIO	High integration that enables support for 802.11ac modules and high bandwidth connectivity for ASICs, 4G/LTE, SATA, low-cost NOR Flash
Packet acceleration engine	Delivers hardware acceleration for outstanding IP forwarding and NAS performance
Security and trust architecture	Support for ARM TrustZone® and secure boot, together with high performance cryptographic processing and manufacturing protection
Low-cost board designs	The LS1012A package is engineered to support low-cost, 4-layer board designs to minimize system costs