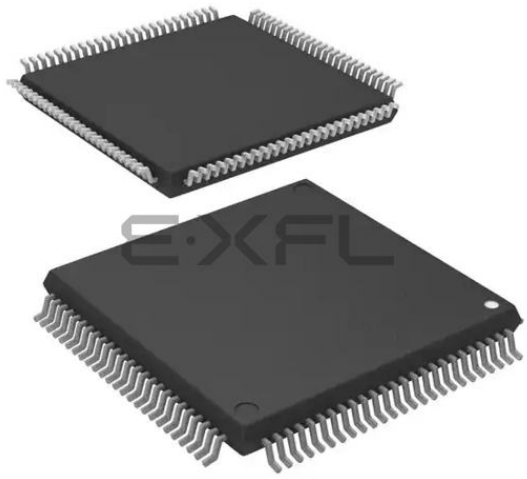

Welcome to E-XFL.COM

What is "Embedded - Microcontrollers"?

"Embedded - Microcontrollers" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "Embedded - Microcontrollers"

Details	
Product Status	Obsolete
Core Processor	R32C/100
Core Size	16/32-Bit
Speed	50MHz
Connectivity	CANbus, EBI/EMI, I²C, IEBus, UART/USART
Peripherals	DMA, LVD, PWM, WDT
Number of I/O	84
Program Memory Size	768KB (768K x 8)
Program Memory Type	FLASH
EEPROM Size	8K x 8
RAM Size	63K x 8
Voltage - Supply (Vcc/Vdd)	3V ~ 5.5V
Data Converters	A/D 26x10b; D/A 2x8b
Oscillator Type	Internal
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	100-LQFP
Supplier Device Package	100-LFQFP (14x14)
Purchase URL	https://www.e-xfl.com/product-detail/renesas-electronics-america/r5f64178dfb-ub

2. Central Processing Unit (CPU)

The CPU contains the registers shown below. There are two register banks each consisting of registers R2R0, R3R1, R6R4, R7R5, A0 to A3, SB, and FB.

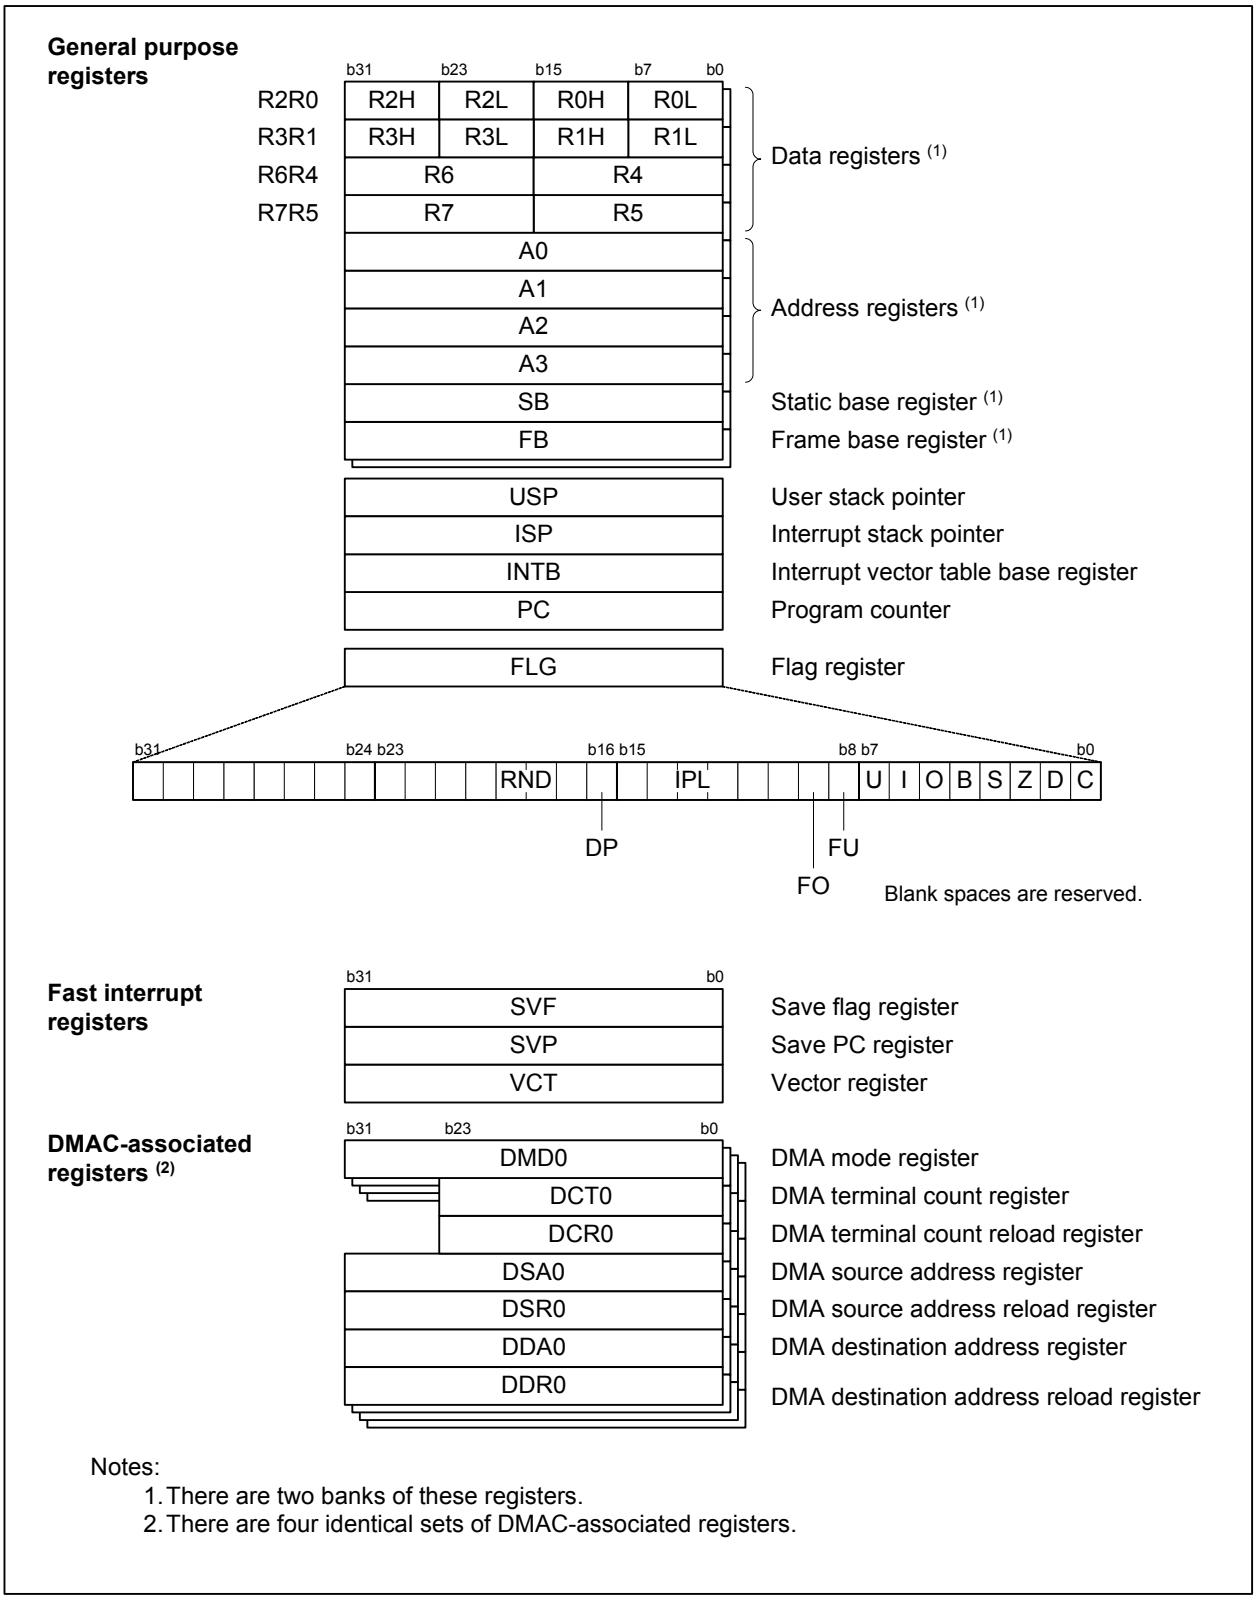

Figure 2.1 CPU Registers

Table 4.30 SFR List (30)

Address	Register	Symbol	Reset Value
047CC0h	CAN0 Mailbox 12: Message Identifier	C0MB12	XXXX XXXXh
047CC1h			
047CC2h			
047CC3h			
047CC4h			
047CC5h	CAN0 Mailbox 12: Data Length		XXh
047CC6h	CAN0 Mailbox 12: Data Field		XXXX XXXX
047CC7h			XXXX XXXXh
047CC8h			
047CC9h			
047CCAh			
047CCBh			
047CCCh			
047CCDh			
047CCEh	CAN0 Mailbox 12: Time Stamp		XXXXh
047CCFh			
047CD0h	CAN0 Mailbox 13: Message Identifier	C0MB13	XXXX XXXXh
047CD1h			
047CD2h			
047CD3h			
047CD4h			
047CD5h	CAN0 Mailbox 13: Data Length		XXh
047CD6h	CAN0 Mailbox 13: Data Field		XXXX XXXX
047CD7h			XXXX XXXXh
047CD8h			
047CD9h			
047CDAh			
047CDBh			
047CDCh			
047CDDh			
047CDEh	CAN0 Mailbox 13: Time Stamp		XXXXh
047CDFh			
047CE0h	CAN0 Mailbox 14: Message Identifier	C0MB14	XXXX XXXXh
047CE1h			
047CE2h			
047CE3h			
047CE4h			
047CE5h	CAN0 Mailbox 14: Data Length		XXh
047CE6h	CAN0 Mailbox 14: Data Field		XXXX XXXX
047CE7h			XXXX XXXXh
047CE8h			
047CE9h			

Table 4.34 SFR List (34)

Address	Register	Symbol	Reset Value
047D80h	CAN0 Mailbox 24: Message Identifier	C0MB24	XXXX XXXXh
047D81h			
047D82h			
047D83h			
047D84h			
047D85h	CAN0 Mailbox 24: Data Length		XXh
047D86h	CAN0 Mailbox 24: Data Field		XXXX XXXX
047D87h			XXXX XXXXh
047D88h			
047D89h			
047D8Ah			
047D8Bh			
047D8Ch			
047D8Dh			
047D8Eh	CAN0 Mailbox 24: Time Stamp		XXXXh
047D8Fh			
047D90h	CAN0 Mailbox 25: Message Identifier	C0MB25	XXXX XXXXh
047D91h			
047D92h			
047D93h			
047D94h			
047D95h	CAN0 Mailbox 25: Data Length		XXh
047D96h	CAN0 Mailbox 25: Data Field		XXXX XXXX
047D97h			XXXX XXXXh
047D98h			
047D99h			
047D9Ah			
047D9Bh			
047D9Ch			
047D9Dh			
047D9Eh	CAN0 Mailbox 25: Time Stamp		XXXXh
047D9Fh			
047DA0h	CAN0 Mailbox 26: Message Identifier	C0MB26	XXXX XXXXh
047DA1h			
047DA2h			
047DA3h			
047DA4h			
047DA5h	CAN0 Mailbox 26: Data Length		XXh
047DA6h	CAN0 Mailbox 26: Data Field		XXXX XXXX
047DA7h			XXXX XXXXh
047DA8h			
047DA9h			
047DAAh			
047DABh			
047DACh			
047DADh			
047DAEh	CAN0 Mailbox 26: Time Stamp		XXXXh
047DAFh			

X: Undefined
Blanks are reserved. No access is allowed.

V_{CC} = 5 V

Table 5.16 Electrical Characteristics (2/3)
(V_{CC} = 4.2 to 5.5 V, V_{SS} = 0 V, T_a = T_{opr}, and $f_{(CPU)}$ = 64 MHz, unless otherwise noted)

Symbol	Characteristic	Measurement Condition	Value Min.	Value Typ.	Value Max.	Unit
V_{T+} - V_{T-}	Hysteresis	HOLD, RDY, NMI, INT0 to INT8, KI0 to KI3, TA0IN to TA4IN, TA0OUT to TA4OUT, TB0IN to TB5IN, CTS0 to				

Notes:
1. Pins INT6 to INT8 are available in the 144-pin package only.
2. Ports P9_0, P9_2, and P11 to P15 are available in the 144-pin package only. Port P9_1 is designated as input pin in the 100-pin package.

V_{CC} = 5 V

Timing Requirements (V_{CC} = 4.2 to 5.5 V, V_{SS} = 0 V, and T_a = T_{opr}, unless otherwise noted)

Table 5.20 External Clock Input

Symbol	Characteristic	Value		Unit
		Min.	Max.	
$t_{c(X)}$	External clock input period	62.5	250	ns
$t_{w(XH)}$	External clock input high level pulse width	25		ns
$t_{w(XL)}$	External clock input low level pulse width	25		ns
$t_{r(X)}$	External clock input rise time		5	ns
$t_{f(X)}$	External clock input fall time		5	ns
t_w / t_c	External clock input duty	40	60	%

Table 5.21 External Bus Timing

Symbol	Characteristic	Value		Unit
		Min.	Max.	
$t_{su(D-R)}$	Data setup time before read	40		ns
$t_{h(R-D)}$	Data hold time after read	0		ns
$t_{dis(R-D)}$	Data disable time after read		0.5 × $t_{c(Base)}$ + 10	ns

V_{CC} = 5 V

Timing Requirements (V_{CC} = 4.2 to 5.5 V, V_{SS} = 0 V, and T_a = T_{opr}, unless otherwise noted)

Table 5.30 Serial Interface

Symbol	Characteristic	Value		Unit
		Min.	Max.	
$t_{c(CK)}$	CLKi input clock cycle time	200		ns
$t_{w(CKH)}$	CLKi input high level pulse width	80		ns
$t_{w(CKL)}$	CLKi input low level pulse width	80		ns
$t_{su(D-C)}$	RXDi input setup time	80		ns
$t_{h(C-D)}$	RXDi input hold time	90		ns

Table 5.31 A/D Trigger Input

Symbol	Characteristic	Value		Unit
		Min.	Max.	
$t_{w(ADH)}$	ADTRG input high level pulse width Hardware trigger input high level pulse width	$\frac{3}{\phi_{AD}}$		ns
$t_{w(ADL)}$	ADTRG input low level pulse width Hardware trigger input high level pulse width	125		ns

Table 5.32 External Interrupt INTi Input

Symbol	Characteristic		Value		Unit
			Min.	Max.	
$t_{w(INH)}$	INTi input high level pulse width	Edge sensitive	250		ns
		Level sensitive	$t_{c(CPU)}$ + 200		ns
$t_{w(INL)}$	INTi input low level pulse width	Edge sensitive	250		ns
		Level sensitive	$t_{c(CPU)}$ + 200		ns

Table 5.33 Intelligent I/O

Symbol	Characteristic	Value		Unit
		Min.	Max.	
$t_{c(ISCLK2)}$	ISCLK2 input clock cycle time	600		ns
$t_{w(ISCLK2H)}$	ISCLK2 input high level pulse width	270		ns
$t_{w(ISCLK2L)}$	ISCLK2 input low level pulse width	270		ns
$t_{su(RXD-ISCLK2)}$	ISRXD2 input setup time	150		ns
$t_{h(ISCLK2-RXD)}$	ISRXD2 input hold time	100		ns

V_{CC} = 3.3 V

Table 5.45 D/A Conversion Characteristics (V_{CC} = AV_{CC} = V_{REF} = 3.0 to 3.6 V, V_{SS} = AV_{SS} = 0 V, and T_a = T_{opr}, unless otherwise noted)

Symbol	Characteristic	Measurement Condition	Value			Unit
			Min.	Typ.	Max.	
—	Resolution				8	Bits
—	Absolute precision				1.0	%
t_S	Settling time				3	µs
R_O						

Note:
1. One D/A converter is used. The DAi register (i = 0, 1) of the other unused converter is set to 00h. The resistor ladder for the A/D converter is not considered.
Even when the VCUT bit in the AD0CON1 register is set to 0 (V_{REF} disconnected), I_{VREF} is supplied.

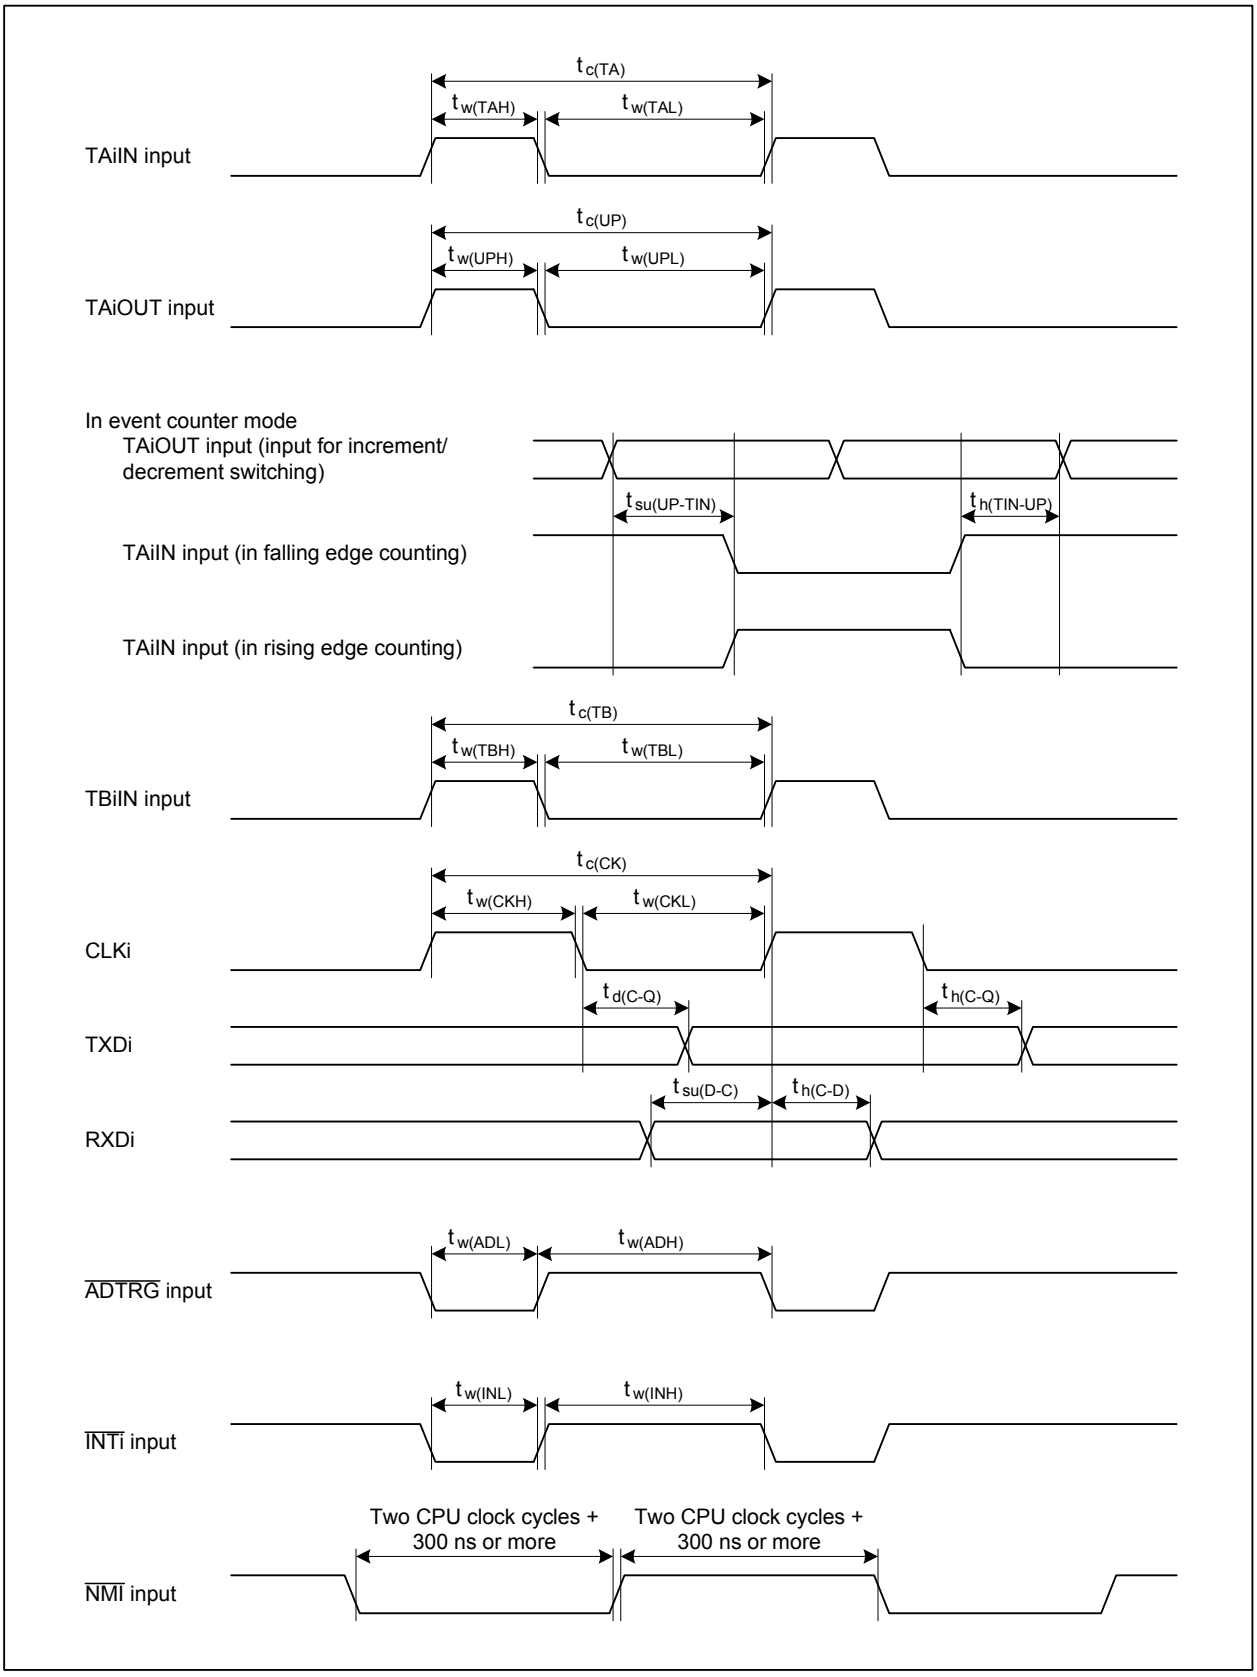

Figure 5.10 Timing of Peripherals

Revision History	R32C/117 Group Datasheet

Rev.	Date	Description	
		Page	Summary
			Chapter 1. Overview
		—	• Modified wording and enhanced description in this chapter
		2, 4	• Modified expressions “Main clock oscillator stop/re-oscillation detection”, “calculation transfer”, “chained transfer”, and “inputs/ outputs” in **Tables 1.1 and 1.3** to “Main clock oscillator stop/restart detection”, “calculation result transfer”, “chain transfer”, and “I/O ports”, respectively
		6	• Completed “on planning” phase of part number R5F6417APFB in **Table 1.5**
		6, 7	• Completed “under development” phase of versions D and P products in **Tables 1.5 and 1.6**
		10, 15	• Changed order of signals in **Figures 1.3 and 1.4**
		11, 16	• Changed order of timer pins “TB5IN/TA0IN” in **Tables 1.7 and 1.11** to “TA0IN/TB5IN”
		21	• Changed expression “I2C bus” in **Table 1.16** to “I2C-bus”
		23	• Modified Note 1 of **Table 1.18**
			Chapter 2. CPU
		—	• Modified wording and enhanced description in this chapter
		25	• Corrected a typo “R3R0” in line 3 of **2.1.1** to “R3R1”
			Chapter 3. Memory
		—	• Modified wording and enhanced description in this chapter
			Chapter 4. SFRs
		—	• Changed expressions “I2C Bus” and “I2C-Bus” to “I2C-bus”
		34, 35, 37	• Changed hexadecimal format of reset values for registers G1BCR0, G2BCR0, and G0BCR0 in **Tables 4.6, 4.7, and 4.9** to binary
		41	• Changed register name “Increment/Decrement Counting Select Register” in **Table 4.13** to “Increment/Decrement Select Register”
		43	• Corrected reset value “X00X X000b” for AD0CON2 register in **Table 4.15** to “XX0X X000b”
		53	• Modified register name “I2C Bus START Condition/STOP Condition Control Register” in **Table 4.25** to “I2C-bus START and STOP Conditions Control Register”; Corrected reset values for the following registers in: I2CSSCR, I2CCR1, I2CCR2, I2CSR, and I2CMR
		64, 65	• Changed register name “CAN0 Acceptance Mask Register k” in **Tables 4.36 and 4.37** to “CAN0 Mask Register k”
		67	• Corrected reset value “XXXX XX00b” for C0MSMR register in **Table 4.39** to “0000 0000b”
			Chapter 5. Electrical Characteristics
		—	• Modified wording and enhanced description in this chapter
		74	• Changed expression “Programming and erasure endurance of flash memory” in **Table 5.8** to “Program/erase cycles”; Changed its unit “times” to “Cycles”
		79, 92	• Added “MSCL” and “MSDA” to **Tables 5.16 and 5.42**
		80, 93	• Modified description “Drive power” in **Tables 5.17 and 5.43** to “Drive strength”
		86, 99	• Corrected “INTi” in the title of **Tables 5.32 and 5.58** to “INTi”