Silicon Labs - EFM32ZG110F16-QFN24 Datasheet

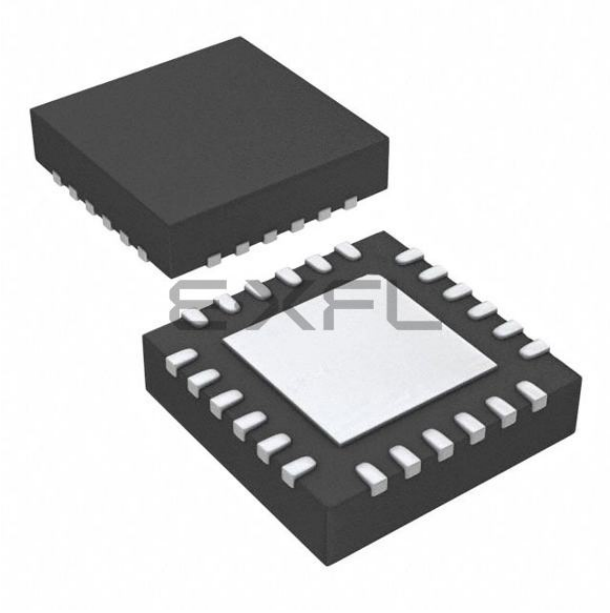

Welcome to E-XFL.COM

What is "Embedded - Microcontrollers"?

"Embedded - Microcontrollers" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "Embedded - Microcontrollers"

Details	
Product Status	Discontinued at Digi-Key
Core Processor	ARM® Cortex®-M0+
Core Size	32-Bit Single-Core
Speed	24MHz
Connectivity	EBI/EMI, I²C, IrDA, SmartCard, SPI, UART/USART
Peripherals	Brown-out Detect/Reset, DMA, I²S, POR, PWM, WDT
Number of I/O	17
Program Memory Size	16KB (16K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	4K x 8
Voltage - Supply (Vcc/Vdd)	1.98V ~ 3.8V
Data Converters	A/D 2x12b; D/A 1x12b
Oscillator Type	Internal
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	24-VQFN Exposed Pad
Supplier Device Package	24-QFN (5x5)
Purchase URL	https://www.e-xfl.com/product-detail/silicon-labs/efm32zg110f16-qfn24

Symbol	Parameter	Condition	Min	Typ	Max	Unit
		14 MHz HFRCO, all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=25°C		50	54	µA/MHz
		14 MHz HFRCO, all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=85°C		51	56	µA/MHz
		11 MHz HFRCO, all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=25°C		52	56	µA/MHz
		11 MHz HFRCO, all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=85°C		53	58	µA/MHz
		6.6 MHz HFRCO, all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=25°C		57	63	µA/MHz
		6.6 MHz HFRCO, all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=85°C		59	66	µA/MHz
		1.2 MHz HFRCO. all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=25°C		89	99	µA/MHz
		1.2 MHz HFRCO. all peripheral clocks disabled, V_{DD}= 3.0 V, T_{AMB}=85°C		92	103	µA/MHz
I_{EM2}	EM2 current	EM2 current with RTC prescaled to 1 Hz, 32.768 kHz LFRCO, V_{DD}= 3.0 V, T_{AMB}=25°C		0.9	1.25	µA
		EM2 current with RTC prescaled to 1 Hz, 32.768 kHz LFRCO, V_{DD}= 3.0 V, T_{AMB}=85°C		1.7	2.35	µA
I_{EM3}	EM3 current	EM3 current (ULFRCO enabled, LFRCO/LFXO disabled), V_{DD}= 3.0 V, T_{AMB}=25°C		0.5	0.9	µA
		EM3 current (ULFRCO enabled, LFRCO/LFXO disabled), V_{DD}= 3.0 V, T_{AMB}=85°C		1.3	2.0	µA
I_{EM4}	EM4 current	V_{DD}= 3.0 V, T_{AMB}=25°C		0.02	0.035	µA
		V_{DD}= 3.0 V, T_{AMB}=85°C		0.29	0.700	µA

Figure 3.9. EM1 Current consumption with all peripheral clocks disabled and HFRCO running at 11 MHz

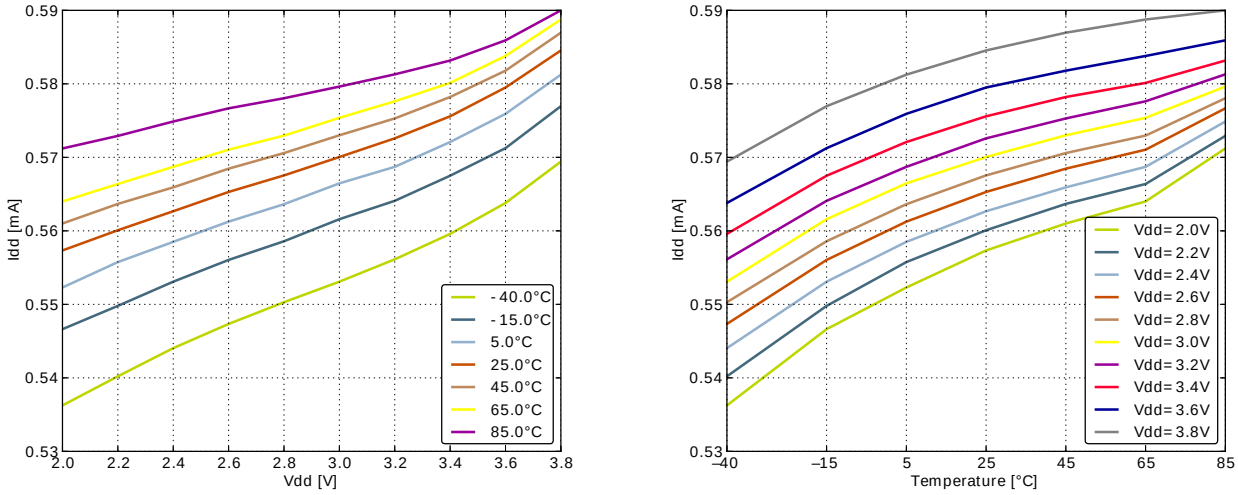

Figure 3.10. EM1 Current consumption with all peripheral clocks disabled and HFRCO running at 6.6 MHz

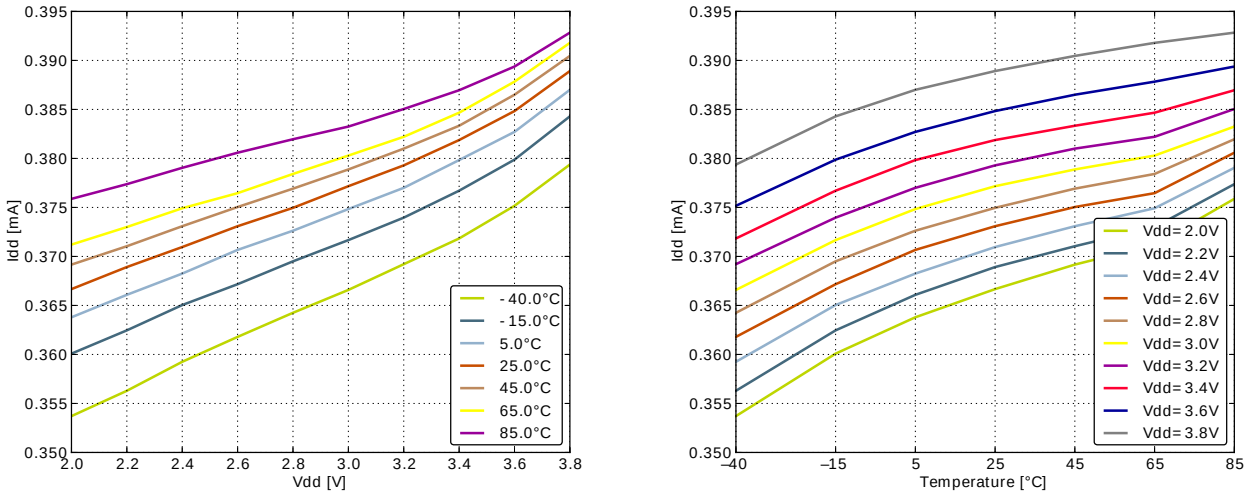

3.4.5 EM4 Current Consumption

Figure 3.13. EM4 current consumption.

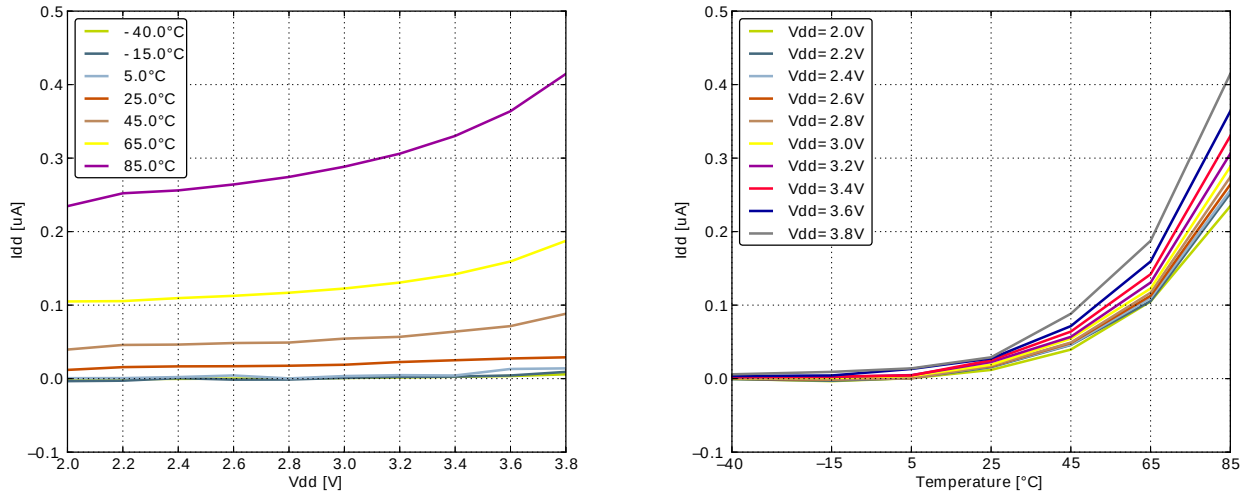

3.5 Transition between Energy Modes

The transition times are measured from the trigger to the first clock edge in the CPU.

Table 3.4. Energy Modes Transitions

Symbol	Parameter	Min	Typ	Max	Unit
t_{EM10}	Transition time from EM1 to EM0		0		HF-CORE-CLK cycles
t_{EM20}	Transition time from EM2 to EM0		2		µs
t_{EM30}	Transition time from EM3 to EM0		2		µs
t_{EM40}	Transition time from EM4 to EM0		163		µs

3.6 Power Management

The EFM32ZG requires the AVDD_x, VDD_DREG and IOVDD_x pins to be connected together (with optional filter) at the PCB level. For practical schematic recommendations, please see the application note, "AN0002 EFM32 Hardware Design Considerations".

Symbol	Parameter	Condition	Min	Typ	Max	Unit
		Sourcing 1 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = LOW		0.85V_{DD}		V
		Sourcing 1 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = LOW		0.90V_{DD}		V
		Sourcing 6 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = STANDARD	0.75V_{DD}			V
		Sourcing 6 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = STANDARD	0.85V_{DD}			V
		Sourcing 20 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = HIGH	0.60V_{DD}			V
		Sourcing 20 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = HIGH	0.80V_{DD}			V
V_{IOOL}	Output low voltage (Production test condition = 3.0V, DRIVEMODE = STANDARD)	Sinking 0.1 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = LOWEST		0.20V_{DD}		V
		Sinking 0.1 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = LOWEST		0.10V_{DD}		V
		Sinking 1 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = LOW		0.10V_{DD}		V
		Sinking 1 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = LOW		0.05V_{DD}		V
		Sinking 6 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = STANDARD			0.30V_{DD}	V
		Sinking 6 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = STANDARD			0.20V_{DD}	V
		Sinking 20 mA, V_{DD}=1.98 V, GPIO_Px_CTRL DRIVEMODE = HIGH			0.35V_{DD}	V
		Sinking 20 mA, V_{DD}=3.0 V, GPIO_Px_CTRL DRIVEMODE = HIGH			0.25V_{DD}	V
I_{IOLEAK}	Input leakage current	High Impedance IO connected to GROUND or Vdd		±0.1	±100	nA
R_{PU}	I/O pin pull-up resistor			40		kOhm
R_{PD}	I/O pin pull-down resistor			40		kOhm
R_{IOESD}	Internal ESD series resistor			200		Ohm
$t_{IOGLITCH}$	Pulse width of pulses to be removed		10		50	ns

Symbol	Parameter	Condition	Min	Typ	Max	Unit
	by the glitch suppression filter					
t_{IOOF}	Output fall time	GPIO_Px_CTRL DRIVEMODE = LOWEST and load capacitance C_L=12.5-25pF.	20+0.1C_L		250	ns
		GPIO_Px_CTRL DRIVEMODE = LOW and load capacitance C_L=350-600pF	20+0.1C_L		250	ns
V_{IOHYST}	I/O pin hysteresis (V_{IOTHR+} - V_{IOTHR-})	V_{DD} = 1.98 - 3.8 V	0.1V_{DD}			V

Figure 3.15. Typical High-Level Output Current, 2V Supply Voltage

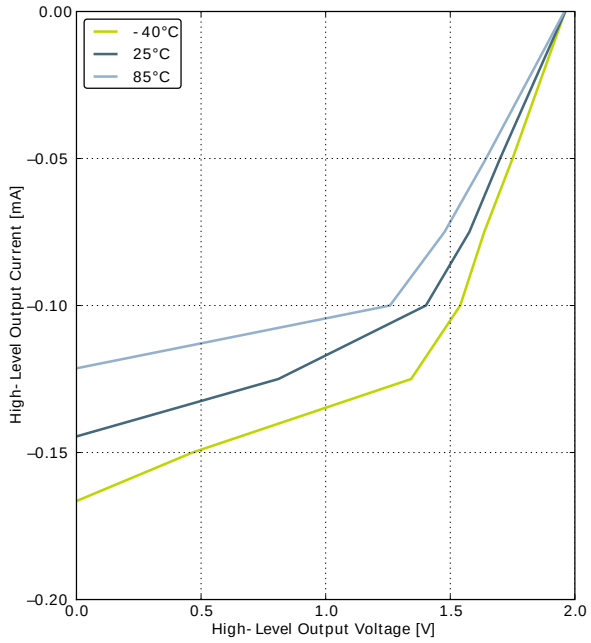

GPIO_Px_CTRL DRIVEMODE = LOWEST

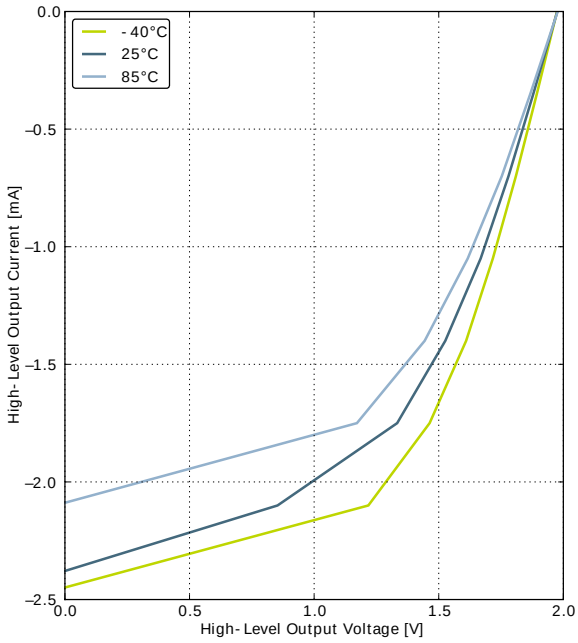

GPIO_Px_CTRL DRIVEMODE = LOW

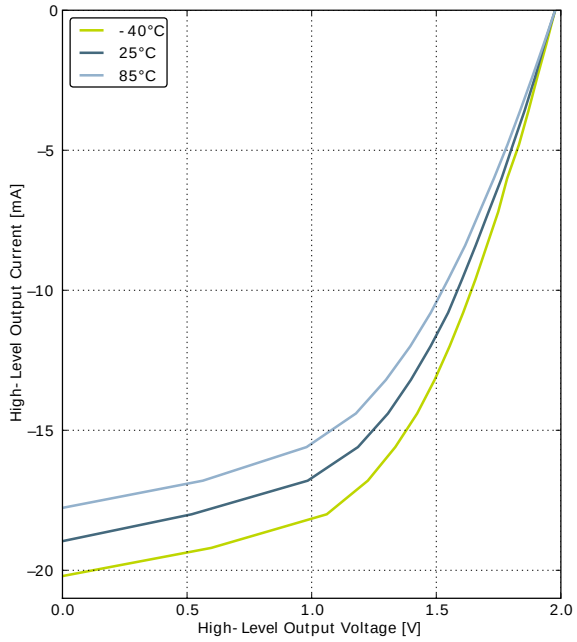

GPIO_Px_CTRL DRIVEMODE = STANDARD

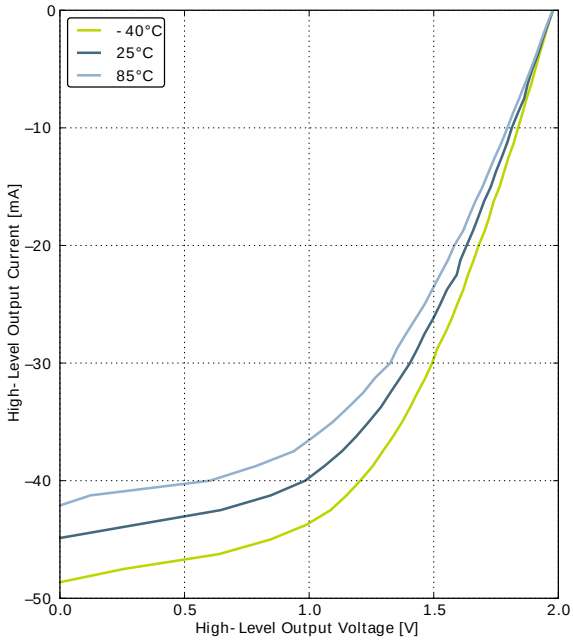

GPIO_Px_CTRL DRIVEMODE = HIGH

Figure 3.18. Typical Low-Level Output Current, 3.8V Supply Voltage

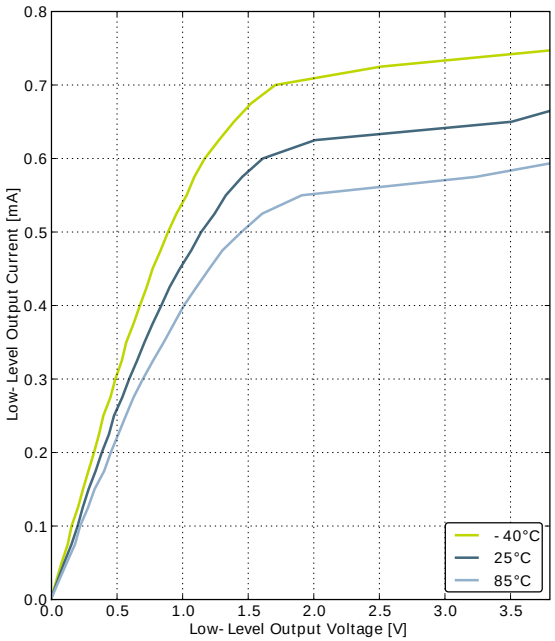

GPIO_Px_CTRL DRIVEMODE = LOWEST

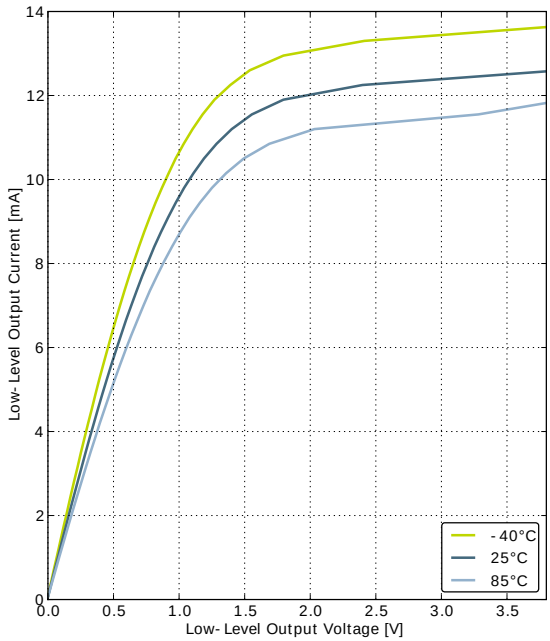

GPIO_Px_CTRL DRIVEMODE = LOW

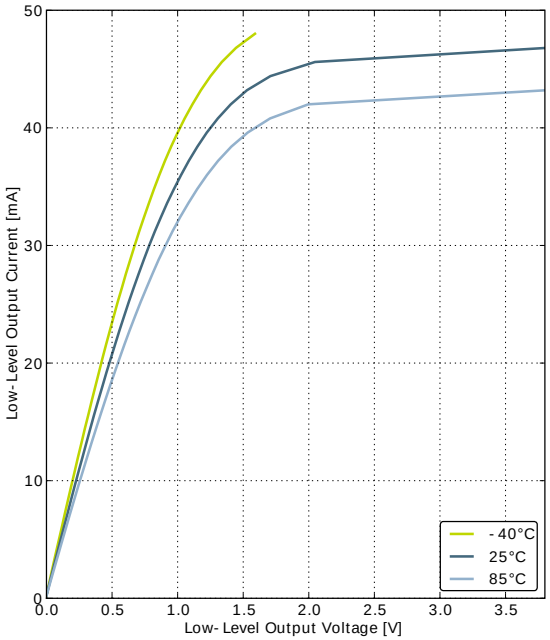

GPIO_Px_CTRL DRIVEMODE = STANDARD

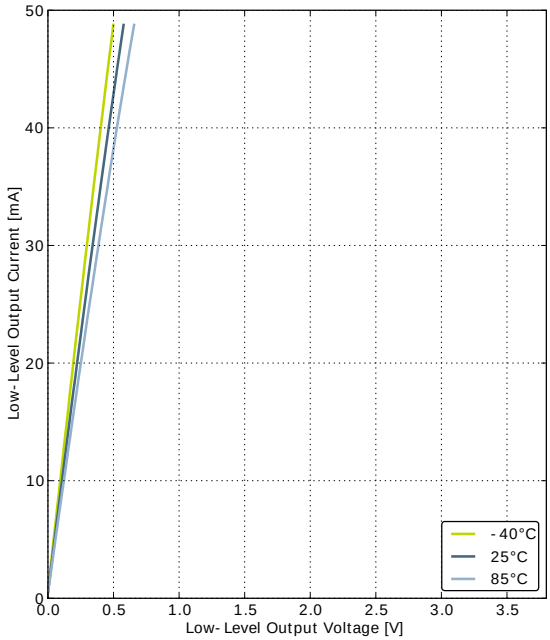

GPIO_Px_CTRL DRIVEMODE = HIGH

3.9.3 LFRCO

Table 3.10. LFRCO

Symbol	Parameter	Condition	Min	Typ	Max	Unit
f_{LFRCO}	Oscillation frequency , V_{DD}= 3.0 V, T_{AMB}=25°C		31.29	32.768	34.28	kHz
t_{LFRCO}	Startup time not including software calibration			150		µs
I_{LFRCO}	Current consumption			190		nA
$TUNESTEP_{L-FRCO}$	Frequency step for LSB change in TUNING value			1.5		%

Figure 3.20. Calibrated LFRCO Frequency vs Temperature and Supply Voltage

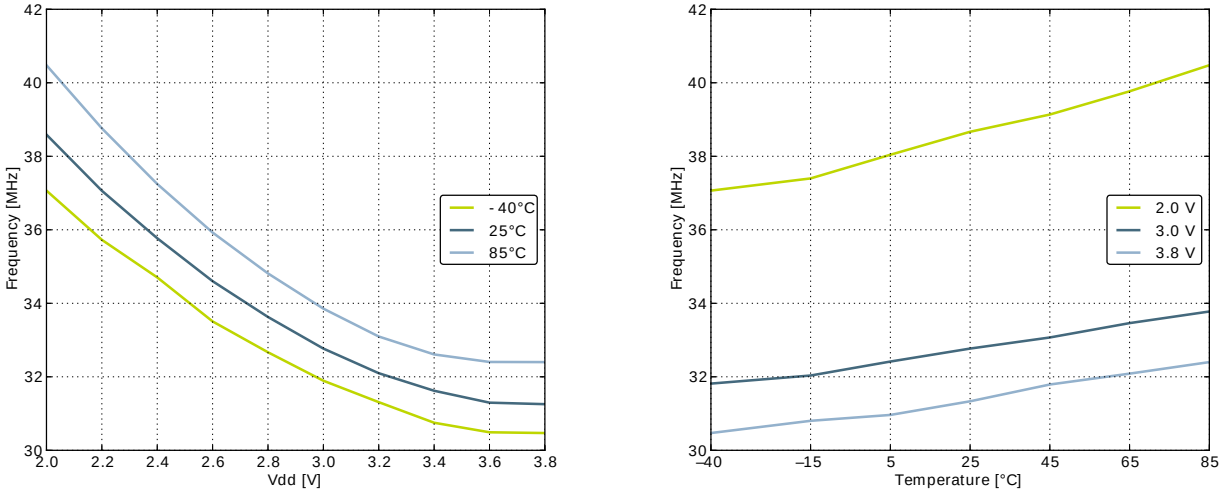

Figure 3.25. Calibrated HFRCO 21 MHz Band Frequency vs Supply Voltage and Temperature

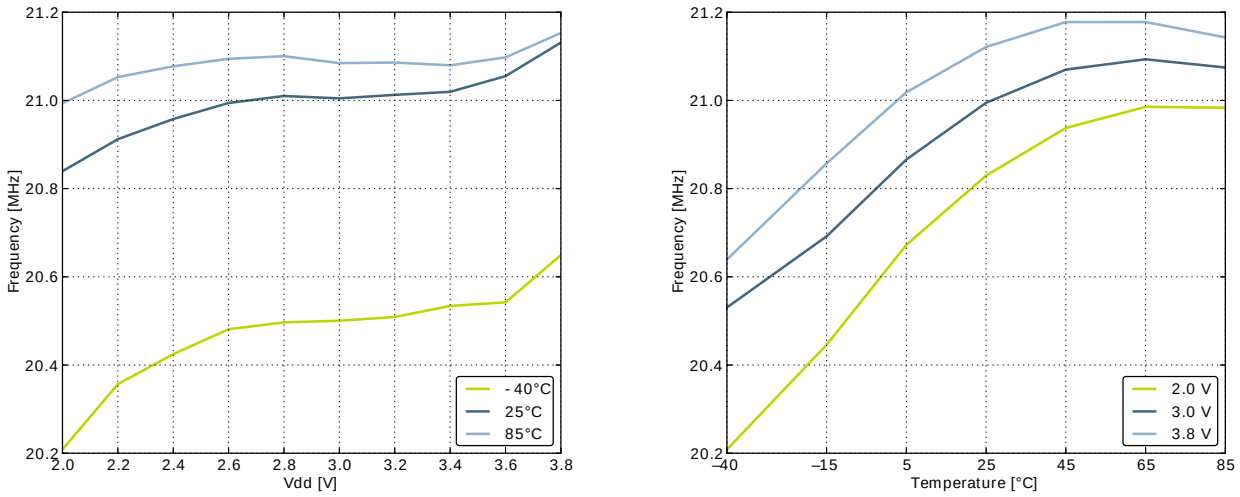

3.9.5 AUXHFRCO

Table 3.12. AUXHFRCO

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$f_{AUXHFRCO}$	Oscillation frequency, V_{DD}= 3.0 V, T_{AMB}=25°C	$f_{AUXHFRCO}$ = 21 MHz	20.37	21.0	21.63	MHz
		$f_{AUXHFRCO}$ = 14 MHz	13.58	14.0	14.42	MHz
		$f_{AUXHFRCO}$ = 11 MHz	10.67	11.0	11.33	MHz
		$f_{AUXHFRCO}$ = 6.6 MHz	6.40	6.60	6.80	MHz
		$f_{AUXHFRCO}$ = 1.2 MHz	1.15	1.20	1.25	MHz
$t_{AUXHFRCO_settling}$	Settling time after start-up	$f_{AUXHFRCO}$ = 14 MHz		0.6		Cycles
$TUNESTEP_{AUXHFRCO}$	Frequency step for LSB change in TUNING value			0.3		%

3.9.6 ULFRCO

Table 3.13. ULFRCO

Symbol	Parameter	Condition	Min	Typ	Max	Unit
f_{ULFRCO}	Oscillation frequency	25°C, 3V	0.70		1.75	kHz
TC_{ULFRCO}	Temperature coefficient			0.05		%/°C
VC_{ULFRCO}	Supply voltage coefficient			-18.2		%/V

3.10 Analog Digital Converter (ADC)

Table 3.14. ADC

Symbol	Parameter	Condition	Min	Typ	Max	Unit
V_{ADCIN}	Input voltage range	Single ended	0		V_{REF}	V

Symbol	Parameter	Condition	Min	Typ	Max	Unit
		Differential	$-V_{REF}/2$		$V_{REF}/2$	V
$V_{ADCREFIN}$	Input range of external reference voltage, single ended and differential		1.25		V_{DD}	V
$V_{ADCREFIN_CH7}$	Input range of external negative reference voltage on channel 7	See $V_{ADCREFIN}$	0		V_{DD} - 1.1	V
$V_{ADCREFIN_CH6}$	Input range of external positive reference voltage on channel 6	See $V_{ADCREFIN}$	0.625		V_{DD}	V
$V_{ADCCMIN}$	Common mode input range		0		V_{DD}	V
I_{ADCIN}	Input current	2pF sampling capacitors		<100		nA
$CMRR_{ADC}$	Analog input common mode rejection ratio			65		dB
I_{ADC}	Average active current	1 MSamples/s, 12 bit, external reference		351	500	µA
		10 kSamples/s 12 bit, internal 1.25 V reference, WARMUP-MODE in ADCn_CTRL set to 0b00		67		µA
		10 kSamples/s 12 bit, internal 1.25 V reference, WARMUP-MODE in ADCn_CTRL set to 0b01		63		µA
		10 kSamples/s 12 bit, internal 1.25 V reference, WARMUP-MODE in ADCn_CTRL set to 0b10		64		µA
I_{ADCREF}	Current consumption of internal voltage reference	Internal voltage reference		65	127	µA
C_{ADCIN}	Input capacitance			2		pF
R_{ADCIN}	Input ON resistance		1			MOhm
$R_{ADCFILT}$	Input RC filter resistance			10		kOhm
$C_{ADCFILT}$	Input RC filter/decoupling capacitance			250		fF
f_{ADCCLK}	ADC Clock Frequency				13	MHz
$t_{ADCCONV}$	Conversion time	6 bit	7			ADC-CLK Cycles
		8 bit	11			ADC-CLK Cycles

Symbol	Parameter	Condition	Min	Typ	Max	Unit
		200 kSamples/s, 12 bit, differential, 2xV_{DD} reference		70		dB
$SINAD_{ADC}$	SIgnal-to-Noise And Distortion-ratio (SINAD)	1 MSamples/s, 12 bit, single ended, internal 1.25V reference		58		dB
		1 MSamples/s, 12 bit, single ended, internal 2.5V reference		62		dB
		1 MSamples/s, 12 bit, single ended, V_{DD} reference		64		dB
		1 MSamples/s, 12 bit, differential, internal 1.25V reference		60		dB
		1 MSamples/s, 12 bit, differential, internal 2.5V reference		64		dB
		1 MSamples/s, 12 bit, differential, 5V reference		54		dB
		1 MSamples/s, 12 bit, differential, V_{DD} reference		66		dB
		1 MSamples/s, 12 bit, differential, 2xV_{DD} reference		68		dB
		200 kSamples/s, 12 bit, single ended, internal 1.25V reference		61		dB
		200 kSamples/s, 12 bit, single ended, internal 2.5V reference		65		dB
		200 kSamples/s, 12 bit, single ended, V_{DD} reference		66		dB
		200 kSamples/s, 12 bit, differential, internal 1.25V reference		63		dB
		200 kSamples/s, 12 bit, differential, internal 2.5V reference		66		dB
		200 kSamples/s, 12 bit, differential, 5V reference		66		dB
		200 kSamples/s, 12 bit, differential, V_{DD} reference	62	66		dB
		200 kSamples/s, 12 bit, differential, 2xV_{DD} reference		69		dB
$SFDR_{ADC}$	Spurious-Free Dynamic Range (SFDR)	1 MSamples/s, 12 bit, single ended, internal 1.25V reference		64		dBc
		1 MSamples/s, 12 bit, single ended, internal 2.5V reference		76		dBc
		1 MSamples/s, 12 bit, single ended, V_{DD} reference		73		dBc
		1 MSamples/s, 12 bit, differential, internal 1.25V reference		66		dBc
		1 MSamples/s, 12 bit, differential, internal 2.5V reference		77		dBc
		1 MSamples/s, 12 bit, differential, V_{DD} reference		76		dBc

Figure 3.31. ADC Absolute Offset, Common Mode = Vdd /2

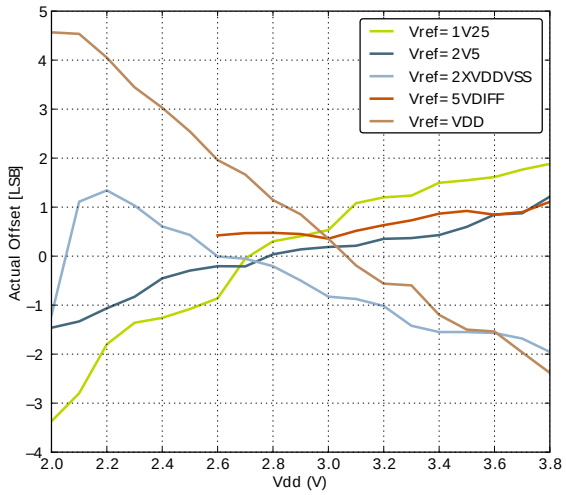

Offset vs Supply Voltage, Temp = 25°C

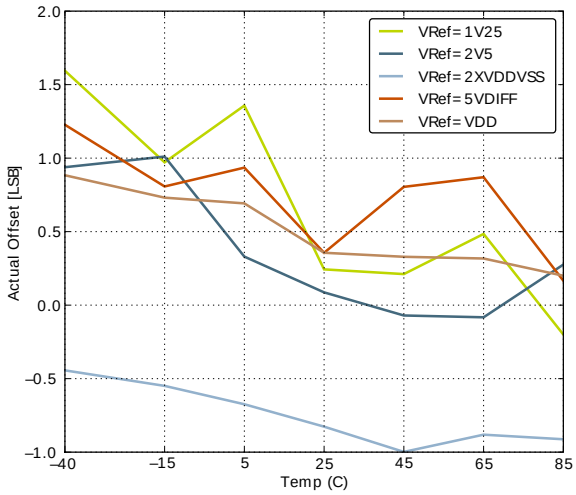

Offset vs Temperature, Vdd = 3V

Figure 3.32. ADC Dynamic Performance vs Temperature for all ADC References, Vdd = 3V

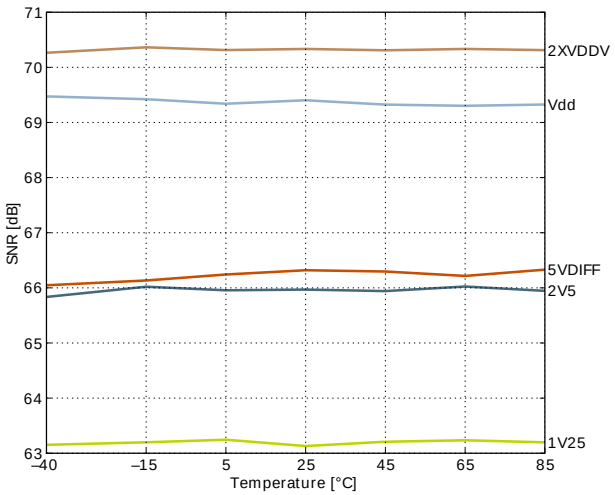

Signal to Noise Ratio (SNR)

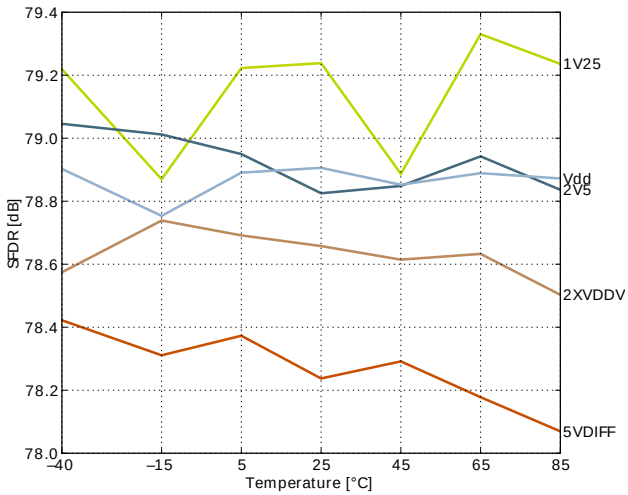

Spurious-Free Dynamic Range (SFDR)

Figure 3.33. ADC Temperature sensor readout

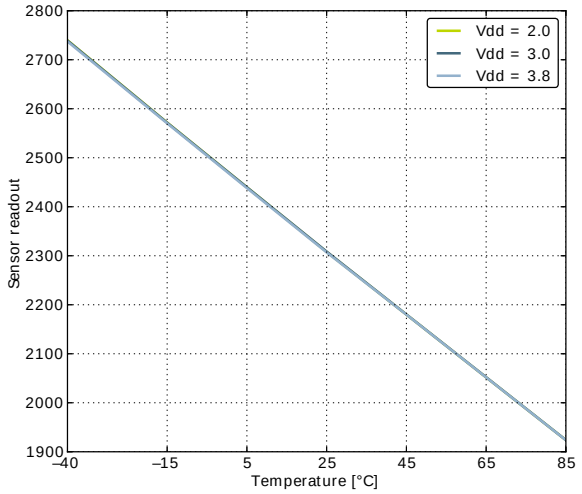

3.11 Current Digital Analog Converter (IDAC)

Table 3.15. IDAC Range 0 Source

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{IDAC}	Active current with STEPSEL=0x10	EM0, default settings		11.7		µA
		Duty-cycled		10		nA
I_{0x10}	Nominal IDAC output current with STEPSEL=0x10			0.84		µA
I_{STEP}	Step size			0.049		µA
I_D	Current drop at high impedance load	V_{IDAC_OUT} = V_{DD} - 100mV		0.73		%
TC_{IDAC}	Temperature coefficient	V_{DD} = 3.0V, STEPSEL=0x10		0.3		nA/°C
VC_{IDAC}	Voltage coefficient	T = 25 °C, STEPSEL=0x10		11.7		nA/V

Table 3.16. IDAC Range 0 Sink

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{IDAC}	Active current with STEPSEL=0x10	EM0, default settings		13.7		µA
I_{0x10}	Nominal IDAC output current with STEPSEL=0x10			0.84		µA
I_{STEP}	Step size			0.050		µA
I_D	Current drop at high impedance load	V_{IDAC_OUT} = 200 mV		0.16		%
TC_{IDAC}	Temperature coefficient	V_{DD} = 3.0 V, STEPSEL=0x10		0.2		nA/°C
VC_{IDAC}	Voltage coefficient	T = 25 °C, STEPSEL=0x10		12.5		nA/V

Figure 3.35. IDAC Sink Current as a function of voltage from IDAC_OUT

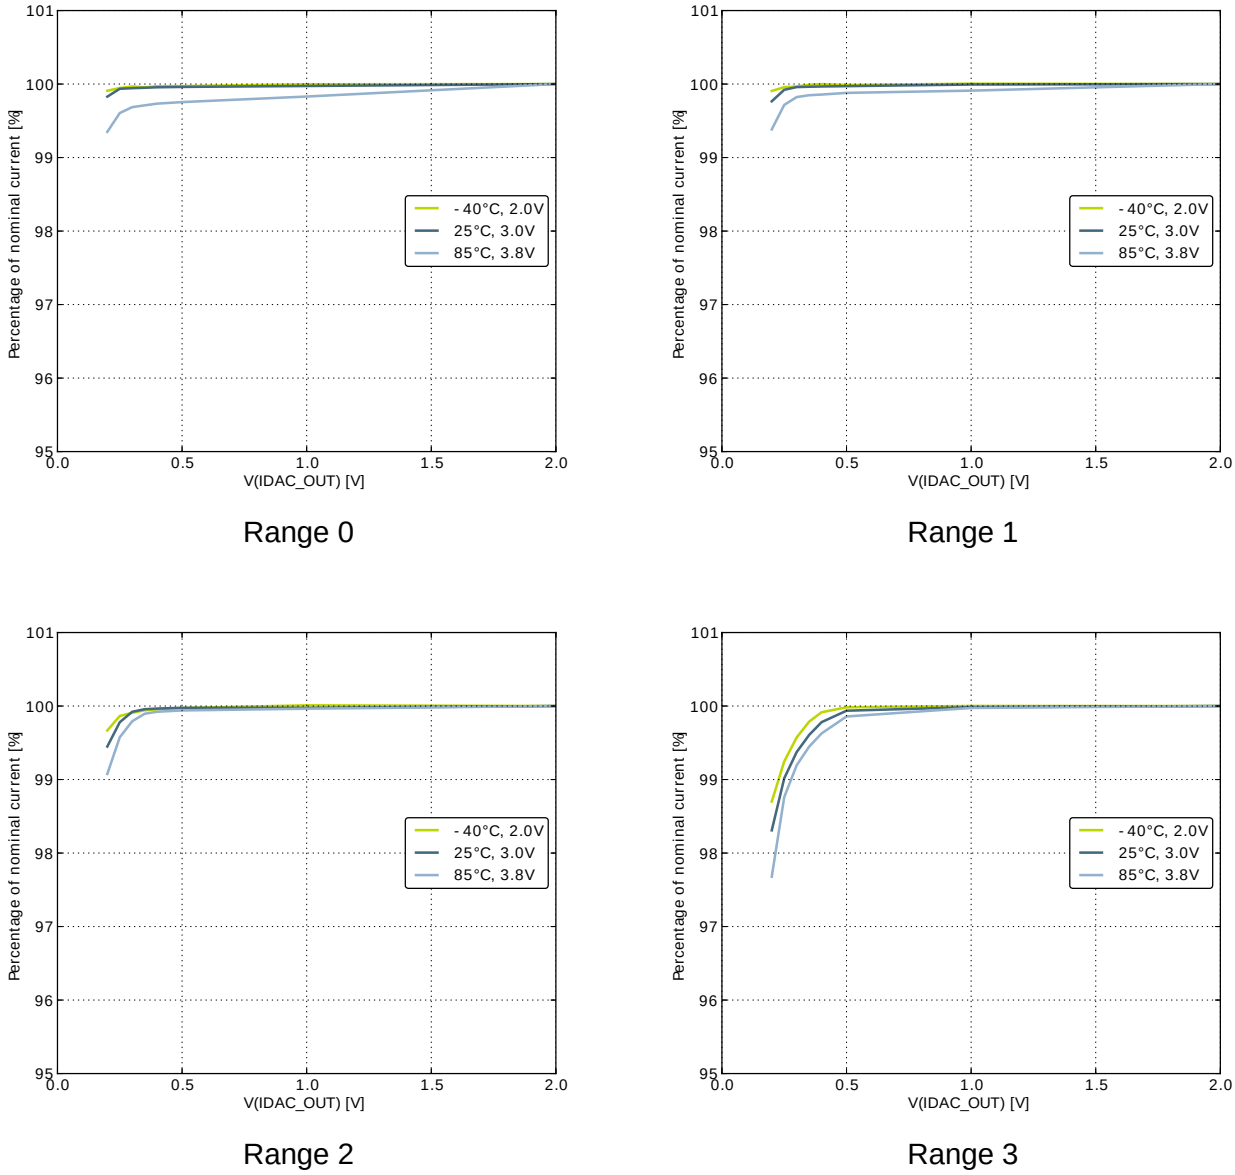

Figure 3.36. IDAC linearity

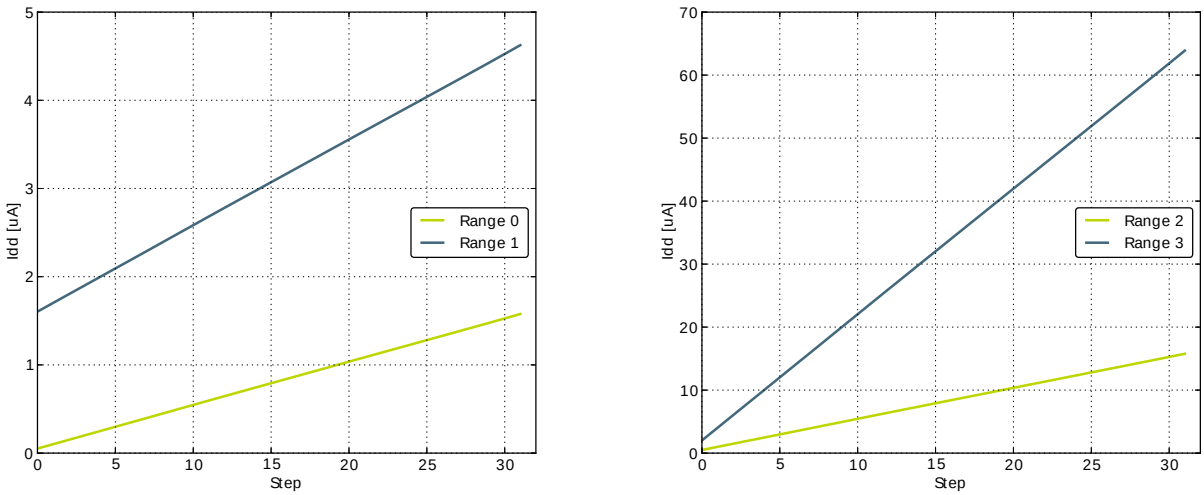

4 Pinout and Package

Note

Please refer to the application note "AN0002 EFM32 Hardware Design Considerations" for guidelines on designing Printed Circuit Boards (PCB's) for the EFM32ZG110.

4.1 Pinout

The *EFM32ZG110* pinout is shown in Figure 4.1 (p. 51) and Table 4.1 (p. 51). Alternate locations are denoted by "#" followed by the location number (Multiple locations on the same pin are split with "/"). Alternate locations can be configured in the LOCATION bitfield in the *_ROUTE register in the module in question.

Figure 4.1. EFM32ZG110 Pinout (top view, not to scale)

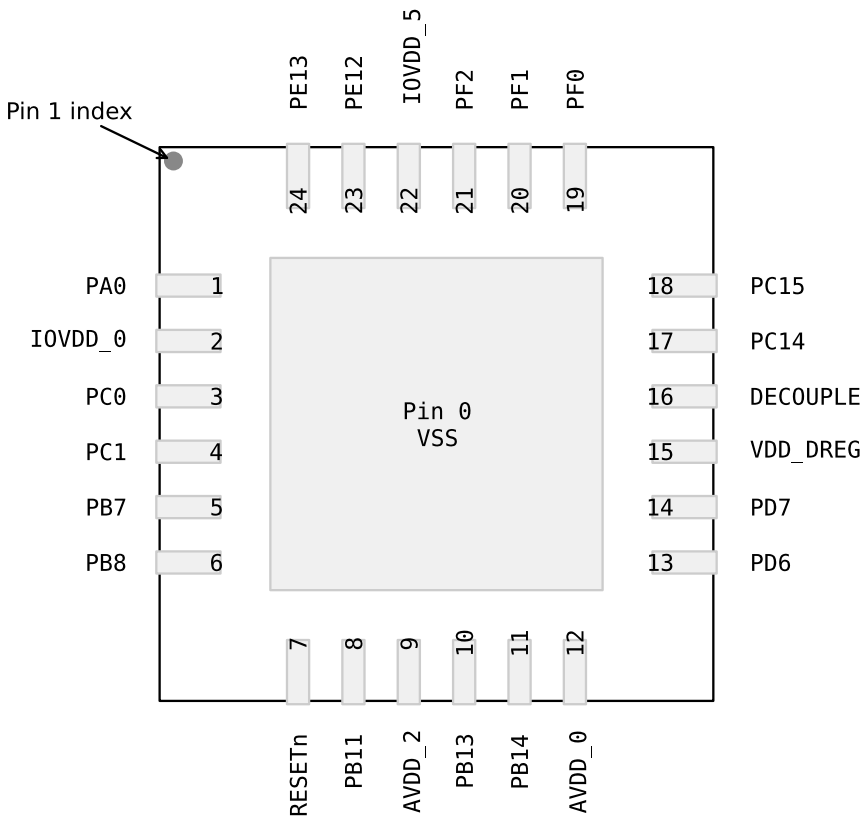

Table 4.1. Device Pinout

QFN24 Pin# and Name		Pin Alternate Functionality / Description			
Pin #	Pin Name	Analog	Timers	Communication	Other
0	VSS	Ground.			
1	PA0		TIM0_CC0 #0/1/4	LEU0_RX #4	PRS_CH0 #0

4.4 QFN24 Package

Figure 4.2. QFN24

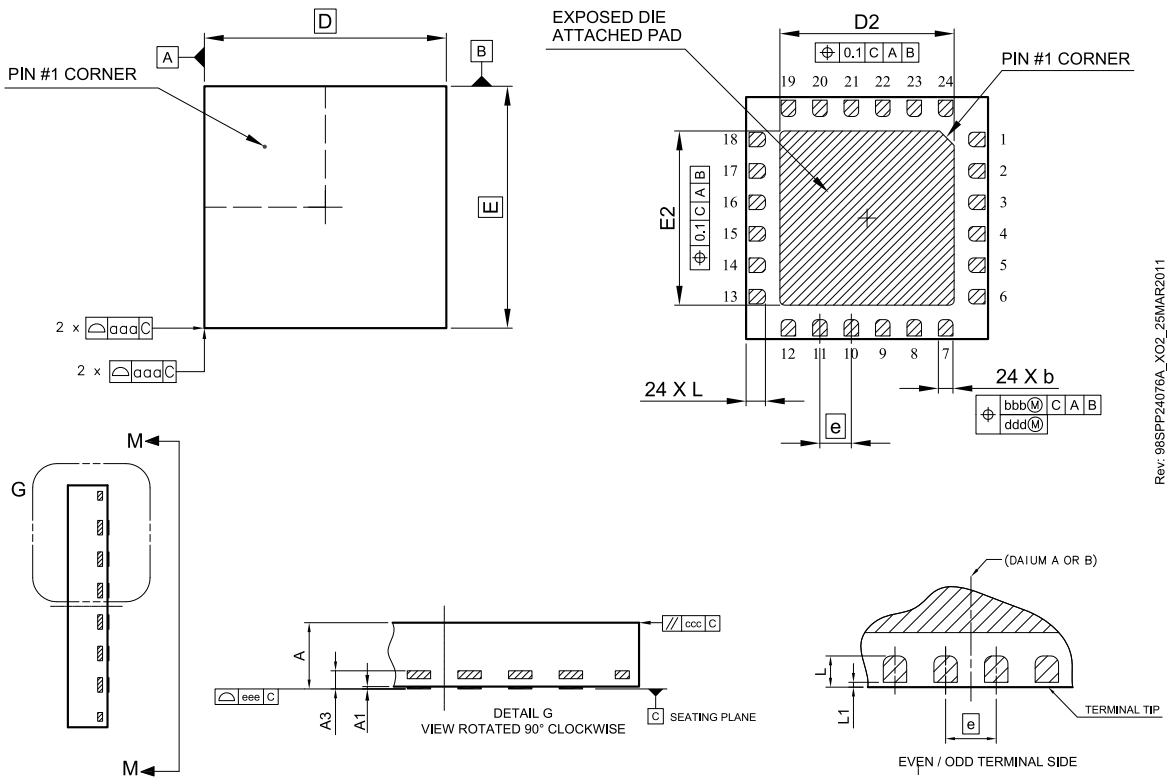

Note:

1. Dimensioning & tolerancing confirm to ASME Y14.5M-1994.
2. All dimensions are in millimeters. Angles are in degrees.
3. Dimension 'b' applies to metallized terminal and is measured between 0.25 mm and 0.30 mm from the terminal tip. Dimension L1 represents terminal full back from package edge up to 0.1 mm is acceptable.
4. Coplanarity applies to the exposed heat slug as well as the terminal.
5. Radius on terminal is optional

Table 4.4. QFN24 (Dimensions in mm)

Symbol	A	A1	A3	b	D	E	D2	E2	e	L	L1	aaa	bbb	ccc	ddd	eee
Min	0.80	0.00	0.203 REF	0.25	5.00 BSC	5.00 BSC	3.50	3.50	0.65 BSC	0.35	0.00	0.10	0.10	0.10	0.05	0.08
Nom	0.85	-		0.30			3.60	3.60		0.40						
Max	0.90	0.05		0.35			3.70	3.70		0.45	0.10					

The QFN24 Package uses Nickel-Palladium-Gold preplated leadframe.

All EFM32 packages are RoHS compliant and free of Bromine (Br) and Antimony (Sb).

For additional Quality and Environmental information, please see:
http://www.silabs.com/support/quality/pages/default.aspx

6 Chip Marking, Revision and Errata

6.1 Chip Marking

In the illustration below package fields and position are shown.

Figure 6.1. Example Chip Marking (top view)

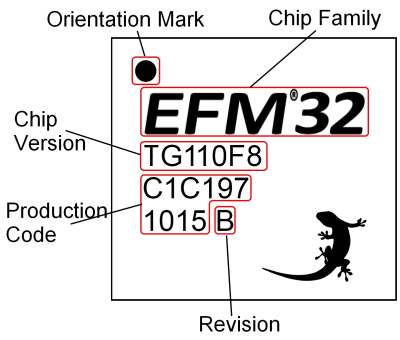

6.2 Revision

The revision of a chip can be determined from the "Revision" field in Figure 6.1 (p. 59) .

6.3 Errata

Please see the errata document for EFM32ZG110 for description and resolution of device erratas. This document is available in Simplicity Studio and online at:
http://www.silabs.com/support/pages/document-library.aspx?p=MCUs--32-bit

7 Revision History

7.1 Revision 1.10

March 6th, 2015

Updated ADC data, updated temperature sensor graph and added clarification on conditions for INL_{ADC} and DNL_{ADC} parameters.

Updated Max ESR_{HFXO} value for Crystal Frequency of 24 MHz.

Updated current consumption.

Updated LFXO and HFXO data.

Updated LFRCO and HFRCO data.

Updated ACMP data.

Updated VCMP data.

Updated Memory Map.

Added DMA current in Digital Peripherals section.

Added AUXHFRCO to block diagram and Electrical Characteristics.

Updated Package dimensions table.

Updated block diagram.

7.2 Revision 1.00

July 2nd, 2014

Corrected single power supply voltage minimum value from 1.85V to 1.98V.

Removed "Preliminary" markings.

Updated current consumption.

Updated transition between energy modes.

Updated power management data.

Updated GPIO data.

Updated LFXO, HFXO, HFRCO and ULFRCO data.

Updated LFRCO and HFRCO plots.

Updated ADC data.

Updated ACMP data.

7.3 Revision 0.61

November 21st, 2013

List of Tables

1.1. Ordering Information 2
2.1. Configuration Summary 6
3.1. Absolute Maximum Ratings 8
3.2. General Operating Conditions 8
3.3. Current Consumption 9
3.4. Energy Modes Transitions 17
3.5. Power Management 18
3.6. Flash 18
3.7. GPIO 18
3.8. LFXO 27
3.9. HFXO 27
3.10. LFRCO 28
3.11. HFRCO 29
3.12. AUXHFRCO 31
3.13. ULFRCO 31
3.14. ADC 31
3.15. IDAC Range 0 Source 41
3.16. IDAC Range 0 Sink 41
3.17. IDAC Range 1 Source 42
3.18. IDAC Range 1 Sink 42
3.19. IDAC Range 2 Source 42
3.20. IDAC Range 2 Sink 42
3.21. IDAC Range 3 Source 43
3.22. IDAC Range 3 Sink 43
3.23. IDAC 43
3.24. ACMP 46
3.25. VCMP 48
3.26. I2C Standard-mode (Sm) 48
3.27. I2C Fast-mode (Fm) 49
3.28. I2C Fast-mode Plus (Fm+) 49
3.29. Digital Peripherals 49
4.1. Device Pinout 51
4.2. Alternate functionality overview 53
4.3. GPIO Pinout 54
4.4. QFN24 (Dimensions in mm) 55
5.1. QFN24 PCB Land Pattern Dimensions (Dimensions in mm) 56
5.2. QFN24 PCB Solder Mask Dimensions (Dimensions in mm) 57
5.3. QFN24 PCB Stencil Design Dimensions (Dimensions in mm) 58

List of Equations

3.1. Total ACMP Active Current 46
3.2. VCMP Trigger Level as a Function of Level Setting 48