



Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

Product Status	Active
Core Processor	Coldfire V1
Core Size	32-Bit Single-Core
Speed	50MHz
Connectivity	I <sup>2</sup> C, SCI, SPI
Peripherals	LVD, PWM, WDT
Number of I/O	54
Program Memory Size	128KB (128K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	8K x 8
Voltage - Supply (Vcc/Vdd)	1.8V ~ 3.6V
Data Converters	A/D 20x12b
Oscillator Type	Internal
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	64-LQFP
Supplier Device Package	64-LQFP (10x10)
Purchase URL	<a href="https://www.e-xfl.com/product-detail/nxp-semiconductors/mcf51qe128clh">https://www.e-xfl.com/product-detail/nxp-semiconductors/mcf51qe128clh</a>

# MCF51QE128

## 32-bit Fact Sheet



### Target Applications

- HVAC building and control systems
- Health care monitoring and instrumentation
- Fire/security control and monitoring systems
- Factory and automation systems
- Measurement equipment
- Hand-held medical/industrial applications
- Low-power industrial applications

### Overview


The Flexis™ series of controllers is the connection point on the Freescale Controller Continuum, where 8- and 32-bit compatibility becomes reality. The Flexis series includes complementary families of 8-bit S08 and 32-bit ColdFire® V1 microcontrollers that share a common set of peripherals and development tools to deliver the ultimate in migration flexibility.

The QE family, comprised of a pin-compatible 8-bit and 32-bit device duo, is the first family in the Flexis series.

The 32-bit MCF51QE128 device extends the low end of the ColdFire embedded controller family with up to 128 KB flash memory and a 12-bit analog to digital converter (ADC) with up to 24 channels. The MCF51QE128 includes up to 3.6V supply voltage, a 50 MHz CPU core and three timers for improved motor control—perfect for medical devices such as health care monitoring instrumentation and industrial equipment including networked smoke detectors and security cameras.

The 32-bit MCF51QE128 is pin-, peripheral- and tool-compatible with the 8-bit S08QE128 device, providing unprecedented design freedom across the performance spectrum.

MCF51QE Block Diagram

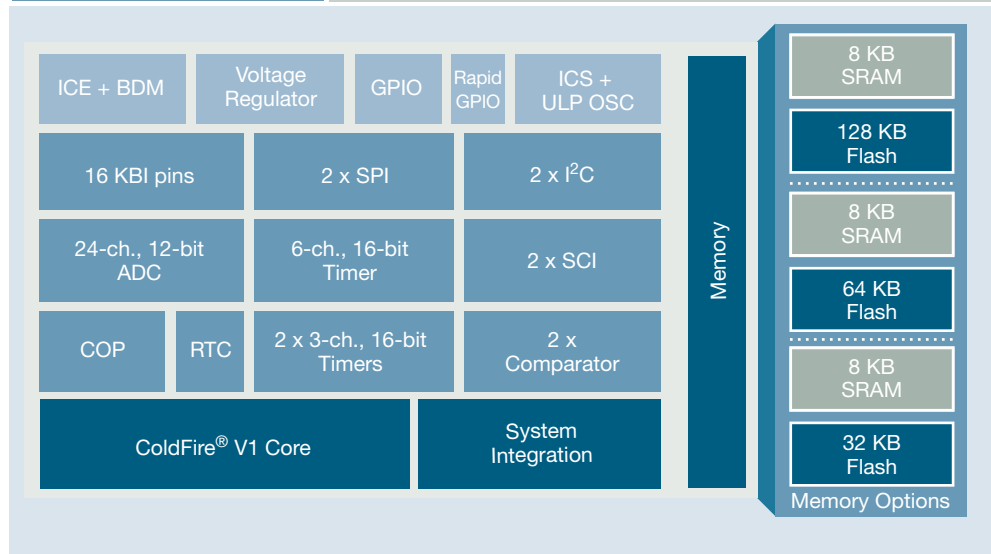

### Features

#### 32-Bit ColdFire V1 Central Processing Unit (CPU)

- Up to 50 MHz ColdFire V1 core from 2.1V to 3.6V, and 20 MHz CPU at 1.8V to 2.1V across temperature range of -40°C to +85°C

- ColdFire Instruction Set Revision C (ISA\_C)

- Support for up to 256 interrupt/reset sources

### Benefits

- Offers high performance, even at low voltage levels for battery operated applications
- Provides bus speed operation of 25.117 MHz from 2.1V to 3.6V and 10 MHz from 1.8 to 2.1V

- Provides additional instructions for easy handling of 8-bit and 16-bit data

- Allows for software flexibility and optimization for real-time applications

### On-Chip Memory

- Up to 128 KB flash read/program/erase over full operating voltage and temperature
- Up to 8 KB random-access memory (RAM)

- Security circuitry prevents unauthorized access to RAM and flash contents to reduce system power consumption

### Power-Saving Modes

- Two ultra-low-power (ULP) stop modes, one of which allows limited use of peripherals
- New ULP power wait mode
- 6 μs typical wake up time from stop3 mode

- Allows continued application sampling in a reduced power state which extends the battery life

- Internal clock Source (ICS) Module containing a frequency locked-loop (FLL) controlled by internal or external reference

- Eliminates use of an external clock source. This ultimately reduces system costs associated with development

- Oscillator (OSC) Loop-control Pierce oscillator; crystal or ceramic resonator range of 31.25 kHz to 38.4 kHz or 1 MHz to 16 MHz

- Includes ultra-low-power OSC for accurate timebase in low-power modes

## Features

## Benefits

### Peripherals

- Two analog comparators with option to compare to an internal reference—output can be optionally routed to timer/pulse width modulator (PWM) as input capture trigger
- Analog Digital Converter (ADC) up to 24-channel, 12-bit resolution; 2.5  $\mu$ s conversion time; automatic compare function; 1.7 mV/ $^{\circ}$ C temperature sensor; internal bandgap reference channel; operation in stop3
- 2x Serial Communications Interface (SCI)—Two modules offering asynchronous communications, 13-bit break option, flexible baud rate generator, double buffered transmit and receive and optional H/W parity checking and generation
- 2x SCI (Serial Peripheral Interfaces)—Two modules with full-duplex or single-wire bidirectional; double-buffered transmit and receive; master or slave mode; MSB-first or LSB-first shifting
- Time pulse-width modulation (TPM) one 6-channel (TMP3) and two 3-channel (TPM1 and TPM2); selectable input capture, output compare, or buffered edge- or center-aligned PWM on each channel
- Two I<sup>2</sup>Cs with; Up to 100 kbps with maximum bus loading; multi-master operation; programmable slave address; interrupt-driven byte-by-byte data transfer; supports broadcast mode and 10-bit addressing

### Input/Output

- 16 bits of Rapid General Purpose Input/Output (RGPIO) connected to the CPU's high-speed local bus with set, clear and toggle functionality
- 70 GPIO (General Purpose Input/Output), one input-only and one output-only pin
- 16 Keyboard Interrupts (KBI) pins with selectable polarity

### System Protection

- Watchdog computer operating properly (COP) reset with option to run from dedicated 1 kHz internal clock source or bus clock
- Low-voltage detection with reset or interrupt; selectable trip points
- Illegal op code detection with reset
- Flash block protection

### Development Support

- Classic ColdFire Debug B+ functionality mapped into a single-pin BDM interface
- Real-time debug support
- Program trace support

## Package Options

Part Number	Temp. Range	Package
MCF51QE128CLK	-40°C to +85°C	80 LQFP
MCF51QE128CLH	-40°C to +85°C	64 LQFP
MCF51QE64CLH	-40°C to +85°C	64 LQFP
MCF51QE32CLH	-40°C to +85°C	64 LQFP
MCF51QE32LH	0°C to +70°C	64 LQFP

## Cost-Effective Development Tools

### DEMOQE128

\$99\*

Cost-effective demonstration kit, including the S08 and ColdFire® V1 daughter cards, as well as a serial port and built-in USB-BDM cable for debugging and programming.

### EVBQE128

\$325\*

Full-featured evaluation system for the QE128 device family. This evaluation system enables full evaluation of both the MC9S08QE128 and MCF51QE128 devices.

## CodeWarrior® Development Studio for Microcontrollers 6.0

### Complimentary\*\* Special Edition

CodeWarrior Development Studio for Microcontrollers is a single tool suite that supports software development for Freescale's 8-bit and 32-bit ColdFire V1 microcontrollers. Designers can further accelerate application development with the help of Processor Expert, an award-winning rapid application development tool integrated into the CodeWarrior tool suite.

\* Prices indicated are MSRP

\*\* Subject to license agreement

## Learn More:

For more information about the Flexis QE family, please visit [www.freescale.com/flexis](http://www.freescale.com/flexis).