

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |   |
|--------------------------------|---|
| Product Status                 | Obsolete  |
| Number of LABs/CLBs            | 576   |
| Number of Logic Elements/Cells | 1368  |
| Total RAM Bits                 | 18432   |
| Number of I/O                  | 145   |
| Number of Gates                | 13000   |
| Voltage - Supply               | 3V ~ 3.6V   |
| Mounting Type                  | Surface Mount   |
| Operating Temperature          | -40°C ~ 100°C (TJ)  |
| Package / Case                 | 176-LQFP Exposed Pad  |
| Supplier Device Package        | 176-TQFP (24x24)  |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/xilinx/xc4013xl-2ht176i">https://www.e-xfl.com/product-detail/xilinx/xc4013xl-2ht176i</a> |

## XC4000E and XC4000X Series Compared to the XC4000

For readers already familiar with the XC4000 family of Xilinx Field Programmable Gate Arrays, the major new features in the XC4000 Series devices are listed in this section. The biggest advantages of XC4000E and XC4000X devices are significantly increased system speed, greater capacity, and new architectural features, particularly Select-RAM memory. The XC4000X devices also offer many new routing features, including special high-speed clock buffers that can be used to capture input data with minimal delay.

Any XC4000E device is pinout- and bitstream-compatible with the corresponding XC4000 device. An existing XC4000 bitstream can be used to program an XC4000E device. However, since the XC4000E includes many new features, an XC4000E bitstream cannot be loaded into an XC4000 device.

XC4000X Series devices are not bitstream-compatible with equivalent array size devices in the XC4000 or XC4000E families. However, equivalent array size devices, such as the XC4025, XC4025E, XC4028EX, and XC4028XL, are pinout-compatible.

### Improvements in XC4000E and XC4000X

#### *Increased System Speed*

XC4000E and XC4000X devices can run at synchronous system clock rates of up to 80 MHz, and internal performance can exceed 150 MHz. This increase in performance over the previous families stems from improvements in both device processing and system architecture. XC4000 Series devices use a sub-micron multi-layer metal process. In addition, many architectural improvements have been made, as described below.

The XC4000XL family is a high performance 3.3V family based on 0.35 $\mu$  SRAM technology and supports system speeds to 80 MHz.

#### *PCI Compliance*

XC4000 Series -2 and faster speed grades are fully PCI compliant. XC4000E and XC4000X devices can be used to implement a one-chip PCI solution.

#### *Carry Logic*

The speed of the carry logic chain has increased dramatically. Some parameters, such as the delay on the carry chain through a single CLB ( $T_{BYP}$ ), have improved by as

much as 50% from XC4000 values. See [“Fast Carry Logic” on page 18](#) for more information.

#### *Select-RAM Memory: Edge-Triggered, Synchronous RAM Modes*

The RAM in any CLB can be configured for synchronous, edge-triggered, write operation. The read operation is not affected by this change to an edge-triggered write.

#### *Dual-Port RAM*

A separate option converts the 16x2 RAM in any CLB into a 16x1 dual-port RAM with simultaneous Read/Write.

The function generators in each CLB can be configured as either level-sensitive (asynchronous) single-port RAM, edge-triggered (synchronous) single-port RAM, edge-triggered (synchronous) dual-port RAM, or as combinatorial logic.

#### *Configurable RAM Content*

The RAM content can now be loaded at configuration time, so that the RAM starts up with user-defined data.

#### *H Function Generator*

In current XC4000 Series devices, the H function generator is more versatile than in the original XC4000. Its inputs can come not only from the F and G function generators but also from up to three of the four control input lines. The H function generator can thus be totally or partially independent of the other two function generators, increasing the maximum capacity of the device.

#### *IOB Clock Enable*

The two flip-flops in each IOB have a common clock enable input, which through configuration can be activated individually for the input or output flip-flop or both. This clock enable operates exactly like the EC pin on the XC4000 CLB. This new feature makes the IOBs more versatile, and avoids the need for clock gating.

#### *Output Drivers*

The output pull-up structure defaults to a TTL-like totem-pole. This driver is an n-channel pull-up transistor, pulling to a voltage one transistor threshold below  $V_{cc}$ , just like the XC4000 family outputs. Alternatively, XC4000 Series devices can be globally configured with CMOS outputs, with p-channel pull-up transistors pulling to  $V_{cc}$ . Also, the configurable pull-up resistor in the XC4000 Series is a p-channel transistor that pulls to  $V_{cc}$ , whereas in the original XC4000 family it is an n-channel transistor that pulls to a voltage one transistor threshold below  $V_{cc}$ .

**Table 1: XC4000E and XC4000X Series Field Programmable Gate Arrays**

| Device      | Logic Cells | Max Logic Gates (No RAM) | Max. RAM Bits (No Logic) | Typical Gate Range (Logic and RAM)* | CLB Matrix | Total CLBs | Number of Flip-Flops | Max. User I/O |
|-------------|-------------|--------------------------|--------------------------|-------------------------------------|------------|------------|----------------------|---------------|
| XC4002XL    | 152         | 1,600                    | 2,048                    | 1,000 - 3,000                       | 8 x 8      | 64         | 256                  | 64            |
| XC4003E     | 238         | 3,000                    | 3,200                    | 2,000 - 5,000                       | 10 x 10    | 100        | 360                  | 80            |
| XC4005E/XL  | 466         | 5,000                    | 6,272                    | 3,000 - 9,000                       | 14 x 14    | 196        | 616                  | 112           |
| XC4006E     | 608         | 6,000                    | 8,192                    | 4,000 - 12,000                      | 16 x 16    | 256        | 768                  | 128           |
| XC4008E     | 770         | 8,000                    | 10,368                   | 6,000 - 15,000                      | 18 x 18    | 324        | 936                  | 144           |
| XC4010E/XL  | 950         | 10,000                   | 12,800                   | 7,000 - 20,000                      | 20 x 20    | 400        | 1,120                | 160           |
| XC4013E/XL  | 1368        | 13,000                   | 18,432                   | 10,000 - 30,000                     | 24 x 24    | 576        | 1,536                | 192           |
| XC4020E/XL  | 1862        | 20,000                   | 25,088                   | 13,000 - 40,000                     | 28 x 28    | 784        | 2,016                | 224           |
| XC4025E     | 2432        | 25,000                   | 32,768                   | 15,000 - 45,000                     | 32 x 32    | 1,024      | 2,560                | 256           |
| XC4028EX/XL | 2432        | 28,000                   | 32,768                   | 18,000 - 50,000                     | 32 x 32    | 1,024      | 2,560                | 256           |
| XC4036EX/XL | 3078        | 36,000                   | 41,472                   | 22,000 - 65,000                     | 36 x 36    | 1,296      | 3,168                | 288           |
| XC4044XL    | 3800        | 44,000                   | 51,200                   | 27,000 - 80,000                     | 40 x 40    | 1,600      | 3,840                | 320           |
| XC4052XL    | 4598        | 52,000                   | 61,952                   | 33,000 - 100,000                    | 44 x 44    | 1,936      | 4,576                | 352           |
| XC4062XL    | 5472        | 62,000                   | 73,728                   | 40,000 - 130,000                    | 48 x 48    | 2,304      | 5,376                | 384           |
| XC4085XL    | 7448        | 85,000                   | 100,352                  | 55,000 - 180,000                    | 56 x 56    | 3,136      | 7,168                | 448           |

\* Max values of Typical Gate Range include 20-30% of CLBs used as RAM.

**Note:** All functionality in low-voltage families is the same as in the corresponding 5-Volt family, except where numerical references are made to timing or power.

## Description

XC4000 Series devices are implemented with a regular, flexible, programmable architecture of Configurable Logic Blocks (CLBs), interconnected by a powerful hierarchy of versatile routing resources, and surrounded by a perimeter of programmable Input/Output Blocks (IOBs). They have generous routing resources to accommodate the most complex interconnect patterns.

The devices are customized by loading configuration data into internal memory cells. The FPGA can either actively read its configuration data from an external serial or byte-parallel PROM (master modes), or the configuration data can be written into the FPGA from an external device (slave and peripheral modes).

XC4000 Series FPGAs are supported by powerful and sophisticated software, covering every aspect of design from schematic or behavioral entry, floor planning, simulation, automatic block placement and routing of interconnects, to the creation, downloading, and readback of the configuration bit stream.

Because Xilinx FPGAs can be reprogrammed an unlimited number of times, they can be used in innovative designs


where hardware is changed dynamically, or where hardware must be adapted to different user applications. FPGAs are ideal for shortening design and development cycles, and also offer a cost-effective solution for production rates well beyond 5,000 systems per month.

## Taking Advantage of Re-configuration

FPGA devices can be re-configured to change logic function while resident in the system. This capability gives the system designer a new degree of freedom not available with any other type of logic.

Hardware can be changed as easily as software. Design updates or modifications are easy, and can be made to products already in the field. An FPGA can even be re-configured dynamically to perform different functions at different times.

Re-configurable logic can be used to implement system self-diagnostics, create systems capable of being re-configured for different environments or operations, or implement multi-purpose hardware for a given application. As an added benefit, using re-configurable FPGA devices simplifies hardware design and debugging and shortens product time-to-market.

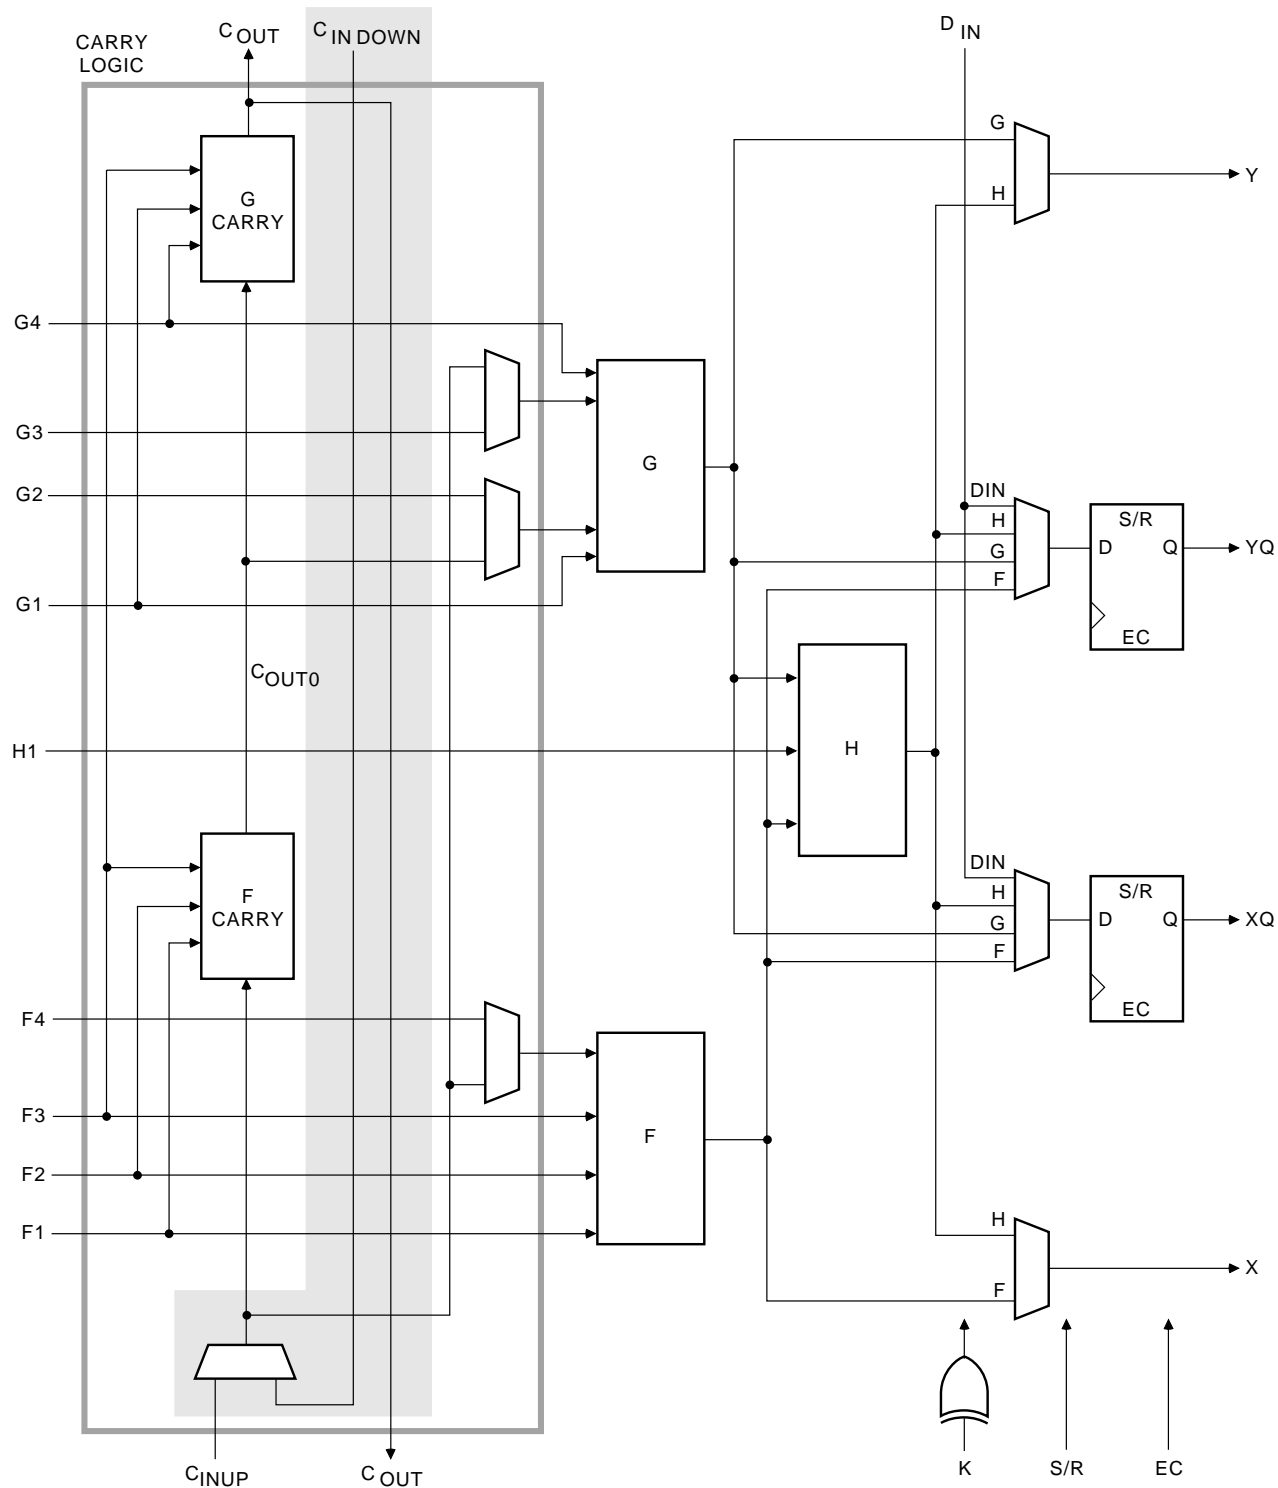

X6699

**Figure 13: Fast Carry Logic in XC4000E CLB (shaded area not present in XC4000X)**

**Table 8: Supported Sources for XC4000 Series Device Inputs**

| Source   | XC4000E/EX Series Inputs |                 | XC4000XL Series Inputs |
|--|--------------------------|-----------------|------------------------|
|  | 5 V, TTL                 | 5 V, CMOS       | 3.3 V CMOS             |
| Any device, V <sub>CC</sub> = 3.3 V, CMOS outputs                        | ✓                        | Unreliable Data | ✓                      |
| XC4000 Series, V <sub>CC</sub> = 5 V, TTL outputs                        | ✓                        |                 | ✓                      |
| Any device, V <sub>CC</sub> = 5 V, TTL outputs (V <sub>oh</sub> ≤ 3.7 V) | ✓                        |                 | ✓                      |
| Any device, V <sub>CC</sub> = 5 V, CMOS outputs                          | ✓                        | ✓               | ✓                      |

#### XC4000XL 5-Volt Tolerant I/Os

The I/Os on the XC4000XL are fully 5-volt tolerant even though the V<sub>CC</sub> is 3.3 volts. This allows 5 V signals to directly connect to the XC4000XL inputs without damage, as shown in [Table 8](#). In addition, the 3.3 volt V<sub>CC</sub> can be applied before or after 5 volt signals are applied to the I/Os. This makes the XC4000XL immune to power supply sequencing problems.


#### Registered Inputs

The I1 and I2 signals that exit the block can each carry either the direct or registered input signal.

The input and output storage elements in each IOB have a common clock enable input, which, through configuration, can be activated individually for the input or output flip-flop, or both. This clock enable operates exactly like the EC pin on the XC4000 Series CLB. It cannot be inverted within the IOB.

The storage element behavior is shown in [Table 9](#).

**Table 9: Input Register Functionality (active rising edge is shown)**

| Mode            | Clock   | Clock Enable | D | Q  |
|-----------------|---|--------------|---|----|
| Power-Up or GSR | X   | X            | X | SR |
| Flip-Flop       |  | 1*           | D | D  |
|                 | 0   | X            | X | Q  |
| Latch           | 1   | 1*           | X | Q  |
|                 | 0   | 1*           | D | D  |
| Both            | X   | 0            | X | Q  |

Legend:

X 

SR

0\*

1\*

Don't care  
Rising edge

Set or Reset value. Reset is default.

Input is Low or unconnected (default value)

Input is High or unconnected (default value)

#### Optional Delay Guarantees Zero Hold Time

The data input to the register can optionally be delayed by several nanoseconds. With the delay enabled, the setup time of the input flip-flop is increased so that normal clock routing does not result in a positive hold-time requirement. A positive hold time requirement can lead to unreliable, temperature- or processing-dependent operation.

The input flip-flop setup time is defined between the data measured at the device I/O pin and the clock input at the IOB (not at the clock pin). Any routing delay from the device clock pin to the clock input of the IOB must, therefore, be subtracted from this setup time to arrive at the real setup time requirement relative to the device pins. A short specified setup time might, therefore, result in a negative setup time at the device pins, i.e., a positive hold-time requirement.

When a delay is inserted on the data line, more clock delay can be tolerated without causing a positive hold-time requirement. Sufficient delay eliminates the possibility of a data hold-time requirement at the external pin. The maximum delay is therefore inserted as the default.

The XC4000E IOB has a one-tap delay element: either the delay is inserted (default), or it is not. The delay guarantees a zero hold time with respect to clocks routed through any of the XC4000E global clock buffers. (See [“Global Nets and Buffers \(XC4000E only\)” on page 35](#) for a description of the global clock buffers in the XC4000E.) For a shorter input register setup time, with non-zero hold, attach a NODELAY attribute or property to the flip-flop.

The XC4000X IOB has a two-tap delay element, with choices of a full delay, a partial delay, or no delay. The attributes or properties used to select the desired delay are shown in [Table 10](#). The choices are no added attribute, MEDDELAY, and NODELAY. The default setting, with no added attribute, ensures no hold time with respect to any of the XC4000X clock buffers, including the Global Low-Skew buffers. MEDDELAY ensures no hold time with respect to the Global Early buffers. Inputs with NODELAY may have a positive hold time with respect to all clock buffers. For a description of each of these buffers, see [“Global Nets and Buffers \(XC4000X only\)” on page 37](#).

**Table 10: XC4000X IOB Input Delay Element**

| Value                                    | When to Use   |
|--|---|
| full delay (default, no attribute added) | Zero Hold with respect to Global Low-Skew Buffer, Global Early Buffer |
| MEDDELAY                                 | Zero Hold with respect to Global Early Buffer                         |
| NODELAY                                  | Short Setup, positive Hold time                                       |

Any XC4000 Series 5-Volt device with its outputs configured in TTL mode can drive the inputs of any typical 3.3-Volt device. (For a detailed discussion of how to interface between 5 V and 3.3 V devices, see the 3V Products section of *The Programmable Logic Data Book*.)


Supported destinations for XC4000 Series device outputs are shown in [Table 12](#).

An output can be configured as open-drain (open-collector) by placing an OBUFT symbol in a schematic or HDL code, then tying the 3-state pin (T) to the output signal, and the input pin (I) to Ground. (See [Figure 18](#).)

**Table 12: Supported Destinations for XC4000 Series Outputs**

| Destination  | XC4000 Series Outputs |          |                   |
|--|-----------------------|----------|-------------------|
|  | 3.3 V, CMOS           | 5 V, TTL | 5 V, CMOS         |
| Any typical device, Vcc = 3.3 V, CMOS-threshold inputs | ✓                     | ✓        | some <sup>1</sup> |
| Any device, Vcc = 5 V, TTL-threshold inputs            | ✓                     | ✓        | ✓                 |
| Any device, Vcc = 5 V, CMOS-threshold inputs           | Unreliable Data       |          | ✓                 |

1. Only if destination device has 5-V tolerant inputs

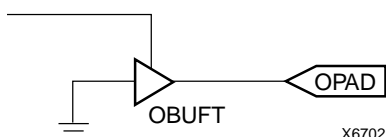

**Figure 18: Open-Drain Output**

### Output Slew Rate

The slew rate of each output buffer is, by default, reduced, to minimize power bus transients when switching non-critical signals. For critical signals, attach a FAST attribute or property to the output buffer or flip-flop.

For XC4000E devices, maximum total capacitive load for simultaneous fast mode switching in the same direction is 200 pF for all package pins between each Power/Ground pin pair. For XC4000X devices, additional internal

Power/Ground pin pairs are connected to special Power and Ground planes within the packages, to reduce ground bounce. Therefore, the maximum total capacitive load is 300 pF between each external Power/Ground pin pair. Maximum loading may vary for the low-voltage devices.

For slew-rate limited outputs this total is two times larger for each device type: 400 pF for XC4000E devices and 600 pF for XC4000X devices. This maximum capacitive load should not be exceeded, as it can result in ground bounce of greater than 1.5 V amplitude and more than 5 ns duration. This level of ground bounce may cause undesired transient behavior on an output, or in the internal logic. This restriction is common to all high-speed digital ICs, and is not particular to Xilinx or the XC4000 Series.

XC4000 Series devices have a feature called “Soft Start-up,” designed to reduce ground bounce when all outputs are turned on simultaneously at the end of configuration. When the configuration process is finished and the device starts up, the first activation of the outputs is automatically slew-rate limited. Immediately following the initial activation of the I/O, the slew rate of the individual outputs is determined by the individual configuration option for each IOB.

### Global Three-State

A separate Global 3-State line (not shown in [Figure 15](#) or [Figure 16](#)) forces all FPGA outputs to the high-impedance state, unless boundary scan is enabled and is executing an EXTEST instruction. This global net (GTS) does not compete with other routing resources; it uses a dedicated distribution network.

GTS can be driven from any user-programmable pin as a global 3-state input. To use this global net, place an input pad and input buffer in the schematic or HDL code, driving the GTS pin of the STARTUP symbol. A specific pin location can be assigned to this input using a LOC attribute or property, just as with any other user-programmable pad. An inverter can optionally be inserted after the input buffer to invert the sense of the Global 3-State signal. Using GTS is similar to GSR. See [Figure 2 on page 11](#) for details.

Alternatively, GTS can be driven from any internal node.



The oscillator output is optionally available after configuration. Any two of four resynchronized taps of a built-in divider are also available. These taps are at the fourth, ninth, fourteenth and nineteenth bits of the divider. Therefore, if the primary oscillator output is running at the nominal 8 MHz, the user has access to an 8 MHz clock, plus any two of 500 kHz, 16kHz, 490Hz and 15Hz (up to 10% lower for low-voltage devices). These frequencies can vary by as much as -50% or +25%.

These signals can be accessed by placing the OSC4 library element in a schematic or in HDL code (see [Figure 24](#)).

The oscillator is automatically disabled after configuration if the OSC4 symbol is not used in the design.

## Programmable Interconnect

All internal connections are composed of metal segments with programmable switching points and switching matrices to implement the desired routing. A structured, hierarchical matrix of routing resources is provided to achieve efficient automated routing.

The XC4000E and XC4000X share a basic interconnect structure. XC4000X devices, however, have additional routing not available in the XC4000E. The extra routing resources allow high utilization in high-capacity devices. All XC4000X-specific routing resources are clearly identified throughout this section. Any resources not identified as XC4000X-specific are present in all XC4000 Series devices.

This section describes the varied routing resources available in XC4000 Series devices. The implementation software automatically assigns the appropriate resources based on the density and timing requirements of the design.

## Interconnect Overview

There are several types of interconnect.

- CLB routing is associated with each row and column of the CLB array.
- IOB routing forms a ring (called a VersaRing) around the outside of the CLB array. It connects the I/O with the internal logic blocks.

- Global routing consists of dedicated networks primarily designed to distribute clocks throughout the device with minimum delay and skew. Global routing can also be used for other high-fanout signals.

Five interconnect types are distinguished by the relative length of their segments: single-length lines, double-length lines, quad and octal lines (XC4000X only), and longlines. In the XC4000X, direct connects allow fast data flow between adjacent CLBs, and between IOBs and CLBs.

Extra routing is included in the IOB pad ring. The XC4000X also includes a ring of octal interconnect lines near the IOBs to improve pin-swapping and routing to locked pins.

XC4000E/X devices include two types of global buffers. These global buffers have different properties, and are intended for different purposes. They are discussed in detail later in this section.

## CLB Routing Connections

A high-level diagram of the routing resources associated with one CLB is shown in [Figure 25](#). The shaded arrows represent routing present only in XC4000X devices.

[Table 14](#) shows how much routing of each type is available in XC4000E and XC4000X CLB arrays. Clearly, very large designs, or designs with a great deal of interconnect, will route more easily in the XC4000X. Smaller XC4000E designs, typically requiring significantly less interconnect, do not require the additional routing.

[Figure 27 on page 30](#) is a detailed diagram of both the XC4000E and the XC4000X CLB, with associated routing. The shaded square is the programmable switch matrix, present in both the XC4000E and the XC4000X. The L-shaped shaded area is present only in XC4000X devices. As shown in the figure, the XC4000X block is essentially an XC4000E block with additional routing.

CLB inputs and outputs are distributed on all four sides, providing maximum routing flexibility. In general, the entire architecture is symmetrical and regular. It is well suited to established placement and routing algorithms. Inputs, outputs, and function generators can freely swap positions within a CLB to avoid routing congestion during the placement and routing operation.

circuit prevents undefined floating levels. However, it is overridden by any driver, even a pull-up resistor.

Each XC4000E longline has a programmable splitter switch at its center, as does each XC4000X longline driven by TBUFs. This switch can separate the line into two independent routing channels, each running half the width or height of the array.

Each XC4000X longline not driven by TBUFs has a buffered programmable splitter switch at the 1/4, 1/2, and 3/4 points of the array. Due to the buffering, XC4000X longline performance does not deteriorate with the larger array sizes. If the longline is split, the resulting partial longlines are independent.

Routing connectivity of the longlines is shown in [Figure 27 on page 30](#).

### **Direct Interconnect (XC4000X only)**

The XC4000X offers two direct, efficient and fast connections between adjacent CLBs. These nets facilitate a data flow from the left to the right side of the device, or from the top to the bottom, as shown in [Figure 30](#). Signals routed on the direct interconnect exhibit minimum interconnect propagation delay and use no general routing resources.

The direct interconnect is also present between CLBs and adjacent IOBs. Each IOB on the left and top device edges has a direct path to the nearest CLB. Each CLB on the right and bottom edges of the array has a direct path to the nearest two IOBs, since there are two IOBs for each row or column of CLBs.

The place and route software uses direct interconnect whenever possible, to maximize routing resources and minimize interconnect delays.



**Figure 30: XC4000X Direct Interconnect**

### **I/O Routing**

XC4000 Series devices have additional routing around the IOB ring. This routing is called a VersaRing. The VersaRing facilitates pin-swapping and redesign without affecting board layout. Included are eight double-length lines spanning two CLBs (four IOBs), and four longlines. Global lines and Wide Edge Decoder lines are provided. XC4000X devices also include eight octal lines.

A high-level diagram of the VersaRing is shown in [Figure 31](#). The shaded arrows represent routing present only in XC4000X devices.

[Figure 33 on page 34](#) is a detailed diagram of the XC4000E and XC4000X VersaRing. The area shown includes two IOBs. There are two IOBs per CLB row or column, therefore this diagram corresponds to the CLB routing diagram shown in [Figure 27 on page 30](#). The shaded areas represent routing and routing connections present only in XC4000X devices.


### **Octal I/O Routing (XC4000X only)**

Between the XC4000X CLB array and the pad ring, eight interconnect tracks provide for versatility in pin assignment and fixed pinout flexibility. (See [Figure 32 on page 33](#).)

These routing tracks are called octals, because they can be broken every eight CLBs (sixteen IOBs) by a programmable buffer that also functions as a splitter switch. The buffers are staggered, so each line goes through a buffer at every eighth CLB location around the device edge.


The octal lines bend around the corners of the device. The lines cross at the corners in such a way that the segment most recently buffered before the turn has the farthest distance to travel before the next buffer, as shown in [Figure 32](#).



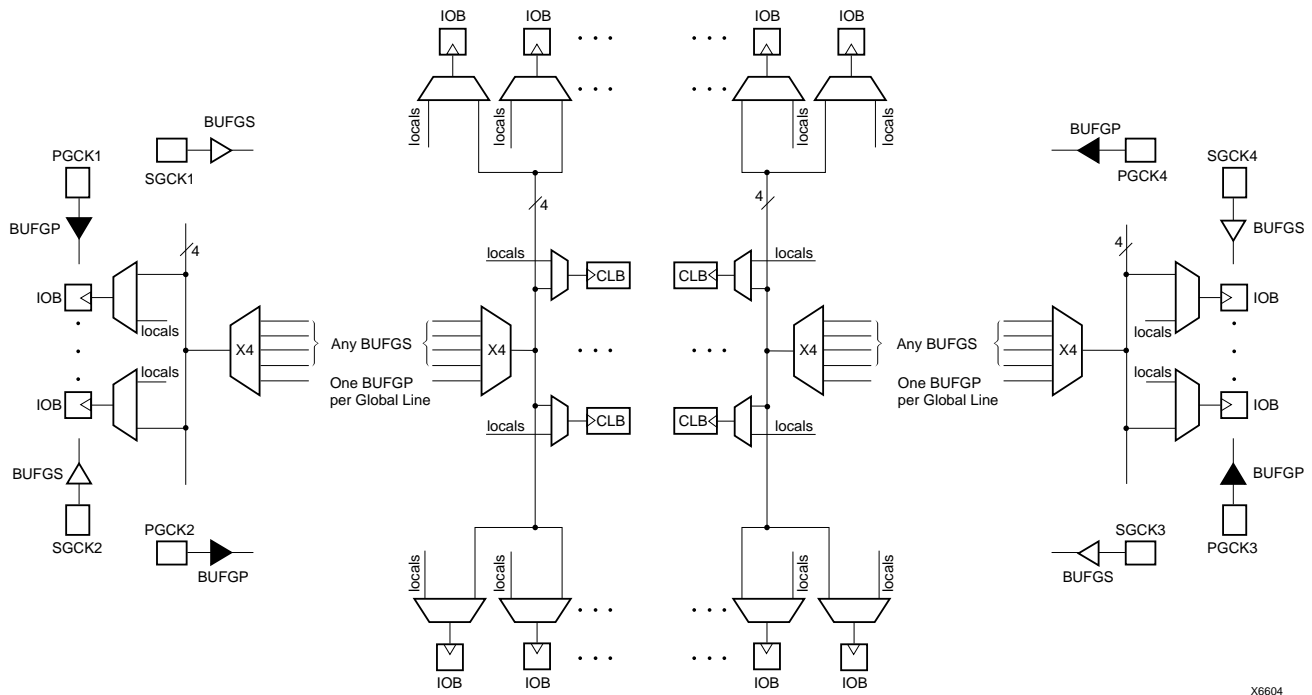

X6604

**Figure 34: XC4000E Global Net Distribution**

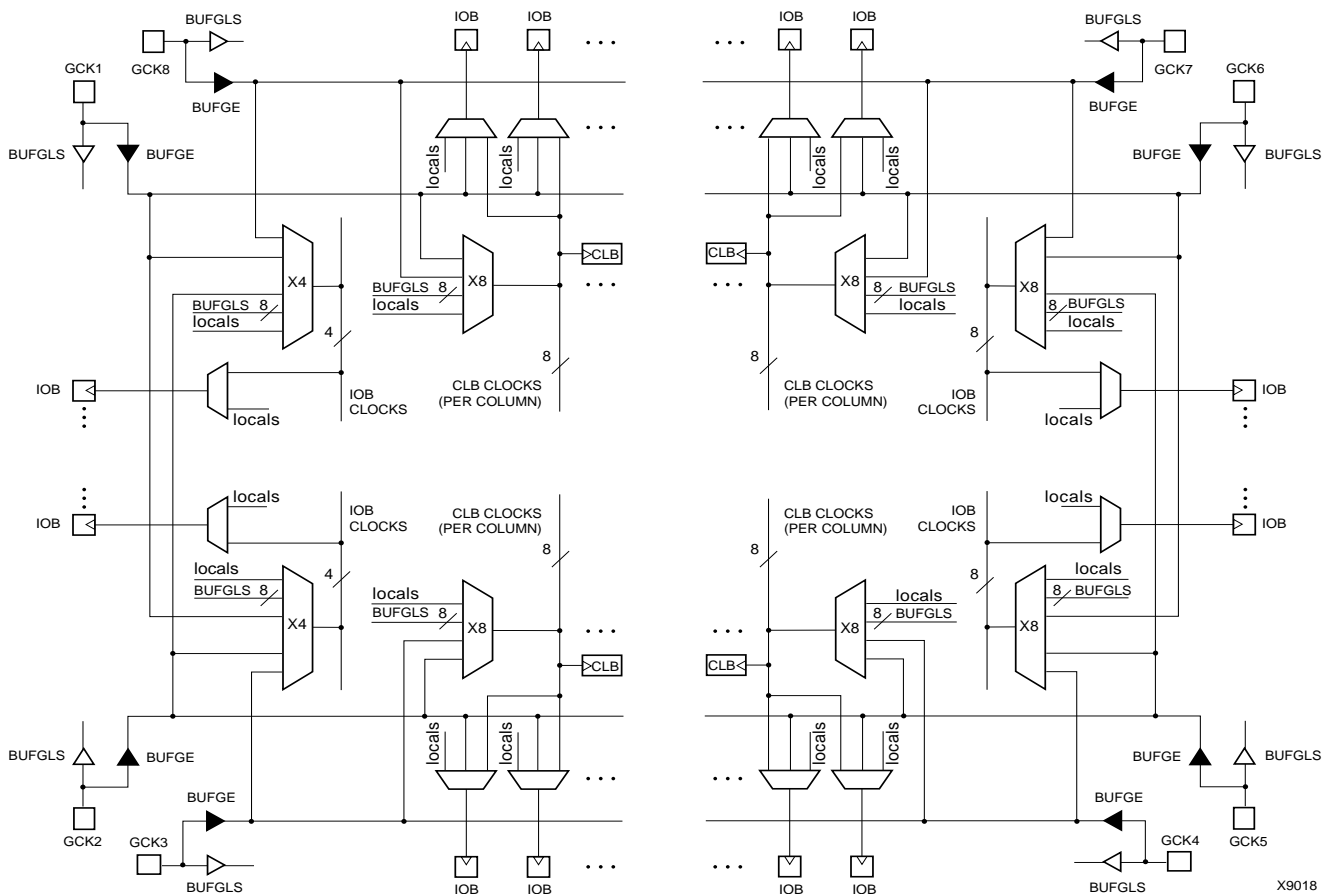


X9018

**Figure 35: XC4000X Global Net Distribution**

**Table 16: Pin Descriptions**

| Pin Name   | I/O During Config. | I/O After Config.            | Pin Description   |
|--|--------------------|------------------------------|---|
| <b>Permanently Dedicated Pins</b>                    |                    |                              |   |
| VCC  | I                  | I                            | Eight or more (depending on package) connections to the nominal +5 V supply voltage (+3.3 V for low-voltage devices). All must be connected, and each must be decoupled with a 0.01 - 0.1 $\mu$ F capacitor to Ground.  |
| GND  | I                  | I                            | Eight or more (depending on package type) connections to Ground. All must be connected.   |
| CCLK   | I or O             | I                            | During configuration, Configuration Clock (CCLK) is an output in Master modes or Asynchronous Peripheral mode, but is an input in Slave mode and Synchronous Peripheral mode. After configuration, CCLK has a weak pull-up resistor and can be selected as the Readback Clock. There is no CCLK High or Low time restriction on XC4000 Series devices, except during Readback. See <a href="#">“Violating the Maximum High and Low Time Specification for the Readback Clock” on page 56</a> for an explanation of this exception.  |
| DONE   | I/O                | O                            | DONE is a bidirectional signal with an optional internal pull-up resistor. As an output, it indicates the completion of the configuration process. As an input, a Low level on DONE can be configured to delay the global logic initialization and the enabling of outputs. The optional pull-up resistor is selected as an option in the XACTstep program that creates the configuration bitstream. The resistor is included by default.   |
| $\overline{\text{PROGRAM}}$                          | I                  | I                            | PROGRAM is an active Low input that forces the FPGA to clear its configuration memory. It is used to initiate a configuration cycle. When PROGRAM goes High, the FPGA finishes the current clear cycle and executes another complete clear cycle, before it goes into a WAIT state and releases INIT.<br>The PROGRAM pin has a permanent weak pull-up, so it need not be externally pulled up to Vcc.   |
| <b>User I/O Pins That Can Have Special Functions</b> |                    |                              |   |
| RDY/ $\overline{\text{BUSY}}$                        | O                  | I/O                          | During Peripheral mode configuration, this pin indicates when it is appropriate to write another byte of data into the FPGA. The same status is also available on D7 in Asynchronous Peripheral mode, if a read operation is performed when the device is selected. After configuration, RDY/ $\overline{\text{BUSY}}$ is a user-programmable I/O pin. RDY/ $\overline{\text{BUSY}}$ is pulled High with a high-impedance pull-up prior to $\overline{\text{INIT}}$ going High.   |
| $\overline{\text{RCLK}}$                             | O                  | I/O                          | During Master Parallel configuration, each change on the A0-A17 outputs (A0 - A21 for XC4000X) is preceded by a rising edge on $\overline{\text{RCLK}}$ , a redundant output signal. $\overline{\text{RCLK}}$ is useful for clocked PROMs. It is rarely used during configuration. After configuration, $\overline{\text{RCLK}}$ is a user-programmable I/O pin.  |
| M0, M1, M2   | I                  | I (M0),<br>O (M1),<br>I (M2) | As Mode inputs, these pins are sampled after $\overline{\text{INIT}}$ goes High to determine the configuration mode to be used. After configuration, M0 and M2 can be used as inputs, and M1 can be used as a 3-state output. These three pins have no associated input or output registers.<br>During configuration, these pins have weak pull-up resistors. For the most popular configuration mode, Slave Serial, the mode pins can thus be left unconnected. The three mode inputs can be individually configured with or without weak pull-up or pull-down resistors. A pull-down resistor value of 4.7 k $\Omega$ is recommended.<br>These pins can only be used as inputs or outputs when called out by special schematic definitions. To use these pins, place the library components MD0, MD1, and MD2 instead of the usual pad symbols. Input or output buffers must still be used. |
| TDO  | O                  | O                            | If boundary scan is used, this pin is the Test Data Output. If boundary scan is not used, this pin is a 3-state output without a register, after configuration is completed.<br>This pin can be user output only when called out by special schematic definitions. To use this pin, place the library component TDO instead of the usual pad symbol. An output buffer must still be used.   |

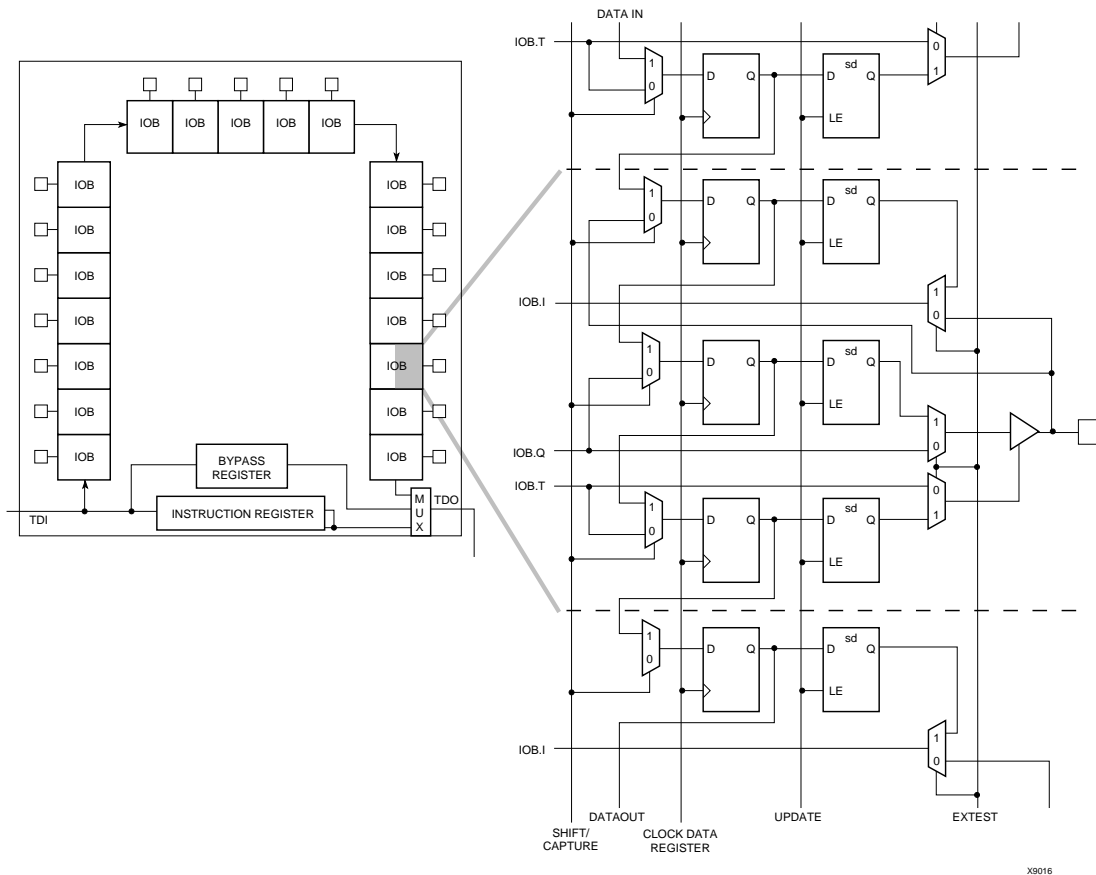

**Figure 41: XC4000 Series Boundary Scan Logic**

## Instruction Set

The XC4000 Series boundary scan instruction set also includes instructions to configure the device and read back the configuration data. The instruction set is coded as shown in [Table 17](#).

## Bit Sequence

The bit sequence within each IOB is: In, Out, 3-State. The input-only M0 and M2 mode pins contribute only the In bit to the boundary scan I/O data register, while the output-only M1 pin contributes all three bits.

The first two bits in the I/O data register are TDO.T and TDO.O, which can be used for the capture of internal signals. The final bit is BSCANT.UPD, which can be used to drive an internal net. These locations are primarily used by Xilinx for internal testing.

From a cavity-up view of the chip (as shown in XDE or Epic), starting in the upper right chip corner, the boundary scan data-register bits are ordered as shown in [Figure 42](#). The device-specific pinout tables for the XC4000 Series include the boundary scan locations for each IOB pin.

BSDL (Boundary Scan Description Language) files for XC4000 Series devices are available on the Xilinx FTP site.

## Including Boundary Scan in a Schematic


If boundary scan is only to be used during configuration, no special schematic elements need be included in the schematic or HDL code. In this case, the special boundary scan pins TDI, TMS, TCK and TDO can be used for user functions after configuration.

To indicate that boundary scan remain enabled after configuration, place the BSCAN library symbol and connect the TDI, TMS, TCK and TDO pad symbols to the appropriate pins, as shown in [Figure 43](#).

Even if the boundary scan symbol is used in a schematic, the input pins TMS, TCK, and TDI can still be used as inputs to be routed to internal logic. Care must be taken not to force the chip into an undesired boundary scan state by inadvertently applying boundary scan input patterns to these pins. The simplest way to prevent this is to keep TMS High, and then apply whatever signal is desired to TDI and TCK.

**Table 17: Boundary Scan Instructions**

| Instruction | I1 | I2 | I0 | Test Selected      | TDO Source         | I/O Data Source |
|-------------|----|----|----|--------------------|--------------------|-----------------|
| 0           | 0  | 0  | 0  | EXTEST             | DR                 | DR              |
| 0           | 0  | 1  | 1  | SAMPLE/PR<br>ELOAD | DR                 | Pin/Logic       |
| 0           | 1  | 0  | 0  | USER 1             | BSCAN.<br>TDO1     | User Logic      |
| 0           | 1  | 1  | 1  | USER 2             | BSCAN.<br>TDO2     | User Logic      |
| 1           | 0  | 0  | 0  | READBACK           | Readback<br>Data   | Pin/Logic       |
| 1           | 0  | 1  | 1  | CONFIGURE          | DOUT               | Disabled        |
| 1           | 1  | 0  | 0  | Reserved           | —                  | —               |
| 1           | 1  | 1  | 1  | BYPASS             | Bypass<br>Register | —               |

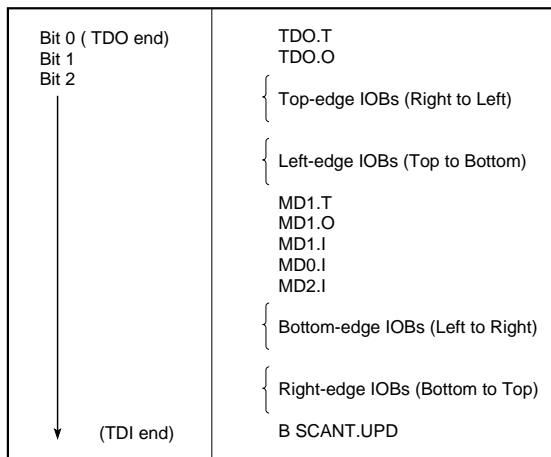

X6075

**Figure 42: Boundary Scan Bit Sequence**


## Avoiding Inadvertent Boundary Scan

If TMS or TCK is used as user I/O, care must be taken to ensure that at least one of these pins is held constant during configuration. In some applications, a situation may occur where TMS or TCK is driven during configuration. This may cause the device to go into boundary scan mode and disrupt the configuration process.

To prevent activation of boundary scan during configuration, do either of the following:

- TMS: Tie High to put the Test Access Port controller in a benign RESET state
- TCK: Tie High or Low—don't toggle this clock input.

For more information regarding boundary scan, refer to the Xilinx Application Note XAPP 017.001, "Boundary Scan in XC4000E Devices."

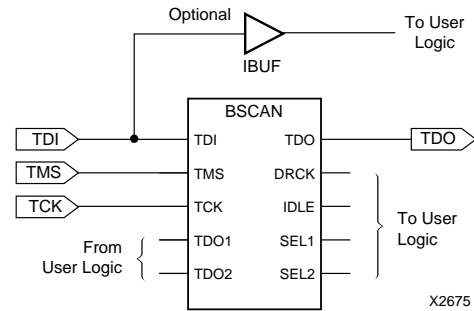

**Figure 43: Boundary Scan Schematic Example**

## Configuration

Configuration is the process of loading design-specific programming data into one or more FPGAs to define the functional operation of the internal blocks and their interconnections. This is somewhat like loading the command registers of a programmable peripheral chip. XC4000 Series devices use several hundred bits of configuration data per CLB and its associated interconnects. Each configuration bit defines the state of a static memory cell that controls either a function look-up table bit, a multiplexer input, or an interconnect pass transistor. The XACT<sup>step</sup> development system translates the design into a netlist file. It automatically partitions, places and routes the logic and generates the configuration data in PROM format.

## Special Purpose Pins

Three configuration mode pins (M2, M1, M0) are sampled prior to configuration to determine the configuration mode. After configuration, these pins can be used as auxiliary connections. M2 and M0 can be used as inputs, and M1 can be used as an output. The XACT<sup>step</sup> development system does not use these resources unless they are explicitly specified in the design entry. This is done by placing a special pad symbol called MD2, MD1, or MD0 instead of the input or output pad symbol.

In XC4000 Series devices, the mode pins have weak pull-up resistors during configuration. With all three mode pins High, Slave Serial mode is selected, which is the most popular configuration mode. Therefore, for the most common configuration mode, the mode pins can be left unconnected. (Note, however, that the internal pull-up resistor value can be as high as 100 kΩ.) After configuration, these pins can individually have weak pull-up or pull-down resistors, as specified in the design. A pull-down resistor value of 4.7 kΩ is recommended.

These pins are located in the lower left chip corner and are near the readback nets. This location allows convenient routing if compatibility with the XC2000 and XC3000 family conventions of M0/RT, M1/RD is desired.

is passed through and is captured by each FPGA when it recognizes the 0010 preamble. Following the length-count data, each FPGA outputs a High on DOUT until it has received its required number of data frames.

After an FPGA has received its configuration data, it passes on any additional frame start bits and configuration data on DOUT. When the total number of configuration clocks applied after memory initialization equals the value of the 24-bit length count, the FPGAs begin the start-up sequence and become operational together. FPGA I/O are normally released two CCLK cycles after the last configuration bit is received. **Figure 47 on page 53** shows the start-up timing for an XC4000 Series device.

The daisy-chained bitstream is not simply a concatenation of the individual bitstreams. The PROM file formatter must be used to combine the bitstreams for a daisy-chained configuration.

### Multi-Family Daisy Chain

All Xilinx FPGAs of the XC2000, XC3000, and XC4000 Series use a compatible bitstream format and can, therefore, be connected in a daisy chain in an arbitrary sequence. There is, however, one limitation. The lead device must belong to the highest family in the chain. If the chain contains XC4000 Series devices, the master normally cannot be an XC2000 or XC3000 device.

The reason for this rule is shown in **Figure 47 on page 53**. Since all devices in the chain store the same length count value and generate or receive one common sequence of CCLK pulses, they all recognize length-count match on the same CCLK edge, as indicated on the left edge of **Figure 47**. The master device then generates additional CCLK pulses until it reaches its finish point F. The different families generate or require different numbers of additional CCLK pulses until they reach F. Not reaching F means that the device does not really finish its configuration, although DONE may have gone High, the outputs became active, and the internal reset was released. For the XC4000 Series device, not reaching F means that readback cannot be ini-

tiated and most boundary scan instructions cannot be used.


The user has some control over the relative timing of these events and can, therefore, make sure that they occur at the proper time and the finish point F is reached. Timing is controlled using options in the bitstream generation software.

### XC3000 Master with an XC4000 Series Slave

Some designers want to use an inexpensive lead device in peripheral mode and have the more precious I/O pins of the XC4000 Series devices all available for user I/O. **Figure 44** provides a solution for that case.

This solution requires one CLB, one IOB and pin, and an internal oscillator with a frequency of up to 5 MHz as a clock source. The XC3000 master device must be configured with late Internal Reset, which is the default option.

One CLB and one IOB in the lead XC3000-family device are used to generate the additional CCLK pulse required by the XC4000 Series devices. When the lead device removes the internal RESET signal, the 2-bit shift register responds to its clock input and generates an active Low output signal for the duration of the subsequent clock period. An external connection between this output and CCLK thus creates the extra CCLK pulse.

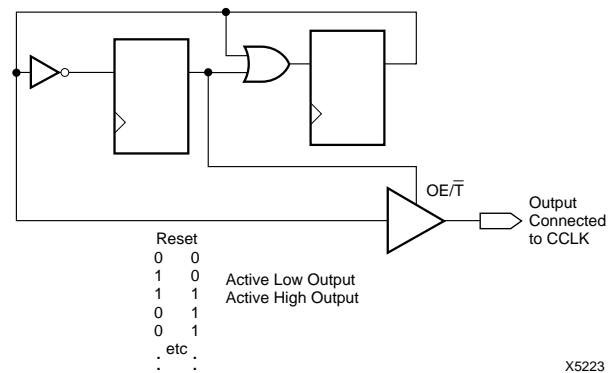

**Figure 44: CCLK Generation for XC3000 Master Driving an XC4000 Series Slave**

Table 20: XC4000E Program Data

| Device               | XC4003E          | XC4005E          | XC4006E          | XC4008E          | XC4010E          | XC4013E          | XC4020E          | XC4025E            |
|----------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|--------------------|
| Max Logic Gates      | 3,000            | 5,000            | 6,000            | 8,000            | 10,000           | 13,000           | 20,000           | 25,000             |
| CLBs<br>(Row x Col.) | 100<br>(10 x 10) | 196<br>(14 x 14) | 256<br>(16 x 16) | 324<br>(18 x 18) | 400<br>(20 x 20) | 576<br>(24 x 24) | 784<br>(28 x 28) | 1,024<br>(32 x 32) |
| IOBs                 | 80               | 112              | 128              | 144              | 160              | 192              | 224              | 256                |
| Flip-Flops           | 360              | 616              | 768              | 936              | 1,120            | 1,536            | 2,016            | 2,560              |
| Bits per Frame       | 126              | 166              | 186              | 206              | 226              | 266              | 306              | 346                |
| Frames               | 428              | 572              | 644              | 716              | 788              | 932              | 1,076            | 1,220              |
| Program Data         | 53,936           | 94,960           | 119,792          | 147,504          | 178,096          | 247,920          | 329,264          | 422,128            |
| PROM Size<br>(bits)  | 53,984           | 95,008           | 119,840          | 147,552          | 178,144          | 247,968          | 329,312          | 422,176            |

- Notes:
- Bits per Frame = (10 x number of rows) + 7 for the top + 13 for the bottom + 1 + 1 start bit + 4 error check bits  
 Number of Frames = (36 x number of columns) + 26 for the left edge + 41 for the right edge + 1  
 Program Data = (Bits per Frame x Number of Frames) + 8 postamble bits  
 PROM Size = Program Data + 40 (header) + 8
  - The user can add more "one" bits as leading dummy bits in the header, or, if CRC = off, as trailing dummy bits at the end of any frame, following the four error check bits. However, the Length Count value **must** be adjusted for all such extra "one" bits, even for extra leading ones at the beginning of the header.

Table 21: XC4000EX/XL Program Data

| Device                 | XC4002XL      | XC4005           | XC4010           | XC4013           | XC4020           | XC4028             | XC4036             | XC4044             | XC4052             | XC4062             | XC4085             |
|------------------------|---------------|------------------|------------------|------------------|------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Max Logic Gates        | 2,000         | 5,000            | 10,000           | 13,000           | 20,000           | 28,000             | 36,000             | 44,000             | 52,000             | 62,000             | 85,000             |
| CLBs<br>(Row x Column) | 64<br>(8 x 8) | 196<br>(14 x 14) | 400<br>(20 x 20) | 576<br>(24 x 24) | 784<br>(28 x 28) | 1,024<br>(32 x 32) | 1,296<br>(36 x 36) | 1,600<br>(40 x 40) | 1,936<br>(44 x 44) | 2,304<br>(48 x 48) | 3,136<br>(56 x 56) |
| IOBs                   | 64            | 112              | 160              | 192              | 224              | 256                | 288                | 320                | 352                | 384                | 448                |
| Flip-Flops             | 256           | 616              | 1,120            | 1,536            | 2,016            | 2,560              | 3,168              | 3,840              | 4,576              | 5,376              | 7,168              |
| Bits per Frame         | 133           | 205              | 277              | 325              | 373              | 421                | 469                | 517                | 565                | 613                | 709                |
| Frames                 | 459           | 741              | 1,023            | 1,211            | 1,399            | 1,587              | 1,775              | 1,963              | 2,151              | 2,339              | 2,715              |
| Program Data           | 61,052        | 151,910          | 283,376          | 393,580          | 521,832          | 668,124            | 832,480            | 1,014,876          | 1,215,320          | 1,433,804          | 1,924,940          |
| PROM Size<br>(bits)    | 61,104        | 151,960          | 283,424          | 393,632          | 521,880          | 668,172            | 832,528            | 1,014,924          | 1,215,368          | 1,433,852          | 1,924,992          |

- Notes:
- Bits per frame = (13 x number of rows) + 9 for the top + 17 for the bottom + 8 + 1 start bit + 4 error check bits.  
 Frames = (47 x number of columns) + 27 for the left edge + 52 for the right edge + 4.  
 Program data = (bits per frame x number of frames) + 5 postamble bits.  
 PROM size = (program data + 40 header bits + 8 start bits) rounded up to the nearest byte.
  - The user can add more "one" bits as leading dummy bits in the header, or, if CRC = off, as trailing dummy bits at the end of any frame, following the four error check bits. However, the Length Count value must be adjusted for all such extra "one" bits, even for extra leading "ones" at the beginning of the header.

## Cyclic Redundancy Check (CRC) for Configuration and Readback

The Cyclic Redundancy Check is a method of error detection in data transmission applications. Generally, the transmitting system performs a calculation on the serial bitstream. The result of this calculation is tagged onto the data stream as additional check bits. The receiving system performs an identical calculation on the bitstream and compares the result with the received checksum.

Each data frame of the configuration bitstream has four error bits at the end, as shown in [Table 19](#). If a frame data error is detected during the loading of the FPGA, the con-

figuration process with a potentially corrupted bitstream is terminated. The FPGA pulls the  $\overline{\text{INIT}}$  pin Low and goes into a Wait state.

During Readback, 11 bits of the 16-bit checksum are added to the end of the Readback data stream. The checksum is computed using the CRC-16 CCITT polynomial, as shown in [Figure 45](#). The checksum consists of the 11 most significant bits of the 16-bit code. A change in the checksum indicates a change in the Readback bitstream. A comparison to a previous checksum is meaningful only if the readback data is independent of the current device state. CLB outputs should not be included (Read Capture option not



used), and if RAM is present, the RAM content must be unchanged.

Statistically, one error out of 2048 might go undetected.

## Configuration Sequence

There are four major steps in the XC4000 Series power-up configuration sequence.

- Configuration Memory Clear
- Initialization
- Configuration
- Start-Up

The full process is illustrated in Figure 46.

### Configuration Memory Clear

When power is first applied or is reapplied to an FPGA, an internal circuit forces initialization of the configuration logic. When  $V_{CC}$  reaches an operational level, and the circuit passes the write and read test of a sample pair of configuration bits, a time delay is started. This time delay is nominally 16 ms, and up to 10% longer in the low-voltage devices. The delay is four times as long when in Master Modes (M0 Low), to allow ample time for all slaves to reach a stable  $V_{CC}$ . When all  $\overline{INIT}$  pins are tied together, as recommended, the longest delay takes precedence. Therefore, devices with different time delays can easily be mixed and matched in a daisy chain.


This delay is applied only on power-up. It is not applied when re-configuring an FPGA by pulsing the  $\overline{PROGRAM}$  pin



**Figure 45: Circuit for Generating CRC-16**




**Figure 46: Power-up Configuration Sequence**

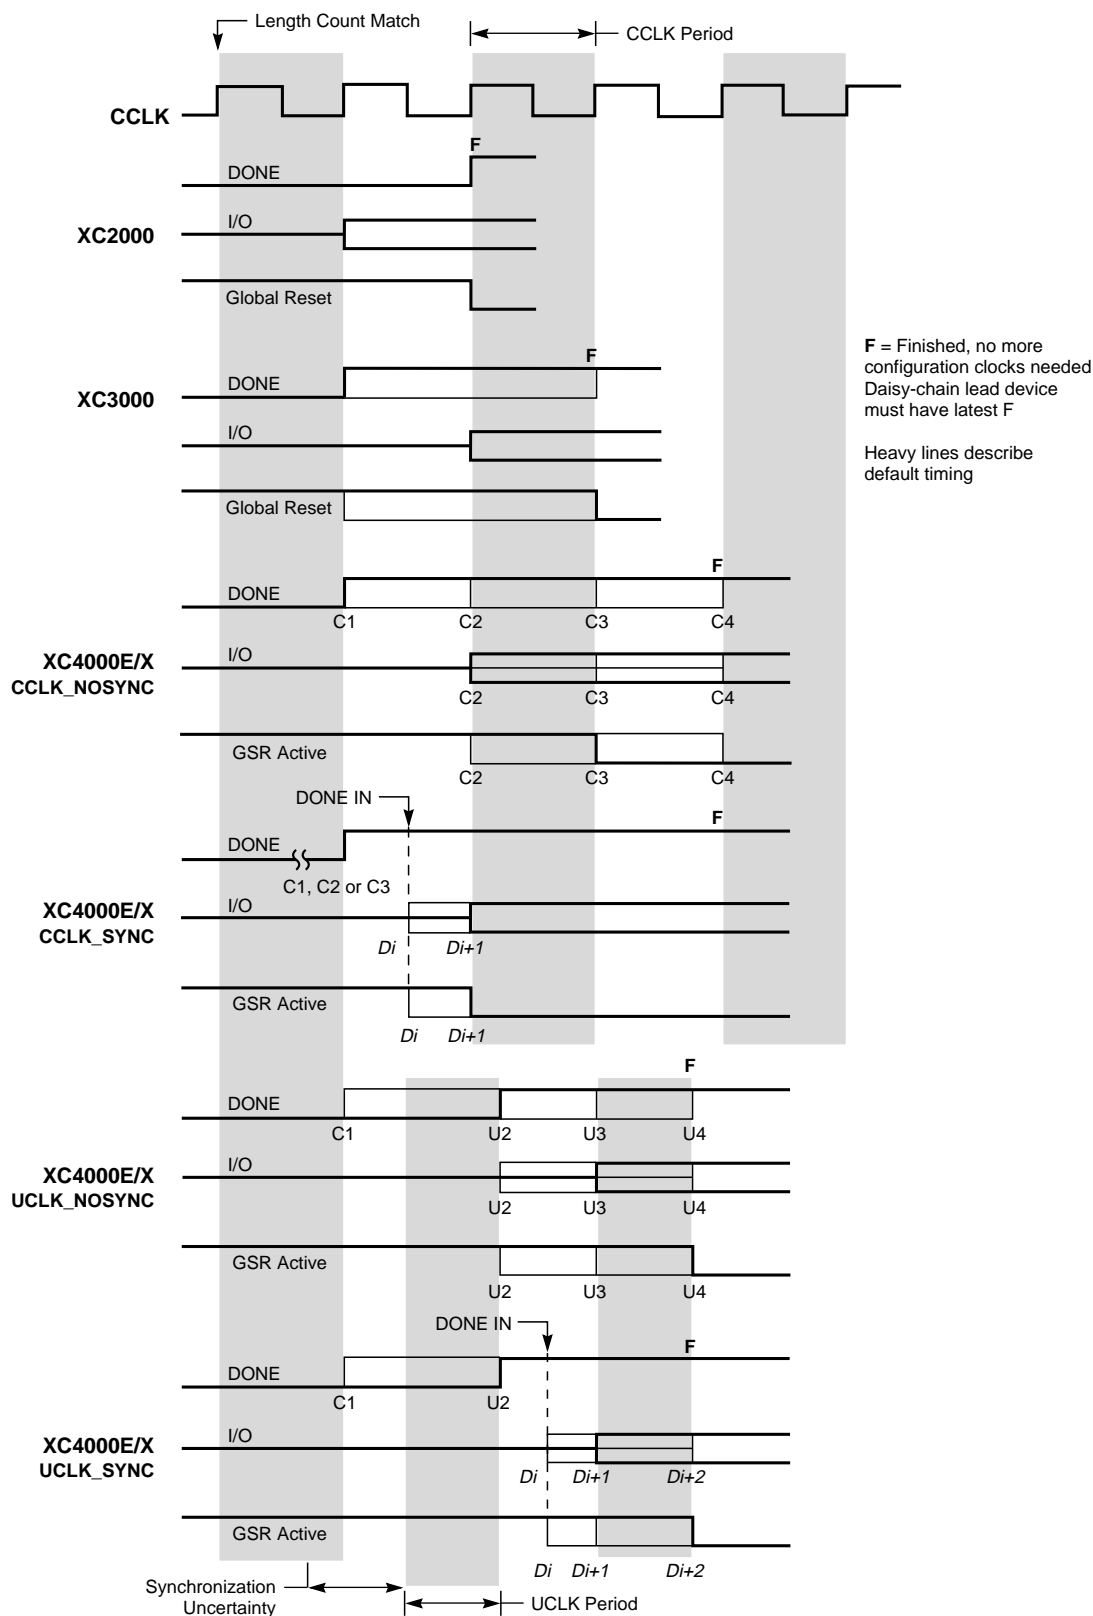

X9024

**Figure 47: Start-up Timing**

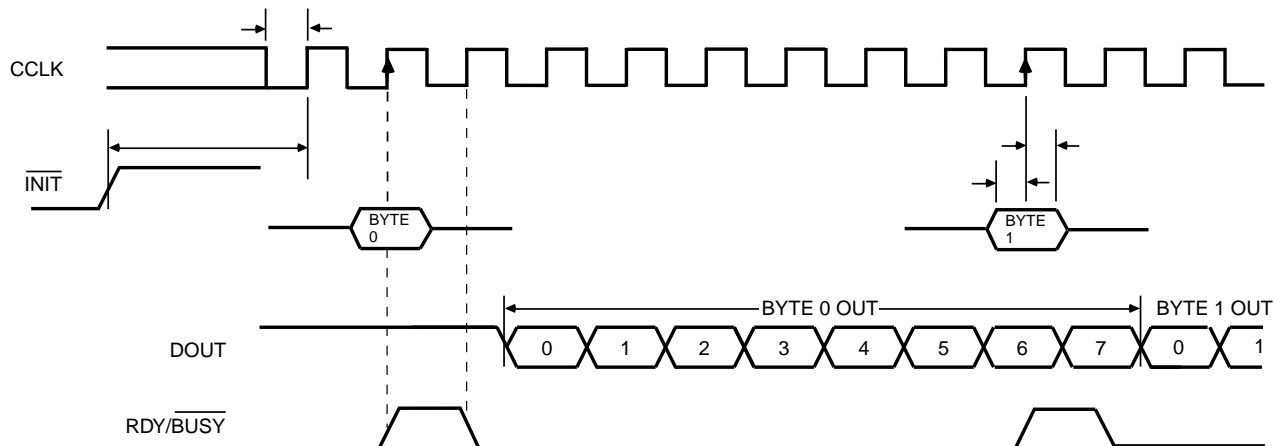

X6096

|      | Description            | Symbol    | Min | Max | Units   |
|------|------------------------|-----------|-----|-----|---------|
| CCLK | INIT (High) setup time | $T_{IC}$  | 5   |     | $\mu s$ |
|      | D0 - D7 setup time     | $T_{DC}$  | 60  |     | ns      |
|      | D0 - D7 hold time      | $T_{CD}$  | 0   |     | ns      |
|      | CCLK High time         | $T_{CCH}$ | 50  |     | ns      |
|      | CCLK Low time          | $T_{CCL}$ | 60  |     | ns      |
|      | CCLK Frequency         | $F_{CC}$  |     | 8   | MHz     |

- Notes:
1. Peripheral Synchronous mode can be considered Slave Parallel mode. An external CCLK provides timing, clocking in the **first** data byte on the **second** rising edge of CCLK after INIT goes High. Subsequent data bytes are clocked in on every eighth consecutive rising edge of CCLK.
  2. The RDY/BUSY line goes High for one CCLK period after data has been clocked in, although synchronous operation does not require such a response.
  3. The pin name RDY/BUSY is a misnomer. In Synchronous Peripheral mode this is really an ACKNOWLEDGE signal.
  4. Note that data starts to shift out serially on the DOUT pin 0.5 CCLK periods after it was loaded in parallel. Therefore, additional CCLK pulses are clearly required after the last byte has been loaded.

**Figure 57: Synchronous Peripheral Mode Programming Switching Characteristics**

## Asynchronous Peripheral Mode

## Write to FPGA

Asynchronous Peripheral mode uses the trailing edge of the logic AND condition of  $\overline{WS}$  and  $\overline{CS0}$  being Low and  $\overline{RS}$  and  $CS1$  being High to accept byte-wide data from a micro-processor bus. In the lead FPGA, this data is loaded into a double-buffered UART-like parallel-to-serial converter and is serially shifted into the internal logic.

The lead FPGA presents the preamble data (and all data that overflows the lead device) on its DOUT pin. The RDY/ $\overline{\text{BUSY}}$  output from the lead FPGA acts as a handshake signal to the microprocessor. RDY/ $\overline{\text{BUSY}}$  goes Low when a byte has been received, and goes High again when the byte-wide input buffer has transferred its information into the shift register, and the buffer is ready to receive new data. A new write may be started immediately, as soon as the RDY/ $\overline{\text{BUSY}}$  output has gone Low, acknowledging receipt of the previous data. Write may not be terminated until RDY/ $\overline{\text{BUSY}}$  is High again for one CCLK period. Note that RDY/ $\overline{\text{BUSY}}$  is pulled High with a high-impedance pull-up prior to  $\overline{\text{INIT}}$  going High.

The length of the  $\overline{\text{BUSY}}$  signal depends on the activity in the UART. If the shift register was empty when the new byte was received, the  $\overline{\text{BUSY}}$  signal lasts for only two CCLK periods. If the shift register was still full when the new byte was received, the  $\overline{\text{BUSY}}$  signal can be as long as nine CCLK periods.

Note that after the last byte has been entered, only seven of its bits are shifted out. CCLK remains High with DOUT equal to bit 6 (the next-to-last bit) of the last byte entered.

The  $\overline{\text{READY}}/\text{BUSY}$  handshake can be ignored if the delay from any one Write to the end of the next Write is guaranteed to be longer than 10 CCLK periods.

### Status Read

The logic AND condition of the  $\overline{CS0}$ , CS1 and  $\overline{RS}$  inputs puts the device status on the Data bus.


- D7 High indicates Ready
- D7 Low indicates Busy
- D0 through D6 go unconditionally High

It is mandatory that the whole start-up sequence be started and completed by one byte-wide input. Otherwise, the pins used as Write Strobe or Chip Enable might become active outputs and interfere with the final byte transfer. If this transfer does not occur, the start-up sequence is not completed all the way to the finish (point F in [Figure 47 on page 53](#)).

In this case, at worst, the internal reset is not released. At best, Readback and Boundary Scan are inhibited. The length-count value, as generated by the XACTstep software, ensures that these problems never occur.


Although RDY/ $\overline{\text{BUSY}}$  is brought out as a separate signal, microprocessors can more easily read this information on one of the data lines. For this purpose, D7 represents the RDY/ $\overline{\text{BUSY}}$  status when  $\overline{\text{RS}}$  is Low,  $\overline{\text{WS}}$  is High, and the two chip select lines are both active.

Asynchronous Peripheral mode is selected by a <101> on the mode pins (M2, M1, M0).

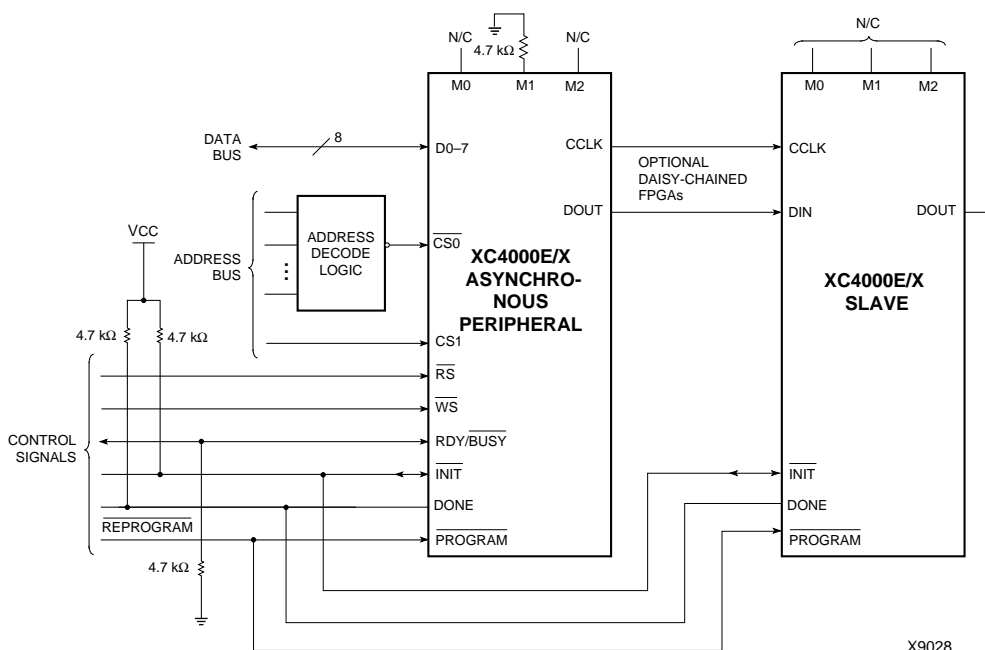

**Figure 58: Asynchronous Peripheral Mode Circuit Diagram**

## Configuration Switching Characteristics

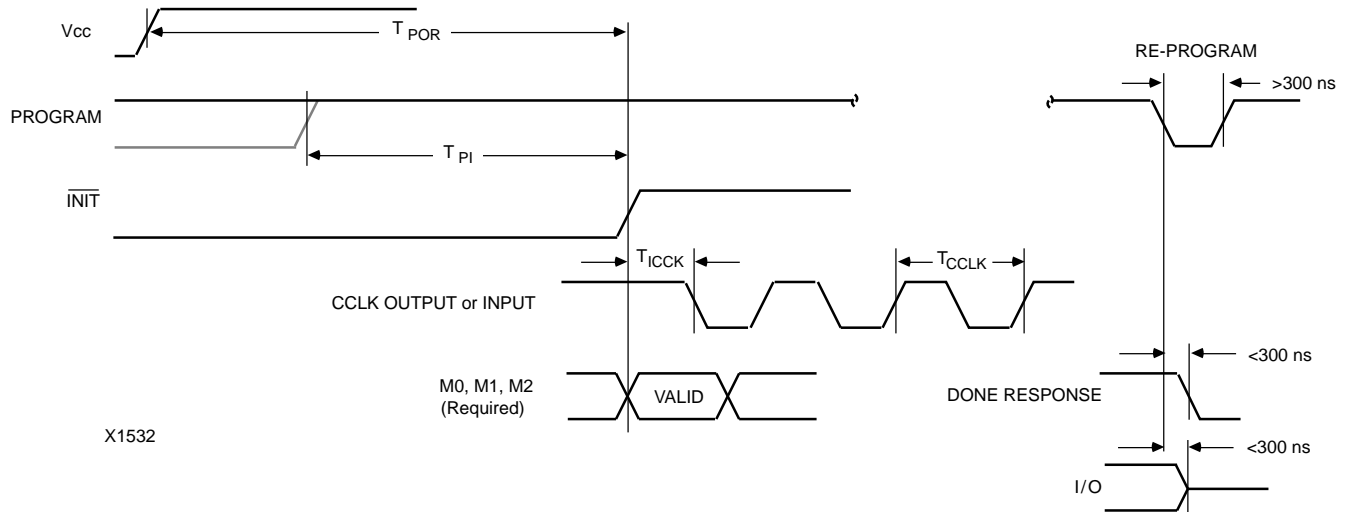

X1532

### Master Modes (XC4000E/EX)

| Description                |           | Symbol     | Min | Max  | Units                  |
|----------------------------|-----------|------------|-----|------|------------------------|
| Power-On Reset             | M0 = High | $T_{POR}$  | 10  | 40   | ms                     |
|                            | M0 = Low  | $T_{POR}$  | 40  | 130  | ms                     |
| Program Latency            |           | $T_{PI}$   | 30  | 200  | $\mu$ s per CLB column |
| CCLK (output) Delay        |           | $T_{ICCK}$ | 40  | 250  | $\mu$ s                |
| CCLK (output) Period, slow |           | $T_{CCLK}$ | 640 | 2000 | ns                     |
| CCLK (output) Period, fast |           | $T_{CCLK}$ | 80  | 250  | ns                     |

### Master Modes (XC4000XL)

| Description                |           | Symbol     | Min | Max  | Units                  |
|----------------------------|-----------|------------|-----|------|------------------------|
| Power-On Reset             | M0 = High | $T_{POR}$  | 10  | 40   | ms                     |
|                            | M0 = Low  | $T_{POR}$  | 40  | 130  | ms                     |
| Program Latency            |           | $T_{PI}$   | 30  | 200  | $\mu$ s per CLB column |
| CCLK (output) Delay        |           | $T_{ICCK}$ | 40  | 250  | $\mu$ s                |
| CCLK (output) Period, slow |           | $T_{CCLK}$ | 540 | 1600 | ns                     |
| CCLK (output) Period, fast |           | $T_{CCLK}$ | 67  | 200  | ns                     |

### Slave and Peripheral Modes (All)

| Description                    |  | Symbol     | Min | Max | Units                  |
|--------------------------------|--|------------|-----|-----|------------------------|
| Power-On Reset                 |  | $T_{POR}$  | 10  | 33  | ms                     |
| Program Latency                |  | $T_{PI}$   | 30  | 200 | $\mu$ s per CLB column |
| CCLK (input) Delay (required)  |  | $T_{ICCK}$ | 4   |     | $\mu$ s                |
| CCLK (input) Period (required) |  | $T_{CCLK}$ | 100 |     | ns                     |

**Table 25: Component Availability Chart for XC4000E FPGAs**

|         | PINS | TYPE | CODE | 84          | 100         | 100         | 120        | 144         | 156        | 160         | 191        | 208            | 208         | 223        | 225        | 240            | 240         | 299        | 304           |
|---------|------|------|------|-------------|-------------|-------------|------------|-------------|------------|-------------|------------|----------------|-------------|------------|------------|----------------|-------------|------------|---------------|
|         |      |      |      | Plast. PLCC | Plast. PQFP | Plast. VQFP | Ceram. PGA | Plast. TQFP | Ceram. PGA | Plast. PQFP | Ceram. PGA | High-Perf. QFP | Plast. PQFP | Ceram. PGA | Plast. BGA | High-Perf. QFP | Plast. PQFP | Ceram. PGA | High-Perf. QF |
|         |      |      |      | PC84        | PQ100       | VQ100       | PG120      | TQ144       | PG156      | PQ160       | PG191      | HQ208          | PQ208       | PG223      | BG225      | HQ240          | PQ240       | PG299      | HQ304         |
| XC4003E | -4   | C I  | C I  | C I         | C I         |             |            |             |            |             |            |                |             |            |            |                |             |            |               |
|         | -3   | C I  | C I  | C I         | C I         |             |            |             |            |             |            |                |             |            |            |                |             |            |               |
|         | -2   | C I  | C I  | C I         | C I         |             |            |             |            |             |            |                |             |            |            |                |             |            |               |
|         | -1   | C    | C    | C           | C           |             |            |             |            |             |            |                |             |            |            |                |             |            |               |
| XC4005E | -4   | C I  | C I  |             |             |             |            | C I         | C I        | C I         |            |                | C I         |            |            |                |             |            |               |
|         | -3   | C I  | C I  |             |             |             |            | C I         | C I        | C I         |            |                | C I         |            |            |                |             |            |               |
|         | -2   | C I  | C I  |             |             |             |            | C I         | C I        | C I         |            |                | C I         |            |            |                |             |            |               |
|         | -1   | C    | C    |             |             |             |            | C           | C          | C           |            |                | C           |            |            |                |             |            |               |
| XC4006E | -4   | C I  |      |             |             |             |            | C I         | C I        | C I         |            |                | C I         |            |            |                |             |            |               |
|         | -3   | C I  |      |             |             |             |            | C I         | C I        | C I         |            |                | C I         |            |            |                |             |            |               |
|         | -2   | C I  |      |             |             |             |            | C I         | C I        | C I         |            |                | C I         |            |            |                |             |            |               |
|         | -1   | C    |      |             |             |             |            | C           | C          | C           |            |                | C           |            |            |                |             |            |               |
| XC4008E | -4   | C I  |      |             |             |             |            |             |            | C I         | C I        |                | C I         |            |            |                |             |            |               |
|         | -3   | C I  |      |             |             |             |            |             |            | C I         | C I        |                | C I         |            |            |                |             |            |               |
|         | -2   | C I  |      |             |             |             |            |             |            | C I         | C I        |                | C I         |            |            |                |             |            |               |
|         | -1   | C    |      |             |             |             |            |             |            | C           | C          |                | C           |            |            |                |             |            |               |
| XC4010E | -4   | C I  |      |             |             |             |            |             |            | C I         | C I        | C I            | C I         |            |            | C I            |             |            |               |
|         | -3   | C I  |      |             |             |             |            |             |            | C I         | C I        | C I            | C I         |            |            | C I            |             |            |               |
|         | -2   | C I  |      |             |             |             |            |             |            | C I         | C I        | C I            | C I         |            |            | C I            |             |            |               |
|         | -1   | C    |      |             |             |             |            |             |            | C           | C          | C              | C           |            |            | C              |             |            |               |
| XC4013E | -4   |      |      |             |             |             |            |             |            | C I         |            | C I            | C I         | C I        | C I        | C I            | C I         |            |               |
|         | -3   |      |      |             |             |             |            |             |            | C I         |            | C I            | C I         | C I        | C I        | C I            | C I         |            |               |
|         | -2   |      |      |             |             |             |            |             |            | C I         |            | C I            | C I         | C I        | C I        | C I            | C I         |            |               |
|         | -1   |      |      |             |             |             |            |             |            | C           |            | C              | C           | C          | C          | C              | C           |            |               |
| XC4020E | -4   |      |      |             |             |             |            |             |            |             |            | C I            |             | C I        |            | C I            |             |            |               |
|         | -3   |      |      |             |             |             |            |             |            |             |            | C I            |             | C I        |            | C I            |             |            |               |
|         | -2   |      |      |             |             |             |            |             |            |             |            | C I            |             | C I        |            | C I            |             |            |               |
|         | -1   |      |      |             |             |             |            |             |            |             |            | C              |             | C          |            | C              |             |            |               |
| XC4025E | -4   |      |      |             |             |             |            |             |            |             |            |                |             | C I        |            | C I            |             | C I        | C I           |
|         | -3   |      |      |             |             |             |            |             |            |             |            |                |             | C I        |            | C I            |             | C I        | C I           |
|         | -2   |      |      |             |             |             |            |             |            |             |            |                |             | C          |            | C              |             | C          | C             |

1/29/99

C = Commercial  $T_J = 0^\circ$  to  $+85^\circ\text{C}$

I = Industrial  $T_J = -40^\circ\text{C}$  to  $+100^\circ\text{C}$

**Table 26: Component Availability Chart for XC4000EX FPGAs**

|          | PINS | TYPE | CODE | 208            | 240            | 299        | 304            | 352        | 411        | 432        |
|----------|------|------|------|----------------|----------------|------------|----------------|------------|------------|------------|
|          |      |      |      | High-Perf. QFP | High-Perf. QFP | Ceram. PGA | High-Perf. QFP | Plast. BGA | Ceram. PGA | Plast. BGA |
|          |      |      |      | HQ208          | HQ240          | PG299      | HQ304          | BG352      | PG411      | BG432      |
| XC4028EX | -4   | C I  |      | C I            | C I            | C I        | C I            | C I        |            |            |
|          | -3   | C I  |      | C I            | C I            | C I        | C I            | C I        |            |            |
|          | -2   | C    |      | C              | C              | C          | C              | C          |            |            |
| XC4036EX | -4   |      |      |                | C I            |            | C I            | C I        | C I        | C I        |
|          | -3   |      |      |                | C I            |            | C I            | C I        | C I        | C I        |
|          | -2   |      |      |                | C              |            | C              | C          | C          | C          |

1/29/99

C = Commercial  $T_J = 0^\circ$  to  $+85^\circ\text{C}$

I = Industrial  $T_J = -40^\circ\text{C}$  to  $+100^\circ\text{C}$



## XC4000 Series Electrical Characteristics and Device-Specific Pinout Table


For the latest Electrical Characteristics and package/pinout information for each XC4000 Family, see the Xilinx web site at

[http://www.xilinx.com/xlnx/xweb/xil\\_publications\\_index.jsp](http://www.xilinx.com/xlnx/xweb/xil_publications_index.jsp)

## Ordering Information

### Example:

# XC4013E-3HQ240C

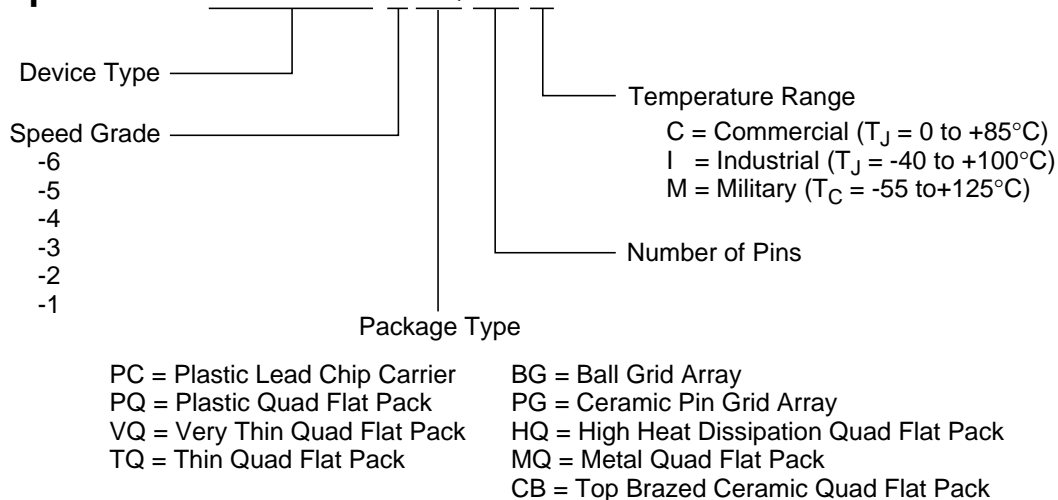

X9020

## Revision Control

| Version       | Description  |
|---------------|--|
| 3/30/98 (1.5) | Updated XC4000XL timing and added XC4002XL   |
| 1/29/99 (1.5) | Updated pin diagrams   |
| 5/14/99 (1.6) | Replaced Electrical Specification and pinout pages for E, EX, and XL families with separate updates and added URL link for electrical specifications/pinouts for Web users |