



Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

Product Status	Obsolete
Core Processor	F <sup>2</sup> MC-16LX
Core Size	16-Bit
Speed	16MHz
Connectivity	CANbus, SCI, UART/USART
Peripherals	POR, WDT
Number of I/O	34
Program Memory Size	64KB (64K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	2K x 8
Voltage - Supply (Vcc/Vdd)	3.5V ~ 5.5V
Data Converters	A/D 8x8/10b
Oscillator Type	External
Operating Temperature	-40°C ~ 105°C (TA)
Mounting Type	Surface Mount
Package / Case	48-LQFP
Supplier Device Package	48-LQFP (7x7)
Purchase URL	<a href="https://www.e-xfl.com/product-detail/infineon-technologies/mb90f387pmt-ge1">https://www.e-xfl.com/product-detail/infineon-technologies/mb90f387pmt-ge1</a>

**DTP/External Interrupt: 4 channels, CAN wakeup:  
1 channel**

- Module for activation of expanded intelligent I/O service (EI<sup>2</sup>OS), and generation of external interrupt.

**Delay Interrupt Generator Module**

- Generates interrupt request for task switching.

**8/10-bit A/D Converter: 8 channels**

- Resolution is selectable between 8-bit and 10-bit.
- Activation by external trigger input is allowed.
- Conversion time: 6.125  $\mu$ s (at 16 MHz machine clock, including sampling time)

**Program Patch Function**

- Address matching detection for 2 address pointers.

## 1. Product Lineup

Part Number		MB90F387 MB90F387S	MB90387 MB90387S	MB90V495G
Parameter				
Classification		Flash ROM	Mask ROM	Evaluation product
ROM capacity		64 Kbytes		–
RAM capacity		2 Kbytes		6 Kbytes
Process		CMOS		
Package		LQFP-48 (pin pitch 0.50 mm)		PGA-256
Operating power supply voltage		3.5 V to 5.5 V		4.5 V to 5.5 V
Special power supply for emulator*1		–		None
CPU functions		Number of basic instructions : 351 instructions		
		Instruction bit length : 8 bits and 16 bits		
		Instruction length : 1 byte to 7 bytes		
		Data bit length : 1 bit, 8 bits, 16 bits		
		Minimum instruction execution time: 62.5 ns (at 16 MHz machine clock)		
		Interrupt processing time: 1.5 $\mu$ s at minimum (at 16 MHz machine clock)		
Low power consumption (standby) mode		Sleep mode / Watch mode / Time-base timer mode / Stop mode / CPU intermittent		
I/O port		General-purpose input/output ports (CMOS output): 34 ports (36 ports*2) including 4 high-current output ports (P14 to P17)		
Time-base timer		18-bit free-run counter Interrupt cycle: 1.024 ms, 4.096 ms, 16.834 ms, 131.072 ms (with oscillation clock frequency at 4 MHz)		
Watchdog timer		Reset generation cycle: 3.58 ms, 14.33 ms, 57.23 ms, 458.75 ms (with oscillation clock frequency at 4 MHz)		
16-bit input/output timer	16-bit free-run timer	Number of channels: 1 Interrupt upon occurrence of overflow		
	Input capture	Number of channels: 4 Retaining free-run timer value set by pin input (rising edge, falling edge, and both edges)		
16-bit reload timer		Number of channels: 2 16-bit reload timer operation Count clock cycle: 0.25 $\mu$ s, 0.5 $\mu$ s, 2.0 $\mu$ s (at 16-MHz machine clock frequency) External event count is allowed.		
Watch timer		15-bit free-run counter Interrupt cycle: 31.25 ms, 62.5 ms, 12 ms, 250 ms, 500 ms, 1.0 s, 2.0 s (with 8.192 kHz sub clock)		
8/16-bit PPG timer		Number of channels: 2 (four 8-bit channels are available also.) PPG operation is allowed with four 8-bit channels or two 16-bit channels. Outputting pulse wave of arbitrary cycle or arbitrary duty is allowed. Count clock: 62.5 ns to 1 $\mu$ s (with 16 MHz machine clock)		
Delay interrupt generator module		Interrupt generator module for task switching. Used for realtime OS.		
DTP/External interrupt		Number of inputs: 4 Activated by rising edge, falling edge, "H" level or "L" level input. External interrupt or expanded intelligent I/O service (EI <sup>2</sup> OS) is available.		

## 5. Pin Description

Pin No.	Pin Name	Circuit Type	Function
1	AVcc	–	Vcc power input pin for A/D converter.
2	AVR	–	Power (Vref+) input pin for A/D converter. Use as input for Vcc or lower.
3 to 10	P50 to P57	E	General-purpose input/output ports.
	AN0 to AN7		Functions as analog input pins for A/D converter. Valid when analog input setting is "enabled."
11	P37	D	General-purpose input/output port.
	ADTG		Function as an external trigger input pin for A/D converter. Use the pin by setting as input port.
12	P20	D	General-purpose input/output port.
	TIN0		Function as an event input pin for reload timer 0. Use the pin by setting as input port.
13	P21	D	General-purpose input/output port.
	TOT0		Function as an event output pin for reload timer 0. Valid only when output setting is "enabled."
14	P22	D	General-purpose input/output port.
	TIN1		Function as an event input pin for reload timer 1. Use the pin by setting as input port.
15	P23	D	General-purpose input/output port.
	TOT1		Function as an event output pin for reload timer 1. Valid only when output setting is "enabled."
16 to 19	P24 to P27	D	General-purpose input/output ports.
	INT4 to INT7		Functions as external interrupt input pins. Use the pins by setting as input port.
20	MD2	F	Input pin for specifying operation mode. Connect directly to Vss.
21	MD1	C	Input pin for specifying operation mode. Connect directly to Vcc.
22	MD0	C	Input pin for specifying operation mode. Connect directly to Vcc.
23	RST	B	External reset input pin.
24	Vcc	–	Power source (5 V) input pin.
25	Vss	–	Power source (0 V) input pin.
26	C	–	Capacitor pin for stabilizing power source. Connect a ceramic capacitor of approximately 0.1 $\mu$ F.
27	X0	A	Pin for high-rate oscillation.
28	X1	A	Pin for high-rate oscillation.
29 to 32	P10 to P13	D	General-purpose input/output ports.
	IN0 to IN3		Functions as trigger input pins of input capture ch.0 to ch.3. Use the pins by setting as input ports.
33 to 36	P14 to P17	G	General-purpose input/output ports. High-current output ports.
	PPG0 to PPG3		Functions as output pins of PPG timers 01 and 23. Valid when output setting is "enabled."
37	P40	D	General-purpose input/output port.
	SIN1		Serial data input pin for UART. Use the pin by setting as input port.
38	P41	D	General-purpose input/output port.
	SCK1		Serial clock input pin for UART. Valid only when serial clock input/output setting on UART is "enabled."

### **Notes When Using No Sub Clock**

- If an oscillator is not connected to X0A and X1A pin, apply pull-down resistor to X0A pin and leave X1A pin open.

### **About Power Supply Pins**

- If two or more Vcc and Vss pins exist, the pins that should be at the same potential are connected to each other inside the device. For reducing unwanted emissions and preventing malfunction of strobe signals caused by increase of ground level, however, be sure to connect the Vcc and Vss pins to the power source and the ground externally.
- Pay attention to connect a power supply to Vcc and Vss of MB90385 series device in a lowest-possible impedance.
- Near pins of MB90385 series device, connecting a bypass capacitor is recommended at 0.1  $\mu$ F across Vcc pin and Vss pin.

### **Crystal Oscillator Circuit**

- Noises around X0 and X1 pins cause malfunctions on a MB90385 series device. Design a print circuit so that X0 and X1 pins, an crystal oscillator (or a ceramic oscillator), and bypass capacitor to the ground become as close as possible to each other. Furthermore, avoid wires to X0 and X1 pins crossing each other as much as possible.
- Print circuit designing that surrounds X0 and X1 pins with grounding wires, which ensures stable operation, is strongly recommended.

### **Caution on Operations during PLL Clock Mode**

- If the PLL clock mode is selected, the microcontroller attempt to be working with the self-oscillating circuit even when there is no external oscillator or external clock input is stopped. Performance of this operation, however, cannot be guaranteed.

### **Sequence of Turning on Power of A/D Converter and Applying Analog Input**

- Be sure to turn on digital power (Vcc) before applying signals to the A/D converter and applying analog input signals (AN0 to AN7 pins).
- Be sure to turn off the power of A/D converter and analog input before turning off the digital power source.
- Be sure not to apply AVR exceeding AVcc when turning on and off. (No problems occur if analog and digital power is turned on and off simultaneously.)

### **Handling Pins When A/D Converter is Not Used**

- If the A/D converter is not used, connect the pins under the following conditions: "AVcc=AVR=Vcc," and "AVss=Vss"

### **Note on Turning on Power**

- For preventing malfunctions on built-in step-down circuit, maintain a minimum of 50  $\mu$ s of voltage rising time (between 0.2 V and 2.7V) when turning on the power.

### **Stabilization of Supply Voltage**

- A sudden change in the supply voltage may cause the device to malfunction even within the specified Vcc supply voltage operating range. Therefore, the Vcc supply voltage should be stabilized.  
For reference, the supply voltage should be controlled so that Vcc ripple variations (peak-to-peak values) at commercial frequencies (50 Hz / 60 Hz) fall below 10% of the standard Vcc supply voltage and the coefficient of fluctuation does not exceed 0.1 V/ms at instantaneous power switching.

## 10. I/O Map

Address	Register Abbreviation	Register	Read/Write	Resource	Initial Value
000000 <sub>H</sub>	(Reserved area) *				
000001 <sub>H</sub>	PDR1	Port 1 data register	R/W	Port 1	XXXXXXXX <sub>B</sub>
000002 <sub>H</sub>	PDR2	Port 2 data register	R/W	Port 2	XXXXXXXX <sub>B</sub>
000003 <sub>H</sub>	PDR3	Port 3 data register	R/W	Port 3	XXXXXXXX <sub>B</sub>
000004 <sub>H</sub>	PDR4	Port 4 data register	R/W	Port 4	XXXXXXXX <sub>B</sub>
000005 <sub>H</sub>	PDR5	Port 5 data register	R/W	Port 5	XXXXXXXX <sub>B</sub>
000006 <sub>H</sub> to 000010 <sub>H</sub>	(Reserved area) *				
000011 <sub>H</sub>	DDR1	Port 1 direction data register	R/W	Port 1	00000000 <sub>B</sub>
000012 <sub>H</sub>	DDR2	Port 2 direction data register	R/W	Port 2	00000000 <sub>B</sub>
000013 <sub>H</sub>	DDR3	Port 3 direction data register	R/W	Port 3	000X0000 <sub>B</sub>
000014 <sub>H</sub>	DDR4	Port 4 direction data register	R/W	Port 4	XXX00000 <sub>B</sub>
000015 <sub>H</sub>	DDR5	Port 5 direction data register	R/W	Port 5	00000000 <sub>B</sub>
000016 <sub>H</sub> to 00001A <sub>H</sub>	(Reserved area) *				
00001B <sub>H</sub>	ADER	Analog input permission register	R/W	8/10-bit A/D converter	11111111 <sub>B</sub>
00001C <sub>H</sub> to 000025 <sub>H</sub>	(Reserved area) *				
000026 <sub>H</sub>	SMR1	Serial mode register 1	R/W	UART1	00000000 <sub>B</sub>
000027 <sub>H</sub>	SCR1	Serial control register 1	R/W, W		00000100 <sub>B</sub>
000028 <sub>H</sub>	SIDR1/ SODR1	Serial input data register 1/ Serial output data register 1	R, W		XXXXXXXX <sub>B</sub>
000029 <sub>H</sub>	SSR1	Serial status data register 1	R, R/W		00001000 <sub>B</sub>
00002A <sub>H</sub>	(Reserved area) *				
00002B <sub>H</sub>	CDCR1	Communication prescaler control register 1	R/W	UART1	0XXX0000 <sub>B</sub>
00002C <sub>H</sub> to 00002F <sub>H</sub>	(Reserved area) *				
000030 <sub>H</sub>	ENIR	DTP/External interrupt permission register	R/W	DTP/External interrupt	00000000 <sub>B</sub>
000031 <sub>H</sub>	EIRR	DTP/External interrupt permission register	R/W		XXXXXXXX <sub>B</sub>
000032 <sub>H</sub>	ELVR	Detection level setting register	R/W		00000000 <sub>B</sub>
000033 <sub>H</sub>			R/W		00000000 <sub>B</sub>
000034 <sub>H</sub>	ADCS	A/D control status register	R/W	8/10-bit A/D converter	00000000 <sub>B</sub>
000035 <sub>H</sub>			R/W, W		00000000 <sub>B</sub>
000036 <sub>H</sub>	ADCR	A/D data register	W, R		XXXXXXXX <sub>B</sub>
000037 <sub>H</sub>			R		00101XXX <sub>B</sub>

Interrupt Source	EI <sup>2</sup> OS Readiness	Interrupt Vector		Interrupt Control Register		Priority* <sup>3</sup>
		Number	Address	ICR	Address	
UART1 reception completed	⊙	#37	25 <sub>H</sub>	FFFF68 <sub>H</sub>	ICR13	High ↑
UART1 transmission completed	Δ	#38	26 <sub>H</sub>	FFFF64 <sub>H</sub>		
Reserved	×	#39	27 <sub>H</sub>	FFFF60 <sub>H</sub>	ICR14	
Reserved	×	#40	28 <sub>H</sub>	FFFF5C <sub>H</sub>		
Flash memory	×	#41	29 <sub>H</sub>	FFFF58 <sub>H</sub>	ICR15	↓ Low
Delay interrupt generation module	×	#42	2A <sub>H</sub>	FFFF54 <sub>H</sub>		

○ : Available

× : Unavailable

⊙ : Available EI<sup>2</sup>OS function is provided.

Δ: Available when a cause of interrupt sharing a same ICR is not used.

- \*1:
- Peripheral functions sharing an ICR register have the same interrupt level.
  - If peripheral functions share an ICR register, only one function is available when using expanded intelligent I/O service.
  - If peripheral functions share an ICR register, a function using expanded intelligent I/O service does not allow interrupt by another function.

\*2: Input capture 1 corresponds to EI<sup>2</sup>OS, however, PPG does not. When using EI<sup>2</sup>OS by input capture 1, interrupt should be disabled for PPG.

\*3: Priority when two or more interrupts of a same level occur simultaneously.

## 12. Peripheral Resources

### 12.1 I/O Ports

The I/O ports are used as general-purpose input/output ports (parallel I/O ports). The MB60385 series model is provided with 5 ports (34 inputs). The ports function as input/output pins for peripheral functions also.


#### I/O Port Functions

An I/O port, using port data register (PDR), outputs the output data to I/O pin and input a signal input to I/O port. The port direction register (DDR) specifies direction of input/output of I/O pins on a bit-by-bit basis.

The following summarizes functions of the ports and sharing peripheral functions:

- Port 1: General-purpose input/output port, used also for PPG timer output and input capture inputs.
- Port 2: General-purpose input/output port, used also for reload timer input/output and external interrupt input.
- Port 3: General-purpose input/output port, used also for A/D converter activation trigger pin.
- Port 4: General-purpose input/output port, used also for UART input/output and CAN controller send/receive pin.
- Port 5: General-purpose input/output port, used also analog input pin.

Port 3 Pins Block Diagram (general-purpose input/output port)

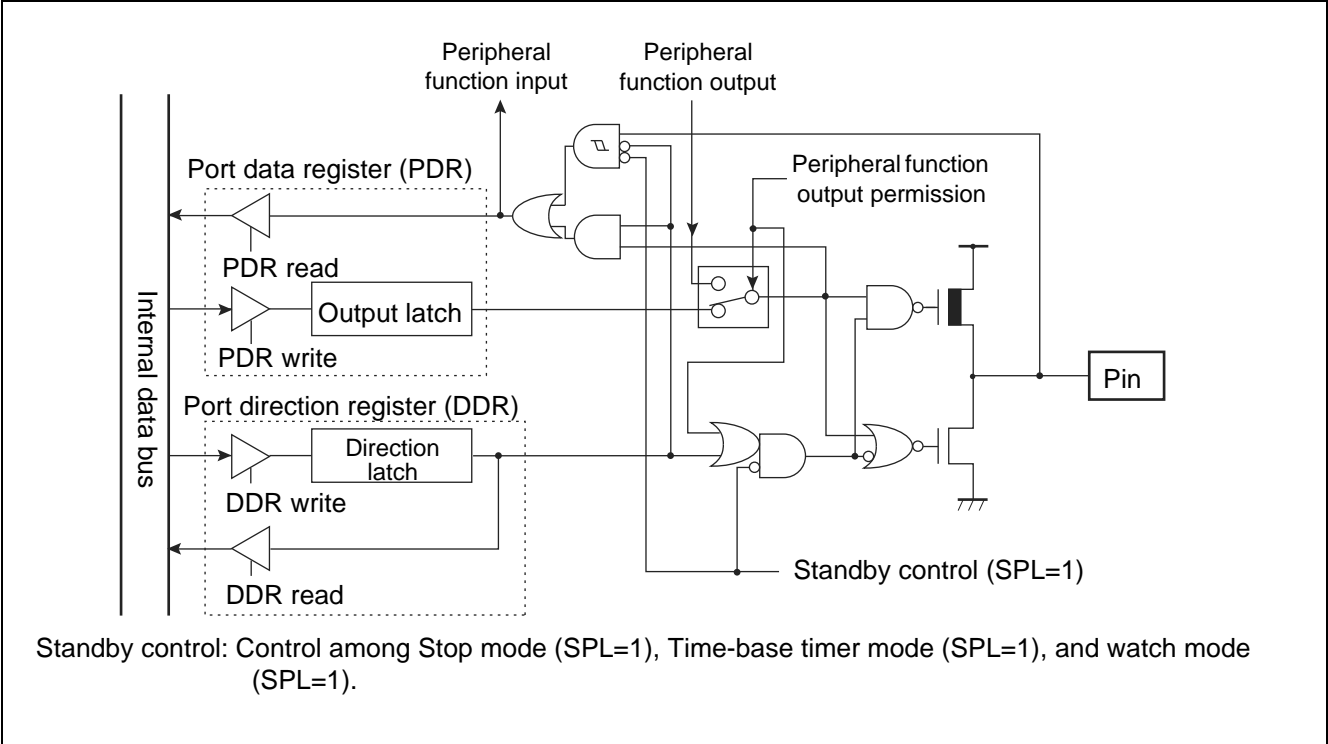

Port 3 Registers

- Port 3 registers include port 3 data register (PDR3) and port 3 direction register (DDR3).
- The bits configuring the register correspond to port 3 pins on a one-to-one basis.

Relation between Port 3 Registers and Pins

Port Name	Bits of Register and Corresponding Pins								
Port 3	PDR3, DDR3	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
	Corresponding pins	P37	P36*	P35*	–	P33	P32	P31	P30

\*: P35 and P36 do not exist on MB90387and MB90F387.



## 12.2 Time-Base Timer

The time-base time is an 18-bit free-run counter (time-base timer counter) that counts up in synchronization with the main clock (dividing main oscillation clock by 2).

- Four choices of interval time are selectable, and generation of interrupt request is allowed for each interval time.
- Provides operation clock signal to oscillation stabilizing wait timer and peripheral functions.

### Interval Timer Function

- When the counter of time-base timer reaches an interval time specified by interval time selection bit (TBTC: TBC1, TBC0), an overflow (carrying-over) occurs (TBTC: TBOF=1) and interrupt request is generated.
- If an interrupt by overflow is permitted (TBTC: TBIE=1), an interrupt is generated when overflow occurs (TBTC: TBOF=1).
- The following four interval time settings are selectable:

#### Interval Time of Time-base Timer

Count Clock	Interval Time
2/HCLK (0.5 $\mu$ s)	$2^{12}$ /HCLK (Approx. 1.0 ms)
	$2^{14}$ /HCLK (Approx. 4.1 ms)
	$2^{16}$ /HCLK (Approx. 16.4 ms)
	$2^{19}$ /HCLK (Approx. 131.1 ms)

HCLK: Oscillation clock

Values in parentheses “( )” are those under operation of 4-MHz oscillation clock.

## 12.4 16-bit Input/Output Timer

The 16-bit input/output timer is a compound module composed of 16-bit free-run timer, (1 unit) and input capture (2 units, 4 input pins). The timer, using the 16-bit free-run timer as a basis, enables measurement of clock cycle of an input signal and its pulse width.

### Configuration of 16-bit Input/Output Timer

The 16-bit input/output timer is composed of the following modules:

- 16-bit free-run timer (1 unit)
- Input capture (2 units, 2 input pins per unit)

### Functions of 16-bit Input/Output Timer

#### *Functions of 16-bit Free-run Timer*

The 16-bit free-run timer is composed of 16-bit up counter, timer counter control status register, and prescaler. The 16-bit up counter increments in synchronization with dividing ratio of machine clock.


- Count clock is set among four types of machine clock dividing rates.
- Generation of interrupt is allowed by counter value overflow.
- Activation of expanded intelligent I/O service (EI<sup>2</sup>OS) is allowed by interrupt generation.
- Counter value of 16-bit free-run timer is cleared to "0000<sub>H</sub>" by either resetting or software-clearing with timer count clear bit (TCCS: CLR).
- Counter value of 16-bit free-run timer is output to input capture, which is available as base time for capture operation.

#### *Functions of Input Capture*


The input capture, upon detecting an edge of a signal input to the input pin from external device, stores a counter value of 16-bit free-run timer at the time of detection into the input capture data register. The function includes the input capture data registers corresponding to four input pins, input capture control status register, and edge detection circuit.

- Rising edge, falling edge, and both edges are selectable for detection.
- Generating interrupt on CPU is allowed by detecting an edge of input signal.
- Expanded intelligent I/O service (EI<sup>2</sup>OS) is activated by interrupt generation.
- The four input capture input pins and input capture data registers allows monitoring of a maximum of four events.

### 16-bit Input/Output Timer Block Diagram

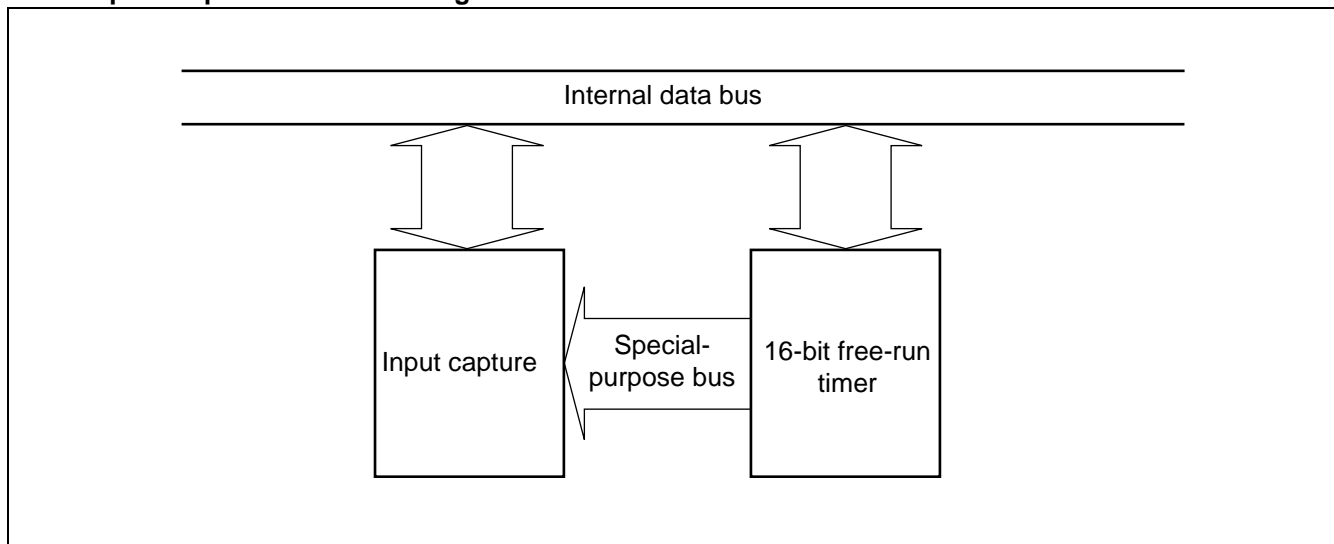

# Input Capture Block Diagram

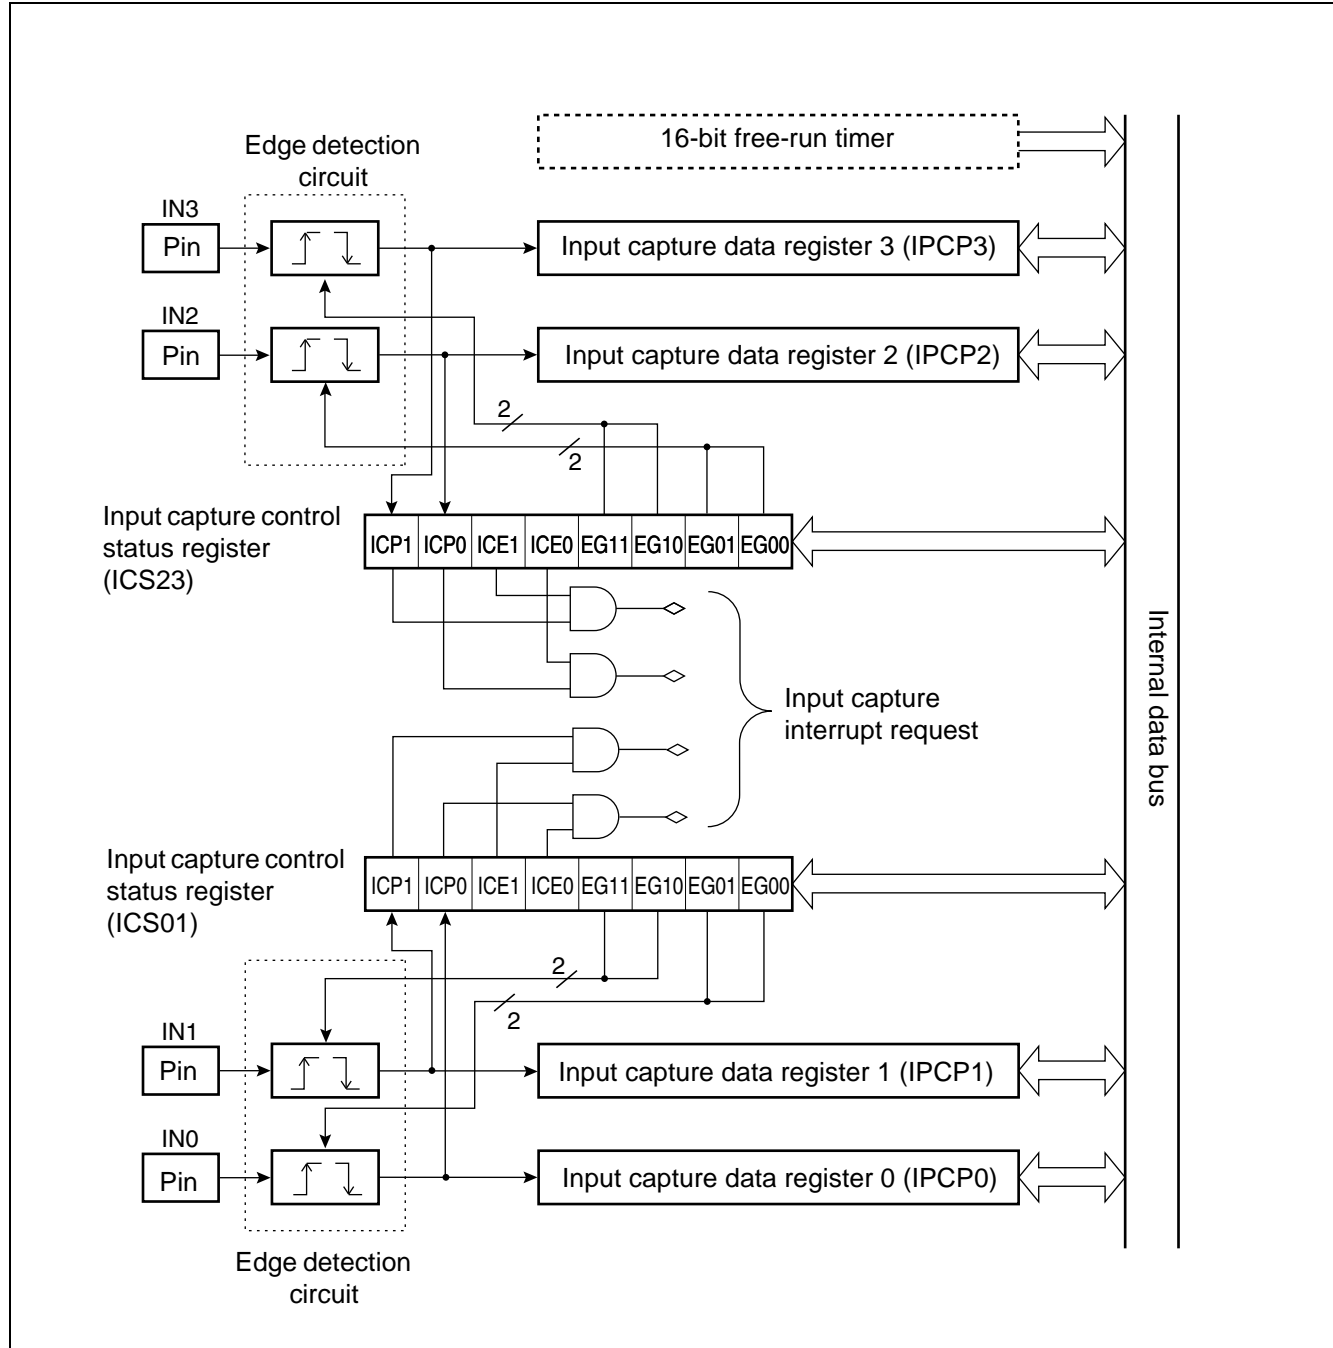

## 12.5 16-bit Reload Timer

The 16-bit reload timer has the following functions:

- Count clock is selectable among 3 internal clocks and external event clock.
- Activation trigger is selectable between software trigger and external trigger.
- Generation of CPU interrupt is allowed upon occurrence of underflow on 16-bit timer register. Available as an interval timer using the interrupt function.
- When underflow of 16-bit timer register (TMR) occurs, one of two reload modes is selectable between one-shot mode that halts counting operation of TMR, and reload mode that reloads 16-bit reload register value to TMR, continuing TMR counting operation.
- The 16-bit reload timer is ready for expanded intelligent I/O service (EI<sup>2</sup>OS).
- MB90385 series device has 2 channels of built-in 16-bit reload timer.


### Operation Mode of 16-bit Reload Timer

Count Clock	Activation Trigger	Operation upon Underflow
Internal clock mode	Software trigger, external trigger	One-shot mode, reload mode
Event count mode	Software trigger	One-shot mode, reload mode

### Internal Clock Mode

- The 16-bit reload timer is set to internal clock mode, by setting count clock selection bit (TMCSR: CSL1, CSL0) to "00<sub>b</sub>", "01<sub>b</sub>", "10<sub>b</sub>".
- In the internal clock mode, the counter decrements in synchronization with the internal clock.
- Three types of count clock cycles are selectable by count clock selection bit (TMCSR: CSL1, CSL0) in timer control status register.
- Edge detection of software trigger or external trigger is specified as an activation trigger.

16-bit Reload Timer Block Diagram

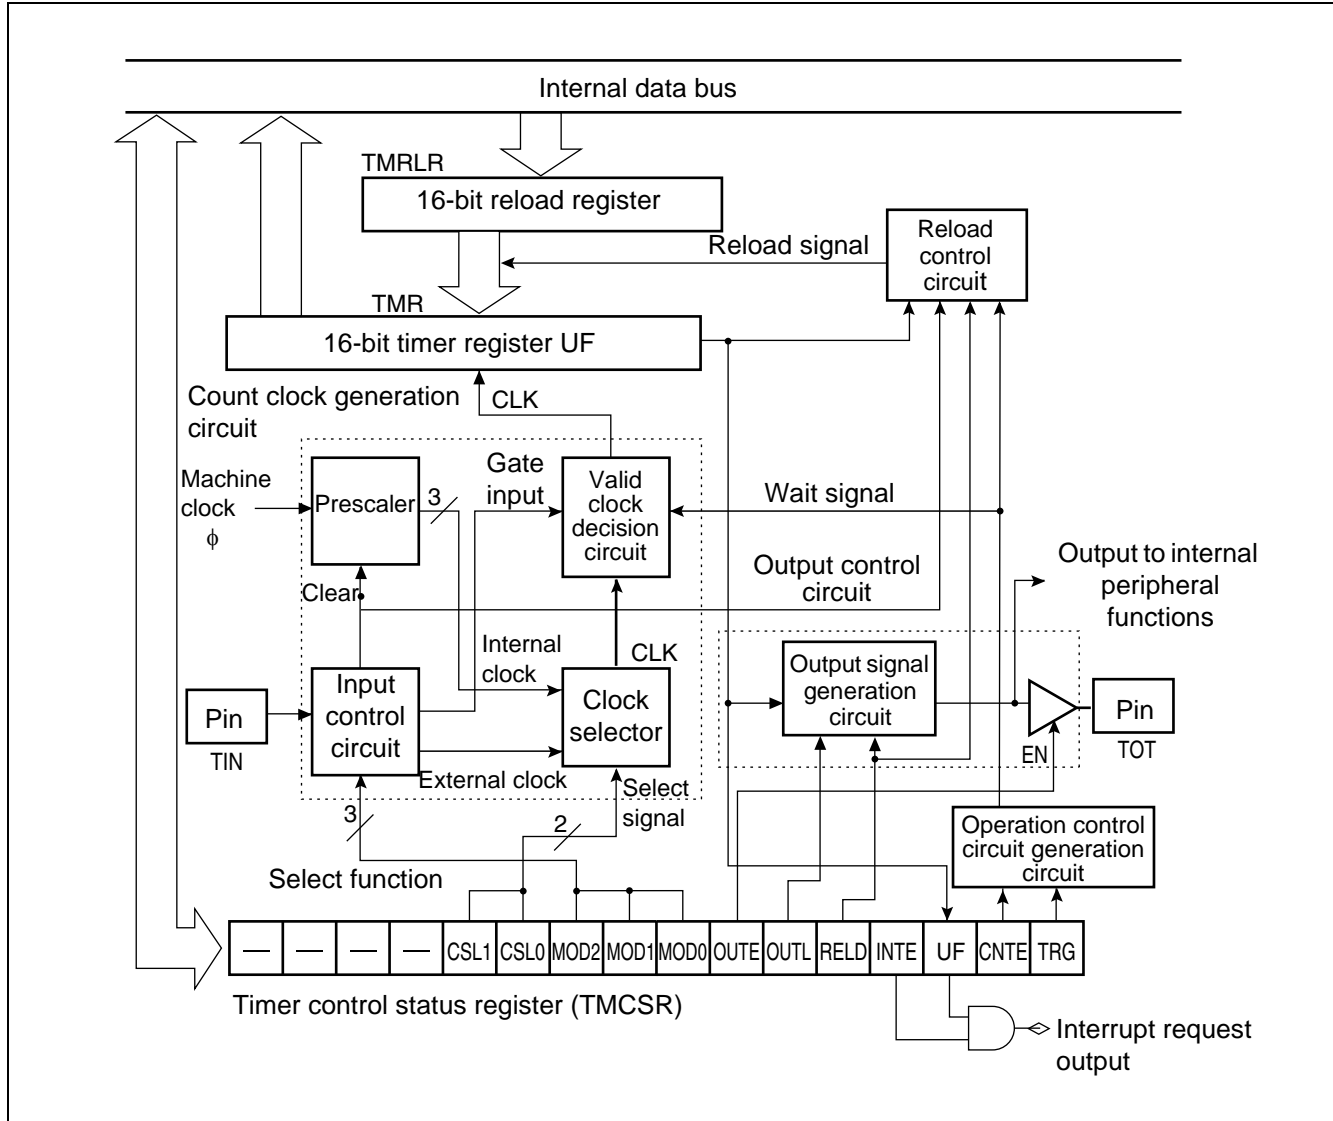

## 12.6 Watch Timer Outline

The watch timer is a 15-bit free-run counter that increments in synchronization with sub clock.

- Interval time is selectable among 7 choices, and generation of interrupt request is allowed for each interval.
- Provides operation clock to the subclock oscillation stabilizing wait timer and watchdog timer.
- Always uses subclock as a count clock regardless of settings of clock selection register (CKSCR).

### Interval Timer Function

- In the watch timer, a bit corresponding to the interval time overflows (carry-over) when an interval time, which is specified by interval time selection bit, is reached. Then overflow flag bit is set (WTC: WTOF=1).
- If an interrupt by overflow is permitted (WTC: WTIE=1), an interrupt request is generated upon setting an overflow flag bit.
- Interval time of watch timer is selectable among the following seven choices:


### Interval Time of Watch Timer

Sub Clock Cycle	Interval Time
1/SCLK (122 $\mu$ s)	$2^8$ /SCLK (31.25 ms)
	$2^9$ /SCLK (62.5 ms)
	$2^{10}$ /SCLK (125 ms)
	$2^{11}$ /SCLK (250 ms)
	$2^{12}$ /SCLK (500 ms)
	$2^{13}$ /SCLK (1.0 s)
	$2^{14}$ /SCLK (2.0 s)

SCLK: Sub clock frequency


Values in parentheses “( )” are calculation when operating with 8.192 kHz clock.

8/16-bit PPG Timer 0 Block Diagram

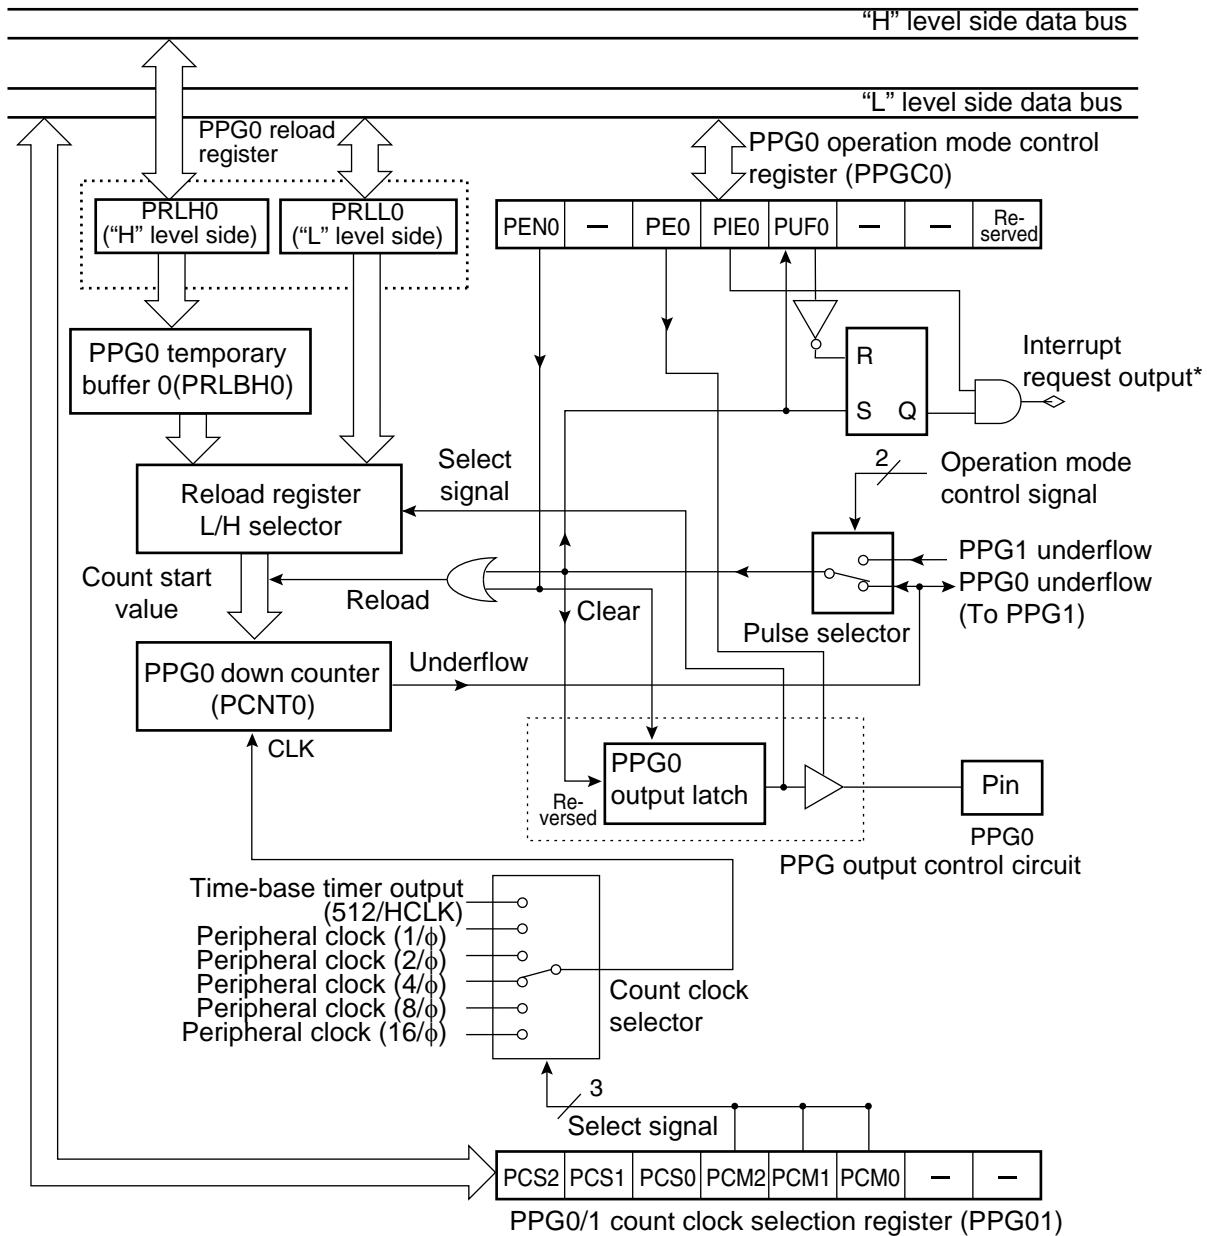

- : Undefined
- Reserved: Reserved bit
- HCLK : Oscillation clock frequency
- φ : Machine clock frequency
- \* : Interrupt output of 8/16-bit PPG timer 0 is incorporated into one by the OR circuit against interrupt output of 8/16-bit PPG timer 1.

UART Block Diagram

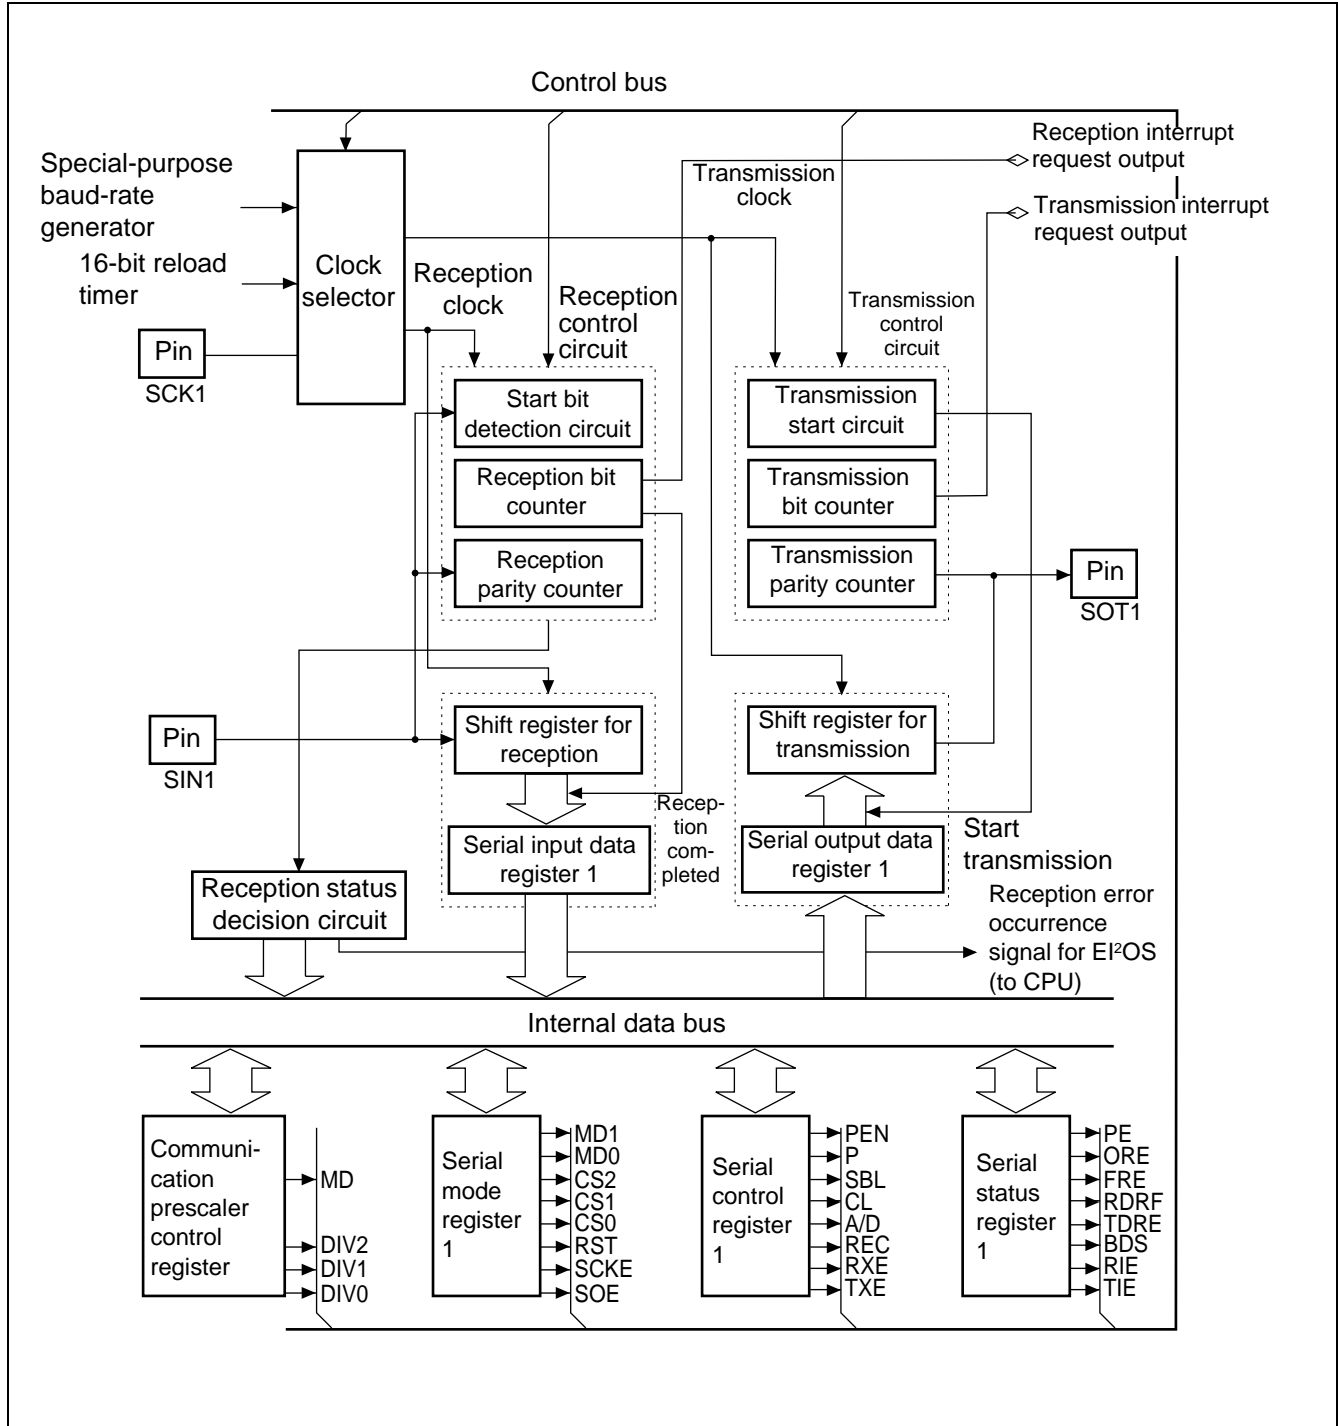



## 13. Electrical Characteristics

### 13.1 Absolute Maximum Rating

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage*1	V <sub>CC</sub>	V <sub>SS</sub> – 0.3	V <sub>SS</sub> + 6.0	V	
	AV <sub>CC</sub>	V <sub>SS</sub> – 0.3	V <sub>SS</sub> + 6.0	V	V <sub>CC</sub> = AV <sub>CC</sub> *2
	AVR	V <sub>SS</sub> – 0.3	V <sub>SS</sub> + 6.0	V	AV <sub>CC</sub> ≥ AVR*2
Input voltage*1	V <sub>I</sub>	V <sub>SS</sub> – 0.3	V <sub>SS</sub> + 6.0	V	*3
Output voltage*1	V <sub>O</sub>	V <sub>SS</sub> – 0.3	V <sub>SS</sub> + 6.0	V	*3
Maximum clamp current	I <sub>CLAMP</sub>	– 2.0	+ 2.0	mA	*7
Total maximum clamp current	Σ   I <sub>CLAMP</sub>	–	20	mA	*7
“L” level maximum output current	I <sub>OL1</sub>	–	15	mA	Normal output*4
	I <sub>OL2</sub>	–	40	mA	High-current output*4
“L” level average output current	I <sub>OLAV1</sub>	–	4	mA	Normal output*5
	I <sub>OLAV2</sub>	–	30	mA	High-current output*5
“L” level maximum total output current	Σ I <sub>OL1</sub>	–	125	mA	Normal output
	Σ I <sub>OL2</sub>	–	160	mA	High-current output
“L” level average total output current	Σ I <sub>OLAV1</sub>	–	40	mA	Normal output*6
	Σ I <sub>OLAV2</sub>	–	40	mA	High-current output*6
“H” level maximum output current	I <sub>OH1</sub>	–	–15	mA	Normal output*4
	I <sub>OH2</sub>	–	–40	mA	High-current output*4
“H” level average output current	I <sub>OHAV1</sub>	–	–4	mA	Normal output*5
	I <sub>OHAV2</sub>	–	–30	mA	High-current output*5
“H” level maximum total output current	Σ I <sub>OH1</sub>	–	–125	mA	Normal output
	Σ I <sub>OH2</sub>	–	–160	mA	High-current output
“H” level average total output current	Σ I <sub>OHAV1</sub>	–	–40	mA	Normal output*6
	Σ I <sub>OHAV2</sub>	–	–40	mA	High-current output*6
Power consumption	P <sub>D</sub>	–	245	mW	
Operating temperature	T <sub>A</sub>	–40	+105	°C	
Storage temperature	T <sub>stg</sub>	–55	+150	°C	

\*1: The parameter is based on V<sub>SS</sub> = AV<sub>SS</sub> = 0.0 V.

\*2: AV<sub>CC</sub> and AVR should not exceed V<sub>CC</sub>.

\*3: V<sub>I</sub> and V<sub>O</sub> should not exceed V<sub>CC</sub> + 0.3 V. However if the maximum current to/from an input is limited by some means with external components, the I<sub>CLAMP</sub> rating supersedes the V<sub>I</sub> rating.

\*4: A peak value of an applicable one pin is specified as a maximum output current.

\*5: An average current value of an applicable one pin within 100 ms is specified as an average output current. (Average value is found by multiplying operating current by operating rate.)

\*6: An average current value of all pins within 100 ms is specified as an average total output current. (Average value is found by multiplying operating current by operating rate.)

\*7:

■ Applicable to pins: P10 to P17, P20 to P27, P30 to P33, P35\*, P36\*, P37, P40 to P44, P50 to P57

\*: P35 and P36 are MB90387S and MB90F387S only.

#### 13.4.4 UART Timing

( $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40\text{ }^{\circ}\text{C to }+105\text{ }^{\circ}\text{C}$ )

Parameter	Symbol	Pin Name	Conditions	Value		Unit	Remarks
				Min	Max		
Serial clock cycle time	$t_{SCYC}$	SCK1	Internal shift clock mode output pin is: CL = 80 pF+1TTL.	$4\ t_{CP}^*$	–	ns	
SCK ↓ → SOT delay time	$t_{SLOV}$	SCK1, SOT1		–80	+80	ns	
Valid SIN → SCK ↑	$t_{IVSH}$	SCK1, SIN1		100	–	ns	
SCK ↑ → valid SIN hold time	$t_{SHIX}$	SCK1, SIN1		60	–	ns	
Serial clock “H” pulse width	$t_{SHSL}$	SCK1	External shift clock mode output pin is: CL = 80 pF+1TTL.	$2\ t_{CP}^*$	–	ns	
Serial clock “L” pulse width	$t_{SLSH}$	SCK1		$2\ t_{CP}^*$	–	ns	
SCK ↓ → SOT delay time	$t_{SLOV}$	SCK1, SOT1		–	150	ns	
Valid SIN → SCK ↑	$t_{IVSH}$	SCK1, SIN1		60	–	ns	
SCK ↑ → valid SIN hold time	$t_{SHIX}$	SCK1, SIN1		60	–	ns	

\*: Refer to Clock Timing ratings for  $t_{CP}$  (internal operation clock cycle time).

Notes:

- AC Characteristics in CLK synchronous mode.
- $C_L$  is a load capacitance value on pins for testing.

### 13.7 Notes on A/D Converter Section


Use the device with external circuits of the following output impedance for analog inputs:

Recommended output impedance of external circuits are: Approx. 3.9 kΩ or lower ( $4.5\text{ V} \leq AV_{CC} \leq 5.5\text{ V}$ ) (sampling period=2.00 μs at 16 MHz machine clock), Approx. 11 kΩ or lower ( $4.0\text{ V} \leq AV_{CC} < 4.5\text{ V}$ ) (sampling period=8.0 μs at 16 MHz machine clock).

If an external capacitor is used, in consideration of the effect by tap capacitance caused by external capacitors and on-chip capacitors, capacitance of the external one is recommended to be several thousand times as high as internal capacitor.

If output impedance of an external circuit is too high, a sampling period for an analog voltage may be insufficient.

• Analog input circuit model

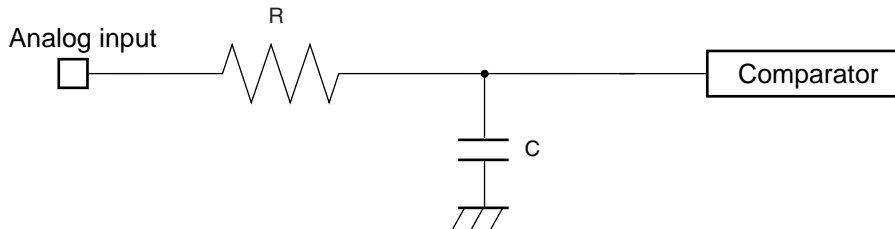

MB90F387/S, MB90387/S

$4.5\text{ V} \leq AV_{CC} \leq 5.5\text{ V}$

$R \cong 2.35\text{ k}\Omega$ ,  $C \cong 36.4\text{ pF}$

$4.0\text{ V} \leq AV_{CC} < 4.5\text{ V}$

$R \cong 16.4\text{ k}\Omega$ ,  $C \cong 36.4\text{ pF}$

Note: Use the values in the figure only as a guideline.

### About errors




As [AVR-AVss] become smaller, values of relative errors grow larger.

### 13.8 Flash Memory Program/Erase Characteristics

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Sector erase time	$T_A = +25\text{ }^\circ\text{C}$ $V_{CC} = 5.0\text{ V}$	—	1	15	s	Excludes 00H programming prior to erasure
Chip erase time		—	4	—	s	Excludes 00H programming prior to erasure
Word (16-bit width) programming time		—	16	3,600	μs	Except for the over head time of the system
Program/Erase cycle	—	10,000	—	—	cycle	
Flash Data Retention Time	Average $T_A = +85\text{ }^\circ\text{C}$	20	—	—	Year	*

\*: This value comes from the technology qualification (using Arrhenius equation to translate high temperature measurements into normalized value at +85 °C).

MB90387

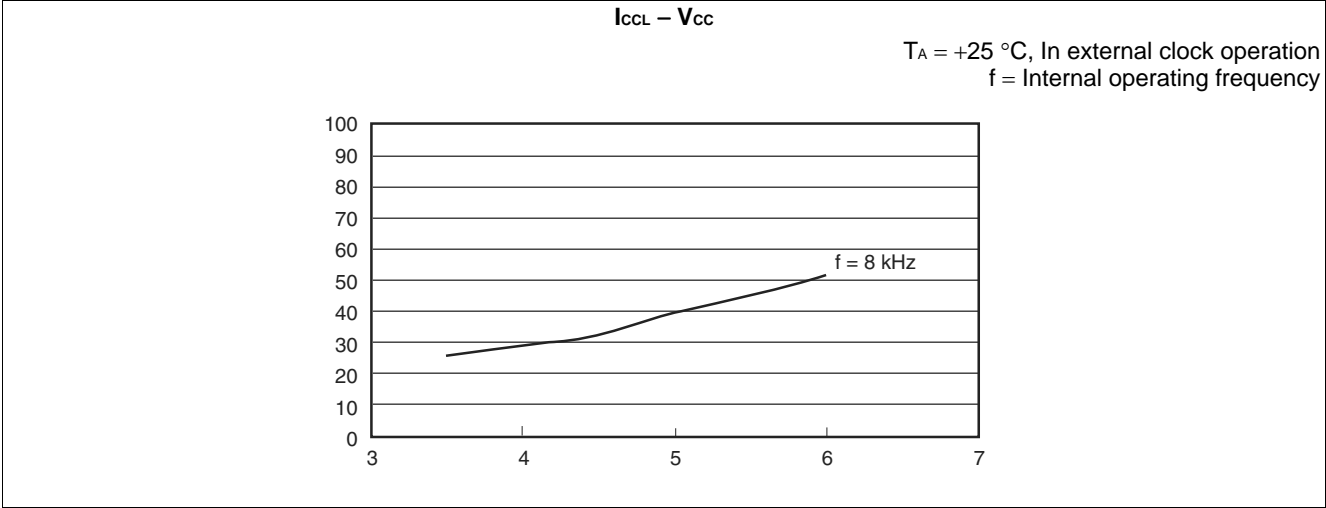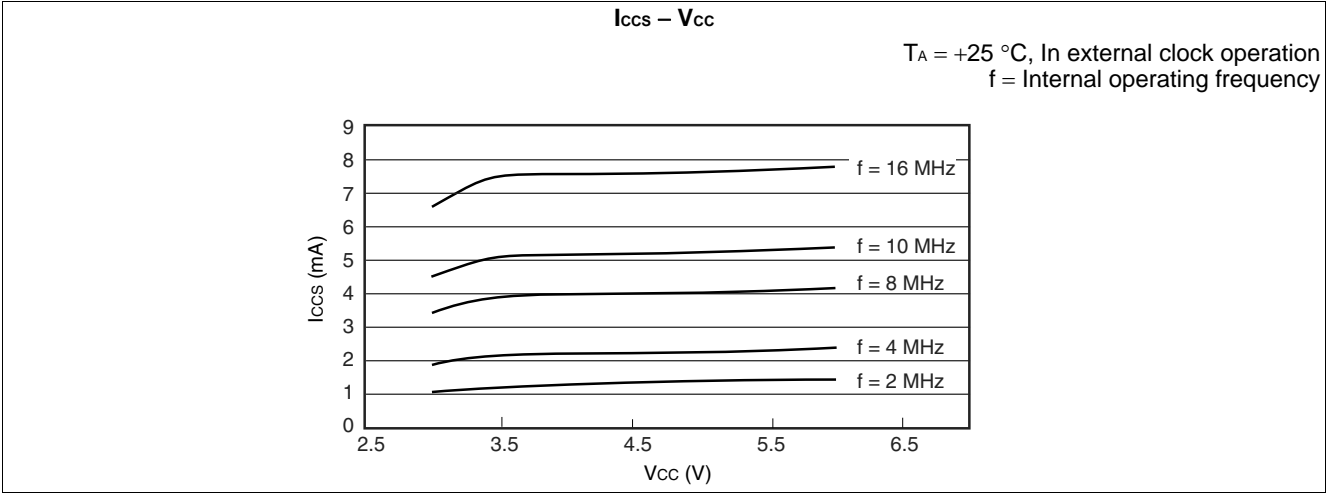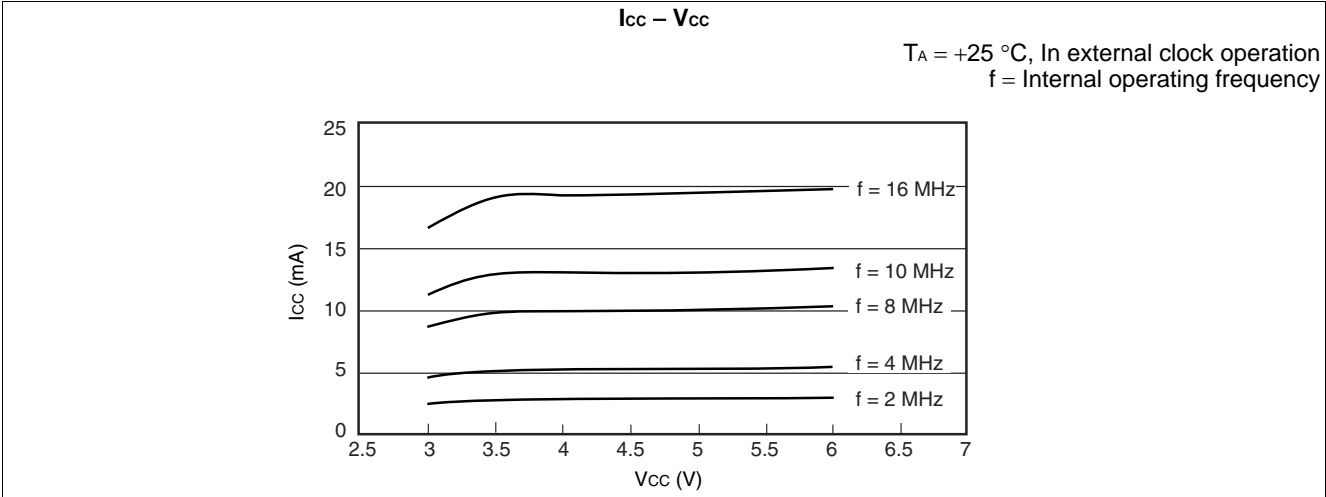

(Continued)

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

Arm® Cortex® Microcontrollers	<a href="http://cypress.com/arm">cypress.com/arm</a>
Automotive	<a href="http://cypress.com/automotive">cypress.com/automotive</a>
Clocks & Buffers	<a href="http://cypress.com/clocks">cypress.com/clocks</a>
Interface	<a href="http://cypress.com/interface">cypress.com/interface</a>
Internet of Things	<a href="http://cypress.com/iot">cypress.com/iot</a>
Memory	<a href="http://cypress.com/memory">cypress.com/memory</a>
Microcontrollers	<a href="http://cypress.com/mcu">cypress.com/mcu</a>
PSoC	<a href="http://cypress.com/psoc">cypress.com/psoc</a>
Power Management ICs	<a href="http://cypress.com/pmic">cypress.com/pmic</a>
Touch Sensing	<a href="http://cypress.com/touch">cypress.com/touch</a>
USB Controllers	<a href="http://cypress.com/usb">cypress.com/usb</a>
Wireless Connectivity	<a href="http://cypress.com/wireless">cypress.com/wireless</a>

### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

### Cypress Developer Community

[Community](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)

---

© Cypress Semiconductor Corporation, 2004-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.