


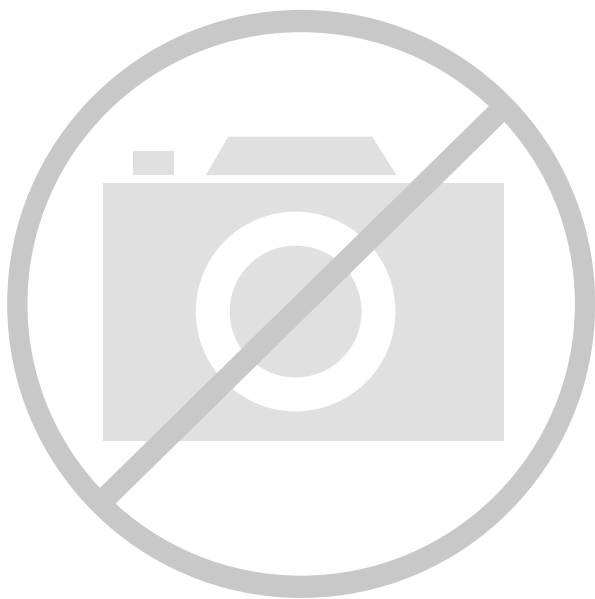

Welcome to [E-XFL.COM](#)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                            |
| Number of LABs/CLBs            | -                                                                                                                                                                   |
| Number of Logic Elements/Cells | 15000                                                                                                                                                               |
| Total RAM Bits                 | 331776                                                                                                                                                              |
| Number of I/O                  | 268                                                                                                                                                                 |
| Number of Gates                | -                                                                                                                                                                   |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                       |
| Mounting Type                  | Surface Mount                                                                                                                                                       |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                                                  |
| Package / Case                 | 388-BBGA                                                                                                                                                            |
| Supplier Device Package        | 388-FPBGA (23x23)                                                                                                                                                   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfxp15e-3fn388i">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfxp15e-3fn388i</a> |

---

## Introduction


The LatticeXP family of FPGA devices combine logic gates, embedded memory and high performance I/Os in a single architecture that is both non-volatile and infinitely reconfigurable to support cost-effective system designs.

The re-programmable non-volatile technology used in the LatticeXP family is the next generation ispXP™ technology. With this technology, expensive external configuration memories are not required and designs are secured from unauthorized read-back. In addition, instant-on capability allows for easy interfacing in many applications.

The ispLEVER® design tool from Lattice allows large complex designs to be efficiently implemented using the LatticeXP family of FPGA devices. Synthesis library support for LatticeXP is available for popular logic synthesis tools. The ispLEVER tool uses the synthesis tool output along with the constraints from its floor planning tools to place and route the design in the LatticeXP device. The ispLEVER tool extracts the timing from the routing and back-annotates it into the design for timing verification.

Lattice provides many pre-designed IP (Intellectual Property) ispLeverCORE™ modules for the LatticeXP family. By using these IPs as standardized blocks, designers are free to concentrate on the unique aspects of their design, increasing their productivity.


Figure 2-6. Secondary Clock Sources

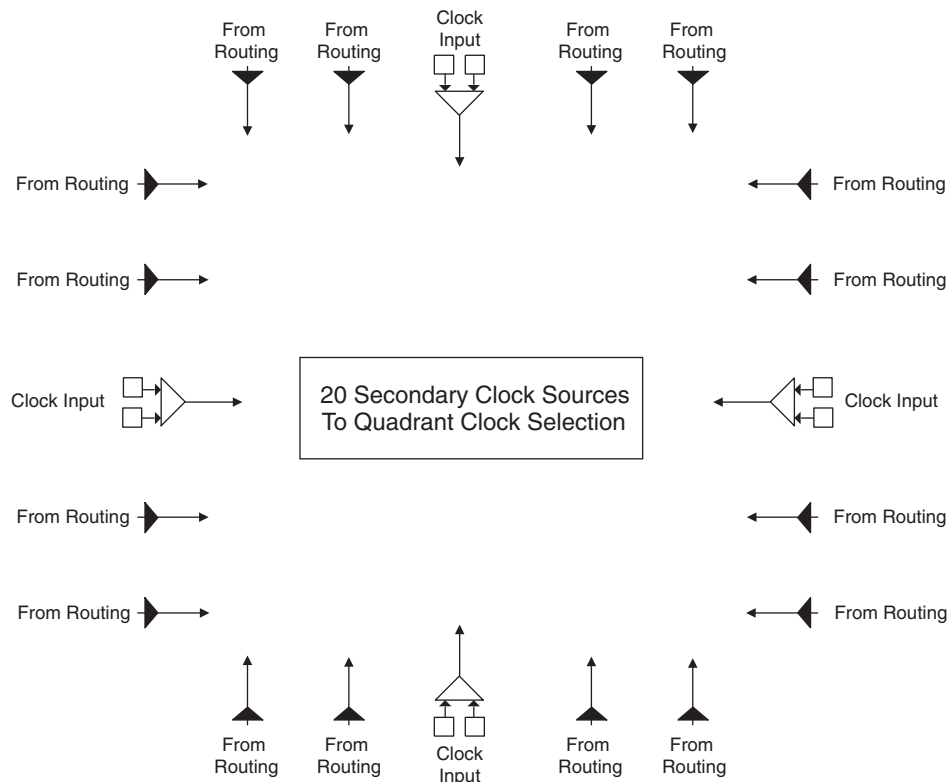


Clock Routing

The clock routing structure in LatticeXP devices consists of four Primary Clock lines and a Secondary Clock network per quadrant. The primary clocks are generated from MUXs located in each quadrant. Figure 2-7 shows this clock routing. The four secondary clocks are generated from MUXs located in each quadrant as shown in Figure 2-8. Each slice derives its clock from the primary clock lines, secondary clock lines and routing as shown in Figure 2-9.

Figure 2-7. Per Quadrant Primary Clock Selection

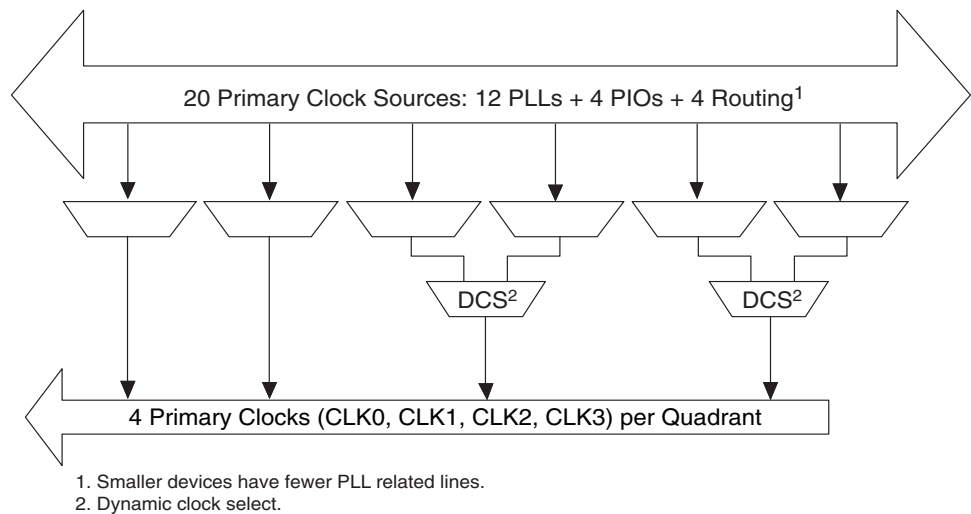


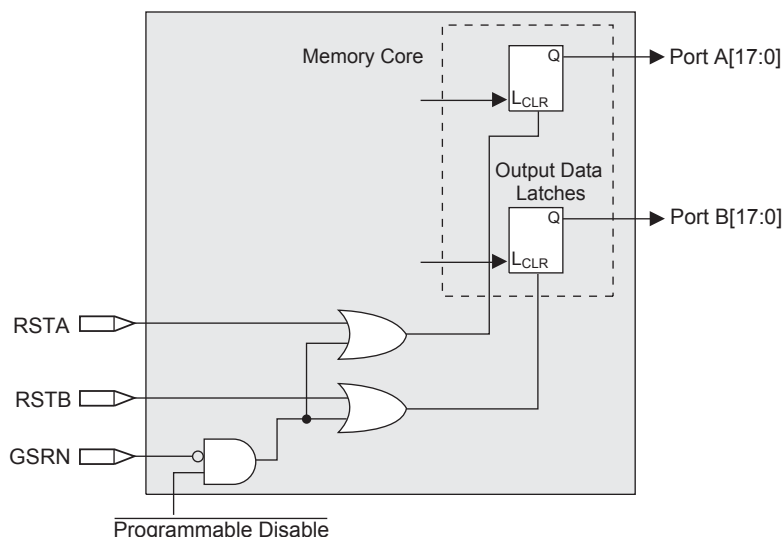**Figure 2-15. Memory Core Reset**

For further information on sysMEM EBR block, see the details of additional technical documentation at the end of this data sheet.

### EBR Asynchronous Reset

EBR asynchronous reset or GSR (if used) can only be applied if all clock enables are low for a clock cycle before the reset is applied and released a clock cycle after the reset is released, as shown in Figure 2-16. The GSR input to the EBR is always asynchronous.

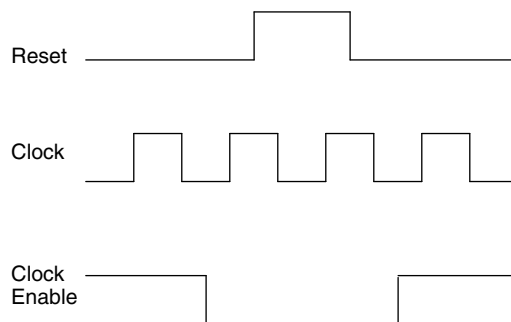**Figure 2-16. EBR Asynchronous Reset (Including GSR) Timing Diagram**

If all clock enables remain enabled, the EBR asynchronous reset or GSR may only be applied and released after the EBR read and write clock inputs are in a steady state condition for a minimum of  $1/f_{MAX}$  (EBR clock). The reset release must adhere to the EBR synchronous reset setup time before the next active read or write clock edge.

If an EBR is pre-loaded during configuration, the GSR input must be disabled or the release of the GSR during device Wake Up must occur before the release of the device I/Os becoming active.

These instructions apply to all EBR RAM and ROM implementations.

Note that there are no reset restrictions if the EBR synchronous reset is used and the EBR GSR input is disabled.

### Programmable I/O Cells (PICs)

Each PIC contains two PIOs connected to their respective sysIO Buffers which are then connected to the PADS as shown in Figure 2-17. The PIO Block supplies the output data (DO) and the Tri-state control signal (TO) to sysIO buffer, and receives input from the buffer.

**Table 2-9. Characteristics of Normal, Off and Sleep Modes**

| Characteristic                  | Normal         | Off             | Sleep           |
|---------------------------------|----------------|-----------------|-----------------|
| SLEEPN Pin                      | High           | —               | Low             |
| Static I <sub>cc</sub>          | Typical <100mA | 0               | Typical <100uA  |
| I/O Leakage                     | <10μA          | <1mA            | <10μA           |
| Power Supplies VCC/VCCIO/VCCAUX | Normal Range   | Off             | Normal Range    |
| Logic Operation                 | User Defined   | Non Operational | Non operational |
| I/O Operation                   | User Defined   | Tri-state       | Tri-state       |
| JTAG and Programming circuitry  | Operational    | Non-operational | Non-operational |
| EBR Contents and Registers      | Maintained     | Non-maintained  | Non-maintained  |

## SLEEPN Pin Characteristics

The SLEEPN pin behaves as an LVCMOS input with the voltage standard appropriate to the VCC supply for the device. This pin also has a weak pull-up typically in the order of 10μA along with a Schmidt trigger and glitch filter to prevent false triggering. An external pull-up to V<sub>CC</sub> is recommended when Sleep Mode is not used to ensure the device stays in normal operation mode. Typically the device enters Sleep Mode several hundred ns after SLEEPN is held at a valid low and restarts normal operation as specified in the Sleep Mode Timing table. The AC and DC specifications portion of this data sheet show a detailed timing diagram.

## Configuration and Testing

The following section describes the configuration and testing features of the LatticeXP family of devices.

### IEEE 1149.1-Compliant Boundary Scan Testability

All LatticeXP devices have boundary scan cells that are accessed through an IEEE 1149.1 compliant test access port (TAP). This allows functional testing of the circuit board, on which the device is mounted, through a serial scan path that can access all critical logic nodes. Internal registers are linked internally, allowing test data to be shifted in and loaded directly onto test nodes, or test data to be captured and shifted out for verification. The test access port consists of dedicated I/Os: TDI, TDO, TCK and TMS. The test access port has its own supply voltage V<sub>CCJ</sub> and can operate with LVCMOS3.3, 2.5, 1.8, 1.5 and 1.2 standards.

For more details on boundary scan test, please see information regarding additional technical documentation at the end of this data sheet.

### Device Configuration

All LatticeXP devices contain two possible ports that can be used for device configuration and programming. The test access port (TAP), which supports serial configuration, and the sysCONFIG port that supports both byte-wide and serial configuration.

The non-volatile memory in the LatticeXP can be configured in three different modes:

- In sysCONFIG mode via the sysCONFIG port. Note this can also be done in background mode.
- In 1532 mode via the 1149.1 port.
- In background mode via the 1149.1 port. This allows the device to be operated while reprogramming takes place.

The SRAM configuration memory can be configured in three different ways:

- At power-up via the on-chip non-volatile memory.
- In 1532 mode via the 1149.1 port SRAM direct configuration.
- In sysCONFIG mode via the sysCONFIG port SRAM direct configuration.

**Programming and Erase Flash Supply Current<sup>1, 2, 3, 4, 5</sup>**

| Symbol      | Parameter                                    | Device    | Typ <sup>6</sup> | Units |
|-------------|----------------------------------------------|-----------|------------------|-------|
| $I_{CC}$    | Core Power Supply                            | LFXP3E    | 30               | mA    |
|             |                                              | LFXP6E    | 40               | mA    |
|             |                                              | LFXP10E   | 50               | mA    |
|             |                                              | LFXP15E   | 60               | mA    |
|             |                                              | LFXP20E   | 70               | mA    |
|             |                                              | LFXP3C    | 50               | mA    |
|             |                                              | LFXP6C    | 60               | mA    |
|             |                                              | LFXP10C   | 90               | mA    |
|             |                                              | LFXP15C   | 100              | mA    |
|             |                                              | LFXP20C   | 110              | mA    |
| $I_{CCAUX}$ | Auxiliary Power Supply<br>$V_{CCAUX} = 3.3V$ | LFXP3E/C  | 50               | mA    |
|             |                                              | LFXP6E/C  | 60               | mA    |
|             |                                              | LFXP10E/C | 90               | mA    |
|             |                                              | LFXP15E/C | 110              | mA    |
|             |                                              | LFXP20E/C | 130              | mA    |
| $I_{CCJ}$   | $V_{CCJ}$ Power Supply <sup>7</sup>          | All       | 2                | mA    |

1. For further information on supply current, please see details of additional technical documentation at the end of this data sheet.

2. Assumes all outputs are tristated, all inputs are configured as LVCMOS and held at the  $V_{CCIO}$  or GND.

3. Blank user pattern; typical Flash pattern.

4. Bypass or decoupling capacitor across the supply.

5. JTAG programming is at 1MHz.

6.  $T_A=25^{\circ}C$ , power supplies at nominal voltage.

7. When programming via JTAG.


## Differential HSTL and SSTL

Differential HSTL and SSTL outputs are implemented as a pair of complementary single-ended outputs. All allowable single-ended output classes (class I and class II) are supported in this mode.

### LVDS25E

The top and bottom side of LatticeXP devices support LVDS outputs via emulated complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The scheme shown in Figure 3-1 is one possible solution for point-to-point signals.

**Figure 3-1. LVDS25E Output Termination Example**

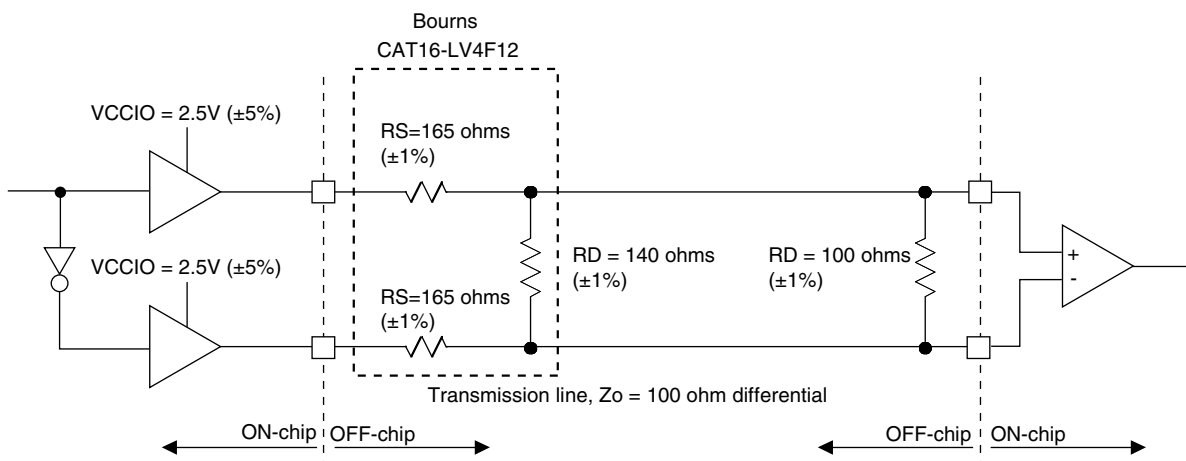

**Table 3-1. LVDS25E DC Conditions**

#### Over Recommended Operating Conditions

| Parameter  | Description                 | Typical | Units |
|------------|-----------------------------|---------|-------|
| $V_{OH}$   | Output high voltage         | 1.43    | V     |
| $V_{OL}$   | Output low voltage          | 1.07    | V     |
| $V_{OD}$   | Output differential voltage | 0.35    | V     |
| $V_{CM}$   | Output common mode voltage  | 1.25    | V     |
| $Z_{BACK}$ | Back impedance              | 100     | ohms  |
| $I_{DC}$   | DC output current           | 3.66    | mA    |


### BLVDS

The LatticeXP devices support BLVDS standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel external resistor across the driver outputs. BLVDS is intended for use when multi-drop and bi-directional multi-point differential signaling is required. The scheme shown in Figure 3-2 is one possible solution for bi-directional multi-point differential signals.

## LVPECL

The LatticeXP devices support differential LVPECL standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The LVPECL input standard is supported by the LVDS differential input buffer. The scheme shown in Figure 3-3 is one possible solution for point-to-point signals.

**Figure 3-3. Differential LVPECL**

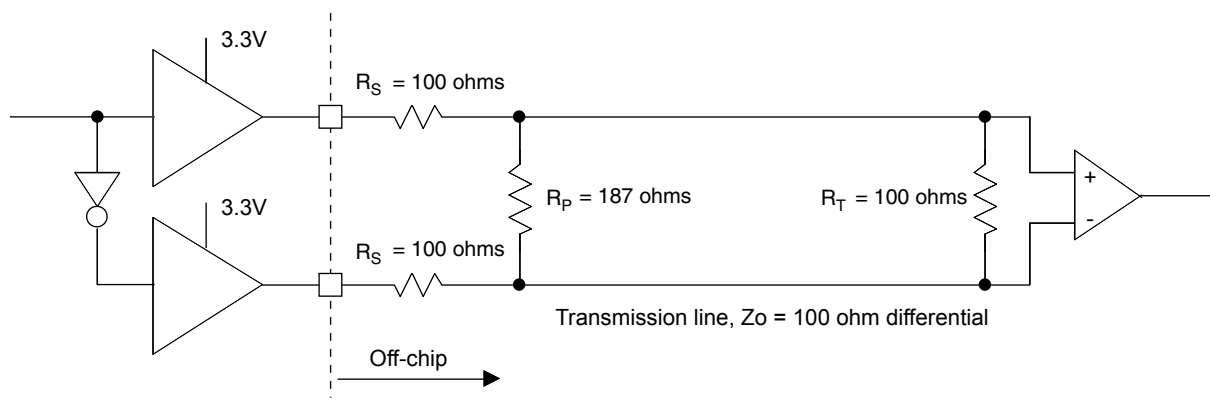

**Table 3-3. LVPECL DC Conditions<sup>1</sup>**

### Over Recommended Operating Conditions

| Symbol     | Description                 | Typical | Units |
|------------|-----------------------------|---------|-------|
| $Z_{OUT}$  | Output impedance            | 100     | ohms  |
| $R_P$      | Driver parallel resistor    | 187     | ohms  |
| $R_S$      | Driver series resistor      | 100     | ohms  |
| $R_T$      | Receiver termination        | 100     | ohms  |
| $V_{OH}$   | Output high voltage         | 2.03    | V     |
| $V_{OL}$   | Output low voltage          | 1.27    | V     |
| $V_{OD}$   | Output differential voltage | 0.76    | V     |
| $V_{CM}$   | Output common mode voltage  | 1.65    | V     |
| $Z_{BACK}$ | Back impedance              | 85.7    | ohms  |
| $I_{DC}$   | DC output current           | 12.7    | mA    |

1. For input buffer, see LVDS table.

For further information on LVPECL, BLVDS and other differential interfaces please see details of additional technical documentation at the end of the data sheet.

## RSDS

The LatticeXP devices support differential RSDS standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The RSDS input standard is supported by the LVDS differential input buffer. The scheme shown in Figure 3-4 is one possible solution for RSDS standard implementation. Use LVDS25E mode with suggested resistors for RSDS operation. Resistor values in Figure 3-4 are industry standard values for 1% resistors.



| Parameter  | Description                 | Typical | Units |
|------------|-----------------------------|---------|-------|
| $Z_{OUT}$  | Output impedance            | 20      | ohms  |
| $R_S$      | Driver series resistor      | 300     | ohms  |
| $R_P$      | Driver parallel resistor    | 121     | ohms  |
| $R_T$      | Receiver termination        | 100     | ohms  |
| $V_{OH}$   | Output high voltage         | 1.35    | V     |
| $V_{OL}$   | Output low voltage          | 1.15    | V     |
| $V_{OD}$   | Output differential voltage | 0.20    | V     |
| $V_{CM}$   | Output common mode voltage  | 1.25    | V     |
| $Z_{BACK}$ | Back impedance              | 101.5   | ohms  |
| $I_{DC}$   | DC output current           | 3.66    | mA    |

**Typical Building Block Function Performance<sup>1</sup>****Pin-to-Pin Performance (LVCMOS25 12 mA Drive)**

| Function               | -5 Timing | Units |
|------------------------|-----------|-------|
| <b>Basic Functions</b> |           |       |
| 16-bit decoder         | 6.1       | ns    |
| 32-bit decoder         | 7.3       | ns    |
| 64-bit decoder         | 8.2       | ns    |
| 4:1 MUX                | 4.9       | ns    |
| 8:1 MUX                | 5.3       | ns    |
| 16:1 MUX               | 5.7       | ns    |
| 32:1 MUX               | 6.3       | ns    |

**Register to Register Performance**


| Function                            | -5 Timing | Units |
|-------------------------------------|-----------|-------|
| <b>Basic Functions</b>              |           |       |
| 16-bit decoder                      | 351       | MHz   |
| 32-bit decoder                      | 248       | MHz   |
| 64-bit decoder                      | 237       | MHz   |
| 4:1 MUX                             | 590       | MHz   |
| 8:1 MUX                             | 523       | MHz   |
| 16:1 MUX                            | 434       | MHz   |
| 32:1 MUX                            | 355       | MHz   |
| 8-bit adder                         | 343       | MHz   |
| 16-bit adder                        | 292       | MHz   |
| 64-bit adder                        | 130       | MHz   |
| 16-bit counter                      | 388       | MHz   |
| 32-bit counter                      | 295       | MHz   |
| 64-bit counter                      | 200       | MHz   |
| 64-bit accumulator                  | 164       | MHz   |
| <b>Embedded Memory Functions</b>    |           |       |
| Single Port RAM 256x36 bits         | 254       | MHz   |
| True-Dual Port RAM 512x18 bits      | 254       | MHz   |
| <b>Distributed Memory Functions</b> |           |       |
| 16x2 SP RAM                         | 434       | MHz   |
| 64x2 SP RAM                         | 332       | MHz   |
| 128x4 SP RAM                        | 235       | MHz   |
| 32x2 PDP RAM                        | 322       | MHz   |
| 64x4 PDP RAM                        | 291       | MHz   |

1. These timing numbers were generated using the ispLEVER design tool. Exact performance may vary with design and tool version. The tool uses internal parameters that have been characterized but are not tested on every device.

Timing v.F0.11


EBR Memory Timing Diagrams

Figure 3-8. Read Mode (Normal)

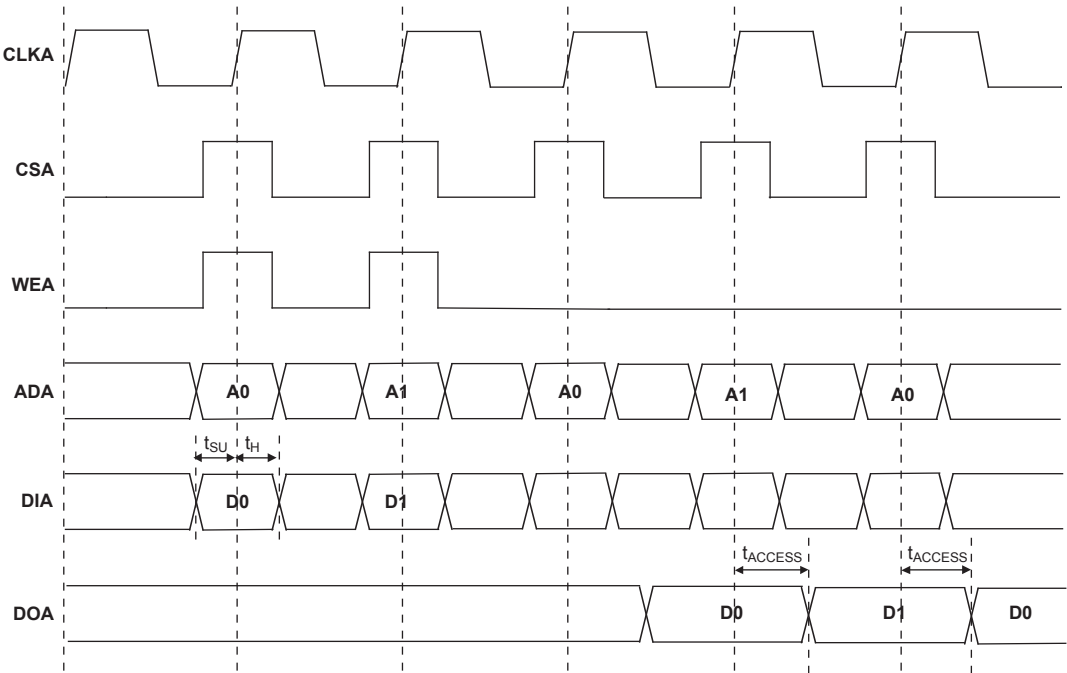

Note: Input data and address are registered at the positive edge of the clock and output data appears after the positive of the clock.

Figure 3-9. Read Mode with Input and Output Registers

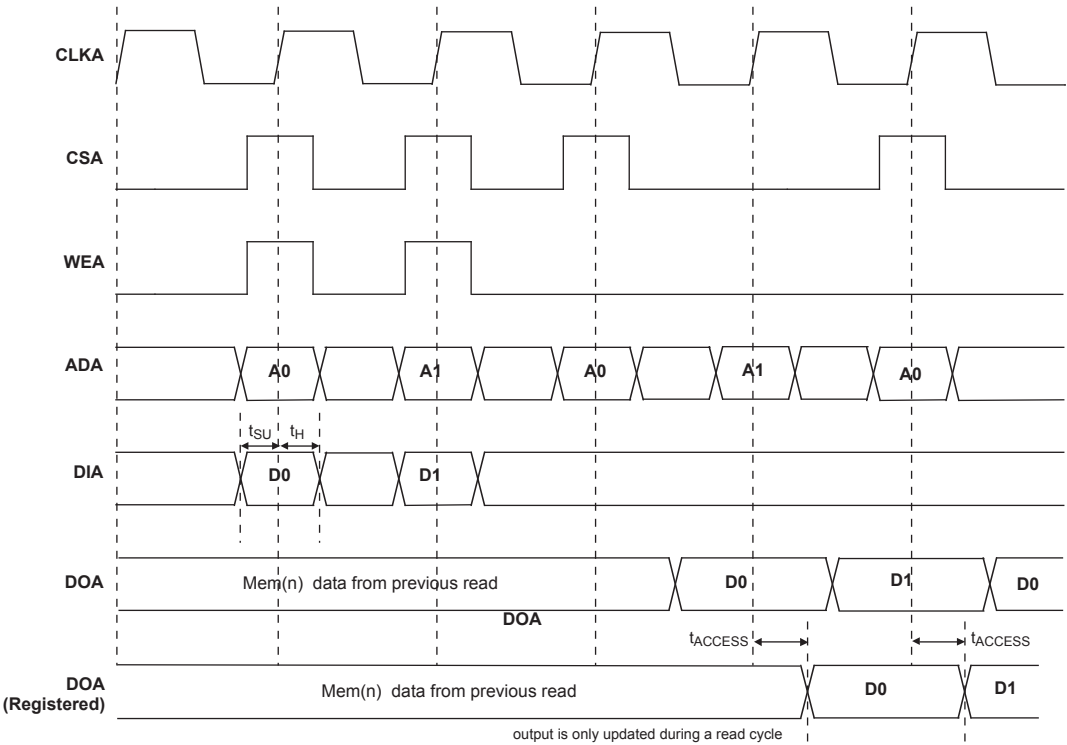

**LFXP3 Logic Signal Connections: 100 TQFP (Cont.)**

| Pin Number | Pin Function | Bank | Differential | Dual Function |
|------------|--------------|------|--------------|---------------|
| 88         | PT14B        | 1    | -            | D7            |
| 89         | PT13B        | 0    | C            | BUSY          |
| 90         | GNDIO0       | 0    | -            | -             |
| 91         | PT13A        | 0    | T            | CS1N          |
| 92         | PT12B        | 0    | C            | PCLKC0_0      |
| 93         | PT12A        | 0    | T            | PCLKT0_0      |
| 94         | VCCIO0       | 0    | -            | -             |
| 95         | PT9A         | 0    | -            | DOUT          |
| 96         | PT8A         | 0    | -            | WRITEN        |
| 97         | PT6A         | 0    | -            | DI            |
| 98         | PT5A         | 0    | -            | CSN           |
| 99         | GND          | -    | -            | -             |
| 100        | CFG0         | 0    | -            | -             |

1. Applies to LFXP "C" only.

2. Applies to LFXP "E" only.

3. Supports dedicated LVDS outputs.

**LFXP3 & LFXP6 Logic Signal Connections: 144 TQFP**

| Pin Number | LFXP3                                 |      |                |                | LFXP6                                 |      |                |                |
|------------|---------------------------------------|------|----------------|----------------|---------------------------------------|------|----------------|----------------|
|            | Pin Function                          | Bank | Differential   | Dual Function  | Pin Function                          | Bank | Differential   | Dual Function  |
| 1          | PROGRAMN                              | 7    | -              | -              | PROGRAMN                              | 7    | -              | -              |
| 2          | CCLK                                  | 7    | -              | -              | CCLK                                  | 7    | -              | -              |
| 3          | GND                                   | -    | -              | -              | GND                                   | -    | -              | -              |
| 4          | PL2A                                  | 7    | T <sup>3</sup> | -              | PL2A                                  | 7    | T <sup>3</sup> | -              |
| 5          | PL2B                                  | 7    | C <sup>3</sup> | -              | PL2B                                  | 7    | C <sup>3</sup> | -              |
| 6          | PL3A                                  | 7    | T              | LUM0_PLLT_FB_A | PL3A                                  | 7    | T              | LUM0_PLLT_FB_A |
| 7          | PL3B                                  | 7    | C              | LUM0_PLLC_FB_A | PL3B                                  | 7    | C              | LUM0_PLLC_FB_A |
| 8          | VCCIO7                                | 7    | -              | -              | VCCIO7                                | 7    | -              | -              |
| 9          | PL5A                                  | 7    | -              | VREF1_7        | PL5A                                  | 7    | -              | VREF1_7        |
| 10         | PL6B                                  | 7    | -              | VREF2_7        | PL6B                                  | 7    | -              | VREF2_7        |
| 11         | GNDIO7                                | 7    | -              | -              | GNDIO7                                | 7    | -              | -              |
| 12         | PL7A                                  | 7    | T <sup>3</sup> | DQS            | PL7A                                  | 7    | T <sup>3</sup> | DQS            |
| 13         | PL7B                                  | 7    | C <sup>3</sup> | -              | PL7B                                  | 7    | C <sup>3</sup> | -              |
| 14         | VCC                                   | -    | -              | -              | VCC                                   | -    | -              | -              |
| 15         | PL8A                                  | 7    | T              | LUM0_PLLT_IN_A | PL8A                                  | 7    | T              | LUM0_PLLT_IN_A |
| 16         | PL8B                                  | 7    | C              | LUM0_PLLC_IN_A | PL8B                                  | 7    | C              | LUM0_PLLC_IN_A |
| 17         | PL9A                                  | 7    | T <sup>3</sup> | -              | PL9A                                  | 7    | T <sup>3</sup> | -              |
| 18         | PL9B                                  | 7    | C <sup>3</sup> | -              | PL9B                                  | 7    | C <sup>3</sup> | -              |
| 19         | VCCP0                                 | -    | -              | -              | VCCP0                                 | -    | -              | -              |
| 20         | GNDP0                                 | -    | -              | -              | GNDP0                                 | -    | -              | -              |
| 21         | VCCIO6                                | 6    | -              | -              | VCCIO6                                | 6    | -              | -              |
| 22         | PL11A                                 | 6    | T <sup>3</sup> | -              | PL16A                                 | 6    | T <sup>3</sup> | -              |
| 23         | PL11B                                 | 6    | C <sup>3</sup> | -              | PL16B                                 | 6    | C <sup>3</sup> | -              |
| 24         | PL12A                                 | 6    | T              | PCLKT6_0       | PL17A                                 | 6    | T              | PCLKT6_0       |
| 25         | PL12B                                 | 6    | C              | PCLKC6_0       | PL17B                                 | 6    | C              | PCLKC6_0       |
| 26         | PL13A                                 | 6    | T <sup>3</sup> | -              | PL18A                                 | 6    | T <sup>3</sup> | -              |
| 27         | PL13B                                 | 6    | C <sup>3</sup> | -              | PL18B                                 | 6    | C <sup>3</sup> | -              |
| 28         | GNDIO6                                | 6    | -              | -              | GNDIO6                                | 6    | -              | -              |
| 29         | PL14A                                 | 6    | -              | VREF1_6        | PL22A                                 | 6    | -              | VREF1_6        |
| 30         | PL15B                                 | 6    | -              | VREF2_6        | PL23B                                 | 6    | -              | VREF2_6        |
| 31         | PL16A                                 | 6    | T <sup>3</sup> | DQS            | PL24A                                 | 6    | T <sup>3</sup> | DQS            |
| 32         | PL16B                                 | 6    | C <sup>3</sup> | -              | PL24B                                 | 6    | C <sup>3</sup> | -              |
| 33         | PL17A                                 | 6    | -              | -              | PL25A                                 | 6    | -              | -              |
| 34         | PL18A                                 | 6    | T <sup>3</sup> | -              | PL26A                                 | 6    | T <sup>3</sup> | -              |
| 35         | PL18B                                 | 6    | C <sup>3</sup> | -              | PL26B                                 | 6    | C <sup>3</sup> | -              |
| 36         | VCCAUX                                | -    | -              | -              | VCCAUX                                | -    | -              | -              |
| 37         | SLEEPN <sup>1</sup> /TOE <sup>2</sup> | -    | -              | -              | SLEEPN <sup>1</sup> /TOE <sup>2</sup> | -    | -              | -              |
| 38         | INITN                                 | 5    | -              | -              | INITN                                 | 5    | -              | -              |
| 39         | VCC                                   | -    | -              | -              | VCC                                   | -    | -              | -              |
| 40         | PB2B                                  | 5    | -              | VREF1_5        | PB5B                                  | 5    | -              | VREF1_5        |
| 41         | PB5B                                  | 5    | -              | VREF2_5        | PB8B                                  | 5    | -              | VREF2_5        |
| 42         | PB7A                                  | 5    | T              | -              | PB10A                                 | 5    | T              | -              |
| 43         | PB7B                                  | 5    | C              | -              | PB10B                                 | 5    | C              | -              |
| 44         | GNDIO5                                | 5    | -              | -              | GNDIO5                                | 5    | -              | -              |
| 45         | PB9A                                  | 5    | -              | -              | PB12A                                 | 5    | -              | -              |
| 46         | PB10B                                 | 5    | -              | -              | PB13B                                 | 5    | -              | -              |

**LFXP3 & LFXP6 Logic Signal Connections: 144 TQFP (Cont.)**

| Pin Number | LFXP3        |      |                |               | LFXP6        |      |                |               |
|------------|--------------|------|----------------|---------------|--------------|------|----------------|---------------|
|            | Pin Function | Bank | Differential   | Dual Function | Pin Function | Bank | Differential   | Dual Function |
| 47         | PB11A        | 5    | T              | DQS           | PB14A        | 5    | T              | DQS           |
| 48         | PB11B        | 5    | C              | -             | PB14B        | 5    | C              | -             |
| 49         | VCCIO5       | 5    | -              | -             | VCCIO5       | 5    | -              | -             |
| 50         | PB12A        | 5    | T              | -             | PB15A        | 5    | T              | -             |
| 51         | PB12B        | 5    | C              | -             | PB15B        | 5    | C              | -             |
| 52         | PB13A        | 5    | T              | -             | PB16A        | 5    | T              | -             |
| 53         | PB13B        | 5    | C              | -             | PB16B        | 5    | C              | -             |
| 54         | GND          | -    | -              | -             | GND          | -    | -              | -             |
| 55         | PB14A        | 4    | T              | -             | PB17A        | 4    | T              | -             |
| 56         | GNDIO4       | 4    | -              | -             | GNDIO4       | 4    | -              | -             |
| 57         | PB14B        | 4    | C              | -             | PB17B        | 4    | C              | -             |
| 58         | PB15A        | 4    | T              | PCLKT4_0      | PB18A        | 4    | T              | PCLKT4_0      |
| 59         | PB15B        | 4    | C              | PCLKC4_0      | PB18B        | 4    | C              | PCLKC4_0      |
| 60         | PB16A        | 4    | T              | -             | PB19A        | 4    | T              | -             |
| 61         | VCCIO4       | 4    | -              | -             | VCCIO4       | 4    | -              | -             |
| 62         | PB16B        | 4    | C              | -             | PB19B        | 4    | C              | -             |
| 63         | PB19A        | 4    | T              | DQS           | PB22A        | 4    | T              | DQS           |
| 64         | GNDIO4       | 4    | -              | -             | GNDIO4       | 4    | -              | -             |
| 65         | PB19B        | 4    | C              | VREF1_4       | PB22B        | 4    | C              | VREF1_4       |
| 66         | PB20A        | 4    | T              | -             | PB23A        | 4    | T              | -             |
| 67         | PB20B        | 4    | C              | -             | PB23B        | 4    | C              | -             |
| 68         | VCCIO4       | 4    | -              | -             | VCCIO4       | 4    | -              | -             |
| 69         | PB22A        | 4    | -              | -             | PB25A        | 4    | -              | -             |
| 70         | PB24A        | 4    | T              | VREF2_4       | PB27A        | 4    | T              | VREF2_4       |
| 71         | PB24B        | 4    | C              | -             | PB27B        | 4    | C              | -             |
| 72         | PB25A        | 4    | -              | -             | PB28A        | 4    | -              | -             |
| 73         | VCC          | -    | -              | -             | VCC          | -    | -              | -             |
| 74         | PR18B        | 3    | C <sup>3</sup> | -             | PR26B        | 3    | C <sup>3</sup> | -             |
| 75         | GNDIO3       | 3    | -              | -             | GNDIO3       | 3    | -              | -             |
| 76         | PR18A        | 3    | T <sup>3</sup> | -             | PR26A        | 3    | T <sup>3</sup> | -             |
| 77         | PR17B        | 3    | C              | -             | PR25B        | 3    | C              | -             |
| 78         | PR17A        | 3    | T              | -             | PR25A        | 3    | T              | -             |
| 79         | PR16B        | 3    | C <sup>3</sup> | -             | PR24B        | 3    | C <sup>3</sup> | -             |
| 80         | PR16A        | 3    | T <sup>3</sup> | DQS           | PR24A        | 3    | T <sup>3</sup> | DQS           |
| 81         | PR15B        | 3    | -              | VREF1_3       | PR23B        | 3    | -              | VREF1_3       |
| 82         | PR14A        | 3    | -              | VREF2_3       | PR22A        | 3    | -              | VREF2_3       |
| 83         | PR13B        | 3    | C              | -             | PR21B        | 3    | C <sup>3</sup> | -             |
| 84         | PR13A        | 3    | T              | -             | PR21A        | 3    | T <sup>3</sup> | -             |
| 85         | GND          | -    | -              | -             | GND          | -    | -              | -             |
| 86         | PR12A        | 3    | -              | -             | PR20A        | 3    | -              | -             |
| 87         | PR11B        | 3    | C              | -             | PR19B        | 3    | C <sup>3</sup> | -             |
| 88         | VCCIO3       | 3    | -              | -             | VCCIO3       | 3    | -              | -             |
| 89         | PR11A        | 3    | T              | -             | PR19A        | 3    | T <sup>3</sup> | -             |
| 90         | GNDP1        | -    | -              | -             | GNDP1        | -    | -              | -             |
| 91         | VCCP1        | -    | -              | -             | VCCP1        | -    | -              | -             |
| 92         | PR9B         | 2    | C              | PCLKC2_0      | PR12B        | 2    | C              | PCLKC2_0      |

**LFXP6 & LFXP10 Logic Signal Connections: 256 fpBGA**

| Ball Number | LFXP6         |      |                |                | LFXP10        |      |                |                |
|-------------|---------------|------|----------------|----------------|---------------|------|----------------|----------------|
|             | Ball Function | Bank | Differential   | Dual Function  | Ball Function | Bank | Differential   | Dual Function  |
| C2          | PROGRAMN      | 7    | -              | -              | PROGRAMN      | 7    | -              | -              |
| C1          | CCLK          | 7    | -              | -              | CCLK          | 7    | -              | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| D2          | PL3A          | 7    | T              | LUM0_PLLT_FB_A | PL3A          | 7    | T              | LUM0_PLLT_FB_A |
| D3          | PL3B          | 7    | C              | LUM0_PLLC_FB_A | PL3B          | 7    | C              | LUM0_PLLC_FB_A |
| D1          | PL2A          | 7    | T <sup>3</sup> | -              | PL5A          | 7    | -              | -              |
| E2          | PL5A          | 7    | -              | VREF1_7        | PL6B          | 7    | -              | VREF1_7        |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| E1          | PL7A          | 7    | T <sup>3</sup> | DQS            | PL7A          | 7    | T <sup>3</sup> | DQS            |
| F1          | PL7B          | 7    | C <sup>3</sup> | -              | PL7B          | 7    | C <sup>3</sup> | -              |
| E3          | PL12A         | 7    | T              | -              | PL8A          | 7    | T              | -              |
| F4          | PL12B         | 7    | C              | -              | PL8B          | 7    | C              | -              |
| F3          | PL4A          | 7    | T <sup>3</sup> | -              | PL9A          | 7    | T <sup>3</sup> | -              |
| F2          | PL4B          | 7    | C <sup>3</sup> | -              | PL9B          | 7    | C <sup>3</sup> | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| G1          | PL2B          | 7    | C <sup>3</sup> | -              | PL11B         | 7    | -              | -              |
| G3          | PL8A          | 7    | T              | LUM0_PLLT_IN_A | PL12A         | 7    | T              | LUM0_PLLT_IN_A |
| G2          | PL8B          | 7    | C              | LUM0_PLLC_IN_A | PL12B         | 7    | C              | LUM0_PLLC_IN_A |
| H1          | PL9A          | 7    | T <sup>3</sup> | -              | PL13A         | 7    | T <sup>3</sup> | -              |
| H2          | PL9B          | 7    | C <sup>3</sup> | -              | PL13B         | 7    | C <sup>3</sup> | -              |
| G4          | PL6B          | 7    | -              | VREF2_7        | PL14A         | 7    | -              | VREF2_7        |
| G5          | PL14A         | 7    | -              | -              | PL15B         | 7    | -              | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| J1          | PL11A         | 7    | T <sup>3</sup> | -              | PL16A         | 7    | T <sup>3</sup> | DQS            |
| J2          | PL11B         | 7    | C <sup>3</sup> | -              | PL16B         | 7    | C <sup>3</sup> | -              |
| H3          | PL13A         | 7    | T <sup>3</sup> | -              | PL18A         | 7    | T <sup>3</sup> | -              |
| J3          | PL13B         | 7    | C <sup>3</sup> | -              | PL18B         | 7    | C <sup>3</sup> | -              |
| H4          | VCCP0         | -    | -              | -              | VCCP0         | -    | -              | -              |
| H5          | GNDP0         | -    | -              | -              | GNDP0         | -    | -              | -              |
| K1          | PL17A         | 6    | T              | PCLKT6_0       | PL20A         | 6    | T              | PCLKT6_0       |
| K2          | PL17B         | 6    | C              | PCLKC6_0       | PL20B         | 6    | C              | PCLKC6_0       |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| J4          | PL15B         | 6    | -              | -              | PL22A         | 6    | -              | -              |
| J5          | PL22A         | 6    | -              | VREF1_6        | PL23B         | 6    | -              | VREF1_6        |
| L1          | PL16A         | 6    | T <sup>3</sup> | -              | PL24A         | 6    | T <sup>3</sup> | DQS            |
| L2          | PL16B         | 6    | C <sup>3</sup> | -              | PL24B         | 6    | C <sup>3</sup> | -              |
| M1          | PL18A         | 6    | T <sup>3</sup> | -              | PL25A         | 6    | T              | LLM0_PLLT_IN_A |
| M2          | PL18B         | 6    | C <sup>3</sup> | -              | PL25B         | 6    | C              | LLM0_PLLC_IN_A |
| K3          | PL19A         | 6    | T <sup>3</sup> | -              | PL26A         | 6    | T <sup>3</sup> | -              |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| L3          | PL19B         | 6    | C <sup>3</sup> | -              | PL26B         | 6    | C <sup>3</sup> | -              |
| L4          | PL21A         | 6    | T <sup>3</sup> | -              | PL28A         | 6    | -              | -              |

**LFXP15 & LFXP20 Logic Signal Connections: 256 fpBGA (Cont.)**

| Ball Number | LFXP15        |      |                |                | LFXP20        |      |                |                |
|-------------|---------------|------|----------------|----------------|---------------|------|----------------|----------------|
|             | Ball Function | Bank | Differential   | Dual Function  | Ball Function | Bank | Differential   | Dual Function  |
| -           | GNDIO2        | 2    | -              | -              | GNDIO2        | 2    | -              | -              |
| F15         | PR10B         | 2    | -              | -              | PR10B         | 2    | -              | -              |
| E15         | PR9A          | 2    | -              | VREF2_2        | PR9A          | 2    | -              | VREF2_2        |
| F14         | PR8B          | 2    | C <sup>3</sup> | -              | PR8B          | 2    | C <sup>3</sup> | -              |
| E14         | PR8A          | 2    | T <sup>3</sup> | -              | PR8A          | 2    | T <sup>3</sup> | -              |
| D15         | PR7B          | 2    | C              | RUM0_PLLC_FB_A | PR7B          | 2    | C              | RUM0_PLLC_FB_A |
| C15         | PR7A          | 2    | T              | RUM0_PLLT_FB_A | PR7A          | 2    | T              | RUM0_PLLT_FB_A |
| -           | GNDIO2        | 2    | -              | -              | GNDIO2        | 2    | -              | -              |
| E16         | TDO           | -    | -              | -              | TDO           | -    | -              | -              |
| D16         | VCCJ          | -    | -              | -              | VCCJ          | -    | -              | -              |
| D14         | TDI           | -    | -              | -              | TDI           | -    | -              | -              |
| C14         | TMS           | -    | -              | -              | TMS           | -    | -              | -              |
| B14         | TCK           | -    | -              | -              | TCK           | -    | -              | -              |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| A15         | PT40B         | 1    | C              | -              | PT44B         | 1    | C              | -              |
| B15         | PT40A         | 1    | T              | -              | PT44A         | 1    | T              | -              |
| D12         | PT39B         | 1    | C              | VREF1_1        | PT43B         | 1    | C              | VREF1_1        |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| C11         | PT39A         | 1    | T              | DQS            | PT43A         | 1    | T              | DQS            |
| A14         | PT38B         | 1    | -              | -              | PT42B         | 1    | -              | -              |
| B13         | PT37A         | 1    | -              | -              | PT41A         | 1    | -              | -              |
| F12         | PT36B         | 1    | C              | -              | PT40B         | 1    | C              | -              |
| E11         | PT36A         | 1    | T              | -              | PT40A         | 1    | T              | -              |
| A13         | PT35B         | 1    | C              | -              | PT39B         | 1    | C              | -              |
| C13         | PT35A         | 1    | T              | D0             | PT39A         | 1    | T              | D0             |
| C10         | PT34B         | 1    | C              | D1             | PT38B         | 1    | C              | D1             |
| E10         | PT34A         | 1    | T              | VREF2_1        | PT38A         | 1    | T              | VREF2_1        |
| A12         | PT33B         | 1    | C              | -              | PT37B         | 1    | C              | -              |
| B12         | PT33A         | 1    | T              | D2             | PT37A         | 1    | T              | D2             |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| C12         | PT32B         | 1    | C              | D3             | PT36B         | 1    | C              | D3             |
| A11         | PT32A         | 1    | T              | -              | PT36A         | 1    | T              | -              |
| B11         | PT31B         | 1    | C              | -              | PT35B         | 1    | C              | -              |
| D11         | PT31A         | 1    | T              | DQS            | PT35A         | 1    | T              | DQS            |
| B9          | PT30B         | 1    | -              | -              | PT34B         | 1    | -              | -              |
| D9          | PT29A         | 1    | -              | D4             | PT33A         | 1    | -              | D4             |
| A10         | PT28B         | 1    | C              | -              | PT32B         | 1    | C              | -              |
| B10         | PT28A         | 1    | T              | D5             | PT32A         | 1    | T              | D5             |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| D10         | PT27B         | 1    | C              | D6             | PT31B         | 1    | C              | D6             |



**LFXP15 & LFXP20 Logic Signal Connections: 484 fpBGA (Cont.)**

| Ball Number | LFXP15        |      |                |                | LFXP20        |      |                |                |
|-------------|---------------|------|----------------|----------------|---------------|------|----------------|----------------|
|             | Ball Function | Bank | Differential   | Dual Function  | Ball Function | Bank | Differential   | Dual Function  |
| L1          | -             | -    | -              | -              | PL23A         | 7    | T <sup>3</sup> | -              |
| M1          | -             | -    | -              | -              | PL23B         | 7    | C <sup>3</sup> | -              |
| M2          | -             | -    | -              | -              | PL24A         | 7    | -              | -              |
| L5          | VCCP0         | -    | -              | -              | VCCP0         | -    | -              | -              |
| N2          | GNDP0         | -    | -              | -              | GNDP0         | -    | -              | -              |
| N1          | -             | -    | -              | -              | PL25B         | 6    | -              | -              |
| P2          | -             | -    | -              | -              | PL26A         | 6    | T <sup>3</sup> | -              |
| P1          | -             | -    | -              | -              | PL26B         | 6    | C <sup>3</sup> | -              |
| M4          | PL23A         | 6    | T <sup>3</sup> | -              | PL27A         | 6    | T <sup>3</sup> | -              |
| M3          | PL23B         | 6    | C <sup>3</sup> | -              | PL27B         | 6    | C <sup>3</sup> | -              |
| R2          | PL24A         | 6    | T              | PCLKT6_0       | PL28A         | 6    | T              | PCLKT6_0       |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| R1          | PL24B         | 6    | C              | PCLKC6_0       | PL28B         | 6    | C              | PCLKC6_0       |
| N3          | PL25A         | 6    | T <sup>3</sup> | -              | PL29A         | 6    | T <sup>3</sup> | -              |
| N4          | PL25B         | 6    | C <sup>3</sup> | -              | PL29B         | 6    | C <sup>3</sup> | -              |
| M5          | PL26A         | 6    | -              | -              | PL30A         | 6    | -              | -              |
| N5          | PL27B         | 6    | -              | VREF1_6        | PL31B         | 6    | -              | VREF1_6        |
| T2          | PL28A         | 6    | T <sup>3</sup> | DQS            | PL32A         | 6    | T <sup>3</sup> | DQS            |
| T1          | PL28B         | 6    | C <sup>3</sup> | -              | PL32B         | 6    | C <sup>3</sup> | -              |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| U2          | PL29A         | 6    | T              | LLM0_PLLT_IN_A | PL33A         | 6    | T              | LLM0_PLLT_IN_A |
| U1          | PL29B         | 6    | C              | LLM0_PLLC_IN_A | PL33B         | 6    | C              | LLM0_PLLC_IN_A |
| P3          | PL30A         | 6    | T <sup>3</sup> | -              | PL34A         | 6    | T <sup>3</sup> | -              |
| P4          | PL30B         | 6    | C <sup>3</sup> | -              | PL34B         | 6    | C <sup>3</sup> | -              |
| P6          | PL32A         | 6    | T <sup>3</sup> | -              | PL36A         | 6    | T <sup>3</sup> | -              |
| P5          | PL32B         | 6    | C <sup>3</sup> | -              | PL36B         | 6    | C <sup>3</sup> | -              |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| V2          | PL33A         | 6    | T              | -              | PL37A         | 6    | T              | -              |
| V1          | PL33B         | 6    | C              | -              | PL37B         | 6    | C              | -              |
| W2          | PL34A         | 6    | T <sup>3</sup> | -              | PL38A         | 6    | T <sup>3</sup> | -              |
| W1          | PL34B         | 6    | C <sup>3</sup> | -              | PL38B         | 6    | C <sup>3</sup> | -              |
| R3          | PL35A         | 6    | -              | VREF2_6        | PL39A         | 6    | -              | VREF2_6        |
| R4          | PL36B         | 6    | -              | -              | PL40B         | 6    | -              | -              |
| R6          | PL37A         | 6    | T <sup>3</sup> | DQS            | PL41A         | 6    | T <sup>3</sup> | DQS            |
| R5          | PL37B         | 6    | C <sup>3</sup> | -              | PL41B         | 6    | C <sup>3</sup> | -              |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| Y2          | PL38A         | 6    | T              | LLM0_PLLT_FB_A | PL42A         | 6    | T              | LLM0_PLLT_FB_A |
| Y1          | PL38B         | 6    | C              | LLM0_PLLC_FB_A | PL42B         | 6    | C              | LLM0_PLLC_FB_A |
| T3          | PL39A         | 6    | T <sup>3</sup> | -              | PL43A         | 6    | T <sup>3</sup> | -              |
| T4          | PL39B         | 6    | C <sup>3</sup> | -              | PL43B         | 6    | C <sup>3</sup> | -              |
| W3          | PL40A         | 6    | T <sup>3</sup> | -              | PL44A         | 6    | T <sup>3</sup> | -              |
| V3          | PL40B         | 6    | C <sup>3</sup> | -              | PL44B         | 6    | C <sup>3</sup> | -              |

**LFXP15 & LFXP20 Logic Signal Connections: 484 fpBGA (Cont.)**

| Ball Number | LFXP15        |      |              |               | LFXP20        |      |              |               |
|-------------|---------------|------|--------------|---------------|---------------|------|--------------|---------------|
|             | Ball Function | Bank | Differential | Dual Function | Ball Function | Bank | Differential | Dual Function |
| D18         | -             | -    | -            | -             | PT55B         | 1    | C            | -             |
| E18         | -             | -    | -            | -             | PT55A         | 1    | T            | -             |
| C19         | -             | -    | -            | -             | PT54B         | 1    | C            | -             |
| C18         | -             | -    | -            | -             | PT54A         | 1    | T            | -             |
| C21         | -             | -    | -            | -             | PT53B         | 1    | C            | -             |
| -           | GNDIO1        | 1    | -            | -             | GNDIO1        | 1    | -            | -             |
| B21         | -             | -    | -            | -             | PT53A         | 1    | T            | -             |
| E17         | PT48B         | 1    | C            | -             | PT52B         | 1    | C            | -             |
| E16         | PT48A         | 1    | T            | -             | PT52A         | 1    | T            | -             |
| C17         | PT47B         | 1    | C            | -             | PT51B         | 1    | C            | -             |
| D17         | PT47A         | 1    | T            | DQS           | PT51A         | 1    | T            | DQS           |
| F17         | PT46B         | 1    | -            | -             | PT50B         | 1    | -            | -             |
| F16         | PT45A         | 1    | -            | -             | PT49A         | 1    | -            | -             |
| C16         | PT44B         | 1    | C            | -             | PT48B         | 1    | C            | -             |
| D16         | PT44A         | 1    | T            | -             | PT48A         | 1    | T            | -             |
| A20         | PT43B         | 1    | C            | -             | PT47B         | 1    | C            | -             |
| -           | GNDIO1        | 1    | -            | -             | GNDIO1        | 1    | -            | -             |
| B20         | PT43A         | 1    | T            | -             | PT47A         | 1    | T            | -             |
| A19         | PT42B         | 1    | C            | -             | PT46B         | 1    | C            | -             |
| B19         | PT42A         | 1    | T            | -             | PT46A         | 1    | T            | -             |
| C15         | PT41B         | 1    | C            | -             | PT45B         | 1    | C            | -             |
| D15         | PT41A         | 1    | T            | -             | PT45A         | 1    | T            | -             |
| A18         | PT40B         | 1    | C            | -             | PT44B         | 1    | C            | -             |
| B18         | PT40A         | 1    | T            | -             | PT44A         | 1    | T            | -             |
| F15         | PT39B         | 1    | C            | VREF1_1       | PT43B         | 1    | C            | VREF1_1       |
| -           | GNDIO1        | 1    | -            | -             | GNDIO1        | 1    | -            | -             |
| E15         | PT39A         | 1    | T            | DQS           | PT43A         | 1    | T            | DQS           |
| A17         | PT38B         | 1    | -            | -             | PT42B         | 1    | -            | -             |
| B17         | PT37A         | 1    | -            | -             | PT41A         | 1    | -            | -             |
| E14         | PT36B         | 1    | C            | -             | PT40B         | 1    | C            | -             |
| F14         | PT36A         | 1    | T            | -             | PT40A         | 1    | T            | -             |
| D14         | PT35B         | 1    | C            | -             | PT39B         | 1    | C            | -             |
| C14         | PT35A         | 1    | T            | D0            | PT39A         | 1    | T            | D0            |
| A16         | PT34B         | 1    | C            | D1            | PT38B         | 1    | C            | D1            |
| B16         | PT34A         | 1    | T            | VREF2_1       | PT38A         | 1    | T            | VREF2_1       |
| A15         | PT33B         | 1    | C            | -             | PT37B         | 1    | C            | -             |
| B15         | PT33A         | 1    | T            | D2            | PT37A         | 1    | T            | D2            |
| -           | GNDIO1        | 1    | -            | -             | GNDIO1        | 1    | -            | -             |
| E13         | PT32B         | 1    | C            | D3            | PT36B         | 1    | C            | D3            |
| D13         | PT32A         | 1    | T            | -             | PT36A         | 1    | T            | -             |
| C13         | PT31B         | 1    | C            | -             | PT35B         | 1    | C            | -             |
| B13         | PT31A         | 1    | T            | DQS           | PT35A         | 1    | T            | DQS           |

**LFXP15 & LFXP20 Logic Signal Connections: 484 fpBGA (Cont.)**

| Ball Number | LFXP15        |      |              |               | LFXP20        |      |              |               |
|-------------|---------------|------|--------------|---------------|---------------|------|--------------|---------------|
|             | Ball Function | Bank | Differential | Dual Function | Ball Function | Bank | Differential | Dual Function |
| H13         | VCCIO1        | 1    | -            | -             | VCCIO1        | 1    | -            | -             |
| K15         | VCCIO2        | 2    | -            | -             | VCCIO2        | 2    | -            | -             |
| L15         | VCCIO2        | 2    | -            | -             | VCCIO2        | 2    | -            | -             |
| L16         | VCCIO2        | 2    | -            | -             | VCCIO2        | 2    | -            | -             |
| L17         | VCCIO2        | 2    | -            | -             | VCCIO2        | 2    | -            | -             |
| M15         | VCCIO3        | 3    | -            | -             | VCCIO3        | 3    | -            | -             |
| M16         | VCCIO3        | 3    | -            | -             | VCCIO3        | 3    | -            | -             |
| M17         | VCCIO3        | 3    | -            | -             | VCCIO3        | 3    | -            | -             |
| N15         | VCCIO3        | 3    | -            | -             | VCCIO3        | 3    | -            | -             |
| R12         | VCCIO4        | 4    | -            | -             | VCCIO4        | 4    | -            | -             |
| R13         | VCCIO4        | 4    | -            | -             | VCCIO4        | 4    | -            | -             |
| T12         | VCCIO4        | 4    | -            | -             | VCCIO4        | 4    | -            | -             |
| U12         | VCCIO4        | 4    | -            | -             | VCCIO4        | 4    | -            | -             |
| R10         | VCCIO5        | 5    | -            | -             | VCCIO5        | 5    | -            | -             |
| R11         | VCCIO5        | 5    | -            | -             | VCCIO5        | 5    | -            | -             |
| T11         | VCCIO5        | 5    | -            | -             | VCCIO5        | 5    | -            | -             |
| U11         | VCCIO5        | 5    | -            | -             | VCCIO5        | 5    | -            | -             |
| M6          | VCCIO6        | 6    | -            | -             | VCCIO6        | 6    | -            | -             |
| M7          | VCCIO6        | 6    | -            | -             | VCCIO6        | 6    | -            | -             |
| M8          | VCCIO6        | 6    | -            | -             | VCCIO6        | 6    | -            | -             |
| N8          | VCCIO6        | 6    | -            | -             | VCCIO6        | 6    | -            | -             |
| K8          | VCCIO7        | 7    | -            | -             | VCCIO7        | 7    | -            | -             |
| L6          | VCCIO7        | 7    | -            | -             | VCCIO7        | 7    | -            | -             |
| L7          | VCCIO7        | 7    | -            | -             | VCCIO7        | 7    | -            | -             |
| L8          | VCCIO7        | 7    | -            | -             | VCCIO7        | 7    | -            | -             |

1. Applies to LFXP "C" only.

2. Applies to LFXP "E" only.

3. Supports dedicated LVDS outputs.

**Commercial (Cont.)**

| Part Number    | I/Os | Voltage      | Grade | Package | Pins | Temp. | LUTs  |
|----------------|------|--------------|-------|---------|------|-------|-------|
| LFXP15C-3F484C | 300  | 1.8/2.5/3.3V | -3    | fpBGA   | 484  | COM   | 15.5K |
| LFXP15C-4F484C | 300  | 1.8/2.5/3.3V | -4    | fpBGA   | 484  | COM   | 15.5K |
| LFXP15C-5F484C | 300  | 1.8/2.5/3.3V | -5    | fpBGA   | 484  | COM   | 15.5K |
| LFXP15C-3F388C | 268  | 1.8/2.5/3.3V | -3    | fpBGA   | 388  | COM   | 15.5K |
| LFXP15C-4F388C | 268  | 1.8/2.5/3.3V | -4    | fpBGA   | 388  | COM   | 15.5K |
| LFXP15C-5F388C | 268  | 1.8/2.5/3.3V | -5    | fpBGA   | 388  | COM   | 15.5K |
| LFXP15C-3F256C | 188  | 1.8/2.5/3.3V | -3    | fpBGA   | 256  | COM   | 15.5K |
| LFXP15C-4F256C | 188  | 1.8/2.5/3.3V | -4    | fpBGA   | 256  | COM   | 15.5K |
| LFXP15C-5F256C | 188  | 1.8/2.5/3.3V | -5    | fpBGA   | 256  | COM   | 15.5K |

| Part Number    | I/Os | Voltage      | Grade | Package | Pins | Temp. | LUTs  |
|----------------|------|--------------|-------|---------|------|-------|-------|
| LFXP20C-3F484C | 340  | 1.8/2.5/3.3V | -3    | fpBGA   | 484  | COM   | 19.7K |
| LFXP20C-4F484C | 340  | 1.8/2.5/3.3V | -4    | fpBGA   | 484  | COM   | 19.7K |
| LFXP20C-5F484C | 340  | 1.8/2.5/3.3V | -5    | fpBGA   | 484  | COM   | 19.7K |
| LFXP20C-3F388C | 268  | 1.8/2.5/3.3V | -3    | fpBGA   | 388  | COM   | 19.7K |
| LFXP20C-4F388C | 268  | 1.8/2.5/3.3V | -4    | fpBGA   | 388  | COM   | 19.7K |
| LFXP20C-5F388C | 268  | 1.8/2.5/3.3V | -5    | fpBGA   | 388  | COM   | 19.7K |
| LFXP20C-3F256C | 188  | 1.8/2.5/3.3V | -3    | fpBGA   | 256  | COM   | 19.7K |
| LFXP20C-4F256C | 188  | 1.8/2.5/3.3V | -4    | fpBGA   | 256  | COM   | 19.7K |
| LFXP20C-5F256C | 188  | 1.8/2.5/3.3V | -5    | fpBGA   | 256  | COM   | 19.7K |

| Part Number   | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs |
|---------------|------|---------|-------|---------|------|-------|------|
| LFXP3E-3Q208C | 136  | 1.2V    | -3    | PQFP    | 208  | COM   | 3.1K |
| LFXP3E-4Q208C | 136  | 1.2V    | -4    | PQFP    | 208  | COM   | 3.1K |
| LFXP3E-5Q208C | 136  | 1.2V    | -5    | PQFP    | 208  | COM   | 3.1K |
| LFXP3E-3T144C | 100  | 1.2V    | -3    | TQFP    | 144  | COM   | 3.1K |
| LFXP3E-4T144C | 100  | 1.2V    | -4    | TQFP    | 144  | COM   | 3.1K |
| LFXP3E-5T144C | 100  | 1.2V    | -5    | TQFP    | 144  | COM   | 3.1K |
| LFXP3E-3T100C | 62   | 1.2V    | -3    | TQFP    | 100  | COM   | 3.1K |
| LFXP3E-4T100C | 62   | 1.2V    | -4    | TQFP    | 100  | COM   | 3.1K |
| LFXP3E-5T100C | 62   | 1.2V    | -5    | TQFP    | 100  | COM   | 3.1K |

**Industrial (Cont.)**

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs |
|-----------------|------|---------|-------|---------|------|-------|------|
| LFXP10E-3FN388I | 244  | 1.2V    | -3    | fpBGA   | 388  | IND   | 9.7K |
| LFXP10E-4FN388I | 244  | 1.2V    | -4    | fpBGA   | 388  | IND   | 9.7K |
| LFXP10E-3FN256I | 188  | 1.2V    | -3    | fpBGA   | 256  | IND   | 9.7K |
| LFXP10E-4FN256I | 188  | 1.2V    | -4    | fpBGA   | 256  | IND   | 9.7K |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|---------|-------|---------|------|-------|-------|
| LFXP15E-3FN484I | 300  | 1.2V    | -3    | fpBGA   | 484  | IND   | 15.5K |
| LFXP15E-4FN484I | 300  | 1.2V    | -4    | fpBGA   | 484  | IND   | 15.5K |
| LFXP15E-3FN388I | 268  | 1.2V    | -3    | fpBGA   | 388  | IND   | 15.5K |
| LFXP15E-4FN388I | 268  | 1.2V    | -4    | fpBGA   | 388  | IND   | 15.5K |
| LFXP15E-3FN256I | 188  | 1.2V    | -3    | fpBGA   | 256  | IND   | 15.5K |
| LFXP15E-4FN256I | 188  | 1.2V    | -4    | fpBGA   | 256  | IND   | 15.5K |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|---------|-------|---------|------|-------|-------|
| LFXP20E-3FN484I | 340  | 1.2V    | -3    | fpBGA   | 484  | IND   | 19.7K |
| LFXP20E-4FN484I | 340  | 1.2V    | -4    | fpBGA   | 484  | IND   | 19.7K |
| LFXP20E-3FN388I | 268  | 1.2V    | -3    | fpBGA   | 388  | IND   | 19.7K |
| LFXP20E-4FN388I | 268  | 1.2V    | -4    | fpBGA   | 388  | IND   | 19.7K |
| LFXP20E-3FN256I | 188  | 1.2V    | -3    | fpBGA   | 256  | IND   | 19.7K |
| LFXP20E-4FN256I | 188  | 1.2V    | -4    | fpBGA   | 256  | IND   | 19.7K |