


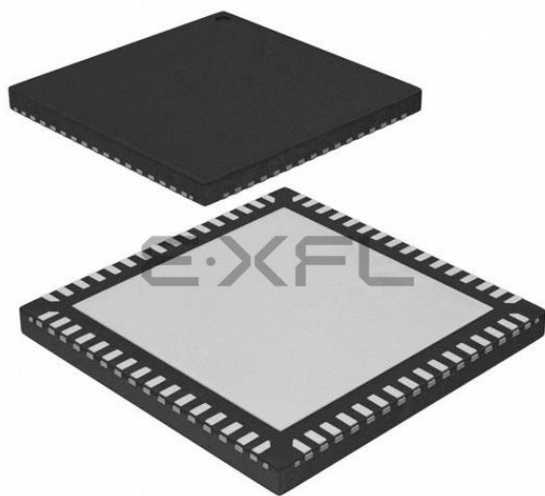

Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                           |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Obsolete                                                                                                                                                  |
| Core Processor             | ARM® Cortex®-M3                                                                                                                                           |
| Core Size                  | 32-Bit Single-Core                                                                                                                                        |
| Speed                      | 48MHz                                                                                                                                                     |
| Connectivity               | I <sup>2</sup> C, IrDA, SmartCard, SPI, UART/USART                                                                                                        |
| Peripherals                | Brown-out Detect/Reset, DMA, POR, PWM, WDT                                                                                                                |
| Number of I/O              | 56                                                                                                                                                        |
| Program Memory Size        | 64KB (64K x 8)                                                                                                                                            |
| Program Memory Type        | FLASH                                                                                                                                                     |
| EEPROM Size                | -                                                                                                                                                         |
| RAM Size                   | 32K x 8                                                                                                                                                   |
| Voltage - Supply (Vcc/Vdd) | 1.98V ~ 3.8V                                                                                                                                              |
| Data Converters            | A/D 8x12b; D/A 2x12b                                                                                                                                      |
| Oscillator Type            | Internal                                                                                                                                                  |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                         |
| Mounting Type              | Surface Mount                                                                                                                                             |
| Package / Case             | 64-VFQFN Exposed Pad                                                                                                                                      |
| Supplier Device Package    | -                                                                                                                                                         |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/silicon-labs/efm32lg230f64-qfn64">https://www.e-xfl.com/product-detail/silicon-labs/efm32lg230f64-qfn64</a> |

# Table of Contents

|                                                                        |          |
|------------------------------------------------------------------------|----------|
| <b>1. Feature List</b>                                                 | <b>1</b> |
| <b>2. Ordering Information</b>                                         | <b>3</b> |
| <b>3. System Summary</b>                                               | <b>6</b> |
| 3.1 System Introduction                                                | 6        |
| 3.1.1 ARM Cortex-M3 Core                                               | 6        |
| 3.1.2 Debug Interface (DBG)                                            | 6        |
| 3.1.3 Memory System Controller (MSC)                                   | 6        |
| 3.1.4 Direct Memory Access Controller (DMA)                            | 7        |
| 3.1.5 Reset Management Unit (RMU)                                      | 7        |
| 3.1.6 Energy Management Unit (EMU)                                     | 7        |
| 3.1.7 Clock Management Unit (CMU)                                      | 7        |
| 3.1.8 Watchdog (WDOG)                                                  | 7        |
| 3.1.9 Peripheral Reflex System (PRS)                                   | 7        |
| 3.1.10 External Bus Interface (EBI)                                    | 7        |
| 3.1.11 TFT Direct Drive                                                | 7        |
| 3.1.12 Universal Serial Bus Controller (USB)                           | 7        |
| 3.1.13 Inter-Integrated Circuit Interface (I2C)                        | 8        |
| 3.1.14 Universal Synchronous/Asynchronous Receiver/Transmitter (USART) | 8        |
| 3.1.15 Pre-Programmed USB/UART Bootloader                              | 8        |
| 3.1.16 Universal Asynchronous Receiver/Transmitter (UART)              | 8        |
| 3.1.17 Low Energy Universal Asynchronous Receiver/Transmitter (LEUART) | 8        |
| 3.1.18 Timer/Counter (TIMER)                                           | 8        |
| 3.1.19 Real Time Counter (RTC)                                         | 8        |
| 3.1.20 Backup Real Time Counter (BURTC)                                | 8        |
| 3.1.21 Low Energy Timer (LETIMER)                                      | 8        |
| 3.1.22 Pulse Counter (PCNT)                                            | 8        |
| 3.1.23 Analog Comparator (ACMP)                                        | 9        |
| 3.1.24 Voltage Comparator (VCMP)                                       | 9        |
| 3.1.25 Analog to Digital Converter (ADC)                               | 9        |
| 3.1.26 Digital to Analog Converter (DAC)                               | 9        |
| 3.1.27 Operational Amplifier (OPAMP)                                   | 9        |
| 3.1.28 Low Energy Sensor Interface (LESENSE)                           | 9        |
| 3.1.29 Backup Power Domain                                             | 9        |
| 3.1.30 Advanced Encryption Standard Accelerator (AES)                  | 9        |
| 3.1.31 General Purpose Input/Output (GPIO)                             | 9        |
| 3.1.32 Liquid Crystal Display Driver (LCD)                             | 10       |
| 3.2 Configuration Summary                                              | 11       |
| 3.2.1 EFM32LG230                                                       | 11       |
| 3.2.2 EFM32LG232                                                       | 13       |
| 3.2.3 EFM32LG280                                                       | 15       |
| 3.2.4 EFM32LG290                                                       | 17       |
| 3.2.5 EFM32LG295                                                       | 19       |
| 3.2.6 EFM32LG330                                                       | 21       |
| 3.2.7 EFM32LG332                                                       | 23       |

| Module | Configuration      | Pin Connections                                                        |
|--------|--------------------|------------------------------------------------------------------------|
| ACMP1  | Full configuration | ACMP1_CH[7:0], ACMP1_O                                                 |
| VCMP   | Full configuration | NA                                                                     |
| ADC0   | Full configuration | ADC0_CH[7:0]                                                           |
| DAC0   | Full configuration | DAC0_OUT[1:0], DAC0_OUTxALT                                            |
| OPAMP  | Full configuration | Outputs: OPAMP_OUTx, OPAMP_OUTxALT, Inputs: OPAMP_Px, OPAMP_Nx         |
| AES    | Full configuration | NA                                                                     |
| GPIO   | 83 pins            | Available pins are shown in <a href="#">5.9.3 GPIO Pinout Overview</a> |

#### 4.9.4 HFRCO

Table 4.11. HFRCO

| Parameter                                                                                            | Symbol                | Test Condition               | Min               | Typ              | Max               | Unit          |
|------------------------------------------------------------------------------------------------------|-----------------------|------------------------------|-------------------|------------------|-------------------|---------------|
| Oscillation frequency, all packages except CSP, $V_{DD}=3.0\text{ V}$ , $T_{AMB}=25^{\circ}\text{C}$ | $f_{HFRCO}$           | $f_{HFRCO} = 28\text{ MHz}$  | 27.5              | 28.0             | 28.5              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 21\text{ MHz}$  | 20.6              | 21.0             | 21.4              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 14\text{ MHz}$  | 13.7              | 14.0             | 14.3              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 11\text{ MHz}$  | 10.8              | 11.0             | 11.2              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 6.6\text{ MHz}$ | 6.48 <sup>1</sup> | 6.6 <sup>1</sup> | 6.72 <sup>1</sup> | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 1.2\text{ MHz}$ | 1.15 <sup>2</sup> | 1.2 <sup>2</sup> | 1.25 <sup>2</sup> | MHz           |
| Oscillation frequency, all packages except CSP, over full supply and temperature range               | $f_{HFRCO}$           | $f_{HFRCO} = 28\text{ MHz}$  | 24.9              | 28.0             | 31.1              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 21\text{ MHz}$  | 18.8              | 21.0             | 23.3              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 14\text{ MHz}$  | 12.4              | 14.0             | 15.6              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 11\text{ MHz}$  | 9.9               | 11.0             | 12.2              | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 6.6\text{ MHz}$ | 5.9 <sup>1</sup>  | 6.6 <sup>1</sup> | 7.4 <sup>1</sup>  | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 1.2\text{ MHz}$ | 0.8 <sup>2</sup>  | 1.2 <sup>2</sup> | 1.6 <sup>2</sup>  | MHz           |
| Oscillation frequency, CSP devices, $V_{DD}=3.0\text{ V}$ , $T_{AMB}=25^{\circ}\text{C}$             | $f_{HFRCO}$           | $f_{HFRCO} = 28\text{ MHz}$  | —                 | 28.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 21\text{ MHz}$  | —                 | 21.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 14\text{ MHz}$  | —                 | 14.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 11\text{ MHz}$  | —                 | 11.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 6.6\text{ MHz}$ | —                 | 6.6 <sup>1</sup> | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 1.2\text{ MHz}$ | —                 | 1.2 <sup>2</sup> | —                 | MHz           |
| Oscillation frequency, CSP devices, over full supply and temperature range                           | $f_{HFRCO}$           | $f_{HFRCO} = 28\text{ MHz}$  | —                 | 28.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 21\text{ MHz}$  | —                 | 21.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 14\text{ MHz}$  | —                 | 14.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 11\text{ MHz}$  | —                 | 11.0             | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 6.6\text{ MHz}$ | —                 | 6.6 <sup>1</sup> | —                 | MHz           |
|                                                                                                      |                       | $f_{HFRCO} = 1.2\text{ MHz}$ | —                 | 1.2 <sup>2</sup> | —                 | MHz           |
| Settling time after start-up                                                                         | $t_{HFRCO\_settling}$ | $f_{HFRCO} = 14\text{ MHz}$  | —                 | 0.6              | —                 | Cycles        |
| Current consumption                                                                                  | $I_{HFRCO}$           | $f_{HFRCO} = 28\text{ MHz}$  | —                 | 165              | 215               | $\mu\text{A}$ |
|                                                                                                      |                       | $f_{HFRCO} = 21\text{ MHz}$  | —                 | 134              | 175               | $\mu\text{A}$ |
|                                                                                                      |                       | $f_{HFRCO} = 14\text{ MHz}$  | —                 | 106              | 140               | $\mu\text{A}$ |
|                                                                                                      |                       | $f_{HFRCO} = 11\text{ MHz}$  | —                 | 94               | 125               | $\mu\text{A}$ |
|                                                                                                      |                       | $f_{HFRCO} = 6.6\text{ MHz}$ | —                 | 77               | 105               | $\mu\text{A}$ |
|                                                                                                      |                       | $f_{HFRCO} = 1.2\text{ MHz}$ | —                 | 25               | 40                | $\mu\text{A}$ |

### 4.13 Analog Comparator (ACMP)

Table 4.17. ACMP

| Parameter                                         | Symbol             | Test Condition                                                      | Min | Typ               | Max              | Unit |
|---------------------------------------------------|--------------------|---------------------------------------------------------------------|-----|-------------------|------------------|------|
| Input voltage range                               | $V_{ACMPIN}$       |                                                                     | 0   | —                 | $V_{DD}$         | V    |
| Input bias current                                | $I_{ACMPBIASIN}$   | $V_{SS} < V_{IN} < V_{DD}$                                          | -40 | —                 | 40               | nA   |
| Input offset current                              | $I_{ACMPOFFSETIN}$ | $V_{SS} < V_{IN} < V_{DD}$                                          | -40 | —                 | 40               | nA   |
| ACMP Common Mode voltage range                    | $V_{ACMPCM}$       |                                                                     | 0   | —                 | $V_{DD}$         | V    |
| Active current                                    | $I_{ACMP}$         | BIASPROG=0b0000, FULL-BIAS=0 and HALFBIAS=1 in ACMPn_CTRL register  | —   | 0.1 <sup>1</sup>  | 0.4 <sup>1</sup> | μA   |
|                                                   |                    | BIASPROG=0b1111, FULL-BIAS= 0 and HALFBIAS=0 in ACMPn_CTRL register | —   | 2.87 <sup>1</sup> | 15 <sup>1</sup>  | μA   |
|                                                   |                    | BIASPROG=0b1111, FULL-BIAS= 1 and HALFBIAS=0 in ACMPn_CTRL register | —   | 195 <sup>1</sup>  | 520 <sup>1</sup> | μA   |
|                                                   |                    | BIASPROG=0b0100, FULL-BIAS=0, HALFBIAS=1 in ACMPn_CTRL register     | —   | 0.8 <sup>1</sup>  | 2.2 <sup>1</sup> | μA   |
|                                                   |                    | BIASPROG=0b1111, FULL-BIAS=0, HALFBIAS=1 in-ACMPn_CTRL register     | —   | 2.7 <sup>1</sup>  | 8.1 <sup>1</sup> | μA   |
| Current consumption of internal voltage reference | $I_{ACMPREF}$      | Internal voltage reference off. Using external voltage reference    | —   | 0                 | —                | μA   |
|                                                   |                    | Internal voltage reference                                          | —   | 5                 | —                | μA   |

## 4.14 Voltage Comparator (VCMP)

**Table 4.18. VCMP**

| Parameter                                                                     | Symbol                                | Test Condition                                                   | Min   | Typ              | Max              | Unit |
|-------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------------------------|-------|------------------|------------------|------|
| Input voltage range                                                           | V <sub>VCMPIN</sub>                   |                                                                  | —     | V <sub>DD</sub>  | —                | V    |
| VCMP Common Mode voltage range                                                | V <sub>VCMP<sub>CM</sub></sub>        |                                                                  | —     | V <sub>DD</sub>  | —                | V    |
| Active current                                                                | I <sub>VCMP</sub>                     | BIASPROG=0b0000 and HALF-BIAS=1 in VCMPn_CTRL register           | —     | 0.3 <sup>1</sup> | 0.6 <sup>1</sup> | μA   |
|                                                                               |                                       | BIASPROG=0b1111 and HALF-BIAS=0 in VCMPn_CTRL register. LPREF=0. | —     | 22 <sup>1</sup>  | 35 <sup>1</sup>  | μA   |
| Startup time reference generator                                              | t <sub>VCMPREF</sub>                  | NORMAL                                                           | —     | 10               | —                | μs   |
| Offset voltage                                                                | V <sub>VCMP<sub>OFFSET</sub></sub>    | Single ended                                                     | —     | 10               | —                | mV   |
|                                                                               |                                       | Differential                                                     | —     | 10               | —                | mV   |
| Negative hysteresis                                                           | V <sub>VCMPHYST<sub>N</sub></sub>     | BIASPROG=0b0000, HALF-BIAS=1, LPREF=1                            | -46.6 | -15.6            | 11.4             | mV   |
| Positive hysteresis                                                           | V <sub>VCMPHYST<sub>P</sub></sub>     | BIASPROG=0b0000, HALF-BIAS=1, LPREF=1                            | -7.5  | 23.4             | 46.6             | mV   |
| Hysteresis delta                                                              | V <sub>VCMPHYST<sub>DELTA</sub></sub> | BIASPROG=0b0000, HALF-BIAS=1, LPREF=1                            | 4.2   | 35.2             | 70.0             | mV   |
| Startup time                                                                  | t <sub>VCMPSTART</sub>                |                                                                  | —     | —                | 10               | μs   |
| Negative response time                                                        | t <sub>RESPONSE<sub>N</sub></sub>     | BIASPROG=0b0000, HALF-BIAS=1, LPREF=1, HYS-TSEL=0                | —     | 372.3            | —                | μs   |
| Positive response time                                                        | t <sub>RESPONSE<sub>P</sub></sub>     | BIASPROG=0b0000, HALF-BIAS=1, LPREF=1, HYS-TSEL=0                | —     | 865.7            | —                | μs   |
| <b>Note:</b><br>1. Includes required contribution from the voltage reference. |                                       |                                                                  |       |                  |                  |      |

The V<sub>DD</sub> trigger level can be configured by setting the TRIGLEVEL field of the VCMP\_CTRL register in accordance with the following equation:

$$V_{DD} \text{ Trigger Level} = 1.667V + 0.034 \times \text{TRIGLEVEL}$$

| Alternate                           | LOCATION |      |      |      |     |   |   | Description                                                                                                                                       |
|-------------------------------------|----------|------|------|------|-----|---|---|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Functionality                       | 0        | 1    | 2    | 3    | 4   | 5 | 6 |                                                                                                                                                   |
| ADC0_CH7                            | PD7      |      |      |      |     |   |   | Analog to digital converter ADC0, input channel number 7.                                                                                         |
| BOOT_RX                             | PE11     |      |      |      |     |   |   | Bootloader RX.                                                                                                                                    |
| BOOT_TX                             | PE10     |      |      |      |     |   |   | Bootloader TX.                                                                                                                                    |
| BU_VIN                              | PD8      |      |      |      |     |   |   | Battery input for Backup Power Domain                                                                                                             |
| CMU_CLK0                            | PA2      | PC12 | PD7  |      |     |   |   | Clock Management Unit, clock output number 0.                                                                                                     |
| CMU_CLK1                            | PA1      | PD8  | PE12 |      |     |   |   | Clock Management Unit, clock output number 1.                                                                                                     |
| OPAMP_N0                            | PC5      |      |      |      |     |   |   | Operational Amplifier 0 external negative input.                                                                                                  |
| OPAMP_N1                            | PD7      |      |      |      |     |   |   | Operational Amplifier 1 external negative input.                                                                                                  |
| OPAMP_N2                            | PD3      |      |      |      |     |   |   | Operational Amplifier 2 external negative input.                                                                                                  |
| DAC0_OUT0 /<br>OPAMP_OUT0           | PB11     |      |      |      |     |   |   | Digital to Analog Converter DAC0_OUT0 /OPAMP output channel number 0.                                                                             |
| DAC0_OUT0ALT /<br>OPAMP_OUT0A<br>LT | PC0      | PC1  | PC2  | PC3  | PD0 |   |   | Digital to Analog Converter DAC0_OUT0ALT /<br>OPAMP alternative output for channel 0.                                                             |
| DAC0_OUT1 /<br>OPAMP_OUT1           | PB12     |      |      |      |     |   |   | Digital to Analog Converter DAC0_OUT1 / OPAMP output channel number 1.                                                                            |
| DAC0_OUT1ALT /<br>OPAMP_OUT1A<br>LT | PC12     | PC13 | PC14 | PC15 | PD1 |   |   | Digital to Analog Converter DAC0_OUT1ALT /<br>OPAMP alternative output for channel 1.                                                             |
| OPAMP_OUT2                          | PD5      | PD0  |      |      |     |   |   | Operational Amplifier 2 output.                                                                                                                   |
| OPAMP_P0                            | PC4      |      |      |      |     |   |   | Operational Amplifier 0 external positive input.                                                                                                  |
| OPAMP_P1                            | PD6      |      |      |      |     |   |   | Operational Amplifier 1 external positive input.                                                                                                  |
| OPAMP_P2                            | PD4      |      |      |      |     |   |   | Operational Amplifier 2 external positive input.                                                                                                  |
| DBG_SWCLK                           | PF0      | PF0  | PF0  | PF0  |     |   |   | Debug-interface Serial Wire clock input.<br><br>Note that this function is enabled to pin out of reset, and has a built-in pull down.             |
| DBG_SWDIO                           | PF1      | PF1  | PF1  | PF1  |     |   |   | Debug-interface Serial Wire data input / output.<br><br>Note that this function is enabled to pin out of reset, and has a built-in pull up.       |
| DBG_SWO                             | PF2      | PC15 | PD1  | PD2  |     |   |   | Debug-interface Serial Wire viewer Output.<br><br>Note that this function is not enabled after reset, and must be enabled by software to be used. |
| ETM_TCLK                            | PD7      |      | PC6  | PA6  |     |   |   | Embedded Trace Module ETM clock .                                                                                                                 |
| ETM_TD0                             | PD6      |      | PC7  | PA2  |     |   |   | Embedded Trace Module ETM data 0.                                                                                                                 |
| ETM_TD1                             | PD3      |      | PD3  | PA3  |     |   |   | Embedded Trace Module ETM data 1.                                                                                                                 |
| ETM_TD2                             | PD4      |      | PD4  | PA4  |     |   |   | Embedded Trace Module ETM data 2.                                                                                                                 |
| ETM_TD3                             | PD5      | PF3  | PD5  | PA5  |     |   |   | Embedded Trace Module ETM data 3.                                                                                                                 |
| GPIO_EM4WU0                         | PA0      |      |      |      |     |   |   | Pin can be used to wake the system up from EM4                                                                                                    |
| GPIO_EM4WU1                         | PA6      |      |      |      |     |   |   | Pin can be used to wake the system up from EM4                                                                                                    |

| Alternate     | LOCATION |     |      |      |      |      |   |                                                                                                                                                      |
|---------------|----------|-----|------|------|------|------|---|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1   | 2    | 3    | 4    | 5    | 6 | Description                                                                                                                                          |
| TIM3_CC2      | PA15     |     |      |      |      |      |   | Timer 3 Capture Compare input / output channel 2.                                                                                                    |
| US0_CLK       | PE12     |     | PC9  | PC15 | PB13 | PB13 |   | USART0 clock input / output.                                                                                                                         |
| US0_CS        | PE13     |     | PC8  | PC14 | PB14 | PB14 |   | USART0 chip select input / output.                                                                                                                   |
| US0_RX        | PE11     |     | PC10 | PE12 | PB8  | PC1  |   | USART0 Asynchronous Receive.<br>USART0 Synchronous mode Master Input / Slave Output (MISO).                                                          |
| US0_TX        | PE10     |     | PC11 | PE13 | PB7  | PC0  |   | USART0 Asynchronous Transmit.Also used as receive input in half duplex communication.<br>USART0 Synchronous mode Master Output / Slave Input (MOSI). |
| US1_CLK       | PB7      | PD2 | PF0  |      |      |      |   | USART1 clock input / output.                                                                                                                         |
| US1_CS        | PB8      | PD3 | PF1  |      |      |      |   | USART1 chip select input / output.                                                                                                                   |
| US1_RX        | PC1      | PD1 | PD6  |      |      |      |   | USART1 Asynchronous Receive.<br>USART1 Synchronous mode Master Input / Slave Output (MISO).                                                          |
| US1_TX        | PC0      | PD0 | PD7  |      |      |      |   | USART1 Asynchronous Transmit.Also used as receive input in half duplex communication.<br>USART1 Synchronous mode Master Output / Slave Input (MOSI). |
| US2_CLK       | PC4      |     |      |      |      |      |   | USART2 clock input / output.                                                                                                                         |
| US2_CS        | PC5      |     |      |      |      |      |   | USART2 chip select input / output.                                                                                                                   |
| US2_RX        | PC3      |     |      |      |      |      |   | USART2 Asynchronous Receive.<br>USART2 Synchronous mode Master Input / Slave Output (MISO).                                                          |
| US2_TX        | PC2      |     |      |      |      |      |   | USART2 Asynchronous Transmit.Also used as receive input in half duplex communication.<br>USART2 Synchronous mode Master Output / Slave Input (MOSI). |

| QFP64 Pin# and Name |          | Pin Alternate Functionality / Description |                             |                                   |                                            |
|---------------------|----------|-------------------------------------------|-----------------------------|-----------------------------------|--------------------------------------------|
| Pin #               | Pin Name | Analog                                    | Timers                      | Communication                     | Other                                      |
| 49                  | PF0      |                                           | TIM0_CC0 #5 LE-TIM0_OUT0 #2 | US1_CLK #2 LEU0_TX #3 I2C0_SDA #5 | DBG_SWCLK #0/1/2/3                         |
| 50                  | PF1      |                                           | TIM0_CC1 #5 LE-TIM0_OUT1 #2 | US1_CS #2 LEU0_RX #3 I2C0_SCL #5  | DBG_SWDIO #0/1/2/3<br>GPIO_EM4WU3          |
| 51                  | PF2      |                                           | TIM0_CC2 #5                 | LEU0_TX #4                        | ACMP1_O #0<br>DBG_SWO #0<br>GPIO_EM4WU4    |
| 52                  | PF3      |                                           | TIM0_CDTI0 #2/5             |                                   | PRS_CH0 #1 ETM_TD3 #1                      |
| 53                  | PF4      |                                           | TIM0_CDTI1 #2/5             |                                   | PRS_CH1 #1                                 |
| 54                  | PF5      |                                           | TIM0_CDTI2 #2/5             |                                   | PRS_CH2 #1                                 |
| 55                  | IOVDD_5  | Digital IO power supply 5.                |                             |                                   |                                            |
| 56                  | VSS      | Ground.                                   |                             |                                   |                                            |
| 57                  | PE8      |                                           | PCNT2_S0IN #1               |                                   | PRS_CH3 #1                                 |
| 58                  | PE9      |                                           | PCNT2_S1IN #1               |                                   |                                            |
| 59                  | PE10     |                                           | TIM1_CC0 #1                 | US0_TX #0                         | BOOT_TX                                    |
| 60                  | PE11     |                                           | TIM1_CC1 #1                 | US0_RX #0                         | LES_ALTEX5 #0<br>BOOT_RX                   |
| 61                  | PE12     |                                           | TIM1_CC2 #1                 | US0_RX #3 US0_CLK #0 I2C0_SDA #6  | CMU_CLK1 #2<br>LES_ALTEX6 #0               |
| 62                  | PE13     |                                           |                             | US0_TX #3 US0_CS #0 I2C0_SCL #6   | LES_ALTEX7 #0<br>ACMP0_O #0<br>GPIO_EM4WU5 |
| 63                  | PE14     |                                           | TIM3_CC0 #0                 | LEU0_TX #2                        |                                            |
| 64                  | PE15     |                                           | TIM3_CC1 #0                 | LEU0_RX #2                        |                                            |

## 5.2.2 Alternate Functionality Pinout

A wide selection of alternate functionality is available for multiplexing to various pins. This is shown in the following table. The table shows the name of the alternate functionality in the first column, followed by columns showing the possible LOCATION bitfield settings.

**Note:** Some functionality, such as analog interfaces, do not have alternate settings or a LOCATION bitfield. In these cases, the pinout is shown in the column corresponding to LOCATION 0.

**Table 5.5. Alternate functionality overview**

| Alternate     | LOCATION |   |     |   |   |   |   | Description                                               |
|---------------|----------|---|-----|---|---|---|---|-----------------------------------------------------------|
| Functionality | 0        | 1 | 2   | 3 | 4 | 5 | 6 |                                                           |
| ACMP0_CH0     | PC0      |   |     |   |   |   |   | Analog comparator ACMP0, channel 0.                       |
| ACMP0_CH1     | PC1      |   |     |   |   |   |   | Analog comparator ACMP0, channel 1.                       |
| ACMP0_CH2     | PC2      |   |     |   |   |   |   | Analog comparator ACMP0, channel 2.                       |
| ACMP0_CH3     | PC3      |   |     |   |   |   |   | Analog comparator ACMP0, channel 3.                       |
| ACMP0_CH4     | PC4      |   |     |   |   |   |   | Analog comparator ACMP0, channel 4.                       |
| ACMP0_CH5     | PC5      |   |     |   |   |   |   | Analog comparator ACMP0, channel 5.                       |
| ACMP0_CH6     | PC6      |   |     |   |   |   |   | Analog comparator ACMP0, channel 6.                       |
| ACMP0_CH7     | PC7      |   |     |   |   |   |   | Analog comparator ACMP0, channel 7.                       |
| ACMP0_O       | PE13     |   | PD6 |   |   |   |   | Analog comparator ACMP0, digital output.                  |
| ACMP1_CH0     | PC8      |   |     |   |   |   |   | Analog comparator ACMP1, channel 0.                       |
| ACMP1_CH1     | PC9      |   |     |   |   |   |   | Analog comparator ACMP1, channel 1.                       |
| ACMP1_CH2     | PC10     |   |     |   |   |   |   | Analog comparator ACMP1, channel 2.                       |
| ACMP1_CH3     | PC11     |   |     |   |   |   |   | Analog comparator ACMP1, channel 3.                       |
| ACMP1_CH4     | PC12     |   |     |   |   |   |   | Analog comparator ACMP1, channel 4.                       |
| ACMP1_CH5     | PC13     |   |     |   |   |   |   | Analog comparator ACMP1, channel 5.                       |
| ACMP1_CH6     | PC14     |   |     |   |   |   |   | Analog comparator ACMP1, channel 6.                       |
| ACMP1_CH7     | PC15     |   |     |   |   |   |   | Analog comparator ACMP1, channel 7.                       |
| ACMP1_O       | PF2      |   | PD7 |   |   |   |   | Analog comparator ACMP1, digital output.                  |
| ADC0_CH0      | PD0      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 0. |
| ADC0_CH1      | PD1      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 1. |
| ADC0_CH2      | PD2      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 2. |
| ADC0_CH3      | PD3      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 3. |
| ADC0_CH4      | PD4      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 4. |
| ADC0_CH5      | PD5      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 5. |
| ADC0_CH6      | PD6      |   |     |   |   |   |   | Analog to digital converter ADC0, input channel number 6. |

| Alternate                           | LOCATION |      |      |     |     |   |   |                                                                                                                                                   |
|-------------------------------------|----------|------|------|-----|-----|---|---|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Functionality                       | 0        | 1    | 2    | 3   | 4   | 5 | 6 | Description                                                                                                                                       |
| BU_STAT                             | PE3      |      |      |     |     |   |   | Backup Power Domain status, whether or not the system is in backup mode                                                                           |
| BU_VIN                              | PD8      |      |      |     |     |   |   | Battery input for Backup Power Domain                                                                                                             |
| BU_VOUT                             | PE2      |      |      |     |     |   |   | Power output for Backup Power Domain                                                                                                              |
| CMU_CLK0                            | PA2      |      | PD7  |     |     |   |   | Clock Management Unit, clock output number 0.                                                                                                     |
| CMU_CLK1                            | PA1      | PD8  | PE12 |     |     |   |   | Clock Management Unit, clock output number 1.                                                                                                     |
| OPAMP_N0                            | PC5      |      |      |     |     |   |   | Operational Amplifier 0 external negative input.                                                                                                  |
| OPAMP_N1                            | PD7      |      |      |     |     |   |   | Operational Amplifier 1 external negative input.                                                                                                  |
| OPAMP_N2                            | PD3      |      |      |     |     |   |   | Operational Amplifier 2 external negative input.                                                                                                  |
| DAC0_OUT0 /<br>OPAMP_OUT0           | PB11     |      |      |     |     |   |   | Digital to Analog Converter DAC0_OUT0 /OPAMP output channel number 0.                                                                             |
| DAC0_OUT0ALT /<br>OPAMP_OUT0A<br>LT | PC0      | PC1  | PC2  | PC3 | PD0 |   |   | Digital to Analog Converter DAC0_OUT0ALT /<br>OPAMP alternative output for channel 0.                                                             |
| DAC0_OUT1 /<br>OPAMP_OUT1           | PB12     |      |      |     |     |   |   | Digital to Analog Converter DAC0_OUT1 /OPAMP output channel number 1.                                                                             |
| DAC0_OUT1ALT /<br>OPAMP_OUT1A<br>LT |          |      |      |     | PD1 |   |   | Digital to Analog Converter DAC0_OUT1ALT /<br>OPAMP alternative output for channel 1.                                                             |
| OPAMP_OUT2                          | PD5      | PD0  |      |     |     |   |   | Operational Amplifier 2 output.                                                                                                                   |
| OPAMP_P0                            | PC4      |      |      |     |     |   |   | Operational Amplifier 0 external positive input.                                                                                                  |
| OPAMP_P1                            | PD6      |      |      |     |     |   |   | Operational Amplifier 1 external positive input.                                                                                                  |
| OPAMP_P2                            | PD4      |      |      |     |     |   |   | Operational Amplifier 2 external positive input.                                                                                                  |
| DBG_SWCLK                           | PF0      | PF0  | PF0  | PF0 |     |   |   | Debug-interface Serial Wire clock input.<br><br>Note that this function is enabled to pin out of reset, and has a built-in pull down.             |
| DBG_SWDIO                           | PF1      | PF1  | PF1  | PF1 |     |   |   | Debug-interface Serial Wire data input / output.<br><br>Note that this function is enabled to pin out of reset, and has a built-in pull up.       |
| DBG_SWO                             | PF2      |      | PD1  | PD2 |     |   |   | Debug-interface Serial Wire viewer Output.<br><br>Note that this function is not enabled after reset, and must be enabled by software to be used. |
| EBI_A00                             | PA12     | PA12 | PA12 |     |     |   |   | External Bus Interface (EBI) address output pin 00.                                                                                               |
| EBI_A01                             | PA13     | PA13 | PA13 |     |     |   |   | External Bus Interface (EBI) address output pin 01.                                                                                               |
| EBI_A02                             | PA14     | PA14 | PA14 |     |     |   |   | External Bus Interface (EBI) address output pin 02.                                                                                               |
| EBI_A03                             | PB9      | PB9  | PB9  |     |     |   |   | External Bus Interface (EBI) address output pin 03.                                                                                               |
| EBI_A04                             | PB10     | PB10 | PB10 |     |     |   |   | External Bus Interface (EBI) address output pin 04.                                                                                               |
| EBI_A05                             | PC6      | PC6  | PC6  |     |     |   |   | External Bus Interface (EBI) address output pin 05.                                                                                               |
| EBI_A06                             | PC7      | PC7  | PC7  |     |     |   |   | External Bus Interface (EBI) address output pin 06.                                                                                               |
| EBI_A07                             | PE0      | PE0  | PE0  |     |     |   |   | External Bus Interface (EBI) address output pin 07.                                                                                               |

| Alternate                           | LOCATION |      |      |      |     |     |      |                                                                                                                                                   |
|-------------------------------------|----------|------|------|------|-----|-----|------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Functionality                       | 0        | 1    | 2    | 3    | 4   | 5   | 6    | Description                                                                                                                                       |
| OPAMP_N2                            | PD3      |      |      |      |     |     |      | Operational Amplifier 2 external negative input.                                                                                                  |
| DAC0_OUT0 /<br>OPAMP_OUT0           | PB11     |      |      |      |     |     |      | Digital to Analog Converter DAC0_OUT0 /OPAMP output channel number 0.                                                                             |
| DAC0_OUT0ALT /<br>OPAMP_OUT0A<br>LT |          |      |      |      | PD0 |     |      | Digital to Analog Converter DAC0_OUT0ALT /<br>OPAMP alternative output for channel 0.                                                             |
| DAC0_OUT1ALT /<br>OPAMP_OUT1A<br>LT | PC12     | PC13 | PC14 | PC15 | PD1 |     |      | Digital to Analog Converter DAC0_OUT1ALT /<br>OPAMP alternative output for channel 1.                                                             |
| OPAMP_OUT2                          | PD5      | PD0  |      |      |     |     |      | Operational Amplifier 2 output.                                                                                                                   |
| OPAMP_P0                            | PC4      |      |      |      |     |     |      | Operational Amplifier 0 external positive input.                                                                                                  |
| OPAMP_P1                            | PD6      |      |      |      |     |     |      | Operational Amplifier 1 external positive input.                                                                                                  |
| OPAMP_P2                            | PD4      |      |      |      |     |     |      | Operational Amplifier 2 external positive input.                                                                                                  |
| DBG_SWCLK                           | PF0      | PF0  | PF0  | PF0  |     |     |      | Debug-interface Serial Wire clock input.<br><br>Note that this function is enabled to pin out of reset, and has a built-in pull down.             |
| DBG_SWDIO                           | PF1      | PF1  | PF1  | PF1  |     |     |      | Debug-interface Serial Wire data input / output.<br><br>Note that this function is enabled to pin out of reset, and has a built-in pull up.       |
| DBG_SWO                             | PF2      | PC15 | PD1  | PD2  |     |     |      | Debug-interface Serial Wire viewer Output.<br><br>Note that this function is not enabled after reset, and must be enabled by software to be used. |
| ETM_TCLK                            | PD7      |      | PC6  |      |     |     |      | Embedded Trace Module ETM clock .                                                                                                                 |
| ETM_TD0                             | PD6      |      | PC7  | PA2  |     |     |      | Embedded Trace Module ETM data 0.                                                                                                                 |
| ETM_TD1                             | PD3      |      | PD3  | PA3  |     |     |      | Embedded Trace Module ETM data 1.                                                                                                                 |
| ETM_TD2                             | PD4      |      | PD4  | PA4  |     |     |      | Embedded Trace Module ETM data 2.                                                                                                                 |
| ETM_TD3                             | PD5      | PF3  | PD5  | PA5  |     |     |      | Embedded Trace Module ETM data 3.                                                                                                                 |
| GPIO_EM4WU0                         | PA0      |      |      |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                    |
| GPIO_EM4WU3                         | PF1      |      |      |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                    |
| GPIO_EM4WU4                         | PF2      |      |      |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                    |
| GPIO_EM4WU5                         | PE13     |      |      |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                    |
| HFX TAL_N                           | PB14     |      |      |      |     |     |      | High Frequency Crystal negative pin. Also used as external optional clock input pin.                                                              |
| HFX TAL_P                           | PB13     |      |      |      |     |     |      | High Frequency Crystal positive pin.                                                                                                              |
| I2C0_SCL                            | PA1      | PD7  | PC7  |      |     | PF1 | PE13 | I2C0 Serial Clock Line input / output.                                                                                                            |
| I2C0_SDA                            | PA0      | PD6  | PC6  |      |     | PF0 | PE12 | I2C0 Serial Data input / output.                                                                                                                  |
| I2C1_SCL                            | PC5      |      |      |      |     |     |      | I2C1 Serial Clock Line input / output.                                                                                                            |
| I2C1_SDA                            | PC4      | PB11 |      |      |     |     |      | I2C1 Serial Data input / output.                                                                                                                  |

### 5.14.2 Alternate Functionality Pinout

A wide selection of alternate functionality is available for multiplexing to various pins. This is shown in the following table. The table shows the name of the alternate functionality in the first column, followed by columns showing the possible LOCATION bitfield settings.

**Note:** Some functionality, such as analog interfaces, do not have alternate settings or a LOCATION bitfield. In these cases, the pinout is shown in the column corresponding to LOCATION 0.

**Table 5.41. Alternate functionality overview**

| Alternate     | LOCATION |     |     |   |   |   |   |                                                           |
|---------------|----------|-----|-----|---|---|---|---|-----------------------------------------------------------|
| Functionality | 0        | 1   | 2   | 3 | 4 | 5 | 6 | Description                                               |
| ACMP0_CH0     | PC0      |     |     |   |   |   |   | Analog comparator ACMP0, channel 0.                       |
| ACMP0_CH1     | PC1      |     |     |   |   |   |   | Analog comparator ACMP0, channel 1.                       |
| ACMP0_CH2     | PC2      |     |     |   |   |   |   | Analog comparator ACMP0, channel 2.                       |
| ACMP0_CH3     | PC3      |     |     |   |   |   |   | Analog comparator ACMP0, channel 3.                       |
| ACMP0_CH4     | PC4      |     |     |   |   |   |   | Analog comparator ACMP0, channel 4.                       |
| ACMP0_CH5     | PC5      |     |     |   |   |   |   | Analog comparator ACMP0, channel 5.                       |
| ACMP0_CH6     | PC6      |     |     |   |   |   |   | Analog comparator ACMP0, channel 6.                       |
| ACMP0_CH7     | PC7      |     |     |   |   |   |   | Analog comparator ACMP0, channel 7.                       |
| ACMP0_O       | PE13     | PE2 | PD6 |   |   |   |   | Analog comparator ACMP0, digital output.                  |
| ACMP1_CH0     | PC8      |     |     |   |   |   |   | Analog comparator ACMP1, channel 0.                       |
| ACMP1_CH1     | PC9      |     |     |   |   |   |   | Analog comparator ACMP1, channel 1.                       |
| ACMP1_CH2     | PC10     |     |     |   |   |   |   | Analog comparator ACMP1, channel 2.                       |
| ACMP1_CH3     | PC11     |     |     |   |   |   |   | Analog comparator ACMP1, channel 3.                       |
| ACMP1_CH4     | PC12     |     |     |   |   |   |   | Analog comparator ACMP1, channel 4.                       |
| ACMP1_CH5     | PC13     |     |     |   |   |   |   | Analog comparator ACMP1, channel 5.                       |
| ACMP1_CH6     | PC14     |     |     |   |   |   |   | Analog comparator ACMP1, channel 6.                       |
| ACMP1_CH7     | PC15     |     |     |   |   |   |   | Analog comparator ACMP1, channel 7.                       |
| ACMP1_O       | PF2      | PE3 | PD7 |   |   |   |   | Analog comparator ACMP1, digital output.                  |
| ADC0_CH0      | PD0      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 0. |
| ADC0_CH1      | PD1      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 1. |
| ADC0_CH2      | PD2      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 2. |
| ADC0_CH3      | PD3      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 3. |
| ADC0_CH4      | PD4      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 4. |
| ADC0_CH5      | PD5      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 5. |
| ADC0_CH6      | PD6      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 6. |

| BGA112 Pin# and Name |          | Pin Alternate Functionality / Description |                 |                                 |                                         |                                         |
|----------------------|----------|-------------------------------------------|-----------------|---------------------------------|-----------------------------------------|-----------------------------------------|
| Pin #                | Pin Name | Analog                                    | EBI             | Timers                          | Communication                           | Other                                   |
| C5                   | PD12     | LCD_SEG31                                 | EBI_CS3 #0/1/2  |                                 |                                         |                                         |
| C6                   | PF9      | LCD_SEG27                                 | EBI_REn #1      |                                 |                                         | ETM_TD0 #1                              |
| C7                   | VSS      | Ground.                                   |                 |                                 |                                         |                                         |
| C8                   | PF2      | LCD_SEG0                                  | EBI_ARDY #0/1/2 | TIM0_CC2 #5                     | LEU0_TX #4                              | ACMP1_O #0<br>DBG_SWO #0<br>GPIO_EM4WU4 |
| C9                   | PE6      | LCD_COM2                                  | EBI_A13 #0/1/2  |                                 | US0_RX #1                               |                                         |
| C10                  | PC10     | ACMP1_CH2                                 | EBI_A10 #1/2    | TIM2_CC2 #2                     | US0_RX #2                               | LES_CH10 #0                             |
| C11                  | PC11     | ACMP1_CH3                                 | EBI_ALE #1/2    |                                 | US0_TX #2                               | LES_CH11 #0                             |
| D1                   | PA3      | LCD_SEG16                                 | EBI_AD12 #0/1/2 | TIM0_CDTI0 #0                   | U0_TX #2                                | LES_ALTEX2 #0<br>ETM_TD1 #3             |
| D2                   | PA2      | LCD_SEG15                                 | EBI_AD11 #0/1/2 | TIM0_CC2 #0/1                   |                                         | CMU_CLK0 #0<br>ETM_TD0 #3               |
| D3                   | PB15     |                                           |                 |                                 |                                         | ETM_TD2 #1                              |
| D4                   | VSS      | Ground.                                   |                 |                                 |                                         |                                         |
| D5                   | IOVDD_6  | Digital IO power supply 6.                |                 |                                 |                                         |                                         |
| D6                   | PD9      | LCD_SEG28                                 | EBI_CS0 #0/1/2  |                                 |                                         |                                         |
| D7                   | IOVDD_5  | Digital IO power supply 5.                |                 |                                 |                                         |                                         |
| D8                   | PF1      |                                           |                 | TIM0_CC1 #5 LE-<br>TIM0_OUT1 #2 | US1_CS #2<br>LEU0_RX #3<br>I2C0_SCL #5  | DBG_SWDIO<br>#0/1/2/3<br>GPIO_EM4WU3    |
| D9                   | PE7      | LCD_COM3                                  | EBI_A14 #0/1/2  |                                 | US0_TX #1                               |                                         |
| D10                  | PC8      | ACMP1_CH0                                 | EBI_A15 #0/1/2  | TIM2_CC0 #2                     | US0_CS #2                               | LES_CH8 #0                              |
| D11                  | PC9      | ACMP1_CH1                                 | EBI_A09 #1/2    | TIM2_CC1 #2                     | US0_CLK #2                              | LES_CH9 #0<br>GPIO_EM4WU2               |
| E1                   | PA6      | LCD_SEG19                                 | EBI_AD15 #0/1/2 |                                 | LEU1_RX #1                              | ETM_TCLK #3<br>GPIO_EM4WU1              |
| E2                   | PA5      | LCD_SEG18                                 | EBI_AD14 #0/1/2 | TIM0_CDTI2 #0                   | LEU1_TX #1                              | LES_ALTEX4 #0<br>ETM_TD3 #3             |
| E3                   | PA4      | LCD_SEG17                                 | EBI_AD13 #0/1/2 | TIM0_CDTI1 #0                   | U0_RX #2                                | LES_ALTEX3 #0<br>ETM_TD2 #3             |
| E4                   | PB0      | LCD_SEG32                                 | EBI_A16 #0/1/2  | TIM1_CC0 #2                     |                                         |                                         |
| E8                   | PF0      |                                           |                 | TIM0_CC0 #5 LE-<br>TIM0_OUT0 #2 | US1_CLK #2<br>LEU0_TX #3<br>I2C0_SDA #5 | DBG_SWCLK<br>#0/1/2/3                   |
| E9                   | PE0      |                                           | EBI_A07 #0/1/2  | TIM3_CC0 #1<br>PCNT0_S0IN #1    | U0_TX #1<br>I2C1_SDA #2                 |                                         |
| E10                  | PE1      |                                           | EBI_A08 #0/1/2  | TIM3_CC1 #1<br>PCNT0_S1IN #1    | U0_RX #1<br>I2C1_SCL #2                 |                                         |
| E11                  | PE3      | BU_STAT                                   | EBI_A10 #0      |                                 | U1_RX #3                                | ACMP1_O #1                              |
| F1                   | PB1      | LCD_SEG33                                 | EBI_A17 #0/1/2  | TIM1_CC1 #2                     |                                         |                                         |

| Alternate     | LOCATION |      |     |      |     |     |      | Description                                                                                                                                                                                                                                                                                                                                     |
|---------------|----------|------|-----|------|-----|-----|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1    | 2   | 3    | 4   | 5   | 6    |                                                                                                                                                                                                                                                                                                                                                 |
| ETM_TD2       | PD4      | PB15 | PD4 | PA4  |     |     |      | Embedded Trace Module ETM data 2.                                                                                                                                                                                                                                                                                                               |
| ETM_TD3       | PD5      | PF3  | PD5 | PA5  |     |     |      | Embedded Trace Module ETM data 3.                                                                                                                                                                                                                                                                                                               |
| GPIO_EM4WU0   | PA0      |      |     |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                                                                                                                                                                                                                  |
| GPIO_EM4WU1   | PA6      |      |     |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                                                                                                                                                                                                                  |
| GPIO_EM4WU2   | PC9      |      |     |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                                                                                                                                                                                                                  |
| GPIO_EM4WU3   | PF1      |      |     |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                                                                                                                                                                                                                  |
| GPIO_EM4WU4   | PF2      |      |     |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                                                                                                                                                                                                                  |
| GPIO_EM4WU5   | PE13     |      |     |      |     |     |      | Pin can be used to wake the system up from EM4                                                                                                                                                                                                                                                                                                  |
| HFX TAL_N     | PB14     |      |     |      |     |     |      | High Frequency Crystal negative pin. Also used as external optional clock input pin.                                                                                                                                                                                                                                                            |
| HFX TAL_P     | PB13     |      |     |      |     |     |      | High Frequency Crystal positive pin.                                                                                                                                                                                                                                                                                                            |
| I2C0_SCL      | PA1      | PD7  | PC7 | PD15 | PC1 | PF1 | PE13 | I2C0 Serial Clock Line input / output.                                                                                                                                                                                                                                                                                                          |
| I2C0_SDA      | PA0      | PD6  | PC6 | PD14 | PC0 | PF0 | PE12 | I2C0 Serial Data input / output.                                                                                                                                                                                                                                                                                                                |
| I2C1_SCL      | PC5      | PB12 | PE1 |      |     |     |      | I2C1 Serial Clock Line input / output.                                                                                                                                                                                                                                                                                                          |
| I2C1_SDA      | PC4      | PB11 | PE0 |      |     |     |      | I2C1 Serial Data input / output.                                                                                                                                                                                                                                                                                                                |
| LCD_BCAP_N    | PA13     |      |     |      |     |     |      | LCD voltage booster (optional), boost capacitor, negative pin. If using the LCD voltage booster, connect a 22 nF capacitor between LCD_BCAP_N and LCD_BCAP_P.                                                                                                                                                                                   |
| LCD_BCAP_P    | PA12     |      |     |      |     |     |      | LCD voltage booster (optional), boost capacitor, positive pin. If using the LCD voltage booster, connect a 22 nF capacitor between LCD_BCAP_N and LCD_BCAP_P.                                                                                                                                                                                   |
| LCD_BEXT      | PA14     |      |     |      |     |     |      | LCD voltage booster (optional), boost output. If using the LCD voltage booster, connect a 1 uF capacitor between this pin and VSS.<br><br>An external LCD voltage may also be applied to this pin if the booster is not enabled.<br><br>If AVDD is used directly as the LCD supply voltage, this pin may be left unconnected or used as a GPIO. |
| LCD_COM0      | PE4      |      |     |      |     |     |      | LCD driver common line number 0.                                                                                                                                                                                                                                                                                                                |
| LCD_COM1      | PE5      |      |     |      |     |     |      | LCD driver common line number 1.                                                                                                                                                                                                                                                                                                                |
| LCD_COM2      | PE6      |      |     |      |     |     |      | LCD driver common line number 2.                                                                                                                                                                                                                                                                                                                |
| LCD_COM3      | PE7      |      |     |      |     |     |      | LCD driver common line number 3.                                                                                                                                                                                                                                                                                                                |
| LCD_SEG0      | PF2      |      |     |      |     |     |      | LCD segment line 0. Segments 0, 1, 2 and 3 are controlled by SEGEN0.                                                                                                                                                                                                                                                                            |
| LCD_SEG1      | PF3      |      |     |      |     |     |      | LCD segment line 1. Segments 0, 1, 2 and 3 are controlled by SEGEN0.                                                                                                                                                                                                                                                                            |
| LCD_SEG2      | PF4      |      |     |      |     |     |      | LCD segment line 2. Segments 0, 1, 2 and 3 are controlled by SEGEN0.                                                                                                                                                                                                                                                                            |
| LCD_SEG3      | PF5      |      |     |      |     |     |      | LCD segment line 3. Segments 0, 1, 2 and 3 are controlled by SEGEN0.                                                                                                                                                                                                                                                                            |

| Alternate     | LOCATION |   |   |   |   |   |   |                                                                           |
|---------------|----------|---|---|---|---|---|---|---------------------------------------------------------------------------|
| Functionality | 0        | 1 | 2 | 3 | 4 | 5 | 6 | Description                                                               |
| LCD_SEG25     | PF7      |   |   |   |   |   |   | LCD segment line 25. Segments 24, 25, 26 and 27 are controlled by SEGEN6. |
| LCD_SEG26     | PF8      |   |   |   |   |   |   | LCD segment line 26. Segments 24, 25, 26 and 27 are controlled by SEGEN6. |
| LCD_SEG27     | PF9      |   |   |   |   |   |   | LCD segment line 27. Segments 24, 25, 26 and 27 are controlled by SEGEN6. |
| LCD_SEG28     | PD9      |   |   |   |   |   |   | LCD segment line 28. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG29     | PD10     |   |   |   |   |   |   | LCD segment line 29. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG30     | PD11     |   |   |   |   |   |   | LCD segment line 30. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG31     | PD12     |   |   |   |   |   |   | LCD segment line 31. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG32     | PB0      |   |   |   |   |   |   | LCD segment line 32. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG33     | PB1      |   |   |   |   |   |   | LCD segment line 33. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG34     | PB2      |   |   |   |   |   |   | LCD segment line 34. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG35     | PA7      |   |   |   |   |   |   | LCD segment line 35. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG36     | PA8      |   |   |   |   |   |   | LCD segment line 36. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LCD_SEG37     | PA9      |   |   |   |   |   |   | LCD segment line 37. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LCD_SEG38     | PA10     |   |   |   |   |   |   | LCD segment line 38. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LCD_SEG39     | PA11     |   |   |   |   |   |   | LCD segment line 39. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LES_ALTEX0    | PD6      |   |   |   |   |   |   | LESENSE alternate exite output 0.                                         |
| LES_ALTEX1    | PD7      |   |   |   |   |   |   | LESENSE alternate exite output 1.                                         |
| LES_ALTEX2    | PA3      |   |   |   |   |   |   | LESENSE alternate exite output 2.                                         |
| LES_ALTEX3    | PA4      |   |   |   |   |   |   | LESENSE alternate exite output 3.                                         |
| LES_ALTEX4    | PA5      |   |   |   |   |   |   | LESENSE alternate exite output 4.                                         |
| LES_ALTEX5    | PE11     |   |   |   |   |   |   | LESENSE alternate exite output 5.                                         |
| LES_ALTEX6    | PE12     |   |   |   |   |   |   | LESENSE alternate exite output 6.                                         |
| LES_ALTEX7    | PE13     |   |   |   |   |   |   | LESENSE alternate exite output 7.                                         |
| LES_CH0       | PC0      |   |   |   |   |   |   | LESENSE channel 0.                                                        |
| LES_CH1       | PC1      |   |   |   |   |   |   | LESENSE channel 1.                                                        |
| LES_CH2       | PC2      |   |   |   |   |   |   | LESENSE channel 2.                                                        |
| LES_CH3       | PC3      |   |   |   |   |   |   | LESENSE channel 3.                                                        |

| Water Pads and Coordinates |          |        |        | Pad Alternative Functionality / Description            |                    |                                                       |                                         |                                             |
|----------------------------|----------|--------|--------|--------------------------------------------------------|--------------------|-------------------------------------------------------|-----------------------------------------|---------------------------------------------|
| Pad #                      | Pad Name | X (μm) | Y (μm) | Analog                                                 | EBI                | Timers                                                | Communica-<br>tion                      | Other                                       |
| 92                         | PC14     | 2065.0 | 1558.7 | ACMP1_CH6<br>DAC0_OUT1AL<br>T #2/<br>OPAMP_OUT1<br>ALT |                    | TIM0_CDT11<br>#1/3 TIM1_CC1<br>#0<br>PCNT0_S1IN<br>#0 | US0_CS #3<br>U0_TX #3                   | LES_CH14 #0                                 |
| 93                         | PF10     | 2065.0 | 1673.6 |                                                        |                    |                                                       | U1_TX #1<br>USB_DM                      |                                             |
| 94                         | PC15     | 2065.0 | 1756.6 | ACMP1_CH7<br>DAC0_OUT1AL<br>T #3/<br>OPAMP_OUT1<br>ALT |                    | TIM0_CDT12<br>#1/3 TIM1_CC2<br>#0                     | US0_CLK #3<br>U0_RX #3                  | LES_CH15 #0<br>DBG_SWO #1                   |
| 95                         | PF11     | 2065.0 | 1870.0 |                                                        |                    |                                                       | U1_RX #1<br>USB_DP                      |                                             |
| 96                         | IOVSS_7  | 1846.0 | 2065.0 | Digital IO ground 7.                                   |                    |                                                       |                                         |                                             |
| 97                         | PF0      | 1739.3 | 2065.0 |                                                        |                    | TIM0_CC0 #5<br>LETIM0_OUT0<br>#2                      | US1_CLK #2<br>LEU0_TX #3<br>I2C0_SDA #5 | DBG_SWCLK<br>#0/1/2/3                       |
| 98                         | PF1      | 1626.3 | 2065.0 |                                                        |                    | TIM0_CC1 #5<br>LETIM0_OUT1<br>#2                      | US1_CS #2<br>LEU0_RX #3<br>I2C0_SCL #5  | DBG_SWDIO<br>#0/1/2/3<br>GPIO_EM4WU<br>3    |
| 99                         | PF2      | 1513.2 | 2065.0 | LCD_SEG0                                               | EBI_ARDY<br>#0/1/2 | TIM0_CC2 #5                                           | LEU0_TX #4                              | ACMP1_O #0<br>DBG_SWO #0<br>GPIO_EM4WU<br>4 |
| 100                        | PF3      | 1389.7 | 2065.0 | LCD_SEG1                                               | EBI_ALE #0         | TIM0_CDT10<br>#2/5                                    |                                         | PRS_CH0 #1<br>ETM_TD3 #1                    |
| 101                        | USB_VBUS | 1242.9 | 2065.0 | USB 5.0 V VBUS input.                                  |                    |                                                       |                                         |                                             |
| 102                        | PF4      | 995.9  | 2065.0 | LCD_SEG2                                               | EBI_WEn #0/2       | TIM0_CDT11<br>#2/5                                    |                                         | PRS_CH1 #1                                  |
| 103                        | PF12     | 886.3  | 2065.0 |                                                        |                    |                                                       | USB_ID                                  |                                             |
| 104                        | PF5      | 782.2  | 2065.0 | LCD_SEG3                                               | EBI_REn #0/2       | TIM0_CDT12<br>#2/5                                    | USB_VBUSEN<br>#0                        | PRS_CH2 #1                                  |
| 105                        | IOVSS_5  | 672.3  | 2065.0 | Digital IO ground 5.                                   |                    |                                                       |                                         |                                             |
| 106                        | IOVDD_5  | 576.7  | 2065.0 | Digital IO power supply 5.                             |                    |                                                       |                                         |                                             |
| 107                        | PF6      | 488.4  | 2065.0 | LCD_SEG24                                              | EBI_BL0 #0/1/2     | TIM0_CC0 #2                                           | U0_TX #0                                |                                             |
| 108                        | PF7      | 380.5  | 2065.0 | LCD_SEG25                                              | EBI_BL1 #0/1/2     | TIM0_CC1 #2                                           | U0_RX #0                                |                                             |
| 109                        | PF8      | 275.3  | 2065.0 | LCD_SEG26                                              | EBI_WEn #1         | TIM0_CC2 #2                                           |                                         | ETM_TCLK #1                                 |
| 110                        | PF9      | 174.3  | 2065.0 | LCD_SEG27                                              | EBI_REn #1         |                                                       |                                         | ETM_TD0 #1                                  |
| 111                        | NC       | 43.2   | 2065.0 | Do not connect.                                        |                    |                                                       |                                         |                                             |
| 112                        | PD9      | -89.5  | 2065.0 | LCD_SEG28                                              | EBI_CS0<br>#0/1/2  |                                                       |                                         |                                             |
| 113                        | PD10     | -204.5 | 2065.0 | LCD_SEG29                                              | EBI_CS1<br>#0/1/2  |                                                       |                                         |                                             |

| QFN64 Pin# and Name |           | Pin Alternate Functionality / Description                                                                                     |                                                  |                                      |                                                           |
|---------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------------------|-----------------------------------------------------------|
| Pin #               | Pin Name  | Analog                                                                                                                        | Timers                                           | Communication                        | Other                                                     |
| 27                  | AVDD_0    | Analog power supply 0.                                                                                                        |                                                  |                                      |                                                           |
| 28                  | PD0       | ADC0_CH0<br>DAC0_OUT0ALT #4/<br>OPAMP_OUT0ALT<br>OPAMP_OUT2 #1                                                                | PCNT2_S0IN #0                                    | US1_TX #1                            |                                                           |
| 29                  | PD1       | ADC0_CH1<br>DAC0_OUT1ALT #4/<br>OPAMP_OUT1ALT                                                                                 | TIM0_CC0 #3<br>PCNT2_S1IN #0                     | US1_RX #1                            | DBG_SWO #2                                                |
| 30                  | PD2       | ADC0_CH2                                                                                                                      | TIM0_CC1 #3                                      | USB_DMPU #0<br>US1_CLK #1            | DBG_SWO #3                                                |
| 31                  | PD3       | ADC0_CH3 OPAMP_N2                                                                                                             | TIM0_CC2 #3                                      | US1_CS #1                            | ETM_TD1 #0/2                                              |
| 32                  | PD4       | ADC0_CH4 OPAMP_P2                                                                                                             |                                                  | LEU0_TX #0                           | ETM_TD2 #0/2                                              |
| 33                  | PD5       | ADC0_CH5<br>OPAMP_OUT2 #0                                                                                                     |                                                  | LEU0_RX #0                           | ETM_TD3 #0/2                                              |
| 34                  | PD6       | ADC0_CH6 OPAMP_P1                                                                                                             | TIM1_CC0 #4 LE-<br>TIM0_OUT0 #0<br>PCNT0_S0IN #3 | US1_RX #2 I2C0_SDA<br>#1             | LES_ALTEX0 #0<br>ACMP0_O #2<br>ETM_TD0 #0                 |
| 35                  | PD7       | ADC0_CH7 OPAMP_N1                                                                                                             | TIM1_CC1 #4 LE-<br>TIM0_OUT1 #0<br>PCNT0_S1IN #3 | US1_TX #2 I2C0_SCL<br>#1             | CMU_CLK0 #2<br>LES_ALTEX1 #0<br>ACMP1_O #2<br>ETM_TCLK #0 |
| 36                  | PD8       | BU_VIN                                                                                                                        |                                                  |                                      | CMU_CLK1 #1                                               |
| 37                  | PC6       | ACMP0_CH6                                                                                                                     |                                                  | LEU1_TX #0 I2C0_SDA<br>#2            | LES_CH6 #0<br>ETM_TCLK #2                                 |
| 38                  | PC7       | ACMP0_CH7                                                                                                                     |                                                  | LEU1_RX #0 I2C0_SCL<br>#2            | LES_CH7 #0 ETM_TD0<br>#2                                  |
| 39                  | VDD_DREG  | Power supply for on-chip voltage regulator.                                                                                   |                                                  |                                      |                                                           |
| 40                  | DECOUPLE  | Decouple output for on-chip voltage regulator. An external capacitance of size C <sub>DECOUPLE</sub> is required at this pin. |                                                  |                                      |                                                           |
| 41                  | PE4       | LCD_COM0                                                                                                                      |                                                  | US0_CS #1                            |                                                           |
| 42                  | PE5       | LCD_COM1                                                                                                                      |                                                  | US0_CLK #1                           |                                                           |
| 43                  | PE6       | LCD_COM2                                                                                                                      |                                                  | US0_RX #1                            |                                                           |
| 44                  | PE7       | LCD_COM3                                                                                                                      |                                                  | US0_TX #1                            |                                                           |
| 45                  | USB_VREGI |                                                                                                                               |                                                  |                                      |                                                           |
| 46                  | USB_VREGO |                                                                                                                               |                                                  |                                      |                                                           |
| 47                  | PF10      |                                                                                                                               |                                                  | USB_DM                               |                                                           |
| 48                  | PF11      |                                                                                                                               |                                                  | USB_DP                               |                                                           |
| 49                  | PF0       |                                                                                                                               | TIM0_CC0 #5 LE-<br>TIM0_OUT0 #2                  | US1_CLK #2 LEU0_TX<br>#3 I2C0_SDA #5 | DBG_SWCLK #0/1/2/3                                        |
| 50                  | PF1       |                                                                                                                               | TIM0_CC1 #5 LE-<br>TIM0_OUT1 #2                  | US1_CS #2 LEU0_RX<br>#3 I2C0_SCL #5  | DBG_SWDIO #0/1/2/3<br>GPIO_EM4WU3                         |
| 51                  | PF2       | LCD_SEG0                                                                                                                      | TIM0_CC2 #5                                      | LEU0_TX #4                           | ACMP1_O #0<br>DBG_SWO #0<br>GPIO_EM4WU4                   |

## 5.20 EFM32LG980 (LQFP100)

### 5.20.1 Pinout

The EFM32LG980 pinout is shown in the following figure and table. Alternate locations are denoted by "#" followed by the location number (Multiple locations on the same pin are split with "/"). Alternate locations can be configured in the LOCATION bitfield in the \*\_ROUTE register in the module in question.

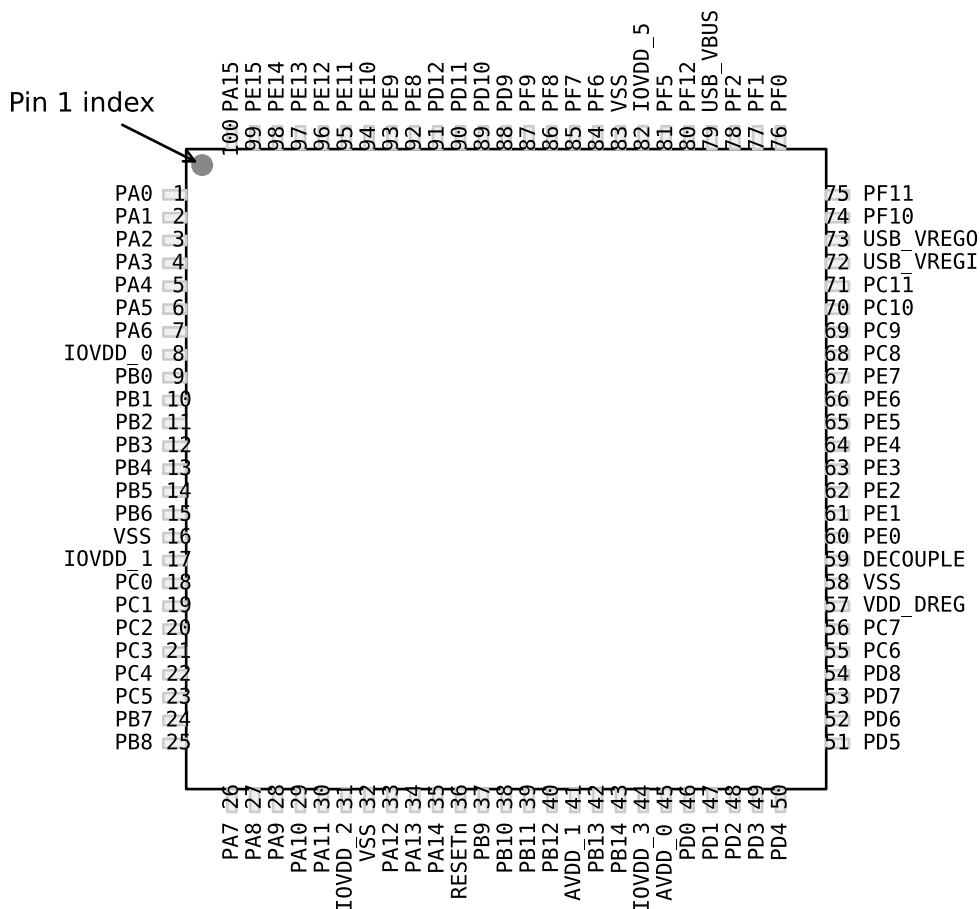


Figure 5.39. EFM32LG980 Pinout (top view, not to scale)

Table 5.58. Device Pinout

| LQFP100 Pin# and Name |          | Pin Alternate Functionality / Description |                 |                 |                           |                           |
|-----------------------|----------|-------------------------------------------|-----------------|-----------------|---------------------------|---------------------------|
| Pin #                 | Pin Name | Analog                                    | EBI             | Timers          | Communication             | Other                     |
| 1                     | PA0      | LCD_SEG13                                 | EBI_AD09 #0/1/2 | TIM0_CC0 #0/1/4 | LEU0_RX #4<br>I2C0_SDA #0 | PRS_CH0 #0<br>GPIO_EM4WU0 |
| 2                     | PA1      | LCD_SEG14                                 | EBI_AD10 #0/1/2 | TIM0_CC1 #0/1   | I2C0_SCL #0               | CMU_CLK1 #0<br>PRS_CH1 #0 |

| Alternate     | LOCATION |      |      |     |   |   |   |                                                                      |
|---------------|----------|------|------|-----|---|---|---|----------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3   | 4 | 5 | 6 | Description                                                          |
| EBI_AD09      | PA0      | PA0  | PA0  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 09. |
| EBI_AD10      | PA1      | PA1  | PA1  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 10. |
| EBI_AD11      | PA2      | PA2  | PA2  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 11. |
| EBI_AD12      | PA3      | PA3  | PA3  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 12. |
| EBI_AD13      | PA4      | PA4  | PA4  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 13. |
| EBI_AD14      | PA5      | PA5  | PA5  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 14. |
| EBI_AD15      | PA6      | PA6  | PA6  |     |   |   |   | External Bus Interface (EBI) address and data input / output pin 15. |
| EBI_ALE       | PF3      | PC11 | PC11 |     |   |   |   | External Bus Interface (EBI) Address Latch Enable output.            |
| EBI_ARDY      | PF2      | PF2  | PF2  |     |   |   |   | External Bus Interface (EBI) Hardware Ready Control input.           |
| EBI_BL0       | PF6      | PF6  | PF6  |     |   |   |   | External Bus Interface (EBI) Byte Lane/Enable pin 0.                 |
| EBI_BL1       | PF7      | PF7  | PF7  |     |   |   |   | External Bus Interface (EBI) Byte Lane/Enable pin 1.                 |
| EBI_CS0       | PD9      | PD9  | PD9  |     |   |   |   | External Bus Interface (EBI) Chip Select output 0.                   |
| EBI_CS1       | PD10     | PD10 | PD10 |     |   |   |   | External Bus Interface (EBI) Chip Select output 1.                   |
| EBI_CS2       | PD11     | PD11 | PD11 |     |   |   |   | External Bus Interface (EBI) Chip Select output 2.                   |
| EBI_CS3       | PD12     | PD12 | PD12 |     |   |   |   | External Bus Interface (EBI) Chip Select output 3.                   |
| EBI_CSTFT     | PA7      | PA7  | PA7  |     |   |   |   | External Bus Interface (EBI) Chip Select output TFT.                 |
| EBI_DCLK      | PA8      | PA8  | PA8  |     |   |   |   | External Bus Interface (EBI) TFT Dot Clock pin.                      |
| EBI_DTEN      | PA9      | PA9  | PA9  |     |   |   |   | External Bus Interface (EBI) TFT Data Enable pin.                    |
| EBI_HSNC      | PA11     | PA11 | PA11 |     |   |   |   | External Bus Interface (EBI) TFT Horizontal Synchronization pin.     |
| EBI_NANDREn   | PC3      | PC3  | PC3  |     |   |   |   | External Bus Interface (EBI) NAND Read Enable output.                |
| EBI_NANDWEn   | PC5      | PC5  | PC5  |     |   |   |   | External Bus Interface (EBI) NAND Write Enable output.               |
| EBI_REn       | PF5      | PF9  | PF5  |     |   |   |   | External Bus Interface (EBI) Read Enable output.                     |
| EBI_VSNC      | PA10     | PA10 | PA10 |     |   |   |   | External Bus Interface (EBI) TFT Vertical Synchronization pin.       |
| EBI_WEn       | PF4      | PF8  | PF4  |     |   |   |   | External Bus Interface (EBI) Write Enable output.                    |
| ETM_TCLK      | PD7      | PF8  | PC6  | PA6 |   |   |   | Embedded Trace Module ETM clock .                                    |
| ETM_TD0       | PD6      | PF9  | PC7  | PA2 |   |   |   | Embedded Trace Module ETM data 0.                                    |
| ETM_TD1       | PD3      | PD13 | PD3  | PA3 |   |   |   | Embedded Trace Module ETM data 1.                                    |

|                        |   | SYMBOL | MIN     | NOM  | MAX  |
|------------------------|---|--------|---------|------|------|
| lead thickness         |   | c1     | 0.09    | —    | 0.16 |
|                        | x | D      | 16 BSC  |      |      |
|                        | y | E      | 16 BSC  |      |      |
| body size              | x | D1     | 14 BSC  |      |      |
|                        | y | E1     | 14 BSC  |      |      |
| lead pitch             |   | e      | 0.5 BSC |      |      |
|                        |   | L      | 0.45    | 0.6  | 0.75 |
| footprint              |   | L1     | 1 REF   |      |      |
|                        |   | θ      | 0°      | 3.5° | 7°   |
|                        |   | θ1     | 0°      | —    | —    |
|                        |   | θ2     | 11°     | 12°  | 13°  |
|                        |   | θ3     | 11°     | 12°  | 13°  |
|                        |   | R1     | 0.08    | —    | —    |
|                        |   | R1     | 0.08    | —    | 0.2  |
|                        |   | S      | 0.2     | —    | —    |
| package edge tolerance |   | aaa    | 0.2     |      |      |
| lead edge tolerance    |   | bbb    | 0.2     |      |      |
| coplanarity            |   | ccc    | 0.08    |      |      |
| lead offset            |   | ddd    | 0.08    |      |      |
| mold flatness          |   | eee    | 0.05    |      |      |

The LQFP100 Package uses Nickel-Palladium-Gold preplated leadframe.

All EFM32 packages are RoHS compliant and free of Bromine (Br) and Antimony (Sb).

For additional Quality and Environmental information, please see: <http://www.silabs.com/support/quality/pages/default.aspx>