



Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"



#### Details

|                            |                                                                                                                                                                     |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Discontinued at Digi-Key                                                                                                                                            |
| Core Processor             | ARM® Cortex®-M3                                                                                                                                                     |
| Core Size                  | 32-Bit Single-Core                                                                                                                                                  |
| Speed                      | 48MHz                                                                                                                                                               |
| Connectivity               | EBI/EMI, I <sup>2</sup> C, IrDA, SmartCard, SPI, UART/USART                                                                                                         |
| Peripherals                | Brown-out Detect/Reset, DMA, POR, PWM, WDT                                                                                                                          |
| Number of I/O              | 86                                                                                                                                                                  |
| Program Memory Size        | 128KB (128K x 8)                                                                                                                                                    |
| Program Memory Type        | FLASH                                                                                                                                                               |
| EEPROM Size                | -                                                                                                                                                                   |
| RAM Size                   | 32K x 8                                                                                                                                                             |
| Voltage - Supply (Vcc/Vdd) | 1.98V ~ 3.8V                                                                                                                                                        |
| Data Converters            | A/D 8x12b; D/A 2x12b                                                                                                                                                |
| Oscillator Type            | Internal                                                                                                                                                            |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                   |
| Mounting Type              | Surface Mount                                                                                                                                                       |
| Package / Case             | 100-LQFP                                                                                                                                                            |
| Supplier Device Package    | 100-LQFP (14x14)                                                                                                                                                    |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/silicon-labs/efm32lg280f128g-e-qfp100">https://www.e-xfl.com/product-detail/silicon-labs/efm32lg280f128g-e-qfp100</a> |

|           |                                       |            |
|-----------|---------------------------------------|------------|
| 5.17.3    | GPIO Pinout Overview                  | 344        |
| 5.17.4    | Opamp Pinout Overview                 | 345        |
| 5.18      | EFM32LG940 (QFN64)                    | 346        |
| 5.18.1    | Pinout                                | 346        |
| 5.18.2    | Alternate Functionality Pinout        | 350        |
| 5.18.3    | GPIO Pinout Overview                  | 356        |
| 5.18.4    | Opamp Pinout Overview                 | 356        |
| 5.19      | EFM32LG942 (TQFP64)                   | 357        |
| 5.19.1    | Pinout                                | 357        |
| 5.19.2    | Alternate Functionality Pinout        | 361        |
| 5.19.3    | GPIO Pinout Overview                  | 366        |
| 5.19.4    | Opamp Pinout Overview                 | 367        |
| 5.20      | EFM32LG980 (LQFP100)                  | 368        |
| 5.20.1    | Pinout                                | 368        |
| 5.20.2    | Alternate Functionality Pinout        | 373        |
| 5.20.3    | GPIO Pinout Overview                  | 382        |
| 5.20.4    | Opamp Pinout Overview                 | 382        |
| 5.21      | EFM32LG990 (BGA112)                   | 383        |
| 5.21.1    | Pinout                                | 383        |
| 5.21.2    | Alternate Functionality Pinout        | 389        |
| 5.21.3    | GPIO Pinout Overview                  | 398        |
| 5.21.4    | Opamp Pinout Overview                 | 398        |
| 5.22      | EFM32LG995 (BGA120)                   | 399        |
| 5.22.1    | Pinout                                | 399        |
| 5.22.2    | Alternate Functionality Pinout        | 405        |
| 5.22.3    | GPIO Pinout Overview                  | 414        |
| 5.22.4    | Opamp Pinout Overview                 | 415        |
| <b>6.</b> | <b>BGA112 Package Specifications</b>  | <b>416</b> |
| 6.1       | BGA112 Package Dimensions             | 416        |
| 6.2       | BGA112 PCB Layout                     | 417        |
| 6.3       | BGA112 Package Marking                | 419        |
| <b>7.</b> | <b>BGA120 Package Specifications</b>  | <b>420</b> |
| 7.1       | BGA120 Package Dimensions             | 420        |
| 7.2       | BGA120 PCB Layout                     | 421        |
| 7.3       | BGA120 Package Marking                | 423        |
| <b>8.</b> | <b>CSP81 Package Specifications</b>   | <b>424</b> |
| 8.1       | CSP81 Package Dimensions              | 424        |
| 8.2       | CSP81 PCB Layout                      | 426        |
| 8.3       | CSP81 Package Marking                 | 429        |
| 8.4       | CSP81 Environmental                   | 429        |
| <b>9.</b> | <b>LQFP100 Package Specifications</b> | <b>430</b> |
| 9.1       | LQFP100 Package Dimensions            | 430        |

| Ordering Code            | Flash (kB) | RAM (kB) | Max Speed (MHz) | Supply Voltage (V) | Temperature (°C) | Package |
|--------------------------|------------|----------|-----------------|--------------------|------------------|---------|
| EFM32LG395F256G-E-BGA120 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG840F64G-E-QFN64   | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | QFN64   |
| EFM32LG840F128G-E-QFN64  | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | QFN64   |
| EFM32LG840F256G-E-QFN64  | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | QFN64   |
| EFM32LG842F64G-E-QFP64   | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | TQFP64  |
| EFM32LG842F128G-E-QFP64  | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | TQFP64  |
| EFM32LG842F256G-E-QFP64  | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | TQFP64  |
| EFM32LG880F64G-E-QFP100  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | LQFP100 |
| EFM32LG880F128G-E-QFP100 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | LQFP100 |
| EFM32LG880F256G-E-QFP100 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | LQFP100 |
| EFM32LG890F64G-E-BGA112  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA112  |
| EFM32LG890F128G-E-BGA112 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA112  |
| EFM32LG890F256G-E-BGA112 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA112  |
| EFM32LG895F64G-E-BGA120  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG895F128G-E-BGA120 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG895F256G-E-BGA120 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG900F256G-E-D1I    | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | Wafer   |
| EFM32LG940F64G-E-QFN64   | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | QFN64   |
| EFM32LG940F128G-E-QFN64  | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | QFN64   |
| EFM32LG940F256G-E-QFN64  | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | QFN64   |
| EFM32LG942F64G-E-BGA120  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG942F128G-E-BGA120 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG942F256G-E-BGA120 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG980F64G-E-QFP100  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | LQFP100 |
| EFM32LG980F128G-E-QFP100 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | LQFP100 |
| EFM32LG980F256G-E-QFP100 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | LQFP100 |
| EFM32LG990F64G-E-BGA112  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA112  |
| EFM32LG990F128G-E-BGA112 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA112  |
| EFM32LG990F256G-E-BGA112 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA112  |
| EFM32LG995F64G-E-BGA120  | 64         | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG995F128G-E-BGA120 | 128        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |
| EFM32LG995F256G-E-BGA120 | 256        | 32       | 48              | 1.98 - 3.8         | -40 - 85         | BGA120  |

| Module | Configuration      | Pin Connections                                                         |
|--------|--------------------|-------------------------------------------------------------------------|
| ACMP1  | Full configuration | ACMP1_CH[7:0], ACMP1_O                                                  |
| VCMP   | Full configuration | NA                                                                      |
| ADC0   | Full configuration | ADC0_CH[7:0]                                                            |
| DAC0   | Full configuration | DAC0_OUT[1:0], DAC0_OUTxALT                                             |
| OPAMP  | Full configuration | Outputs: OPAMP_OUTx, OPAMP_OUTxALT, Inputs: OPAMP_Px, OPAMP_Nx          |
| AES    | Full configuration | NA                                                                      |
| GPIO   | 93 pins            | Available pins are shown in <a href="#">5.11.3 GPIO Pinout Overview</a> |

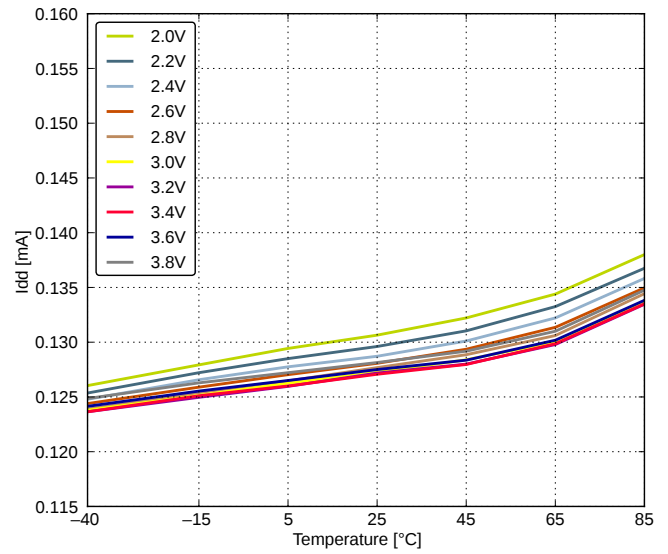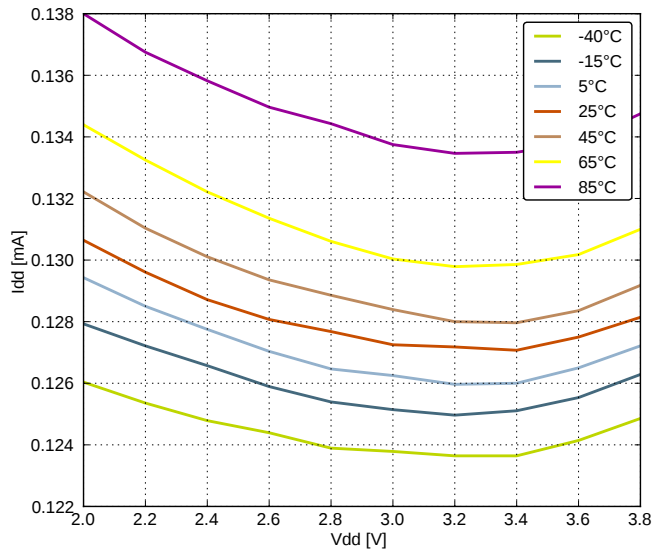

#### 4.4.2 EM2 Current Consumption

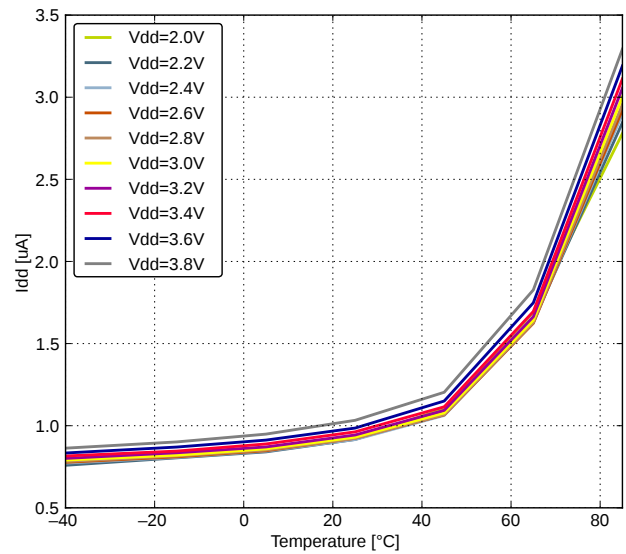
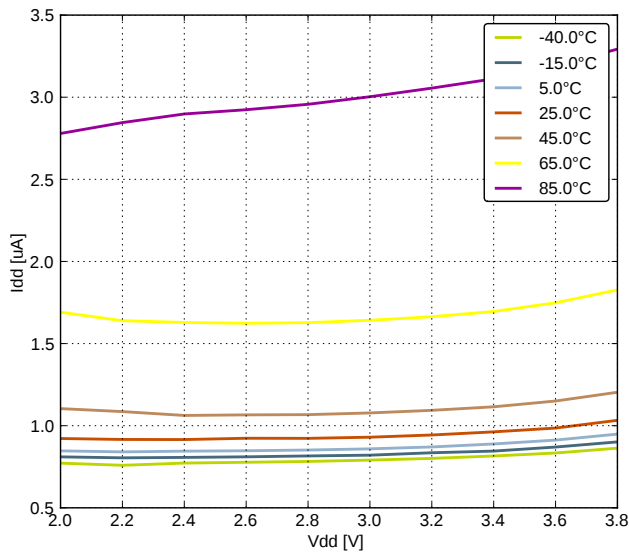


Figure 4.7. EM2 Current Consumption, RTC prescaled to 1 kHz, 32.768 kHz LFRCO

## 4.9.5 AUXHFRCO

Table 4.12. AUXHFRCO

| Parameter                                                                                            | Symbol                          | Test Condition                        | Min               | Typ               | Max               | Unit   |
|------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------------|-------------------|-------------------|-------------------|--------|
| Oscillation frequency, all packages except CSP, $V_{DD}=3.0\text{ V}$ , $T_{AMB}=25^{\circ}\text{C}$ | $f_{\text{AUXHFRCO}}$           | 28 MHz frequency band                 | 27.5              | 28.0              | 28.5              | MHz    |
|                                                                                                      |                                 | 21 MHz frequency band                 | 20.6              | 21.0              | 21.4              | MHz    |
|                                                                                                      |                                 | 14 MHz frequency band                 | 13.7              | 14.0              | 14.3              | MHz    |
|                                                                                                      |                                 | 11 MHz frequency band                 | 10.8              | 11.0              | 11.2              | MHz    |
|                                                                                                      |                                 | 7 MHz frequency band                  | 6.48 <sup>1</sup> | 6.60 <sup>1</sup> | 6.72 <sup>1</sup> | MHz    |
|                                                                                                      |                                 | 1 MHz frequency band                  | 1.15 <sup>2</sup> | 1.20 <sup>2</sup> | 1.25 <sup>2</sup> | MHz    |
| Oscillation frequency, CSP devices, $V_{DD}=3.0\text{ V}$ , $T_{AMB}=25^{\circ}\text{C}$             | $f_{\text{AUXHFRCO}}$           | 28 MHz frequency band                 | —                 | 28.0              | —                 | MHz    |
|                                                                                                      |                                 | 21 MHz frequency band                 | —                 | 21.0              | —                 | MHz    |
|                                                                                                      |                                 | 14 MHz frequency band                 | —                 | 14.0              | —                 | MHz    |
|                                                                                                      |                                 | 11 MHz frequency band                 | —                 | 11.0              | —                 | MHz    |
|                                                                                                      |                                 | 7 MHz frequency band                  | —                 | 6.60 <sup>1</sup> | —                 | MHz    |
|                                                                                                      |                                 | 1 MHz frequency band                  | —                 | 1.20 <sup>2</sup> | —                 | MHz    |
| Settling time after start-up                                                                         | $t_{\text{AUXHFRCO\_settling}}$ | $f_{\text{AUXHFRCO}} = 14\text{ MHz}$ | —                 | 0.6               | —                 | Cycles |
| Frequency step for LSB change in TUNING value                                                        | TUNE-STEP <sub>AUXHFRCO</sub>   |                                       | —                 | 0.3 <sup>3</sup>  | —                 | %      |

**Note:**

1. For devices with prod. rev. < 19, Typ = 7MHz and Min/Max values not applicable.
2. For devices with prod. rev. < 19, Typ = 1MHz and Min/Max values not applicable.
3. The TUNING field in the CMU\_AUXHFRCOCTRL register may be used to adjust the AUXHFRCO frequency. There is enough adjustment range to ensure that the frequency bands above 7 MHz will always have some overlap across supply voltage and temperature. By using a stable frequency reference such as the LFXO or HFXO, a firmware calibration routine can vary the TUNING bits and the frequency band to maintain the AUXHFRCO frequency at any arbitrary value between 7 MHz and 28 MHz across operating conditions.

## 4.9.6 ULFRCO

Table 4.13. ULFRCO

| Parameter                  | Symbol               | Test Condition | Min | Typ   | Max  | Unit |
|----------------------------|----------------------|----------------|-----|-------|------|------|
| Oscillation frequency      | $f_{\text{ULFRCO}}$  | 25°C, 3V       | 0.7 | —     | 1.75 | kHz  |
| Temperature coefficient    | TC <sub>ULFRCO</sub> |                | —   | 0.05  | —    | %/°C |
| Supply voltage coefficient | VC <sub>ULFRCO</sub> |                | —   | -18.2 | —    | %/V  |

| Parameter     | Symbol              | Test Condition                                                                             | Min | Typ  | Max | Unit              |
|---------------|---------------------|--------------------------------------------------------------------------------------------|-----|------|-----|-------------------|
| Slew Rate     | SR <sub>OPAMP</sub> | (OPA2)BIASPROG=0xF,(OPA2)HALF-BIAS=0x0, 70 pF load Rising (Simulated at 25 C and VDD=3 V)  | —   | 3.2  | —   | V/μs              |
|               |                     | (OPA2)BIASPROG=0x7,(OPA2)HALF-BIAS=0x1, 70 pF load, Rising (Simulated at 25 C and VDD=3 V) | —   | 0.8  | —   | V/μs              |
|               |                     | (OPA2)BIASPROG=0x0,(OPA2)HALF-BIAS=0x1, 70 pF load, Rising                                 | —   | 178  | —   | V/μs              |
|               |                     | (OPA2)BIASPROG=0x0,(OPA2)HALF-BIAS=0x1, 70 pF load, Falling                                | —   | 198  | —   | V/μs              |
|               |                     | (OPA2)BIASPROG=0x4,(OPA2)HALF-BIAS=0x1, 70 pF load, Rising                                 | —   | 969  | —   | V/μs              |
|               |                     | (OPA2)BIASPROG=0x4,(OPA2)HALF-BIAS=0x1, 70 pF load, Falling                                | —   | 969  | —   | V/μs              |
|               |                     | (OPA1)BIASPROG=0x0,(OPA1)HALF-BIAS=0x1, 70 pF load, Rising                                 | —   | 166  | —   | V/μs              |
|               |                     | (OPA1)BIASPROG=0x0,(OPA1)HALF-BIAS=0x1, 70 pF load, Falling                                | —   | 180  | —   | V/μs              |
|               |                     | (OPA1)BIASPROG=0x4,(OPA1)HALF-BIAS=0x1, 70 pF load, Rising                                 | —   | 918  | —   | V/μs              |
|               |                     | (OPA1)BIASPROG=0x4,(OPA1)HALF-BIAS=0x1, 70 pF load, Falling                                | —   | 937  | —   | V/μs              |
|               |                     | (OPA0)BIASPROG=0x0,(OPA0)HALF-BIAS=0x1, 70 pF load, Rising                                 | —   | 173  | —   | V/μs              |
|               |                     | (OPA0)BIASPROG=0x0,(OPA0)HALF-BIAS=0x1, 70 pF load, Falling                                | —   | 191  | —   | V/μs              |
|               |                     | (OPA0)BIASPROG=0x4,(OPA0)HALF-BIAS=0x1, 70 pF load, Rising                                 | —   | 935  | —   | V/μs              |
|               |                     | (OPA0)BIASPROG=0x4,(OPA0)HALF-BIAS=0x1, 70 pF load, Falling                                | —   | 950  | —   | V/μs              |
| Voltage Noise | N <sub>OPAMP</sub>  | V <sub>out</sub> =1V, RESSEL=0, 0.1 Hz<f<10 kHz, OPAX-HCMDIS=0                             | —   | 101  | —   | μV <sub>RMS</sub> |
|               |                     | V <sub>out</sub> =1V, RESSEL=0, 0.1 Hz<f<10 kHz, OPAX-HCMDIS=1                             | —   | 141  | —   | μV <sub>RMS</sub> |
|               |                     | V <sub>out</sub> =1V, RESSEL=0, 0.1 Hz<f<1 MHz, OPAX-HCMDIS=0                              | —   | 196  | —   | μV <sub>RMS</sub> |
|               |                     | V <sub>out</sub> =1V, RESSEL=0, 0.1 Hz<f<1 MHz, OPAX-HCMDIS=1                              | —   | 229  | —   | μV <sub>RMS</sub> |
|               |                     | RESSEL=7, 0.1 Hz<f<10 kHz, OPAX-HCMDIS=0                                                   | —   | 1230 | —   | μV <sub>RMS</sub> |
|               |                     | RESSEL=7, 0.1 Hz<f<10 kHz, OPAX-HCMDIS=1                                                   | —   | 2130 | —   | μV <sub>RMS</sub> |
|               |                     | RESSEL=7, 0.1 Hz<f<1 MHz, OPAX-HCMDIS=0                                                    | —   | 1630 | —   | μV <sub>RMS</sub> |
|               |                     | RESSEL=7, 0.1 Hz<f<1 MHz, OPAX-HCMDIS=1                                                    | —   | 2590 | —   | μV <sub>RMS</sub> |

| Parameter           | Symbol                  | Test Condition                                                | Min   | Typ   | Max   | Unit |
|---------------------|-------------------------|---------------------------------------------------------------|-------|-------|-------|------|
| Negative hysteresis | V <sub>ACMPHYST_N</sub> | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=0 | -0.3  | 1.2   | 4.0   | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=1 | -18.0 | -12.2 | -4.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=2 | -25.0 | -17.6 | -9.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=3 | -33.0 | -22.8 | -13.0 | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=4 | -40.0 | -27.8 | -16.0 | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=5 | -46.0 | -33.4 | -21.0 | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=6 | -56.0 | -39.9 | -25.0 | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=7 | -65.0 | -46.4 | -29.0 | mV   |
| Positive hysteresis | V <sub>ACMPHYST_P</sub> | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=0 | -0.3  | 1.2   | 4.0   | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=1 | 4.0   | 12.2  | 21.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=2 | 9.0   | 17.1  | 25.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=3 | 13.0  | 22.3  | 33.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=4 | 17.0  | 28.2  | 42.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=5 | 20.0  | 34.0  | 49.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=6 | 25.0  | 39.8  | 58.0  | mV   |
|                     |                         | BIASPROG=0b1111, FULL-BIAS=0, HALF-BIAS=1, LPREF=0, HYSTSEL=7 | 29.4  | 46.4  | 68.0  | mV   |

## 4.16 LCD

Table 4.24. LCD

| Parameter                                            | Symbol                | Test Condition                                                                                                           | Min | Typ  | Max | Unit |
|------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| Frame rate                                           | $f_{\text{LCDFR}}$    |                                                                                                                          | 30  | —    | 200 | Hz   |
| Number of segments supported                         | NUM <sub>SEG</sub>    |                                                                                                                          | —   | 36×8 | —   | seg  |
| LCD supply voltage range                             | $V_{\text{LCD}}$      | Internal boost circuit enabled                                                                                           | 2.0 | —    | 3.8 | V    |
| Steady state current consumption.                    | $I_{\text{LCD}}$      | Display disconnected, static mode, framerate 32 Hz, all segments on.                                                     | —   | 250  | —   | nA   |
|                                                      |                       | Display disconnected, quadruplex mode, framerate 32 Hz, all segments on, bias mode to ONETHIRD in LCD_DISPCTRL register. | —   | 550  | —   | nA   |
| Steady state Current contribution of internal boost. | $I_{\text{LCDBOOST}}$ | Internal voltage boost off                                                                                               | —   | 0    | —   | μA   |
|                                                      |                       | Internal voltage boost on, boosting from 2.2 V to 3.0 V.                                                                 | —   | 8.4  | —   | μA   |
| Boost Voltage                                        | $V_{\text{BOOST}}$    | VBLEV of LCD_DISPCTRL register to LEVEL0                                                                                 | —   | 3.02 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL1                                                                                 | —   | 3.15 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL2                                                                                 | —   | 3.28 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL3                                                                                 | —   | 3.41 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL4                                                                                 | —   | 3.54 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL5                                                                                 | —   | 3.67 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL6                                                                                 | —   | 3.73 | —   | V    |
|                                                      |                       | VBLEV of LCD_DISPCTRL register to LEVEL7                                                                                 | —   | 3.74 | —   | V    |

The total LCD current is given by the following equation.  $I_{\text{LCDBOOST}}$  is zero if internal boost is off.

$$I_{\text{LCDTOTAL}} = I_{\text{LCD}} + I_{\text{LCDBOOST}}$$

| Alternate     | LOCATION |      |      |   |   |   |   |                                                                      |
|---------------|----------|------|------|---|---|---|---|----------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3 | 4 | 5 | 6 | Description                                                          |
| EBI_AD07      | PE15     | PE15 | PE15 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 07. |
| EBI_AD08      | PA15     | PA15 | PA15 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 08. |
| EBI_AD09      | PA0      | PA0  | PA0  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 09. |
| EBI_AD10      | PA1      | PA1  | PA1  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 10. |
| EBI_AD11      | PA2      | PA2  | PA2  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 11. |
| EBI_AD12      | PA3      | PA3  | PA3  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 12. |
| EBI_AD13      | PA4      | PA4  | PA4  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 13. |
| EBI_AD14      | PA5      | PA5  | PA5  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 14. |
| EBI_AD15      | PA6      | PA6  | PA6  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 15. |
| EBI_ALE       | PF3      | PC11 | PC11 |   |   |   |   | External Bus Interface (EBI) Address Latch Enable output.            |
| EBI_ARDY      | PF2      | PF2  | PF2  |   |   |   |   | External Bus Interface (EBI) Hardware Ready Control input.           |
| EBI_BL0       | PF6      | PF6  | PF6  |   |   |   |   | External Bus Interface (EBI) Byte Lane/Enable pin 0.                 |
| EBI_BL1       | PF7      | PF7  | PF7  |   |   |   |   | External Bus Interface (EBI) Byte Lane/Enable pin 1.                 |
| EBI_CS0       | PD9      | PD9  | PD9  |   |   |   |   | External Bus Interface (EBI) Chip Select output 0.                   |
| EBI_CS1       | PD10     | PD10 | PD10 |   |   |   |   | External Bus Interface (EBI) Chip Select output 1.                   |
| EBI_CS2       | PD11     | PD11 | PD11 |   |   |   |   | External Bus Interface (EBI) Chip Select output 2.                   |
| EBI_CS3       | PD12     | PD12 | PD12 |   |   |   |   | External Bus Interface (EBI) Chip Select output 3.                   |
| EBI_CSTFT     | PA7      | PA7  | PA7  |   |   |   |   | External Bus Interface (EBI) Chip Select output TFT.                 |
| EBI_DCLK      | PA8      | PA8  | PA8  |   |   |   |   | External Bus Interface (EBI) TFT Dot Clock pin.                      |
| EBI_DTEN      | PA9      | PA9  | PA9  |   |   |   |   | External Bus Interface (EBI) TFT Data Enable pin.                    |
| EBI_HSNC      | PA11     | PA11 | PA11 |   |   |   |   | External Bus Interface (EBI) TFT Horizontal Synchronization pin.     |
| EBI_NANDREn   | PC3      | PC3  | PC3  |   |   |   |   | External Bus Interface (EBI) NAND Read Enable output.                |
| EBI_NANDWEn   | PC5      | PC5  | PC5  |   |   |   |   | External Bus Interface (EBI) NAND Write Enable output.               |
| EBI_REn       | PF5      | PF9  | PF5  |   |   |   |   | External Bus Interface (EBI) Read Enable output.                     |
| EBI_VSNC      | PA10     | PA10 | PA10 |   |   |   |   | External Bus Interface (EBI) TFT Vertical Synchronization pin.       |

| Alternate     | LOCATION |      |      |      |      |     |   |                                                                                                               |
|---------------|----------|------|------|------|------|-----|---|---------------------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3    | 4    | 5   | 6 | Description                                                                                                   |
| LES_CH13      | PC13     |      |      |      |      |     |   | LESENSE channel 13.                                                                                           |
| LES_CH14      | PC14     |      |      |      |      |     |   | LESENSE channel 14.                                                                                           |
| LES_CH15      | PC15     |      |      |      |      |     |   | LESENSE channel 15.                                                                                           |
| LETIM0_OUT0   | PD6      | PB11 | PF0  | PC4  |      |     |   | Low Energy Timer LETIM0, output channel 0.                                                                    |
| LETIM0_OUT1   | PD7      | PB12 | PF1  | PC5  |      |     |   | Low Energy Timer LETIM0, output channel 1.                                                                    |
| LEU0_RX       | PD5      | PB14 | PE15 | PF1  | PA0  |     |   | LEUART0 Receive input.                                                                                        |
| LEU0_TX       | PD4      | PB13 | PE14 | PF0  | PF2  |     |   | LEUART0 Transmit output. Also used as receive input in half duplex communication.                             |
| LEU1_RX       | PC7      | PA6  |      |      |      |     |   | LEUART1 Receive input.                                                                                        |
| LEU1_TX       | PC6      | PA5  |      |      |      |     |   | LEUART1 Transmit output. Also used as receive input in half duplex communication.                             |
| LFXTAL_N      | PB8      |      |      |      |      |     |   | Low Frequency Crystal (typically 32.768 kHz) negative pin. Also used as an optional external clock input pin. |
| LFXTAL_P      | PB7      |      |      |      |      |     |   | Low Frequency Crystal (typically 32.768 kHz) positive pin.                                                    |
| PCNT0_S0IN    | PC13     | PE0  | PC0  | PD6  |      |     |   | Pulse Counter PCNT0 input number 0.                                                                           |
| PCNT0_S1IN    | PC14     | PE1  | PC1  | PD7  |      |     |   | Pulse Counter PCNT0 input number 1.                                                                           |
| PCNT1_S0IN    | PC4      | PB3  |      |      |      |     |   | Pulse Counter PCNT1 input number 0.                                                                           |
| PCNT1_S1IN    | PC5      | PB4  |      |      |      |     |   | Pulse Counter PCNT1 input number 1.                                                                           |
| PCNT2_S0IN    | PD0      | PE8  |      |      |      |     |   | Pulse Counter PCNT2 input number 0.                                                                           |
| PCNT2_S1IN    | PD1      | PE9  |      |      |      |     |   | Pulse Counter PCNT2 input number 1.                                                                           |
| PRS_CH0       | PA0      | PF3  |      |      |      |     |   | Peripheral Reflex System PRS, channel 0.                                                                      |
| PRS_CH1       | PA1      | PF4  |      |      |      |     |   | Peripheral Reflex System PRS, channel 1.                                                                      |
| PRS_CH2       | PC0      | PF5  |      |      |      |     |   | Peripheral Reflex System PRS, channel 2.                                                                      |
| PRS_CH3       | PC1      | PE8  |      |      |      |     |   | Peripheral Reflex System PRS, channel 3.                                                                      |
| TIM0_CC0      | PA0      | PA0  | PF6  | PD1  | PA0  | PF0 |   | Timer 0 Capture Compare input / output channel 0.                                                             |
| TIM0_CC1      | PA1      | PA1  | PF7  | PD2  | PC0  | PF1 |   | Timer 0 Capture Compare input / output channel 1.                                                             |
| TIM0_CC2      | PA2      | PA2  | PF8  | PD3  | PC1  | PF2 |   | Timer 0 Capture Compare input / output channel 2.                                                             |
| TIM0_CDTI0    | PA3      | PC13 | PF3  | PC13 | PC2  | PF3 |   | Timer 0 Complimentary Deat Time Insertion channel 0.                                                          |
| TIM0_CDTI1    | PA4      | PC14 | PF4  | PC14 | PC3  | PF4 |   | Timer 0 Complimentary Deat Time Insertion channel 1.                                                          |
| TIM0_CDTI2    | PA5      | PC15 | PF5  | PC15 | PC4  | PF5 |   | Timer 0 Complimentary Deat Time Insertion channel 2.                                                          |
| TIM1_CC0      | PC13     | PE10 | PB0  | PB7  | PD6  |     |   | Timer 1 Capture Compare input / output channel 0.                                                             |
| TIM1_CC1      | PC14     | PE11 | PB1  | PB8  | PD7  |     |   | Timer 1 Capture Compare input / output channel 1.                                                             |
| TIM1_CC2      | PC15     | PE12 | PB2  | PB11 | PC13 |     |   | Timer 1 Capture Compare input / output channel 2.                                                             |
| TIM2_CC0      | PA8      | PA12 | PC8  |      |      |     |   | Timer 2 Capture Compare input / output channel 0.                                                             |

## 5.9.2 Alternate Functionality Pinout

A wide selection of alternate functionality is available for multiplexing to various pins. This is shown in the following table. The table shows the name of the alternate functionality in the first column, followed by columns showing the possible LOCATION bitfield settings.

**Note:** Some functionality, such as analog interfaces, do not have alternate settings or a LOCATION bitfield. In these cases, the pinout is shown in the column corresponding to LOCATION 0.

**Table 5.26. Alternate functionality overview**

| Alternate     | LOCATION |     |     |   |   |   |   | Description                                               |
|---------------|----------|-----|-----|---|---|---|---|-----------------------------------------------------------|
| Functionality | 0        | 1   | 2   | 3 | 4 | 5 | 6 |                                                           |
| ACMP0_CH0     | PC0      |     |     |   |   |   |   | Analog comparator ACMP0, channel 0.                       |
| ACMP0_CH1     | PC1      |     |     |   |   |   |   | Analog comparator ACMP0, channel 1.                       |
| ACMP0_CH2     | PC2      |     |     |   |   |   |   | Analog comparator ACMP0, channel 2.                       |
| ACMP0_CH3     | PC3      |     |     |   |   |   |   | Analog comparator ACMP0, channel 3.                       |
| ACMP0_CH4     | PC4      |     |     |   |   |   |   | Analog comparator ACMP0, channel 4.                       |
| ACMP0_CH5     | PC5      |     |     |   |   |   |   | Analog comparator ACMP0, channel 5.                       |
| ACMP0_CH6     | PC6      |     |     |   |   |   |   | Analog comparator ACMP0, channel 6.                       |
| ACMP0_CH7     | PC7      |     |     |   |   |   |   | Analog comparator ACMP0, channel 7.                       |
| ACMP0_O       | PE13     | PE2 | PD6 |   |   |   |   | Analog comparator ACMP0, digital output.                  |
| ACMP1_CH0     | PC8      |     |     |   |   |   |   | Analog comparator ACMP1, channel 0.                       |
| ACMP1_CH1     | PC9      |     |     |   |   |   |   | Analog comparator ACMP1, channel 1.                       |
| ACMP1_CH2     | PC10     |     |     |   |   |   |   | Analog comparator ACMP1, channel 2.                       |
| ACMP1_CH3     | PC11     |     |     |   |   |   |   | Analog comparator ACMP1, channel 3.                       |
| ACMP1_O       | PF2      | PE3 | PD7 |   |   |   |   | Analog comparator ACMP1, digital output.                  |
| ADC0_CH0      | PD0      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 0. |
| ADC0_CH1      | PD1      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 1. |
| ADC0_CH2      | PD2      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 2. |
| ADC0_CH3      | PD3      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 3. |
| ADC0_CH4      | PD4      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 4. |
| ADC0_CH5      | PD5      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 5. |
| ADC0_CH6      | PD6      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 6. |
| ADC0_CH7      | PD7      |     |     |   |   |   |   | Analog to digital converter ADC0, input channel number 7. |
| BOOT_RX       | PE11     |     |     |   |   |   |   | Bootloader RX.                                            |
| BOOT_TX       | PE10     |     |     |   |   |   |   | Bootloader TX.                                            |

| Alternate     | LOCATION |      |      |      |      |      |   |                                                                                                                                                       |
|---------------|----------|------|------|------|------|------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3    | 4    | 5    | 6 | Description                                                                                                                                           |
| U0_RX         | PF7      | PE1  | PA4  |      |      |      |   | UART0 Receive input.                                                                                                                                  |
| U0_TX         | PF6      | PE0  | PA3  |      |      |      |   | UART0 Transmit output. Also used as receive input in half duplex communication.                                                                       |
| U1_RX         |          | PF11 | PB10 | PE3  |      |      |   | UART1 Receive input.                                                                                                                                  |
| U1_TX         |          | PF10 | PB9  | PE2  |      |      |   | UART1 Transmit output. Also used as receive input in half duplex communication.                                                                       |
| US0_CLK       | PE12     | PE5  | PC9  |      | PB13 | PB13 |   | USART0 clock input / output.                                                                                                                          |
| US0_CS        | PE13     | PE4  | PC8  |      | PB14 | PB14 |   | USART0 chip select input / output.                                                                                                                    |
| US0_RX        | PE11     | PE6  | PC10 | PE12 | PB8  | PC1  |   | USART0 Asynchronous Receive.<br>USART0 Synchronous mode Master Input / Slave Output (MISO).                                                           |
| US0_TX        | PE10     | PE7  | PC11 | PE13 | PB7  | PC0  |   | USART0 Asynchronous Transmit. Also used as receive input in half duplex communication.<br>USART0 Synchronous mode Master Output / Slave Input (MOSI). |
| US1_CLK       | PB7      | PD2  | PF0  |      |      |      |   | USART1 clock input / output.                                                                                                                          |
| US1_CS        | PB8      | PD3  | PF1  |      |      |      |   | USART1 chip select input / output.                                                                                                                    |
| US1_RX        | PC1      | PD1  | PD6  |      |      |      |   | USART1 Asynchronous Receive.<br>USART1 Synchronous mode Master Input / Slave Output (MISO).                                                           |
| US1_TX        | PC0      | PD0  | PD7  |      |      |      |   | USART1 Asynchronous Transmit. Also used as receive input in half duplex communication.<br>USART1 Synchronous mode Master Output / Slave Input (MOSI). |
| US2_CLK       | PC4      | PB5  |      |      |      |      |   | USART2 clock input / output.                                                                                                                          |
| US2_CS        | PC5      | PB6  |      |      |      |      |   | USART2 chip select input / output.                                                                                                                    |
| US2_RX        | PC3      | PB4  |      |      |      |      |   | USART2 Asynchronous Receive.<br>USART2 Synchronous mode Master Input / Slave Output (MISO).                                                           |
| US2_TX        | PC2      | PB3  |      |      |      |      |   | USART2 Asynchronous Transmit. Also used as receive input in half duplex communication.<br>USART2 Synchronous mode Master Output / Slave Input (MOSI). |
| USB_DM        | PF10     |      |      |      |      |      |   | USB D- pin.                                                                                                                                           |
| USB_DMPU      | PD2      |      |      |      |      |      |   | USB D- Pullup control.                                                                                                                                |
| USB_DP        | PF11     |      |      |      |      |      |   | USB D+ pin.                                                                                                                                           |
| USB_ID        | PF12     |      |      |      |      |      |   | USB ID pin. Used in OTG mode.                                                                                                                         |
| USB_VBUS      | USB_VBUS |      |      |      |      |      |   | USB 5 V VBUS input.                                                                                                                                   |
| USB_VBUSEN    | PF5      |      |      |      |      |      |   | USB 5 V VBUS enable.                                                                                                                                  |

## 5.10 EFM32LG390 (BGA112)

### 5.10.1 Pinout

The EFM32LG390 pinout is shown in the following figure and table. Alternate locations are denoted by "#" followed by the location number (Multiple locations on the same pin are split with "/"). Alternate locations can be configured in the LOCATION bitfield in the \*\_ROUTE register in the module in question.

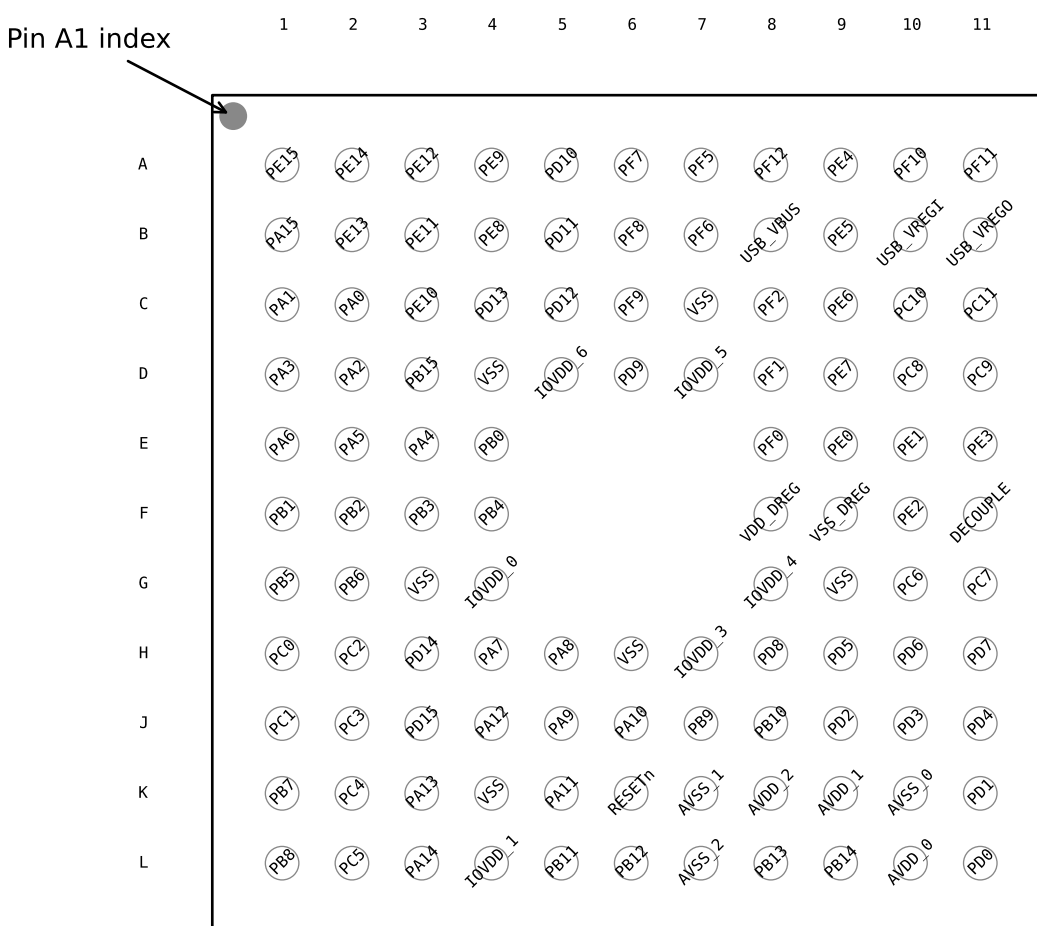


Figure 5.19. EFM32LG390 Pinout (top view, not to scale)

Table 5.28. Device Pinout

| BGA112 Pin# and Name |          | Pin Alternate Functionality / Description |                 |             |               |       |
|----------------------|----------|-------------------------------------------|-----------------|-------------|---------------|-------|
| Pin #                | Pin Name | Analog                                    | EBI             | Timers      | Communication | Other |
| A1                   | PE15     |                                           | EBI_AD07 #0/1/2 | TIM3_CC1 #0 | LEU0_RX #2    |       |
| A2                   | PE14     |                                           | EBI_AD06 #0/1/2 | TIM3_CC0 #0 | LEU0_TX #2    |       |

| BGA112 Pin# and Name |          | Pin Alternate Functionality / Description                                                                                     |                 |                                 |                                         |                                      |
|----------------------|----------|-------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------|-----------------------------------------|--------------------------------------|
| Pin #                | Pin Name | Analog                                                                                                                        | EBI             | Timers                          | Communication                           | Other                                |
| C11                  | PC11     | ACMP1_CH3                                                                                                                     | EBI_ALE #1/2    |                                 | US0_TX #2                               | LES_CH11 #0                          |
| D1                   | PA3      |                                                                                                                               | EBI_AD12 #0/1/2 | TIM0_CDTI0 #0                   | U0_TX #2                                | LES_ALTEX2 #0<br>ETM_TD1 #3          |
| D2                   | PA2      |                                                                                                                               | EBI_AD11 #0/1/2 | TIM0_CC2 #0/1                   |                                         | CMU_CLK0 #0<br>ETM_TD0 #3            |
| D3                   | PB15     |                                                                                                                               |                 |                                 |                                         | ETM_TD2 #1                           |
| D4                   | VSS      | Ground.                                                                                                                       |                 |                                 |                                         |                                      |
| D5                   | IOVDD_6  | Digital IO power supply 6.                                                                                                    |                 |                                 |                                         |                                      |
| D6                   | PD9      |                                                                                                                               | EBI_CS0 #0/1/2  |                                 |                                         |                                      |
| D7                   | IOVDD_5  | Digital IO power supply 5.                                                                                                    |                 |                                 |                                         |                                      |
| D8                   | PF1      |                                                                                                                               |                 | TIM0_CC1 #5 LE-<br>TIM0_OUT1 #2 | US1_CS #2<br>LEU0_RX #3<br>I2C0_SCL #5  | DBG_SWDIO<br>#0/1/2/3<br>GPIO_EM4WU3 |
| D9                   | PE7      |                                                                                                                               | EBI_A14 #0/1/2  |                                 | US0_TX #1                               |                                      |
| D10                  | PC8      | ACMP1_CH0                                                                                                                     | EBI_A15 #0/1/2  | TIM2_CC0 #2                     | US0_CS #2                               | LES_CH8 #0                           |
| D11                  | PC9      | ACMP1_CH1                                                                                                                     | EBI_A09 #1/2    | TIM2_CC1 #2                     | US0_CLK #2                              | LES_CH9 #0<br>GPIO_EM4WU2            |
| E1                   | PA6      |                                                                                                                               | EBI_AD15 #0/1/2 |                                 | LEU1_RX #1                              | ETM_TCLK #3<br>GPIO_EM4WU1           |
| E2                   | PA5      |                                                                                                                               | EBI_AD14 #0/1/2 | TIM0_CDTI2 #0                   | LEU1_TX #1                              | LES_ALTEX4 #0<br>ETM_TD3 #3          |
| E3                   | PA4      |                                                                                                                               | EBI_AD13 #0/1/2 | TIM0_CDTI1 #0                   | U0_RX #2                                | LES_ALTEX3 #0<br>ETM_TD2 #3          |
| E4                   | PB0      |                                                                                                                               | EBI_A16 #0/1/2  | TIM1_CC0 #2                     |                                         |                                      |
| E8                   | PF0      |                                                                                                                               |                 | TIM0_CC0 #5 LE-<br>TIM0_OUT0 #2 | US1_CLK #2<br>LEU0_TX #3<br>I2C0_SDA #5 | DBG_SWCLK<br>#0/1/2/3                |
| E9                   | PE0      |                                                                                                                               | EBI_A07 #0/1/2  | TIM3_CC0 #1<br>PCNT0_S0IN #1    | U0_TX #1<br>I2C1_SDA #2                 |                                      |
| E10                  | PE1      |                                                                                                                               | EBI_A08 #0/1/2  | TIM3_CC1 #1<br>PCNT0_S1IN #1    | U0_RX #1<br>I2C1_SCL #2                 |                                      |
| E11                  | PE3      | BU_STAT                                                                                                                       | EBI_A10 #0      |                                 | U1_RX #3                                | ACMP1_O #1                           |
| F1                   | PB1      |                                                                                                                               | EBI_A17 #0/1/2  | TIM1_CC1 #2                     |                                         |                                      |
| F2                   | PB2      |                                                                                                                               | EBI_A18 #0/1/2  | TIM1_CC2 #2                     |                                         |                                      |
| F3                   | PB3      |                                                                                                                               | EBI_A19 #0/1/2  | PCNT1_S0IN #1                   | US2_TX #1                               |                                      |
| F4                   | PB4      |                                                                                                                               | EBI_A20 #0/1/2  | PCNT1_S1IN #1                   | US2_RX #1                               |                                      |
| F8                   | VDD_DREG | Power supply for on-chip voltage regulator.                                                                                   |                 |                                 |                                         |                                      |
| F9                   | VSS_DREG | Ground for on-chip voltage regulator.                                                                                         |                 |                                 |                                         |                                      |
| F10                  | PE2      | BU_VOUT                                                                                                                       | EBI_A09 #0      | TIM3_CC2 #1                     | U1_TX #3                                | ACMP0_O #1                           |
| F11                  | DECOUPLE | Decouple output for on-chip voltage regulator. An external capacitance of size C <sub>DECOUPLE</sub> is required at this pin. |                 |                                 |                                         |                                      |

| Alternate     | LOCATION |      |      |      |      |      |   | Description                                                                                                   |
|---------------|----------|------|------|------|------|------|---|---------------------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3    | 4    | 5    | 6 |                                                                                                               |
| LEU0_TX       | PD4      | PB13 | PE14 | PF0  | PF2  |      |   | LEUART0 Transmit output. Also used as receive input in half duplex communication.                             |
| LEU1_RX       | PC7      |      |      |      |      |      |   | LEUART1 Receive input.                                                                                        |
| LEU1_TX       | PC6      | PA5  |      |      |      |      |   | LEUART1 Transmit output. Also used as receive input in half duplex communication.                             |
| LFXTAL_N      | PB8      |      |      |      |      |      |   | Low Frequency Crystal (typically 32.768 kHz) negative pin. Also used as an optional external clock input pin. |
| LFXTAL_P      | PB7      |      |      |      |      |      |   | Low Frequency Crystal (typically 32.768 kHz) positive pin.                                                    |
| PCNT0_S0IN    | PC13     |      |      | PD6  |      |      |   | Pulse Counter PCNT0 input number 0.                                                                           |
| PCNT0_S1IN    | PC14     |      |      | PD7  |      |      |   | Pulse Counter PCNT0 input number 1.                                                                           |
| PCNT1_S0IN    | PC4      | PB3  |      |      |      |      |   | Pulse Counter PCNT1 input number 0.                                                                           |
| PCNT1_S1IN    | PC5      | PB4  |      |      |      |      |   | Pulse Counter PCNT1 input number 1.                                                                           |
| PCNT2_S0IN    | PD0      | PE8  |      |      |      |      |   | Pulse Counter PCNT2 input number 0.                                                                           |
| PCNT2_S1IN    | PD1      | PE9  |      |      |      |      |   | Pulse Counter PCNT2 input number 1.                                                                           |
| PRS_CH0       | PA0      | PF3  |      |      |      |      |   | Peripheral Reflex System PRS, channel 0.                                                                      |
| PRS_CH1       | PA1      | PF4  |      |      |      |      |   | Peripheral Reflex System PRS, channel 1.                                                                      |
| PRS_CH2       |          | PF5  |      |      |      |      |   | Peripheral Reflex System PRS, channel 2.                                                                      |
| PRS_CH3       |          | PE8  |      |      |      |      |   | Peripheral Reflex System PRS, channel 3.                                                                      |
| TIM0_CC0      | PA0      | PA0  |      | PD1  | PA0  | PF0  |   | Timer 0 Capture Compare input / output channel 0.                                                             |
| TIM0_CC1      | PA1      | PA1  |      | PD2  |      | PF1  |   | Timer 0 Capture Compare input / output channel 1.                                                             |
| TIM0_CC2      | PA2      | PA2  |      | PD3  |      | PF2  |   | Timer 0 Capture Compare input / output channel 2.                                                             |
| TIM0_CDTI0    | PA3      | PC13 | PF3  | PC13 |      | PF3  |   | Timer 0 Complimentary Deat Time Insertion channel 0.                                                          |
| TIM0_CDTI1    | PA4      | PC14 | PF4  | PC14 |      | PF4  |   | Timer 0 Complimentary Deat Time Insertion channel 1.                                                          |
| TIM0_CDTI2    | PA5      | PC15 | PF5  | PC15 | PC4  | PF5  |   | Timer 0 Complimentary Deat Time Insertion channel 2.                                                          |
| TIM1_CC0      | PC13     | PE10 |      | PB7  | PD6  |      |   | Timer 1 Capture Compare input / output channel 0.                                                             |
| TIM1_CC1      | PC14     | PE11 |      | PB8  | PD7  |      |   | Timer 1 Capture Compare input / output channel 1.                                                             |
| TIM1_CC2      | PC15     | PE12 |      | PB11 |      |      |   | Timer 1 Capture Compare input / output channel 2.                                                             |
| TIM2_CC0      |          | PA12 |      |      |      |      |   | Timer 2 Capture Compare input / output channel 0.                                                             |
| TIM2_CC1      |          | PA13 |      |      |      |      |   | Timer 2 Capture Compare input / output channel 1.                                                             |
| TIM2_CC2      |          | PA14 |      |      |      |      |   | Timer 2 Capture Compare input / output channel 2.                                                             |
| TIM3_CC0      | PE14     |      |      |      |      |      |   | Timer 3 Capture Compare input / output channel 0.                                                             |
| TIM3_CC1      | PE15     |      |      |      |      |      |   | Timer 3 Capture Compare input / output channel 1.                                                             |
| US0_CLK       | PE12     | PE5  |      | PC15 | PB13 | PB13 |   | USART0 clock input / output.                                                                                  |
| US0_CS        | PE13     | PE4  |      | PC14 | PB14 | PB14 |   | USART0 chip select input / output.                                                                            |

| Alternate     | LOCATION |      |      |   |   |   |   |                                                                      |
|---------------|----------|------|------|---|---|---|---|----------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3 | 4 | 5 | 6 | Description                                                          |
| EBI_AD07      | PE15     | PE15 | PE15 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 07. |
| EBI_AD08      | PA15     | PA15 | PA15 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 08. |
| EBI_AD09      | PA0      | PA0  | PA0  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 09. |
| EBI_AD10      | PA1      | PA1  | PA1  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 10. |
| EBI_AD11      | PA2      | PA2  | PA2  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 11. |
| EBI_AD12      | PA3      | PA3  | PA3  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 12. |
| EBI_AD13      | PA4      | PA4  | PA4  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 13. |
| EBI_AD14      | PA5      | PA5  | PA5  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 14. |
| EBI_AD15      | PA6      | PA6  | PA6  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 15. |
| EBI_ALE       | PF3      | PC11 | PC11 |   |   |   |   | External Bus Interface (EBI) Address Latch Enable output.            |
| EBI_ARDY      | PF2      | PF2  | PF2  |   |   |   |   | External Bus Interface (EBI) Hardware Ready Control input.           |
| EBI_BL0       | PF6      | PF6  | PF6  |   |   |   |   | External Bus Interface (EBI) Byte Lane/Enable pin 0.                 |
| EBI_BL1       | PF7      | PF7  | PF7  |   |   |   |   | External Bus Interface (EBI) Byte Lane/Enable pin 1.                 |
| EBI_CS0       | PD9      | PD9  | PD9  |   |   |   |   | External Bus Interface (EBI) Chip Select output 0.                   |
| EBI_CS1       | PD10     | PD10 | PD10 |   |   |   |   | External Bus Interface (EBI) Chip Select output 1.                   |
| EBI_CS2       | PD11     | PD11 | PD11 |   |   |   |   | External Bus Interface (EBI) Chip Select output 2.                   |
| EBI_CS3       | PD12     | PD12 | PD12 |   |   |   |   | External Bus Interface (EBI) Chip Select output 3.                   |
| EBI_CSTFT     | PA7      | PA7  | PA7  |   |   |   |   | External Bus Interface (EBI) Chip Select output TFT.                 |
| EBI_DCLK      | PA8      | PA8  | PA8  |   |   |   |   | External Bus Interface (EBI) TFT Dot Clock pin.                      |
| EBI_DTEN      | PA9      | PA9  | PA9  |   |   |   |   | External Bus Interface (EBI) TFT Data Enable pin.                    |
| EBI_HSNC      | PA11     | PA11 | PA11 |   |   |   |   | External Bus Interface (EBI) TFT Horizontal Synchronization pin.     |
| EBI_NANDREn   | PC3      | PC3  | PC3  |   |   |   |   | External Bus Interface (EBI) NAND Read Enable output.                |
| EBI_NANDWEn   | PC5      | PC5  | PC5  |   |   |   |   | External Bus Interface (EBI) NAND Write Enable output.               |
| EBI_REn       | PF5      | PF9  | PF5  |   |   |   |   | External Bus Interface (EBI) Read Enable output.                     |
| EBI_VSNC      | PA10     | PA10 | PA10 |   |   |   |   | External Bus Interface (EBI) TFT Vertical Synchronization pin.       |

## 5.16 EFM32LG895 (BGA120)

### 5.16.1 Pinout

The EFM32LG895 pinout is shown in the following figure and table. Alternate locations are denoted by "#" followed by the location number (Multiple locations on the same pin are split with "/"). Alternate locations can be configured in the LOCATION bitfield in the \*\_ROUTE register in the module in question.

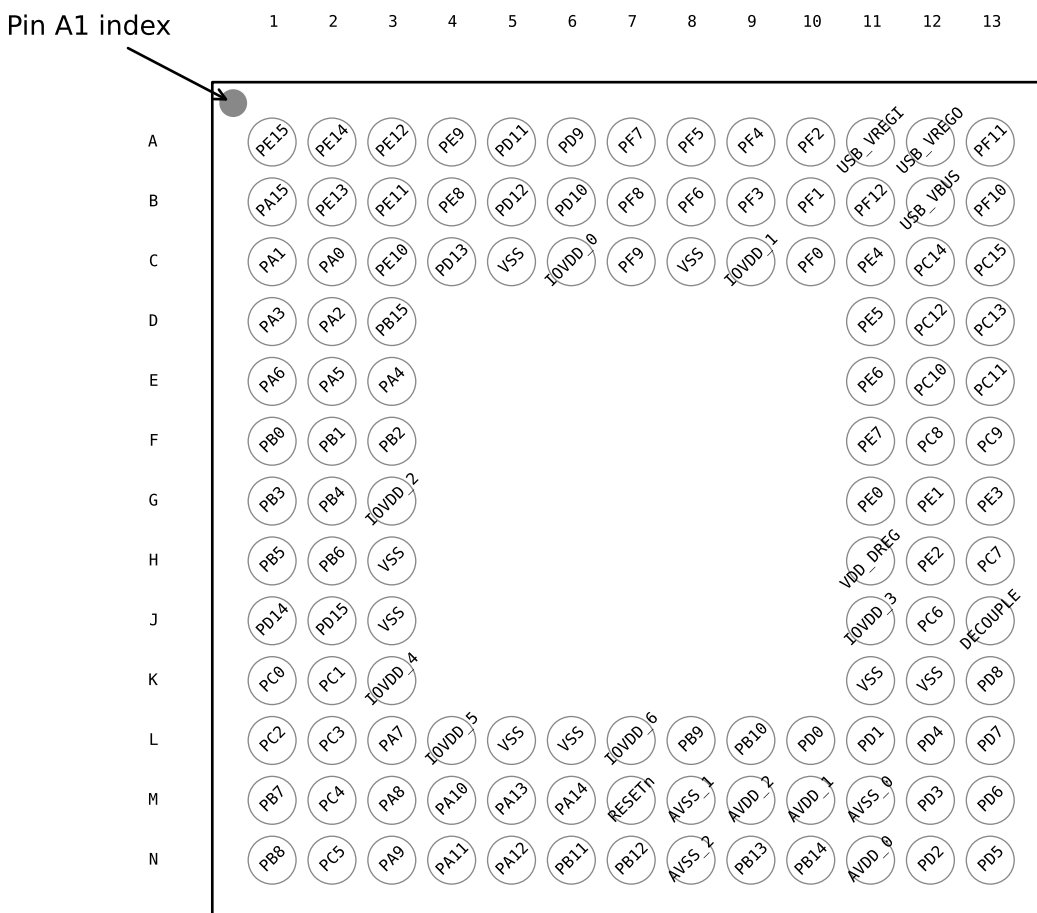


Figure 5.31. EFM32LG895 Pinout (top view, not to scale)

Table 5.46. Device Pinout

| BGA120 Pin# and Name |          | Pin Alternate Functionality / Description |                 |             |               |       |
|----------------------|----------|-------------------------------------------|-----------------|-------------|---------------|-------|
| Pin #                | Pin Name | Analog                                    | EBI             | Timers      | Communication | Other |
| A1                   | PE15     | LCD_SEG11                                 | EBI_AD07 #0/1/2 | TIM3_CC1 #0 | LEU0_RX #2    |       |
| A2                   | PE14     | LCD_SEG10                                 | EBI_AD06 #0/1/2 | TIM3_CC0 #0 | LEU0_TX #2    |       |

| Alternate     | LOCATION |   |   |   |   |   |   |                                                                           |
|---------------|----------|---|---|---|---|---|---|---------------------------------------------------------------------------|
| Functionality | 0        | 1 | 2 | 3 | 4 | 5 | 6 | Description                                                               |
| LCD_SEG25     | PF7      |   |   |   |   |   |   | LCD segment line 25. Segments 24, 25, 26 and 27 are controlled by SEGEN6. |
| LCD_SEG26     | PF8      |   |   |   |   |   |   | LCD segment line 26. Segments 24, 25, 26 and 27 are controlled by SEGEN6. |
| LCD_SEG27     | PF9      |   |   |   |   |   |   | LCD segment line 27. Segments 24, 25, 26 and 27 are controlled by SEGEN6. |
| LCD_SEG28     | PD9      |   |   |   |   |   |   | LCD segment line 28. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG29     | PD10     |   |   |   |   |   |   | LCD segment line 29. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG30     | PD11     |   |   |   |   |   |   | LCD segment line 30. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG31     | PD12     |   |   |   |   |   |   | LCD segment line 31. Segments 28, 29, 30 and 31 are controlled by SEGEN7. |
| LCD_SEG32     | PB0      |   |   |   |   |   |   | LCD segment line 32. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG33     | PB1      |   |   |   |   |   |   | LCD segment line 33. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG34     | PB2      |   |   |   |   |   |   | LCD segment line 34. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG35     | PA7      |   |   |   |   |   |   | LCD segment line 35. Segments 32, 33, 34 and 35 are controlled by SEGEN8. |
| LCD_SEG36     | PA8      |   |   |   |   |   |   | LCD segment line 36. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LCD_SEG37     | PA9      |   |   |   |   |   |   | LCD segment line 37. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LCD_SEG38     | PA10     |   |   |   |   |   |   | LCD segment line 38. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LCD_SEG39     | PA11     |   |   |   |   |   |   | LCD segment line 39. Segments 36, 37, 38 and 39 are controlled by SEGEN9. |
| LES_ALTEX0    | PD6      |   |   |   |   |   |   | LESENSE alternate exite output 0.                                         |
| LES_ALTEX1    | PD7      |   |   |   |   |   |   | LESENSE alternate exite output 1.                                         |
| LES_ALTEX2    | PA3      |   |   |   |   |   |   | LESENSE alternate exite output 2.                                         |
| LES_ALTEX3    | PA4      |   |   |   |   |   |   | LESENSE alternate exite output 3.                                         |
| LES_ALTEX4    | PA5      |   |   |   |   |   |   | LESENSE alternate exite output 4.                                         |
| LES_ALTEX5    | PE11     |   |   |   |   |   |   | LESENSE alternate exite output 5.                                         |
| LES_ALTEX6    | PE12     |   |   |   |   |   |   | LESENSE alternate exite output 6.                                         |
| LES_ALTEX7    | PE13     |   |   |   |   |   |   | LESENSE alternate exite output 7.                                         |
| LES_CH0       | PC0      |   |   |   |   |   |   | LESENSE channel 0.                                                        |
| LES_CH1       | PC1      |   |   |   |   |   |   | LESENSE channel 1.                                                        |
| LES_CH2       | PC2      |   |   |   |   |   |   | LESENSE channel 2.                                                        |
| LES_CH3       | PC3      |   |   |   |   |   |   | LESENSE channel 3.                                                        |

| Alternate     | LOCATION  |   |   |   |   |   |   |                                                                      |
|---------------|-----------|---|---|---|---|---|---|----------------------------------------------------------------------|
| Functionality | 0         | 1 | 2 | 3 | 4 | 5 | 6 | Description                                                          |
| USB_DP        | PF11      |   |   |   |   |   |   | USB D+ pin.                                                          |
| USB_ID        | PF12      |   |   |   |   |   |   | USB ID pin. Used in OTG mode.                                        |
| USB_VBUS      | USB_VBUS  |   |   |   |   |   |   | USB 5 V VBUS input.                                                  |
| USB_VBUSEN    | PF5       |   |   |   |   |   |   | USB 5 V VBUS enable.                                                 |
| USB_VREGI     | USB_VREGI |   |   |   |   |   |   | USB Input to internal 3.3 V regulator                                |
| USB_VREGO     | USB_VREGO |   |   |   |   |   |   | USB Decoupling for internal 3.3 V USB regulator and regulator output |

### 5.21.3 GPIO Pinout Overview


The specific GPIO pins available in EFM32LG990 is shown in the following table. Each GPIO port is organized as 16-bit ports indicated by letters A through F, and the individual pin on this port is indicated by a number from 15 down to 0.

**Table 5.63. GPIO Pinout**

| Port   | Pin 15 | Pin 14 | Pin 13 | Pin 12 | Pin 11 | Pin 10 | Pin 9 | Pin 8 | Pin 7 | Pin 6 | Pin 5 | Pin 4 | Pin 3 | Pin 2 | Pin 1 | Pin 0 |
|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Port A | PA15   | PA14   | PA13   | PA12   | PA11   | PA10   | PA9   | PA8   | PA7   | PA6   | PA5   | PA4   | PA3   | PA2   | PA1   | PA0   |
| Port B | PB15   | PB14   | PB13   | PB12   | PB11   | PB10   | PB9   | PB8   | PB7   | PB6   | PB5   | PB4   | PB3   | PB2   | PB1   | PB0   |
| Port C | —      | —      | —      | —      | PC11   | PC10   | PC9   | PC8   | PC7   | PC6   | PC5   | PC4   | PC3   | PC2   | PC1   | PC0   |
| Port D | PD15   | PD14   | PD13   | PD12   | PD11   | PD10   | PD9   | PD8   | PD7   | PD6   | PD5   | PD4   | PD3   | PD2   | PD1   | PD0   |
| Port E | PE15   | PE14   | PE13   | PE12   | PE11   | PE10   | PE9   | PE8   | PE7   | PE6   | PE5   | PE4   | PE3   | PE2   | PE1   | PE0   |
| Port F | —      | —      | —      | PF12   | PF11   | PF10   | PF9   | PF8   | PF7   | PF6   | PF5   | —     | —     | PF2   | PF1   | PF0   |

### 5.21.4 Opamp Pinout Overview

The specific opamp terminals available in EFM32LG990 is shown in the following figure.

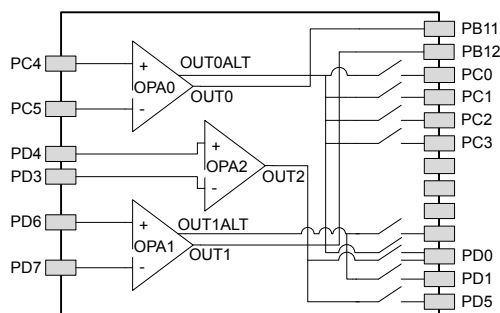

**Figure 5.42. Opamp Pinout**

| Alternate     | LOCATION |      |      |     |     |     |   | Description                                                                                                   |
|---------------|----------|------|------|-----|-----|-----|---|---------------------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3   | 4   | 5   | 6 |                                                                                                               |
| LES_CH4       | PC4      |      |      |     |     |     |   | LESENSE channel 4.                                                                                            |
| LES_CH5       | PC5      |      |      |     |     |     |   | LESENSE channel 5.                                                                                            |
| LES_CH6       | PC6      |      |      |     |     |     |   | LESENSE channel 6.                                                                                            |
| LES_CH7       | PC7      |      |      |     |     |     |   | LESENSE channel 7.                                                                                            |
| LES_CH8       | PC8      |      |      |     |     |     |   | LESENSE channel 8.                                                                                            |
| LES_CH9       | PC9      |      |      |     |     |     |   | LESENSE channel 9.                                                                                            |
| LES_CH10      | PC10     |      |      |     |     |     |   | LESENSE channel 10.                                                                                           |
| LES_CH11      | PC11     |      |      |     |     |     |   | LESENSE channel 11.                                                                                           |
| LES_CH12      | PC12     |      |      |     |     |     |   | LESENSE channel 12.                                                                                           |
| LES_CH13      | PC13     |      |      |     |     |     |   | LESENSE channel 13.                                                                                           |
| LES_CH14      | PC14     |      |      |     |     |     |   | LESENSE channel 14.                                                                                           |
| LES_CH15      | PC15     |      |      |     |     |     |   | LESENSE channel 15.                                                                                           |
| LETIM0_OUT0   | PD6      | PB11 | PF0  | PC4 |     |     |   | Low Energy Timer LETIM0, output channel 0.                                                                    |
| LETIM0_OUT1   | PD7      | PB12 | PF1  | PC5 |     |     |   | Low Energy Timer LETIM0, output channel 1.                                                                    |
| LEU0_RX       | PD5      | PB14 | PE15 | PF1 | PA0 |     |   | LEUART0 Receive input.                                                                                        |
| LEU0_TX       | PD4      | PB13 | PE14 | PF0 | PF2 |     |   | LEUART0 Transmit output. Also used as receive input in half duplex communication.                             |
| LEU1_RX       | PC7      | PA6  |      |     |     |     |   | LEUART1 Receive input.                                                                                        |
| LEU1_TX       | PC6      | PA5  |      |     |     |     |   | LEUART1 Transmit output. Also used as receive input in half duplex communication.                             |
| LFXTAL_N      | PB8      |      |      |     |     |     |   | Low Frequency Crystal (typically 32.768 kHz) negative pin. Also used as an optional external clock input pin. |
| LFXTAL_P      | PB7      |      |      |     |     |     |   | Low Frequency Crystal (typically 32.768 kHz) positive pin.                                                    |
| PCNT0_S0IN    | PC13     | PE0  | PC0  | PD6 |     |     |   | Pulse Counter PCNT0 input number 0.                                                                           |
| PCNT0_S1IN    | PC14     | PE1  | PC1  | PD7 |     |     |   | Pulse Counter PCNT0 input number 1.                                                                           |
| PCNT1_S0IN    | PC4      | PB3  |      |     |     |     |   | Pulse Counter PCNT1 input number 0.                                                                           |
| PCNT1_S1IN    | PC5      | PB4  |      |     |     |     |   | Pulse Counter PCNT1 input number 1.                                                                           |
| PCNT2_S0IN    | PD0      | PE8  |      |     |     |     |   | Pulse Counter PCNT2 input number 0.                                                                           |
| PCNT2_S1IN    | PD1      | PE9  |      |     |     |     |   | Pulse Counter PCNT2 input number 1.                                                                           |
| PRS_CH0       | PA0      | PF3  |      |     |     |     |   | Peripheral Reflex System PRS, channel 0.                                                                      |
| PRS_CH1       | PA1      | PF4  |      |     |     |     |   | Peripheral Reflex System PRS, channel 1.                                                                      |
| PRS_CH2       | PC0      | PF5  |      |     |     |     |   | Peripheral Reflex System PRS, channel 2.                                                                      |
| PRS_CH3       | PC1      | PE8  |      |     |     |     |   | Peripheral Reflex System PRS, channel 3.                                                                      |
| TIM0_CC0      | PA0      | PA0  | PF6  | PD1 | PA0 | PF0 |   | Timer 0 Capture Compare input / output channel 0.                                                             |
| TIM0_CC1      | PA1      | PA1  | PF7  | PD2 | PC0 | PF1 |   | Timer 0 Capture Compare input / output channel 1.                                                             |
| TIM0_CC2      | PA2      | PA2  | PF8  | PD3 | PC1 | PF2 |   | Timer 0 Capture Compare input / output channel 2.                                                             |