



Welcome to [E-XFL.COM](#)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)


Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |   |
|--------------------------------|---|
| Product Status                 | Obsolete  |
| Number of LABs/CLBs            | -   |
| Number of Logic Elements/Cells | 3120  |
| Total RAM Bits                 | 36864   |
| Number of I/O                  | 212   |
| Number of Gates                | 125000  |
| Voltage - Supply               | 1.14V ~ 1.575V  |
| Mounting Type                  | Surface Mount   |
| Operating Temperature          | -40°C ~ 100°C (TJ)  |
| Package / Case                 | 281-TFBGA, CSBGA  |
| Supplier Device Package        | 281-CSP (10x10)   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/aglp125v2-cs281i">https://www.e-xfl.com/product-detail/microchip-technology/aglp125v2-cs281i</a> |

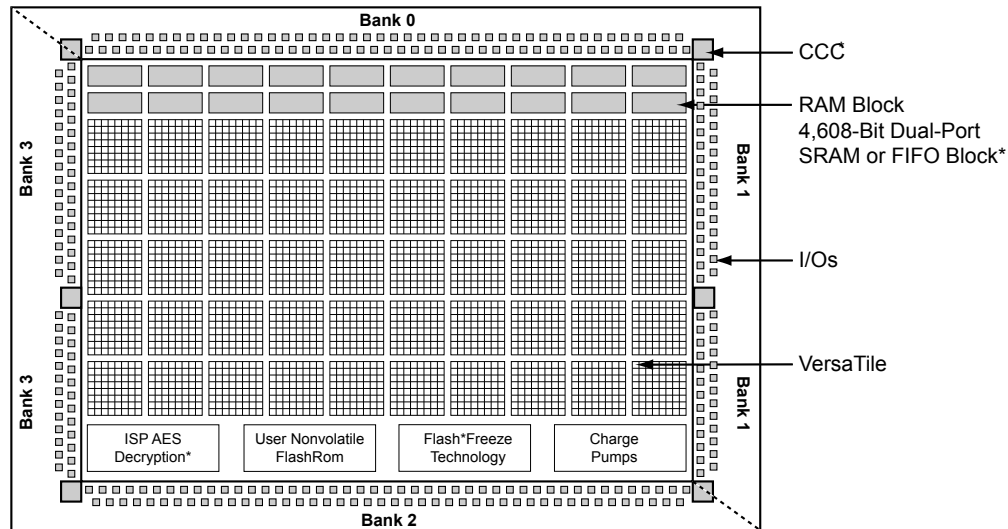

*Note:* \*Not supported by AGLP030 devices


**Figure 1-1 • IGLOO PLUS Device Architecture Overview with Four I/O Banks (AGLP030, AGLP060, and AGLP125)**

### Flash\*Freeze Technology

The IGLOO PLUS device has an ultra-low power static mode, called Flash\*Freeze mode, which retains all SRAM and register information and can still quickly return to normal operation. Flash\*Freeze technology enables the user to quickly (within 1  $\mu$ s) enter and exit Flash\*Freeze mode by activating the Flash\*Freeze pin while all power supplies are kept at their original values. In addition, I/Os and global I/Os can still be driven and can be toggling without impact on power consumption, clocks can still be driven or can be toggling without impact on power consumption, and the device retains all core registers, SRAM information, and I/O states. I/Os can be individually configured to either hold their previous state or be tristated during Flash\*Freeze mode. Alternatively, they can be set to a certain state using weak pull-up or pull-down I/O attribute configuration. No power is consumed by the I/O banks, clocks, JTAG pins, or PLL, and the device consumes as little as 5  $\mu$ W in this mode.

Flash\*Freeze technology allows the user to switch to Active mode on demand, thus simplifying the power management of the device.

The Flash\*Freeze pin (active low) can be routed internally to the core to allow the user's logic to decide when it is safe to transition to this mode. Refer to [Figure 1-2](#) for an illustration of entering/exiting Flash\*Freeze mode. It is also possible to use the Flash\*Freeze pin as a regular I/O if Flash\*Freeze mode usage is not planned.

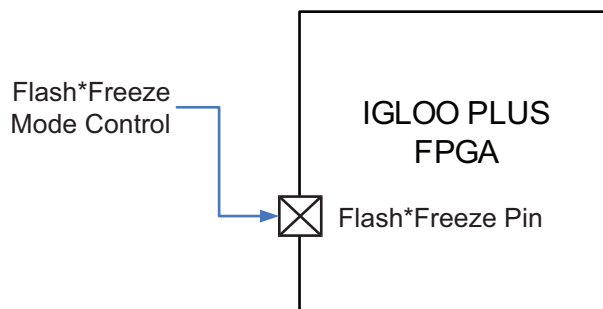

**Figure 1-2 • IGLOO PLUS Flash\*Freeze Mode**

## **SRAM and FIFO**

IGLOO PLUS devices (except AGLP030 devices) have embedded SRAM blocks along their north side. Each variable-aspect-ratio SRAM block is 4,608 bits in size. Available memory configurations are 256×18, 512×9, 1k×4, 2k×2, and 4k×1 bits. The individual blocks have independent read and write ports that can be configured with different bit widths on each port. For example, data can be sent through a 4-bit port and read as a single bitstream. The embedded SRAM blocks can be initialized via the device JTAG port (ROM emulation mode) using the UJTAG macro (except in AGLP030 devices).

In addition, every SRAM block has an embedded FIFO control unit. The control unit allows the SRAM block to be configured as a synchronous FIFO without using additional core VersaTiles. The FIFO width and depth are programmable. The FIFO also features programmable Almost Empty (AEMPTY) and Almost Full (AFULL) flags in addition to the normal Empty and Full flags. The embedded FIFO control unit contains the counters necessary for generation of the read and write address pointers. The embedded SRAM/FIFO blocks can be cascaded to create larger configurations.

## **PLL and CCC**

IGLOO PLUS devices provide designers with very flexible clock conditioning circuit (CCC) capabilities. Each member of the IGLOO PLUS family contains six CCCs. One CCC (center west side) has a PLL. The AGLP030 device does not have a PLL or CCCs; it contains only inputs to six globals.

The six CCC blocks are located at the four corners and the centers of the east and west sides. One CCC (center west side) has a PLL.

The four corner CCCs and the east CCC allow simple clock delay operations as well as clock spine access.

The inputs of the six CCC blocks are accessible from the FPGA core or from one of several inputs located near the CCC that have dedicated connections to the CCC block.

The CCC block has these key features:

- Wide input frequency range ( $f_{IN\_CCC}$ ) = 1.5 MHz up to 250 MHz
- Output frequency range ( $f_{OUT\_CCC}$ ) = 0.75 MHz up to 250 MHz
- 2 programmable delay types for clock skew minimization
- Clock frequency synthesis (for PLL only)

Additional CCC specifications:

- Internal phase shift = 0°, 90°, 180°, and 270°. Output phase shift depends on the output divider configuration (for PLL only).
- Output duty cycle = 50% ± 1.5% or better (for PLL only)
- Low output jitter: worst case < 2.5% × clock period peak-to-peak period jitter when single global network used (for PLL only)
- Maximum acquisition time is 300 μs (for PLL only)
- Exceptional tolerance to input period jitter—allowable input jitter is up to 1.5 ns (for PLL only)
- Four precise phases; maximum misalignment between adjacent phases (for PLL only) is 40 ps × 250 MHz /  $f_{OUT\_CCC}$

## **Global Clocking**

IGLOO PLUS devices have extensive support for multiple clocking domains. In addition to the CCC and PLL support described above, there is a comprehensive global clock distribution network.

Each VersaTile input and output port has access to nine VersaNets: six chip (main) and three quadrant global networks. The VersaNets can be driven by the CCC or directly accessed from the core via multiplexers (MUXes). The VersaNets can be used to distribute low-skew clock signals or for rapid distribution of high-fanout nets.

## **I/Os with Advanced I/O Standards**

The IGLOO PLUS family of FPGAs features a flexible I/O structure, supporting a range of voltages (1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.0 V wide range, and 3.3 V). IGLOO PLUS FPGAs support many different I/O standards.

The I/Os are organized into four banks. All devices in IGLOO PLUS have four banks. The configuration of these banks determines the I/O standards supported.

**Table 2-3 • Flash Programming Limits – Retention, Storage, and Operating Temperature**<sup>1</sup>

| Product Grade | Programming Cycles | Program Retention (biased/unbiased) | Maximum Storage Temperature T <sub>STG</sub> (°C) <sup>2</sup> | Maximum Operating Junction Temperature T <sub>J</sub> (°C) <sup>2</sup> |
|---------------|--------------------|-------------------------------------|--|---|
| Commercial    | 500                | 20 years                            | 110  | 100   |
| Industrial    | 500                | 20 years                            | 110  | 100   |

**Notes:**

1. This is a stress rating only; functional operation at any condition other than those indicated is not implied.
2. These limits apply for program/data retention only. Refer to [Table 2-1 on page 2-1](#) and [Table 2-2](#) for device operating conditions and absolute limits.

**Table 2-4 • Overshoot and Undershoot Limits**<sup>1</sup>

| VCCI          | Average VCCI–GND Overshoot or Undershoot Duration as a Percentage of Clock Cycle <sup>2</sup> | Maximum Overshoot/Undershoot <sup>2</sup> |
|---------------|---|---|
| 2.7 V or less | 10%   | 1.4 V                                     |
|               | 5%  | 1.49 V                                    |
| 3 V           | 10%   | 1.1 V                                     |
|               | 5%  | 1.19 V                                    |
| 3.3 V         | 10%   | 0.79 V                                    |
|               | 5%  | 0.88 V                                    |
| 3.6 V         | 10%   | 0.45 V                                    |
|               | 5%  | 0.54 V                                    |

**Notes:**

1. Based on reliability requirements at 85°C.
2. The duration is allowed at one out of six clock cycles. If the overshoot/undershoot occurs at one out of two cycles, the maximum overshoot/undershoot has to be reduced by 0.15 V.

## I/O Power-Up and Supply Voltage Thresholds for Power-On Reset (Commercial and Industrial)

Sophisticated power-up management circuitry is designed into every IGLOO PLUS device. These circuits ensure easy transition from the powered-off state to the powered-up state of the device. The many different supplies can power up in any sequence with minimized current spikes or surges. In addition, the I/O will be in a known state through the power-up sequence. The basic principle is shown in [Figure 2-1 on page 2-4](#).

There are five regions to consider during power-up.

IGLOO PLUS I/Os are activated only if ALL of the following three conditions are met:

1. VCC and VCCI are above the minimum specified trip points ([Figure 2-1](#) and [Figure 2-2 on page 2-5](#)).
2. VCCI > VCC – 0.75 V (typical)
3. Chip is in the operating mode.

**VCCI Trip Point:**

Ramping up (V5 devices): 0.6 V < trip\_point\_up < 1.2 V

Ramping down (V5 devices): 0.5 V < trip\_point\_down < 1.1 V

Ramping up (V2 devices): 0.75 V < trip\_point\_up < 1.05 V

Ramping down (V2 devices): 0.65 V < trip\_point\_down < 0.95 V

**VCC Trip Point:**

Ramping up (V5 devices): 0.6 V < trip\_point\_up < 1.1 V

Ramping down (V5 devices): 0.5 V < trip\_point\_down < 1.0 V

**Table 2-22 • Summary of Maximum and Minimum DC Input Levels**  
Applicable to Commercial and Industrial Conditions

| DC I/O Standards                     | Commercial <sup>1</sup> |                  | Industrial <sup>2</sup> |                  |
|--------------------------------------|-------------------------|------------------|-------------------------|------------------|
|                                      | IIL <sup>3</sup>        | IIH <sup>4</sup> | IIL <sup>3</sup>        | IIH <sup>4</sup> |
|                                      | μA                      | μA               | μA                      | μA               |
| 3.3 V LVTTTL / 3.3 V LVCMOS          | 10                      | 10               | 15                      | 15               |
| 3.3 V LVCMOS Wide Range              | 10                      | 10               | 15                      | 15               |
| 2.5 V LVCMOS                         | 10                      | 10               | 15                      | 15               |
| 1.8 V LVCMOS                         | 10                      | 10               | 15                      | 15               |
| 1.5 V LVCMOS                         | 10                      | 10               | 15                      | 15               |
| 1.2 V LVCMOS <sup>5</sup>            | 10                      | 10               | 15                      | 15               |
| 1.2 V LVCMOS Wide Range <sup>5</sup> | 10                      | 10               | 15                      | 15               |

**Notes:**

1. Commercial range ( $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$ )
2. Industrial range ( $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$ )
3. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3\text{ V} < V_{IN} < V_{IL}$ .
4. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges.
5. Applicable to IGLOO PLUS V2 devices operating at  $V_{CCI} \geq V_{CC}$ .

### Summary of I/O Timing Characteristics – Default I/O Software Settings

**Table 2-23 • Summary of AC Measuring Points**

| Standard                    | Measuring Trip Point (Vtrip) |
|-----------------------------|------------------------------|
| 3.3 V LVTTTL / 3.3 V LVCMOS | 1.4 V                        |
| 3.3 V LVCMOS Wide Range     | 1.4 V                        |
| 2.5 V LVCMOS                | 1.2 V                        |
| 1.8 V LVCMOS                | 0.90 V                       |
| 1.5 V LVCMOS                | 0.75 V                       |
| 1.2 V LVCMOS                | 0.60 V                       |
| 1.2 V LVCMOS Wide Range     | 0.60 V                       |

## Timing Characteristics

### Applies to 1.5 V DC Core Voltage

**Table 2-36 • 3.3 V LVTTL / 3.3 V LVCMOS Low Slew – Applies to 1.5 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.425 V, Worst-Case VCCI = 3.0 V

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{PYS}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|-----------|------------|----------|----------|----------|----------|-------|
| 2 mA           | STD         | 0.97       | 3.94     | 0.18      | 0.85     | 1.15      | 0.66       | 4.02     | 3.46     | 1.82     | 1.87     | ns    |
| 4 mA           | STD         | 0.97       | 3.94     | 0.18      | 0.85     | 1.15      | 0.66       | 4.02     | 3.46     | 1.82     | 1.87     | ns    |
| 6 mA           | STD         | 0.97       | 3.20     | 0.18      | 0.85     | 1.15      | 0.66       | 3.27     | 2.94     | 2.04     | 2.27     | ns    |
| 8 mA           | STD         | 0.97       | 3.20     | 0.18      | 0.85     | 1.15      | 0.66       | 3.27     | 2.94     | 2.04     | 2.27     | ns    |
| 12 mA          | STD         | 0.97       | 2.72     | 0.18      | 0.85     | 1.15      | 0.66       | 2.78     | 2.57     | 2.20     | 2.53     | ns    |
| 16 mA          | STD         | 0.97       | 2.72     | 0.18      | 0.85     | 1.15      | 0.66       | 2.78     | 2.57     | 2.20     | 2.53     | ns    |

*Note:* For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-37 • 3.3 V LVTTL / 3.3 V LVCMOS High Slew – Applies to 1.5 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.425 V, Worst-Case VCCI = 3.0 V

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{PYS}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|-----------|------------|----------|----------|----------|----------|-------|
| 2 mA           | STD         | 0.97       | 2.36     | 0.18      | 0.85     | 1.15      | 0.66       | 2.41     | 1.90     | 1.82     | 1.98     | ns    |
| 4 mA           | STD         | 0.97       | 2.36     | 0.18      | 0.85     | 1.15      | 0.66       | 2.41     | 1.90     | 1.82     | 1.98     | ns    |
| 6 mA           | STD         | 0.97       | 1.96     | 0.18      | 0.85     | 1.15      | 0.66       | 2.01     | 1.56     | 2.04     | 2.38     | ns    |
| 8 mA           | STD         | 0.97       | 1.96     | 0.18      | 0.85     | 1.15      | 0.66       | 2.01     | 1.56     | 2.04     | 2.38     | ns    |
| 12 mA          | STD         | 0.97       | 1.76     | 0.18      | 0.85     | 1.15      | 0.66       | 1.80     | 1.39     | 2.20     | 2.64     | ns    |
| 16 mA          | STD         | 0.97       | 1.76     | 0.18      | 0.85     | 1.15      | 0.66       | 1.80     | 1.39     | 2.20     | 2.64     | ns    |

#### Notes:

- For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.
- Software default selection highlighted in gray.

### Applies to 1.2 V DC Core Voltage

**Table 2-38 • 3.3 V LVTTL / 3.3 V LVCMOS Low Slew – Applies to 1.2 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.14 V, Worst-Case VCCI = 3.0 V

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{PYS}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|-----------|------------|----------|----------|----------|----------|-------|
| 2 mA           | STD         | 0.98       | 4.56     | 0.19      | 0.99     | 1.37      | 0.67       | 4.63     | 3.98     | 2.26     | 2.57     | ns    |
| 4 mA           | STD         | 0.98       | 4.56     | 0.19      | 0.99     | 1.37      | 0.67       | 4.63     | 3.98     | 2.26     | 2.57     | ns    |
| 6 mA           | STD         | 0.98       | 3.80     | 0.19      | 0.99     | 1.37      | 0.67       | 3.96     | 3.45     | 2.49     | 2.98     | ns    |
| 8 mA           | STD         | 0.98       | 3.80     | 0.19      | 0.99     | 1.37      | 0.67       | 3.86     | 3.45     | 2.49     | 2.98     | ns    |
| 12 mA          | STD         | 0.98       | 3.31     | 0.19      | 0.99     | 1.37      | 0.67       | 3.36     | 3.07     | 2.65     | 3.25     | ns    |
| 16 mA          | STD         | 0.98       | 3.31     | 0.19      | 0.99     | 1.37      | 0.67       | 3.36     | 3.07     | 2.65     | 3.25     | ns    |

*Note:* For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Applies to 1.2 V DC Core Voltage**

**Table 2-44 • 3.3 V LVCMOS Wide Range Low Slew – Applies to 1.2 V DC Core Voltage**  
Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 2.7\text{ V}$

| Drive Strength    | Equivalent Software Default Drive Strength Option <sup>1</sup> | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{PYS}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | Units |
|-------------------|--|-------------|------------|----------|-----------|----------|-----------|------------|----------|----------|----------|----------|-------|
| 100 $\mu\text{A}$ | 4 mA   | STD         | 0.98       | 6.68     | 0.19      | 1.32     | 1.92      | 0.67       | 6.68     | 5.74     | 3.13     | 3.47     | ns    |
| 100 $\mu\text{A}$ | 6 mA   | STD         | 0.98       | 5.51     | 0.19      | 1.32     | 1.92      | 0.67       | 5.51     | 4.94     | 3.48     | 4.11     | ns    |
| 100 $\mu\text{A}$ | 8 mA   | STD         | 0.98       | 5.51     | 0.19      | 1.32     | 1.92      | 0.67       | 5.51     | 4.94     | 3.48     | 4.11     | ns    |
| 100 $\mu\text{A}$ | 12 mA  | STD         | 0.98       | 4.75     | 0.19      | 1.32     | 1.92      | 0.67       | 4.75     | 4.36     | 3.73     | 4.52     | ns    |
| 100 $\mu\text{A}$ | 16 mA  | STD         | 0.98       | 4.75     | 0.19      | 1.32     | 1.92      | 0.67       | 4.75     | 4.36     | 3.73     | 4.52     | ns    |

**Notes:**

1. The minimum drive strength for any LVCMOS 3.3 V software configuration when run in wide range is  $\pm 100\text{ }\mu\text{A}$ . Drive strength displayed in the software is supported for normal range only. For a detailed I/V curve, refer to the IBIS models.
2. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-45 • 3.3 V LVCMOS Wide Range High Slew – Applies to 1.2 V DC Core Voltage**  
Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 2.7\text{ V}$

| Drive Strength    | Equivalent Software Default Drive Strength Option <sup>1</sup> | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{PYS}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | Units |
|-------------------|--|-------------|------------|----------|-----------|----------|-----------|------------|----------|----------|----------|----------|-------|
| 100 $\mu\text{A}$ | 4 mA   | STD         | 0.98       | 4.16     | 0.19      | 1.32     | 1.92      | 0.67       | 4.16     | 3.32     | 3.12     | 3.66     | ns    |
| 100 $\mu\text{A}$ | 6 mA   | STD         | 0.98       | 3.54     | 0.19      | 1.32     | 1.92      | 0.67       | 3.54     | 2.79     | 3.48     | 4.31     | ns    |
| 100 $\mu\text{A}$ | 8 mA   | STD         | 0.98       | 3.54     | 0.19      | 1.32     | 1.92      | 0.67       | 3.54     | 2.79     | 3.48     | 4.31     | ns    |
| 100 $\mu\text{A}$ | 12 mA  | STD         | 0.98       | 3.21     | 0.19      | 1.32     | 1.92      | 0.67       | 3.21     | 2.52     | 3.73     | 4.73     | ns    |
| 100 $\mu\text{A}$ | 16 mA  | STD         | 0.98       | 3.21     | 0.19      | 1.32     | 1.92      | 0.67       | 3.21     | 2.52     | 3.73     | 4.73     | ns    |

**Notes:**

1. The minimum drive strength for any LVCMOS 3.3 V software configuration when run in wide range is  $\pm 100\text{ }\mu\text{A}$ . Drive strength displayed in the software is supported for normal range only. For a detailed I/V curve, refer to the IBIS models.
2. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.
3. Software default selection highlighted in gray.

## 1.8 V LVCMOS


Low-voltage CMOS for 1.8 V is an extension of the LVCMOS standard (JESD8-5) used for general-purpose 1.8 V applications. It uses a 1.8 V input buffer and a push-pull output buffer.

**Table 2-52 • Minimum and Maximum DC Input and Output Levels**

| 1.8 V<br>LVCMOS   | VIL     |             | VIH         |         | VOL     | VOH         | IOL | IOH | IOSL                  | IOSH                  | IIL <sup>1</sup> | IIH <sup>2</sup> |
|-------------------|---------|-------------|-------------|---------|---------|-------------|-----|-----|-----------------------|-----------------------|------------------|------------------|
| Drive<br>Strength | Min., V | Max., V     | Min., V     | Max., V | Max., V | Min., V     | mA  | mA  | Max., mA <sup>3</sup> | Max., mA <sup>3</sup> | μA <sup>4</sup>  | μA <sup>4</sup>  |
| 2 mA              | −0.3    | 0.35 * VCCI | 0.65 * VCCI | 3.6     | 0.45    | VCCI − 0.45 | 2   | 2   | 9                     | 11                    | 10               | 10               |
| 4 mA              | −0.3    | 0.35 * VCCI | 0.65 * VCCI | 3.6     | 0.45    | VCCI − 0.45 | 4   | 4   | 17                    | 22                    | 10               | 10               |
| 6 mA              | −0.3    | 0.35 * VCCI | 0.65 * VCCI | 3.6     | 0.45    | VCCI − 0.45 | 6   | 6   | 35                    | 44                    | 10               | 10               |
| 8 mA              | −0.3    | 0.35 * VCCI | 0.65 * VCCI | 3.6     | 0.45    | VCCI − 0.45 | 8   | 8   | 35                    | 44                    | 10               | 10               |

**Notes:**

1. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3\text{ V} < V_{IN} < V_{IL}$ .
2. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges.
3. Currents are measured at high temperature (100°C junction temperature) and maximum voltage.
4. Currents are measured at 85°C junction temperature.
5. Software default selection highlighted in gray.

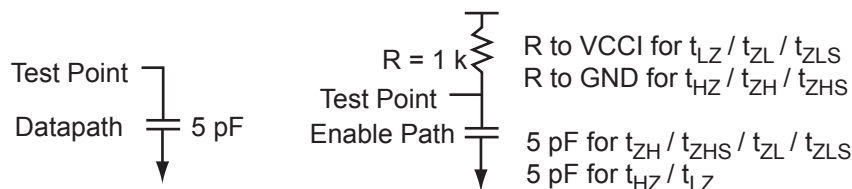

**Figure 2-9 • AC Loading**

**Table 2-53 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V) | C <sub>LOAD</sub> (pF) |
|---------------|----------------|----------------------|------------------------|
| 0             | 1.8            | 0.9                  | 5                      |

**Note:** \*Measuring point = Vtrip. See Table 2-23 on page 2-20 for a complete table of trip points.



## Timing Characteristics

*Applies to 1.5 V DC Core Voltage*

**Table 2-54 • 1.8 V LVCMOS Low Slew – Applies to 1.5 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.425 V, Worst-Case VCCI = 1.7 V

| Drive Strength | Speed Grade | $t_{\text{DOUT}}$ | $t_{\text{DP}}$ | $t_{\text{DIN}}$ | $t_{\text{PY}}$ | $t_{\text{PYS}}$ | $t_{\text{EOUT}}$ | $t_{\text{ZL}}$ | $t_{\text{ZH}}$ | $t_{\text{LZ}}$ | $t_{\text{HZ}}$ | Units |
|----------------|-------------|-------------------|-----------------|------------------|-----------------|------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------|
| 2 mA           | STD         | 0.97              | 5.89            | 0.18             | 1.00            | 1.43             | 0.66              | 6.01            | 5.43            | 1.78            | 1.30            | ns    |
| 4 mA           | STD         | 0.97              | 4.82            | 0.18             | 1.00            | 1.43             | 0.66              | 4.92            | 4.56            | 2.08            | 2.08            | ns    |
| 6 mA           | STD         | 0.97              | 4.13            | 0.18             | 1.00            | 1.43             | 0.66              | 4.21            | 3.96            | 2.30            | 2.46            | ns    |
| 8 mA           | STD         | 0.97              | 4.13            | 0.18             | 1.00            | 1.43             | 0.66              | 4.21            | 3.96            | 2.30            | 2.46            | ns    |

*Note:* For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-55 • 1.8 V LVCMOS High Slew – Applies to 1.5 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.425 V, Worst-Case VCCI = 1.7 V

| Drive Strength | Speed Grade | $t_{\text{DOUT}}$ | $t_{\text{DP}}$ | $t_{\text{DIN}}$ | $t_{\text{PY}}$ | $t_{\text{PYS}}$ | $t_{\text{EOUT}}$ | $t_{\text{ZL}}$ | $t_{\text{ZH}}$ | $t_{\text{LZ}}$ | $t_{\text{HZ}}$ | Units |
|----------------|-------------|-------------------|-----------------|------------------|-----------------|------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------|
| 2 mA           | STD         | 0.97              | 2.82            | 0.18             | 1.00            | 1.43             | 0.66              | 2.88            | 2.78            | 1.78            | 1.35            | ns    |
| 4 mA           | STD         | 0.97              | 2.30            | 0.18             | 1.00            | 1.43             | 0.66              | 2.35            | 2.11            | 2.08            | 2.15            | ns    |
| 6 mA           | STD         | 0.97              | 2.00            | 0.18             | 1.00            | 1.43             | 0.66              | 2.04            | 1.76            | 2.29            | 2.55            | ns    |
| 8 mA           | STD         | 0.97              | 2.00            | 0.18             | 1.00            | 1.43             | 0.66              | 2.04            | 1.76            | 2.29            | 2.55            | ns    |

*Notes:*

- For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.
- Software default selection highlighted in gray.

*Applies to 1.2 V DC Core Voltage*

**Table 2-56 • 1.8 V LVCMOS Low Slew – Applies to 1.2 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.14 V, Worst-Case VCCI = 1.7 V

| Drive Strength | Speed Grade | $t_{\text{DOUT}}$ | $t_{\text{DP}}$ | $t_{\text{DIN}}$ | $t_{\text{PY}}$ | $t_{\text{PYS}}$ | $t_{\text{EOUT}}$ | $t_{\text{ZL}}$ | $t_{\text{ZH}}$ | $t_{\text{LZ}}$ | $t_{\text{HZ}}$ | Units |
|----------------|-------------|-------------------|-----------------|------------------|-----------------|------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------|
| 2 mA           | STD         | 0.98              | 6.43            | 0.19             | 1.12            | 1.61             | 0.67              | 6.54            | 5.93            | 2.19            | 1.88            | ns    |
| 4 mA           | STD         | 0.98              | 5.33            | 0.19             | 1.12            | 1.61             | 0.67              | 5.41            | 5.03            | 2.50            | 2.68            | ns    |
| 6 mA           | STD         | 0.98              | 4.61            | 0.19             | 1.12            | 1.61             | 0.67              | 4.69            | 4.41            | 2.72            | 3.07            | ns    |
| 8 mA           | STD         | 0.98              | 4.61            | 0.19             | 1.12            | 1.61             | 0.67              | 4.69            | 4.41            | 2.72            | 3.07            | ns    |

*Note:* For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-57 • 1.8 V LVCMOS High Slew – Applies to 1.2 V DC Core Voltage**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.14 V, Worst-Case VCCI = 1.7 V

| Drive Strength | Speed Grade | $t_{\text{DOUT}}$ | $t_{\text{DP}}$ | $t_{\text{DIN}}$ | $t_{\text{PY}}$ | $t_{\text{PYS}}$ | $t_{\text{EOUT}}$ | $t_{\text{ZL}}$ | $t_{\text{ZH}}$ | $t_{\text{LZ}}$ | $t_{\text{HZ}}$ | Units |
|----------------|-------------|-------------------|-----------------|------------------|-----------------|------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------|
| 2 mA           | STD         | 0.98              | 3.30            | 0.19             | 1.12            | 1.61             | 0.67              | 3.34            | 3.21            | 2.19            | 1.93            | ns    |
| 4 mA           | STD         | 0.98              | 2.76            | 0.19             | 1.12            | 1.61             | 0.67              | 2.79            | 2.51            | 2.50            | 2.76            | ns    |
| 6 mA           | STD         | 0.98              | 2.45            | 0.19             | 1.12            | 1.61             | 0.67              | 2.48            | 2.16            | 2.71            | 3.16            | ns    |
| 8 mA           | STD         | 0.98              | 2.45            | 0.19             | 1.12            | 1.61             | 0.67              | 2.48            | 2.16            | 2.71            | 3.16            | ns    |

*Notes:*

- For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.
- Software default selection highlighted in gray.

## 1.2 V LVCMOS (JESD8-12A)


Low-Voltage CMOS for 1.2 V complies with the LVCMOS standard JESD8-12A for general purpose 1.2 V applications. It uses a 1.2 V input buffer and a push-pull output buffer.

**Table 2-64 • Minimum and Maximum DC Input and Output Levels**

| 1.2 V LVCMOS <sup>1</sup> | VIL    |             | VIH         |        | VOL         | VOH         | IOL | IOH | IOSL                 | IOSH                 | IIL <sup>2</sup> | IIH <sup>3</sup> |
|---------------------------|--------|-------------|-------------|--------|-------------|-------------|-----|-----|----------------------|----------------------|------------------|------------------|
| Drive Strength            | Min. V | Max. V      | Min. V      | Max. V | Max. V      | Min. V      | mA  | mA  | Max. mA <sup>4</sup> | Max. mA <sup>4</sup> | μA <sup>5</sup>  | μA <sup>5</sup>  |
| 2 mA                      | −0.3   | 0.35 * VCCI | 0.65 * VCCI | 3.6    | 0.25 * VCCI | 0.75 * VCCI | 2   | 2   | 20                   | 26                   | 10               | 10               |

Notes:

1. Applicable to IGLOO nano V2 devices operating at  $VCCI \geq VCC$ .
2. IIL is the input leakage current per I/O pin over recommended operation conditions where  $-0.3 \text{ V} < V_{IN} < V_{IL}$ .
3. IIH is the input leakage current per I/O pin over recommended operating conditions  $V_{IH} < V_{IN} < V_{CCI}$ . Input current is larger when operating outside recommended ranges.
4. Currents are measured at high temperature (100°C junction temperature) and maximum voltage.
5. Currents are measured at 85°C junction temperature.
6. Software default selection highlighted in gray.

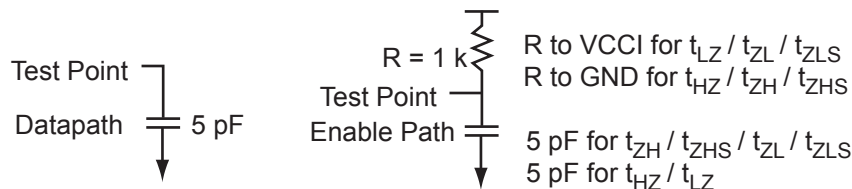

**Figure 2-11 • AC Loading**

**Table 2-65 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V) | C <sub>LOAD</sub> (pF) |
|---------------|----------------|----------------------|------------------------|
| 0             | 1.2            | 0.6                  | 5                      |

Note: \*Measuring point = Vtrip. See Table 2-23 on page 2-20 for a complete table of trip points.

## Timing Characteristics

Applies to 1.2 V DC Core Voltage

**Table 2-66 • 1.2 V LVCMOS Low Slew**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.14 V, Worst-Case VCCI = 1.14 V

| Drive Strength | Speed Grade | t <sub>DOUT</sub> | t <sub>DP</sub> | t <sub>DIN</sub> | t <sub>PY</sub> | t <sub>PYS</sub> | t <sub>EOUT</sub> | t <sub>ZL</sub> | t <sub>ZH</sub> | t <sub>LZ</sub> | t <sub>HZ</sub> | Units |
|----------------|-------------|-------------------|-----------------|------------------|-----------------|------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------|
| 2 mA           | STD         | 0.98              | 8.27            | 0.19             | 1.57            | 2.34             | 0.67              | 7.94            | 6.77            | 3.00            | 3.11            | ns    |

Note: For specific junction temperature and voltage supply levels, refer to Table 2-6 on page 2-6 for derating values.

**Table 2-67 • 1.2 V LVCMOS High Slew**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case VCC = 1.14 V, Worst-Case VCCI = 1.14 V

| Drive Strength | Speed Grade | t <sub>DOUT</sub> | t <sub>DP</sub> | t <sub>DIN</sub> | t <sub>PY</sub> | t <sub>PYS</sub> | t <sub>EOUT</sub> | t <sub>ZL</sub> | t <sub>ZH</sub> | t <sub>LZ</sub> | t <sub>HZ</sub> | Units |
|----------------|-------------|-------------------|-----------------|------------------|-----------------|------------------|-------------------|-----------------|-----------------|-----------------|-----------------|-------|
| 2 mA           | STD         | 0.98              | 3.38            | 0.19             | 1.57            | 2.34             | 0.67              | 3.26            | 2.78            | 2.99            | 3.24            | ns    |

Notes:

1. For specific junction temperature and voltage supply levels, refer to Table 2-6 on page 2-6 for derating values.
2. Software default selection highlighted in gray.

## Clock Conditioning Circuits

### CCC Electrical Specifications


#### Timing Characteristics

**Table 2-90 • IGLOO PLUS CCC/PLL Specification**  
For IGLOO PLUS V2 or V5 devices, 1.5 V DC Core Supply Voltage

| Parameter   | Min.  | Typ.             | Max.    | Units    |
|---|---|------------------|---------|----------|
| Clock Conditioning Circuitry Input Frequency $f_{IN\_CCC}$        | 1.5   |                  | 250     | MHz      |
| Clock Conditioning Circuitry Output Frequency $f_{OUT\_CCC}$      | 0.75  |                  | 250     | MHz      |
| Delay Increments in Programmable Delay Blocks <sup>1, 2</sup>     |   | 360 <sup>3</sup> |         | ps       |
| Number of Programmable Values in Each Programmable Delay Block    |   |                  | 32      |          |
| Serial Clock (SCLK) for Dynamic PLL <sup>4, 5</sup>               |   |                  | 100     | MHz      |
| Input Cycle-to-Cycle Jitter (peak magnitude)                      |   |                  | 1       | ns       |
| Acquisition Time  |   |                  |         |          |
| LockControl = 0   |   |                  | 300     | μs       |
| LockControl = 1   |   |                  | 6.0     | ms       |
| Tracking Jitter <sup>6</sup>                                      |   |                  |         |          |
| LockControl = 0   |   |                  | 2.5     | ns       |
| LockControl = 1   |   |                  | 1.5     | ns       |
| Output Duty Cycle   | 48.5  |                  | 51.5    | %        |
| Delay Range in Block: Programmable Delay 1 <sup>1, 2</sup>        | 1.25  |                  | 15.65   | ns       |
| Delay Range in Block: Programmable Delay 2 <sup>1, 2</sup>        | 0.469   |                  | 15.65   | ns       |
| Delay Range in Block: Fixed Delay <sup>1, 2</sup>                 |   | 3.5              |         | ns       |
| VCO Output Peak-to-Peak Period Jitter $F_{CCC\_OUT}$ <sup>7</sup> | Maximum Peak-to-Peak Period Jitter <sup>7, 8, 9</sup> |                  |         |          |
|   | SSO ≤ 2   | SSO ≤ 4          | SSO ≤ 8 | SSO ≤ 16 |
| 0.75 MHz to 50 MHz  | 0.50%   | 0.60%            | 0.80%   | 1.20%    |
| 50 MHz to 250 MHz   | 2.50%   | 4.00%            | 6.00%   | 12.00%   |

#### Notes:

1. This delay is a function of voltage and temperature. See [Table 2-6 on page 2-6](#) and [Table 2-7 on page 2-6](#) for deratings.
2.  $T_J = 25^\circ\text{C}$ ,  $V_{CC} = 1.5\text{ V}$
3. When the CCC/PLL core is generated by Microsemi core generator software, not all delay values of the specified delay increments are available. Refer to the Libero SoC Online Help associated with the core for more information.
4. Maximum value obtained for a STD speed grade device in Worst Case Commercial Conditions. For specific junction temperature and voltage supply, refer to [Table 2-6 on page 2-6](#) and [Table 2-7 on page 2-6](#) for derating values.
5. The AGLP030 device does not support a PLL.
6. Tracking jitter is defined as the variation in clock edge position of PLL outputs with reference to the PLL input clock edge. Tracking jitter does not measure the variation in PLL output period, which is covered by the period jitter parameter.
7. VCO output jitter is calculated as a percentage of the VCO frequency. The jitter (in ps) can be calculated by multiplying the VCO period by the per cent jitter. The VCO jitter (in ps) applies to CCC\_OUT regardless of the output divider settings. For example, if the jitter on VCO is 300 ps, the jitter on CCC\_OUT is also 300 ps, regardless of the output divider settings.
8. Measurements done with LVTTTL 3.3 V 8 mA I/O drive strength and high slew rate,  $V_{CC}/V_{CCPLL} = 1.425\text{ V}$ ,  $V_{CCI} = 3.3\text{ V}$ , VQ/PQ/TQ type of packages, 20 pF load.
9. SSO are outputs that are synchronous to a single clock domain and have clock-to-out times that are within  $\pm 200\text{ ps}$  of each other. Switching I/Os are placed outside of the PLL bank. Refer to the "Simultaneously Switching Outputs (SSOs) and Printed Circuit Board Layout" section in the [IGLOO PLUS FPGA Fabric User's Guide](#).

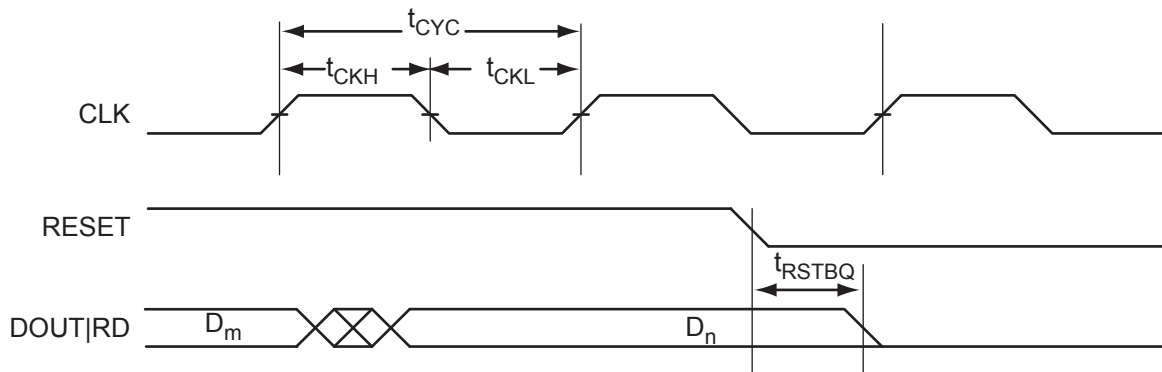

**Figure 2-28 • RAM Reset**

---

## 3 – Pin Descriptions and Packaging

---

### Supply Pins

**GND****Ground**

Ground supply voltage to the core, I/O outputs, and I/O logic.

**GNDQ****Ground (quiet)**

Quiet ground supply voltage to input buffers of I/O banks. Within the package, the GNDQ plane is decoupled from the simultaneous switching noise originated from the output buffer ground domain. This minimizes the noise transfer within the package and improves input signal integrity. GNDQ must always be connected to GND on the board.

**VCC****Core Supply Voltage**

Supply voltage to the FPGA core, nominally 1.5 V for IGLOO PLUS V5 devices, and 1.2 V or 1.5 V for IGLOO PLUS V2 devices. VCC is required for powering the JTAG state machine in addition to VJTAG. Even when a device is in bypass mode in a JTAG chain of interconnected devices, both VCC and VJTAG must remain powered to allow JTAG signals to pass through the device.

For IGLOO PLUS V2 devices, VCC can be switched dynamically from 1.2 V to 1.5 V or vice versa. This allows in-system programming (ISP) when VCC is at 1.5 V and the benefit of low power operation when VCC is at 1.2 V.

**VCCIBx****I/O Supply Voltage**

Supply voltage to the bank's I/O output buffers and I/O logic. Bx is the I/O bank number. There are four I/O banks on low power flash devices plus a dedicated VJTAG bank. Each bank can have a separate VCCI connection. All I/Os in a bank will run off the same VCCIBx supply. VCCI can be 1.2 V, 1.5 V, 1.8 V, 2.5 V, or 3.3 V, nominal voltage. Unused I/O banks should have their corresponding VCCI pins tied to GND.

**VMVx****I/O Supply Voltage (quiet)**

Quiet supply voltage to the input buffers of each I/O bank. x is the bank number. Within the package, the VMV plane biases the input stage of the I/Os in the I/O banks. This minimizes the noise transfer within the package and improves input signal integrity. Each bank must have at least one VMV connection, and no VMV should be left unconnected. All I/Os in a bank run off the same VMVx supply. VMV is used to provide a quiet supply voltage to the input buffers of each I/O bank. VMVx can be 1.2 V, 1.5 V, 1.8 V, 2.5 V, or 3.3 V, nominal voltage. Unused I/O banks should have their corresponding VMV pins tied to GND. VMV and VCCI should be at the same voltage within a given I/O bank. Used VMV pins must be connected to the corresponding VCCI pins of the same bank (i.e., VMV0 to VCCIB0, VMV1 to VCCIB1, etc.).

**VCCPLA/B/C/D/E/F****PLL Supply Voltage**

Supply voltage to analog PLL, nominally 1.5 V or 1.2 V, depending on the device.

- 1.5 V for IGLOO PLUS V5 devices
- 1.2 V or 1.5 V for IGLOO PLUS V2 devices

When the PLLs are not used, the Microsemi Designer place-and-route tool automatically disables the unused PLLs to lower power consumption. The user should tie unused VCCPLx and VCOMPLx pins to ground. Microsemi recommends tying VCCPLx to VCC and using proper filtering circuits to decouple VCC noise from the PLLs. Refer to the PLL Power Supply Decoupling section of the "Clock Conditioning Circuits in Low Power Flash Devices and Mixed signal FPGAs" chapter of the *IGLOO PLUS FPGA Fabric User's Guide* for a complete board solution for the PLL analog power supply and ground.

There is one VCCPLF pin on IGLOO PLUS devices.

## FF Flash\*Freeze Mode Activation Pin

The FF pin is a dedicated input pin used to enter and exit Flash\*Freeze mode. The FF pin is active low, has the same characteristics as a single-ended I/O, and must meet the maximum rise and fall times. When Flash\*Freeze mode is not used in the design, the FF pin is available as a regular I/O.

When Flash\*Freeze mode is used, the FF pin must not be left floating to avoid accidentally entering Flash\*Freeze mode. While in Flash\*Freeze mode, the Flash\*Freeze pin should be constantly asserted.

The Flash\*Freeze pin can be used with any single-ended I/O standard supported by the I/O bank in which the pin is located, and input signal levels compatible with the I/O standard selected. The FF pin should be treated as a sensitive asynchronous signal. When defining pin placement and board layout, simultaneously switching outputs (SSOs) and their effects on sensitive asynchronous pins must be considered.

Unused FF or I/O pins are tristated with weak pull-up. This default configuration applies to both Flash\*Freeze mode and normal operation mode. No user intervention is required.

Table 3-1 shows the Flash\*Freeze pin location on the available packages for IGLOO and ProASIC3L devices. The Flash\*Freeze pin location is independent of device (except for a PQ208 package), allowing migration to larger or smaller IGLOO devices while maintaining the same pin location on the board. Refer to the "Flash\*Freeze Technology and Low Power Modes" chapter of the *IGLOO PLUS Device Family User's Guide* for more information on I/O states during Flash\*Freeze mode.

**Table 3-1 • Flash\*Freeze Pin Location in IGLOO PLUS Devices**

| Package | Flash*Freeze Pin |
|---------|------------------|
| CS281   | W2               |
| CS201   | R4               |
| CS289   | U1               |
| VQ128   | 34               |
| VQ176   | 47               |


| VQ128      |                  | VQ128      |                  | VQ128      |                  |
|------------|------------------|------------|------------------|------------|------------------|
| Pin Number | AGLP030 Function | Pin Number | AGLP030 Function | Pin Number | AGLP030 Function |
| 1          | IO119RSB3        | 36         | IO88RSB2         | 71         | IO57RSB1         |
| 2          | IO118RSB3        | 37         | IO86RSB2         | 72         | VCCIB1           |
| 3          | IO117RSB3        | 38         | IO84RSB2         | 73         | GND              |
| 4          | IO115RSB3        | 39         | IO83RSB2         | 74         | IO55RSB1         |
| 5          | IO116RSB3        | 40         | GND              | 75         | IO54RSB1         |
| 6          | IO113RSB3        | 41         | VCCIB2           | 76         | IO53RSB1         |
| 7          | IO114RSB3        | 42         | IO82RSB2         | 77         | IO52RSB1         |
| 8          | GND              | 43         | IO81RSB2         | 78         | IO51RSB1         |
| 9          | VCCIB3           | 44         | IO79RSB2         | 79         | IO50RSB1         |
| 10         | IO112RSB3        | 45         | IO78RSB2         | 80         | IO49RSB1         |
| 11         | IO111RSB3        | 46         | IO77RSB2         | 81         | VCC              |
| 12         | IO110RSB3        | 47         | IO75RSB2         | 82         | GDB0/IO48RSB1    |
| 13         | IO109RSB3        | 48         | IO74RSB2         | 83         | GDA0/IO47RSB1    |
| 14         | GEC0/IO108RSB3   | 49         | VCC              | 84         | GDC0/IO46RSB1    |
| 15         | GEA0/IO107RSB3   | 50         | IO73RSB2         | 85         | IO45RSB1         |
| 16         | GEB0/IO106RSB3   | 51         | IO72RSB2         | 86         | IO44RSB1         |
| 17         | VCC              | 52         | IO70RSB2         | 87         | IO43RSB1         |
| 18         | IO104RSB3        | 53         | IO69RSB2         | 88         | IO42RSB1         |
| 19         | IO103RSB3        | 54         | IO68RSB2         | 89         | VCCIB1           |
| 20         | IO102RSB3        | 55         | IO66RSB2         | 90         | GND              |
| 21         | IO101RSB3        | 56         | IO65RSB2         | 91         | IO40RSB1         |
| 22         | IO100RSB3        | 57         | GND              | 92         | IO41RSB1         |
| 23         | IO99RSB3         | 58         | VCCIB2           | 93         | IO39RSB1         |
| 24         | GND              | 59         | IO63RSB2         | 94         | IO38RSB1         |
| 25         | VCCIB3           | 60         | IO61RSB2         | 95         | IO37RSB1         |
| 26         | IO97RSB3         | 61         | IO59RSB2         | 96         | IO36RSB1         |
| 27         | IO98RSB3         | 62         | TCK              | 97         | IO35RSB0         |
| 28         | IO95RSB3         | 63         | TDI              | 98         | IO34RSB0         |
| 29         | IO96RSB3         | 64         | TMS              | 99         | IO33RSB0         |
| 30         | IO94RSB3         | 65         | VPUMP            | 100        | IO32RSB0         |
| 31         | IO93RSB3         | 66         | TDO              | 101        | IO30RSB0         |
| 32         | IO92RSB3         | 67         | TRST             | 102        | IO28RSB0         |
| 33         | IO91RSB2         | 68         | IO58RSB1         | 103        | IO27RSB0         |
| 34         | FF/IO90RSB2      | 69         | VJTAG            | 104        | VCCIB0           |
| 35         | IO89RSB2         | 70         | IO56RSB1         | 105        | GND              |

| VQ128      |                  |
|------------|------------------|
| Pin Number | AGLP030 Function |
| 106        | IO26RSB0         |
| 107        | IO25RSB0         |
| 108        | IO23RSB0         |
| 109        | IO22RSB0         |
| 110        | IO21RSB0         |
| 111        | IO19RSB0         |
| 112        | IO18RSB0         |
| 113        | VCC              |
| 114        | IO17RSB0         |
| 115        | IO16RSB0         |
| 116        | IO14RSB0         |
| 117        | IO13RSB0         |
| 118        | IO12RSB0         |
| 119        | IO10RSB0         |
| 120        | IO09RSB0         |
| 121        | VCCIB0           |
| 122        | GND              |
| 123        | IO07RSB0         |
| 124        | IO05RSB0         |
| 125        | IO03RSB0         |
| 126        | IO02RSB0         |
| 127        | IO01RSB0         |
| 128        | IO00RSB0         |



## VQ176

---

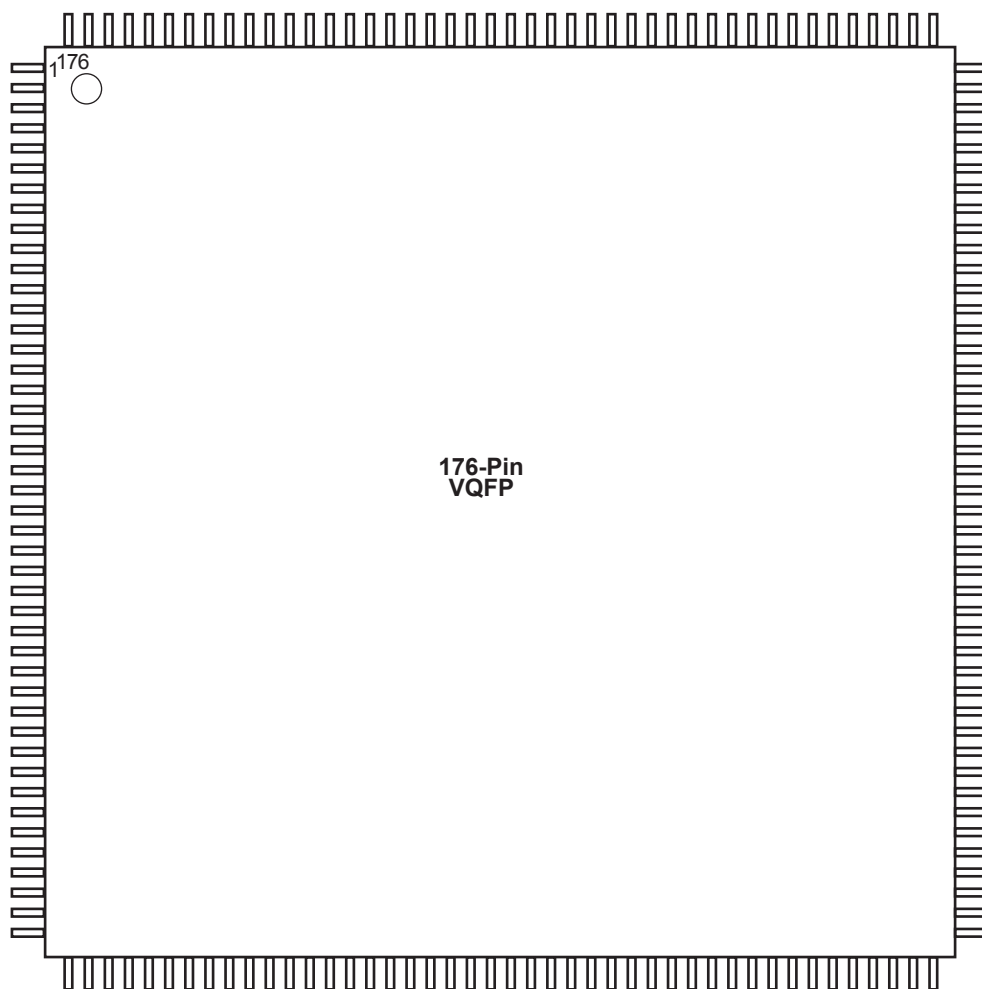

*Note:* This is the bottom view of the package.

---

### **Note**

For Package Manufacturing and Environmental information, visit the Resource Center at <http://www.microsemi.com/soc/products/solutions/package/docs.aspx>.

| CS289      |                  |
|------------|------------------|
| Pin Number | AGLP030 Function |
| P2         | NC               |
| P3         | GND              |
| P4         | NC               |
| P5         | NC               |
| P6         | IO87RSB2         |
| P7         | IO80RSB2         |
| P8         | GND              |
| P9         | IO72RSB2         |
| P10        | IO67RSB2         |
| P11        | IO61RSB2         |
| P12        | NC               |
| P13        | VCCIB2           |
| P14        | NC               |
| P15        | IO60RSB2         |
| P16        | IO62RSB2         |
| P17        | VJTAG            |
| R1         | GND              |
| R2         | IO91RSB2         |
| R3         | NC               |
| R4         | NC               |
| R5         | NC               |
| R6         | VCCIB2           |
| R7         | IO83RSB2         |
| R8         | IO78RSB2         |
| R9         | IO74RSB2         |
| R10        | IO70RSB2         |
| R11        | GND              |
| R12        | NC               |
| R13        | NC               |
| R14        | NC               |
| R15        | NC               |
| R16        | TMS              |
| R17        | TRST             |
| T1         | IO92RSB3         |
| T2         | IO89RSB2         |
| T3         | NC               |
| T4         | GND              |

| CS289      |                  |
|------------|------------------|
| Pin Number | AGLP030 Function |
| T5         | NC               |
| T6         | IO84RSB2         |
| T7         | IO81RSB2         |
| T8         | IO76RSB2         |
| T9         | VCCIB2           |
| T10        | IO69RSB2         |
| T11        | IO65RSB2         |
| T12        | IO64RSB2         |
| T13        | NC               |
| T14        | GND              |
| T15        | NC               |
| T16        | TDI              |
| T17        | TDO              |
| U1         | FF/IO90RSB2      |
| U2         | GND              |
| U3         | NC               |
| U4         | IO88RSB2         |
| U5         | IO86RSB2         |
| U6         | IO82RSB2         |
| U7         | GND              |
| U8         | IO75RSB2         |
| U9         | IO73RSB2         |
| U10        | IO68RSB2         |
| U11        | IO66RSB2         |
| U12        | GND              |
| U13        | NC               |
| U14        | NC               |
| U15        | NC               |
| U16        | TCK              |
| U17        | VPUMP            |

| CS289      |                  |
|------------|------------------|
| Pin Number | AGLP060 Function |
| P8         | GND              |
| P9         | IO91RSB2         |
| P10        | IO86RSB2         |
| P11        | IO81RSB2         |
| P12        | NC               |
| P13        | VCCIB2           |
| P14        | NC               |
| P15        | GDA2/IO78RSB2    |
| P16        | GDC2/IO80RSB2    |
| P17        | VJTAG            |
| R1         | GND              |
| R2         | GEA2/IO110RSB2   |
| R3         | NC               |
| R4         | NC               |
| R5         | NC               |
| R6         | VCCIB2           |
| R7         | IO102RSB2        |
| R8         | IO97RSB2         |
| R9         | IO93RSB2         |
| R10        | IO89RSB2         |
| R11        | GND              |
| R12        | NC               |
| R13        | NC               |
| R14        | NC               |
| R15        | NC               |
| R16        | TMS              |
| R17        | TRST             |
| T1         | GEA1/IO112RSB3   |
| T2         | GEC2/IO108RSB2   |
| T3         | NC               |
| T4         | GND              |
| T5         | NC               |
| T6         | IO103RSB2        |
| T7         | IO100RSB2        |
| T8         | IO95RSB2         |
| T9         | VCCIB2           |
| T10        | IO88RSB2         |
| T11        | IO84RSB2         |

| CS289      |                   |
|------------|-------------------|
| Pin Number | AGLP060 Function  |
| T12        | IO82RSB2          |
| T13        | NC                |
| T14        | GND               |
| T15        | NC                |
| T16        | TDI               |
| T17        | TDO               |
| U1         | FF/GEB2/IO109RSB2 |
| U2         | GND               |
| U3         | NC                |
| U4         | IO107RSB2         |
| U5         | IO105RSB2         |
| U6         | IO101RSB2         |
| U7         | GND               |
| U8         | IO94RSB2          |
| U9         | IO92RSB2          |
| U10        | IO87RSB2          |
| U11        | IO85RSB2          |
| U12        | GND               |
| U13        | NC                |
| U14        | NC                |
| U15        | NC                |
| U16        | TCK               |
| U17        | VPUMP             |

| CS289      |                  |
|------------|------------------|
| Pin Number | AGLP125 Function |
| G13        | IO64RSB1         |
| G14        | IO69RSB1         |
| G15        | IO78RSB1         |
| G16        | IO76RSB1         |
| G17        | GND              |
| H1         | VCOMPLF          |
| H2         | GFB0/IO191RSB3   |
| H3         | IO195RSB3        |
| H4         | IO197RSB3        |
| H5         | IO199RSB3        |
| H6         | GFB1/IO192RSB3   |
| H7         | GND              |
| H8         | GND              |
| H9         | GND              |
| H10        | GND              |
| H11        | GND              |
| H12        | GCC1/IO79RSB1    |
| H13        | IO74RSB1         |
| H14        | GCA0/IO84RSB1    |
| H15        | VCCIB1           |
| H16        | GCA2/IO85RSB1    |
| H17        | GCC0/IO80RSB1    |
| J1         | VCCPLF           |
| J2         | GFA1/IO190RSB3   |
| J3         | VCCIB3           |
| J4         | IO185RSB3        |
| J5         | IO183RSB3        |
| J6         | IO181RSB3        |
| J7         | VCC              |
| J8         | GND              |
| J9         | GND              |
| J10        | GND              |
| J11        | VCC              |
| J12        | GCB2/IO86RSB1    |
| J13        | GCB1/IO81RSB1    |
| J14        | IO90RSB1         |
| J15        | IO89RSB1         |
| J16        | GCB0/IO82RSB1    |

| CS289      |                  |
|------------|------------------|
| Pin Number | AGLP125 Function |
| J17        | GCA1/IO83RSB1    |
| K1         | GND              |
| K2         | GFA0/IO189RSB3   |
| K3         | GFB2/IO187RSB3   |
| K4         | IO179RSB3        |
| K5         | IO175RSB3        |
| K6         | IO177RSB3        |
| K7         | GND              |
| K8         | GND              |
| K9         | GND              |
| K10        | GND              |
| K11        | GND              |
| K12        | IO88RSB1         |
| K13        | IO94RSB1         |
| K14        | IO95RSB1         |
| K15        | IO93RSB1         |
| K16        | GND              |
| K17        | GCC2/IO87RSB1    |
| L1         | GFA2/IO188RSB3   |
| L2         | GFC2/IO186RSB3   |
| L3         | IO182RSB3        |
| L4         | GND              |
| L5         | IO173RSB3        |
| L6         | GEC1/IO170RSB3   |
| L7         | GND              |
| L8         | GND              |
| L9         | VCC              |
| L10        | GND              |
| L11        | GND              |
| L12        | GDC1/IO99RSB1    |
| L13        | GDB1/IO101RSB1   |
| L14        | VCCIB1           |
| L15        | IO98RSB1         |
| L16        | IO92RSB1         |
| L17        | IO91RSB1         |
| M1         | IO184RSB3        |
| M2         | VCCIB3           |
| M3         | IO176RSB3        |

| CS289      |                  |
|------------|------------------|
| Pin Number | AGLP125 Function |
| M4         | IO172RSB3        |
| M5         | GEB0/IO167RSB3   |
| M6         | GEB1/IO168RSB3   |
| M7         | IO159RSB2        |
| M8         | IO161RSB2        |
| M9         | IO135RSB2        |
| M10        | IO128RSB2        |
| M11        | IO121RSB2        |
| M12        | IO113RSB2        |
| M13        | GDA1/IO103RSB1   |
| M14        | GDA0/IO104RSB1   |
| M15        | IO97RSB1         |
| M16        | IO96RSB1         |
| M17        | VCCIB1           |
| N1         | IO180RSB3        |
| N2         | IO178RSB3        |
| N3         | GEC0/IO169RSB3   |
| N4         | GDA0/IO165RSB3   |
| N5         | GND              |
| N6         | IO156RSB2        |
| N7         | IO148RSB2        |
| N8         | IO144RSB2        |
| N9         | IO137RSB2        |
| N10        | VCCIB2           |
| N11        | IO119RSB2        |
| N12        | IO111RSB2        |
| N13        | GDB2/IO106RSB2   |
| N14        | IO109RSB2        |
| N15        | GND              |
| N16        | GDB0/IO102RSB1   |
| N17        | GDC0/IO100RSB1   |
| P1         | IO174RSB3        |
| P2         | IO171RSB3        |
| P3         | GND              |
| P4         | IO160RSB2        |
| P5         | IO157RSB2        |
| P6         | IO154RSB2        |
| P7         | IO152RSB2        |

| Revision                                | Changes   | Page       |
|---|---|------------|
| Revision 3 (continued)                  | The table note for <a href="#">Table 2-9 • Quiescent Supply Current (IDD) Characteristics, IGLOO PLUS Flash*Freeze Mode*</a> to remove the sentence stating that values do not include I/O static contribution.   | 2-7        |
|   | The table note for <a href="#">Table 2-10 • Quiescent Supply Current (IDD) Characteristics, IGLOO PLUS Sleep Mode*</a> was updated to remove VJTAG and VCCI and the statement that values do not include I/O static contribution.   | 2-7        |
|   | The table note for <a href="#">Table 2-11 • Quiescent Supply Current (IDD) Characteristics, IGLOO PLUS Shutdown Mode</a> was updated to remove the statement that values do not include I/O static contribution.  | 2-7        |
|   | Note 2 of <a href="#">Table 2-12 • Quiescent Supply Current (IDD), No IGLOO PLUS Flash*Freeze Mode 1</a> was updated to include VCCPLL. Table note 4 was deleted.   | 2-8        |
|   | <a href="#">Table 2-13 • Summary of I/O Input Buffer Power (per pin) – Default I/O Software Settings</a> and <a href="#">Table 2-14 • Summary of I/O Output Buffer Power (per pin) – Default I/O Software Settings<sup>1</sup></a> were updated to remove static power. The table notes were updated to reflect that power was measured on VCCI. Table note 2 was added to <a href="#">Table 2-13 • Summary of I/O Input Buffer Power (per pin) – Default I/O Software Settings</a> .   | 2-9, 2-9   |
|   | <a href="#">Table 2-16 • Different Components Contributing to the Static Power Consumption in IGLOO PLUS Devices</a> and <a href="#">Table 2-18 • Different Components Contributing to the Static Power Consumption in IGLOO PLUS Devices</a> were updated to change the definition for P <sub>DC5</sub> from bank static power to bank quiescent power. Table subtitles were added for <a href="#">Table 2-16 • Different Components Contributing to the Static Power Consumption in IGLOO PLUS Devices</a> , <a href="#">Table 2-17 • Different Components Contributing to Dynamic Power Consumption in IGLOO PLUS Devices</a> , and <a href="#">Table 2-18 • Different Components Contributing to the Static Power Consumption in IGLOO PLUS Devices</a> . | 2-10, 2-11 |
|   | The "Total Static Power Consumption—P <sub>STAT</sub> " section was revised.  | 2-12       |
|   | <a href="#">Table 2-32 • Schmitt Trigger Input Hysteresis</a> is new.   | 2-26       |
|   | The "CS281" package drawing is new.   | 4-13       |
| Packaging v1.3                          | The "CS281" table for the AGLP125 device is new.  | 4-13       |
| Revision 3 (continued)                  | The "CS289" package drawing was incorrect. The graphic was showing the CS281 mechanical drawing and not the CS289 mechanical drawing. This has now been corrected.  | 4-17       |
| Revision 2 (Jun 2008)<br>Packaging v1.2 | The "CS289" table for the AGLP030 device is new.  | 4-17       |
| Revision 1 (Jun 2008)<br>Packaging v1.1 | The "CS289" table for the AGLP060 device is new.  | 4-20       |
|   | The "CS289" table for the AGLP125 device is new.  | 4-23       |